



Light Loop*

LED Aluminum Profile
Linear Light
Neon Flex


"Bring you beyond"



Light Loop "VISION"

Our vision is to become a leader in LED lighting technology, focusing on energy efficiency and innovation to reduce environmental impact and promote sustainable development.



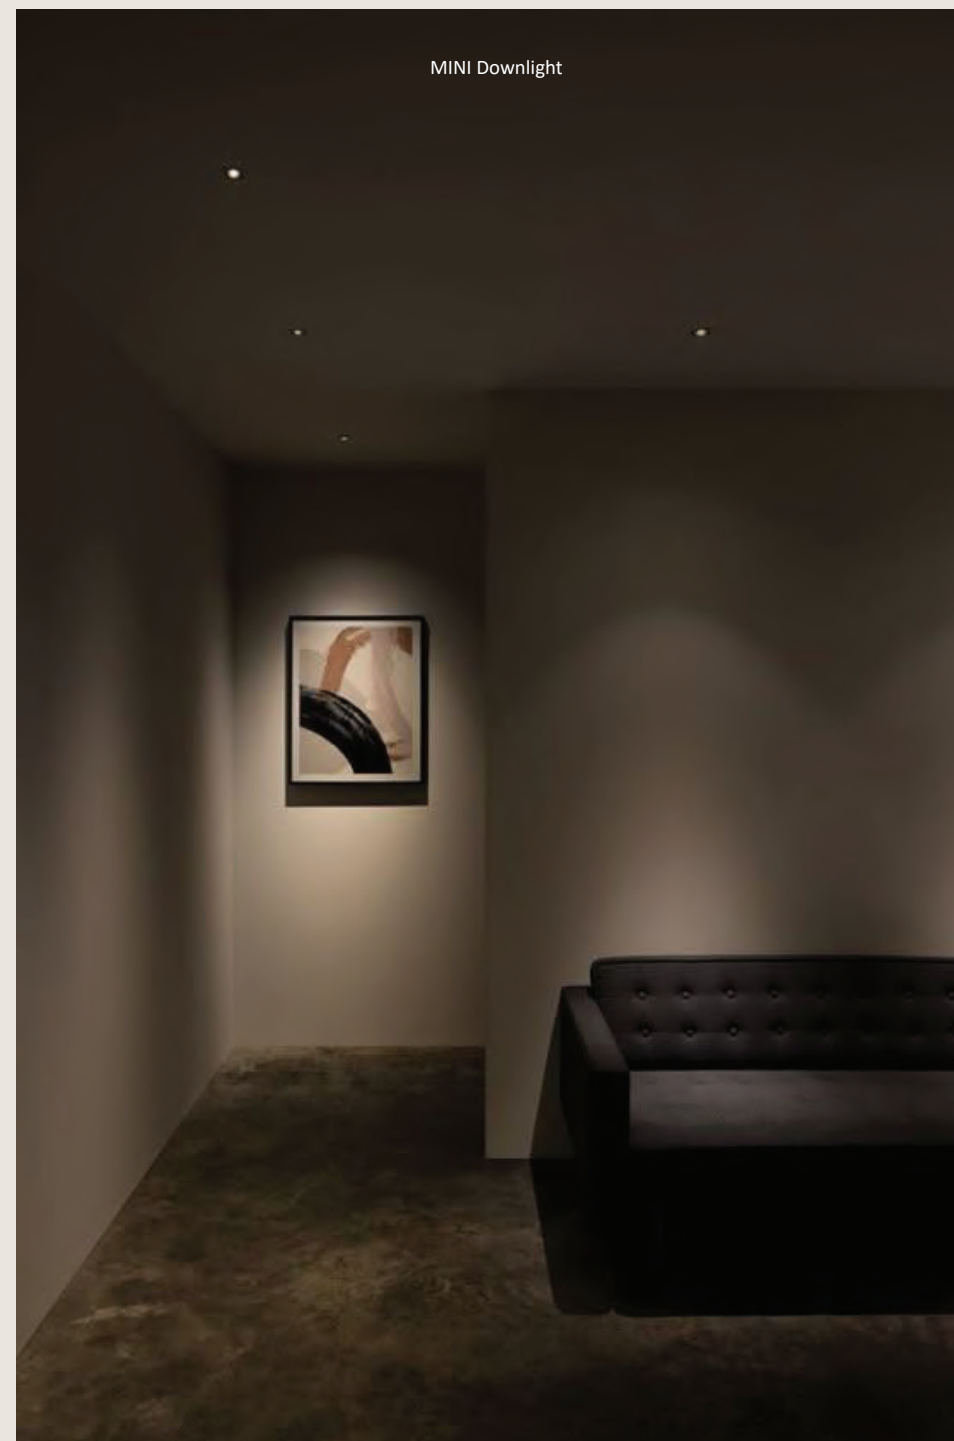

LightLoop "MISSION"

- To supply high-quality, cost-effective lighting products.
- To provide top-notch customer service and professional consultation, ensuring that customers maximize the benefits of their lighting systems.
- To advocate for energy-saving lighting solutions that reduce long-term operational costs.



A narrow beam angle creates a more dramatic and intimate mood, while a wider beam angle provides a softer, more open ambiance.

Beam angle

A narrow beam angle creates a more dramatic and intimate mood, while a wider beam angle provides a softer, more open ambiance.

- **Narrow beam (<30°):** Focused light for spotlight effect. Creates a dramatic, focused, or cozy feeling.
- **Medium beam (30°–60°):** Medium spread light. Suitable for reading or accent lighting.
- **Wide beam (>60°):** Wide light distribution. Gives a soft, open, or relaxing feeling.





CRI > 70-79

CRI > 80/90

CRI (Color Rendering Index)

CRI indicates how accurately a light source reveals the true colors of objects compared to natural light (100 is the best score).

Benefits of High CRI (80–100)

Natural Color Appearance

Ideal for tasks requiring accurate color perception like design, art, clothing stores, or restaurants.

Less Eye Strain

High CRI lighting provides clearer vision and reduces eye fatigue.

Better Ambiance

Brings out true colors, enhancing space appearance and liveliness.

Low CRI (<80) may cause...

Colors to appear dull or distorted, e.g., pale skin tones or unappetizing food. Poor ambiance and unnatural look.

Recommendation

Use CRI 80–100 for homes, retail stores, studios, or any place where accurate color rendering is needed.



CCT (Correlated Color Temperature)

Measured in Kelvin (K), CCT tells whether light appears warm or cool in tone.

Warm White < 3,000K


- ♦ Warm light with yellow-orange tint, similar to candlelight or incandescent bulbs.
- ♦ Cozy and relaxing atmosphere.
- ♦ Best for: Living rooms, bedrooms, restaurants.

Cool White 4,000K - 5,000K

- Natural white light, similar to mid-day sunlight.
- Feels fresh, clean, and balanced.
- Best for: Offices, kitchens, bathrooms, shops.

Daylight > 5,500K

- ♦ Bluish-white light like the sky at noon.
- ♦ Energizing, alertness-enhancing, good for focus.
- ♦ Best for: Hospitals, meeting rooms, factories.

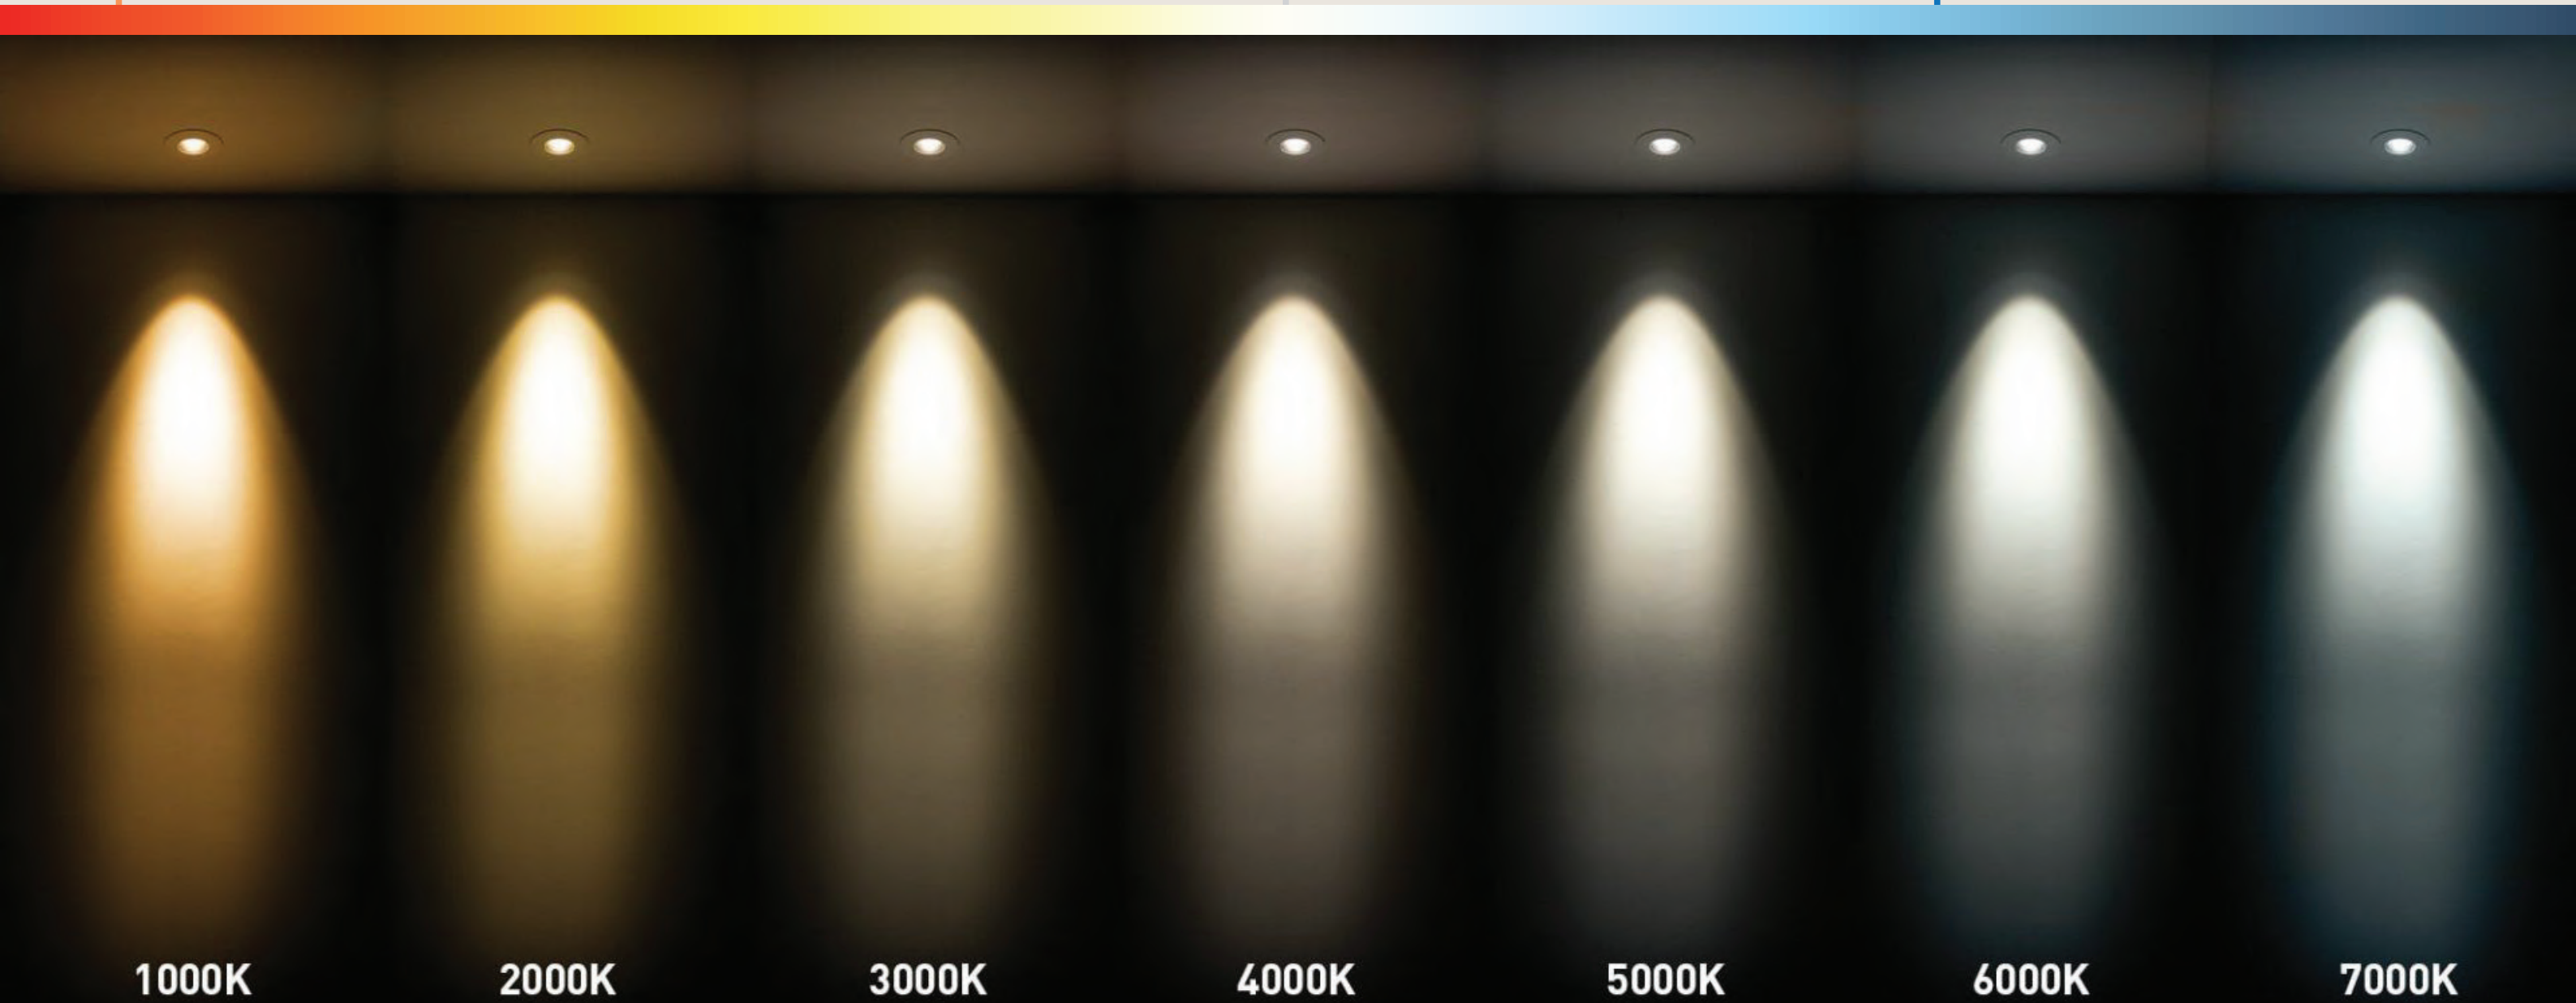

1000K

2000K

3000K

4000K

5000K



6000K

7000K




Office Series




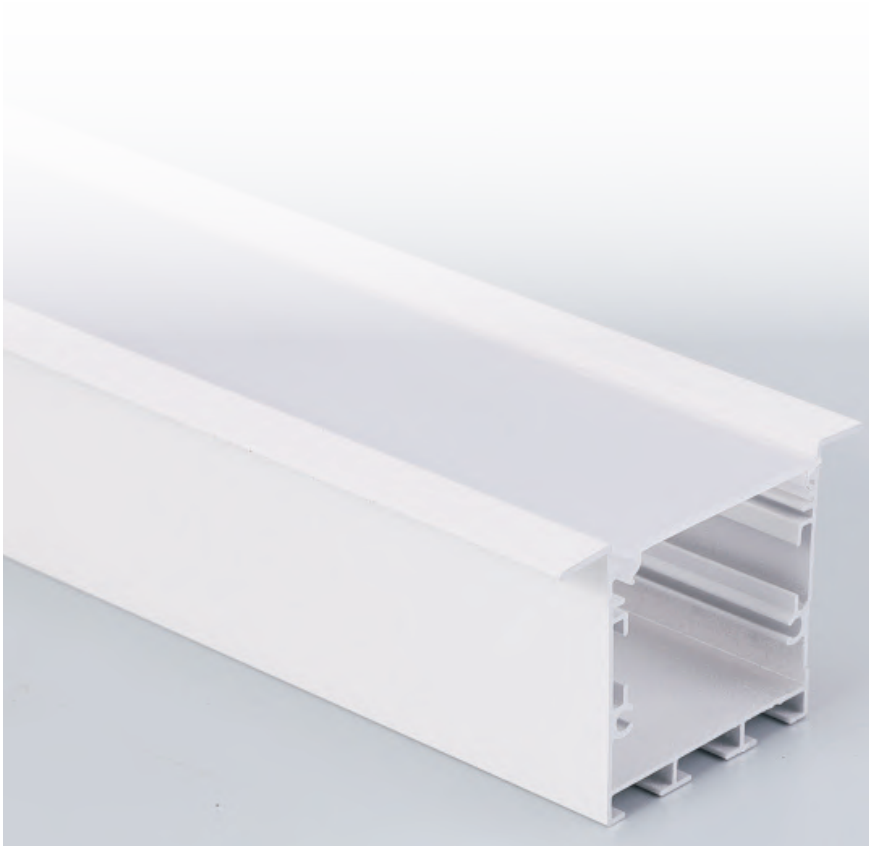


LL-CS3535C-A




LL-CS4035C-A




LL-CS5035C-A




LL-CS6035C-A




LL-CS7035C-A




LL-CS7535C-A





LL-CS8035C-A




LL-CS9035C-A




LL-CS10035C-A

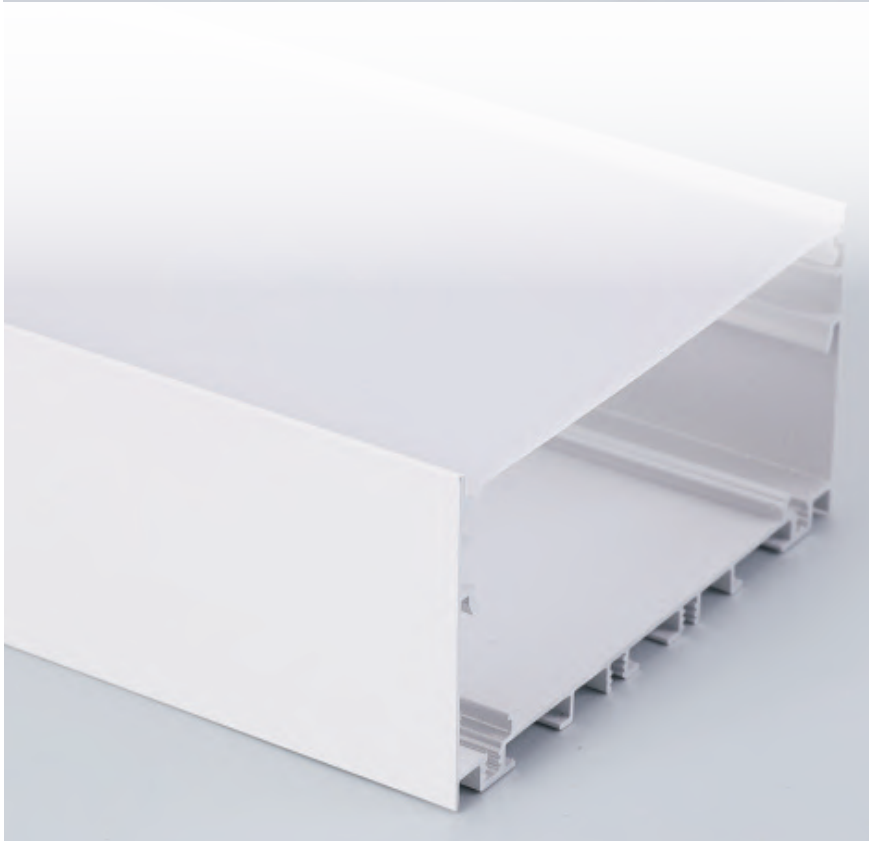


LL-CS3535C




LL-CS4035C




LL-CS5035C




LL-CS6035C




LL-CS7035C




LL-CS7535C



LL-CS8035C






LL-CS9035C




LL-CS10035C




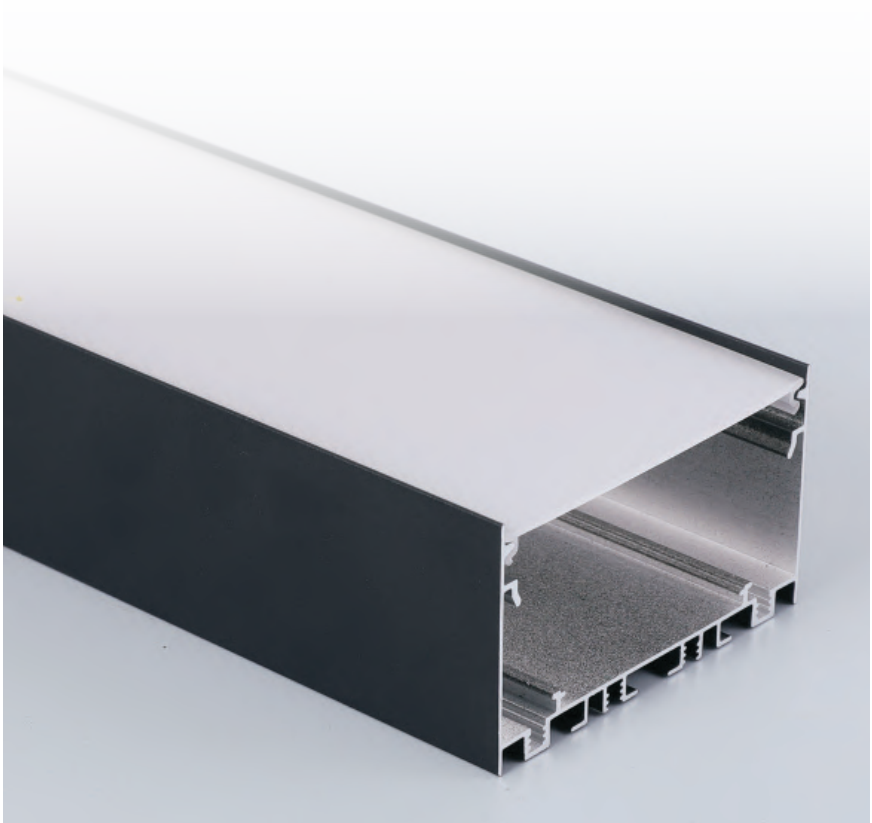


LL-CS4040C




LL-CS5040C




LL-CS6040C




LL-CS7040C




LL-CS7540C





LL-CS8040C




LL-CS9040C




LL-CS10040C

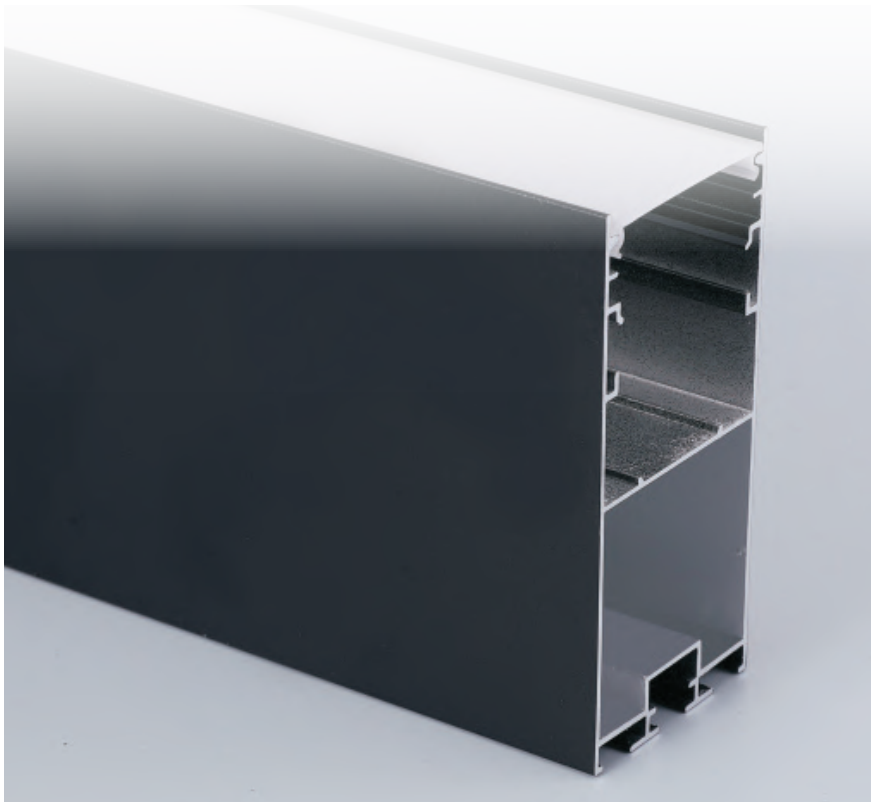


LL-CS3575C




LL-CS4075C




LL-CS5075C




LL-CS6075C




LL-CS7075C




LL-CS7575C



LL-CS8075C







LL-CS9075C




LL-CS10075C




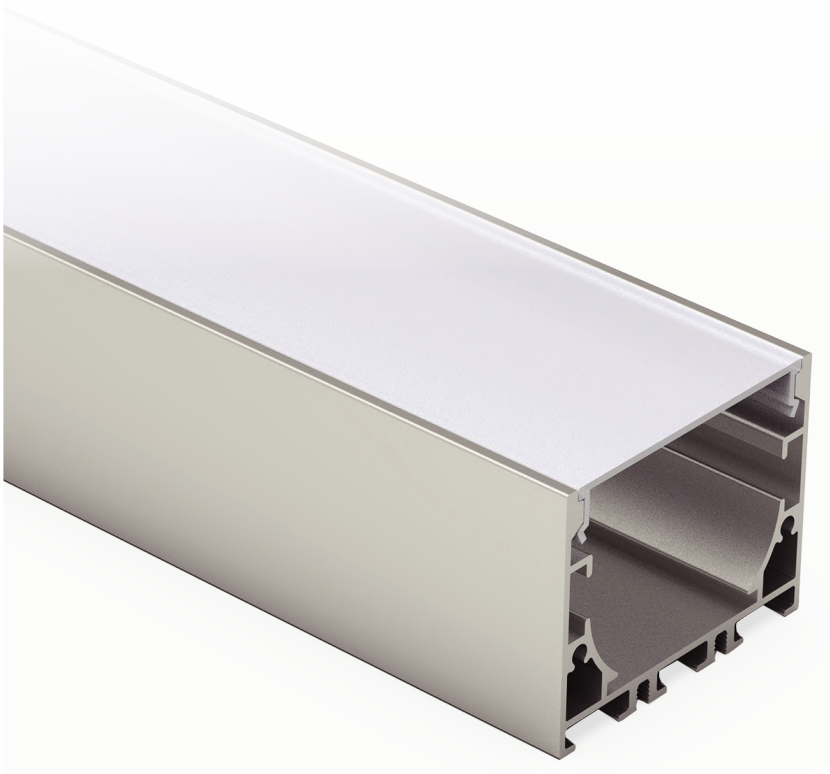


LL-CS4040




LL-CS5040




LL-CS6040




LL-CS7040




LL-CS8040




LL-CS9040




LL-CS10040







LL-CS12040




LL-CS15040




LL-CS20040

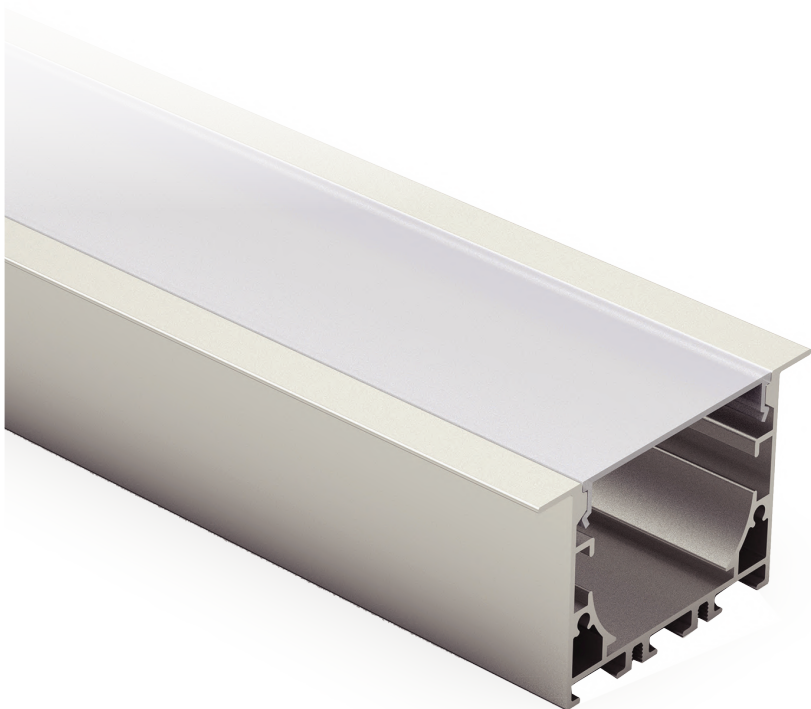


LL-CS5640




LL-CS6640




LL-CS7640




LL-CS8640




LL-CS9640




LL-CS10640




LL-CS11640







LL-CS13640




LL-CS16640




LL-CS21640

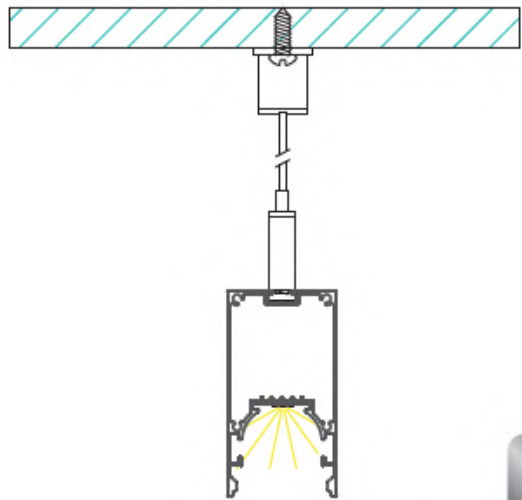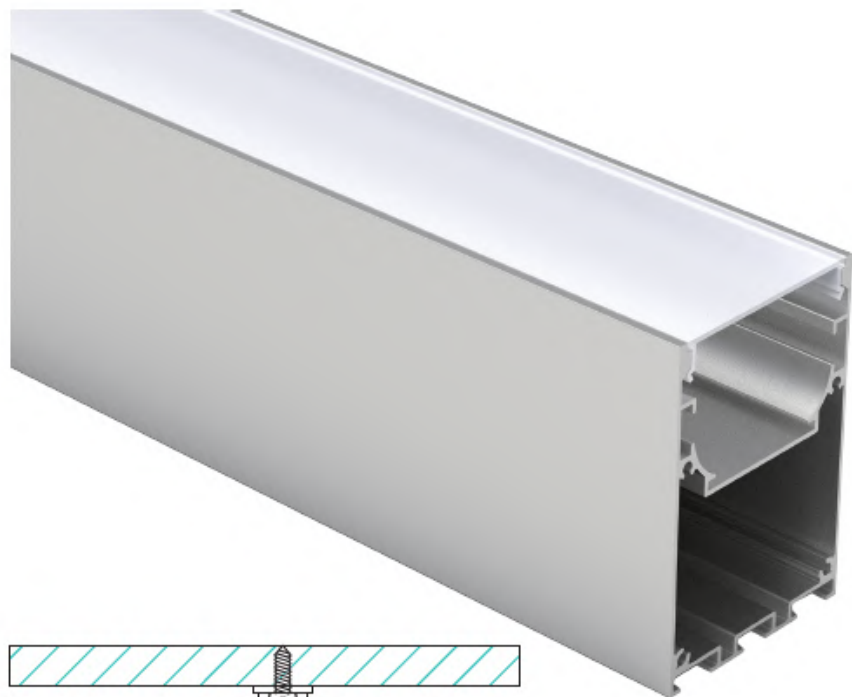


LL-CS4075




LL-CS5075




LL-CS6075




LL-CS7075




LL-CS8075




LL-CS9075




LL-CS10075



LL-CS12085



LL-CS15085





LL-CS20085



NODE CONNECTOR

All system components can be combined without tools, L, T and + connectors expand the system's application range.

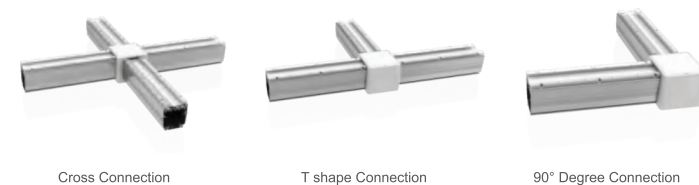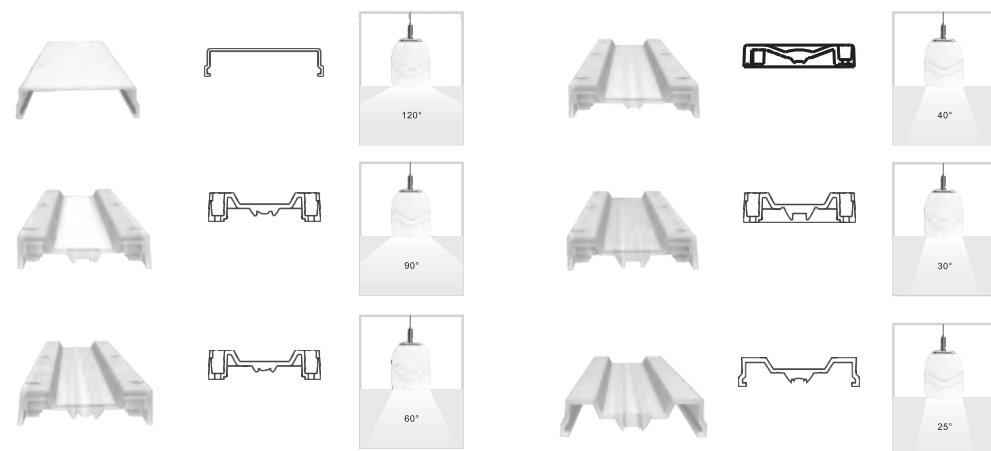

180° DegreeConnection





L,T and + Standard Module Node connectors

Each node connector has diverse of electrical feed-in and feed-out



Installation

- Pendant Chain Installation
- Pendant Cord Installation
- Pendant Rod Installation
- Surface Mounted
- Mounting Clip

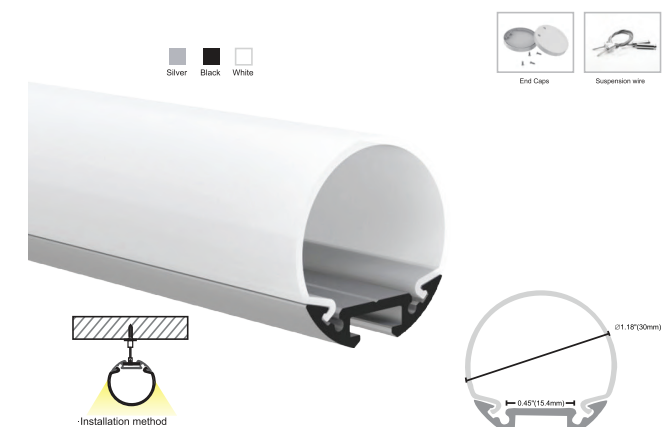
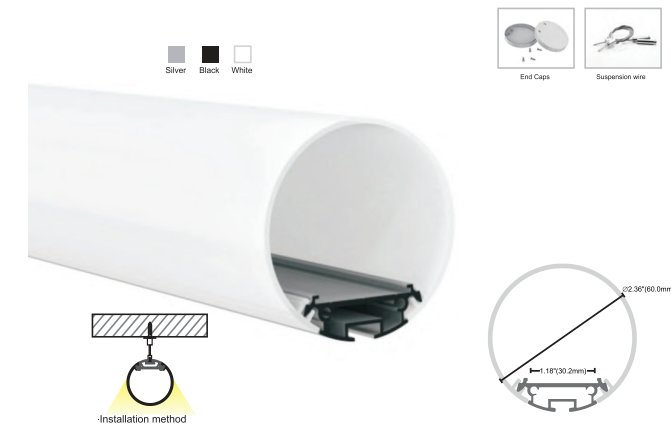





LED Aluminium Profile




LL-YH200

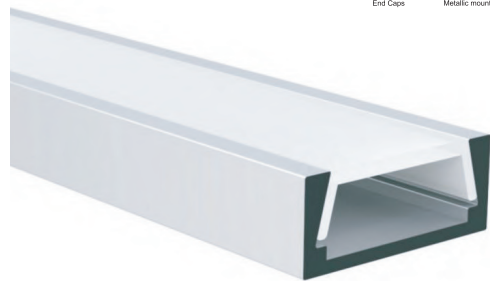


Cover: PC/PMMA/Clear/Milky





Silver Black White




Installation method




LL-YH200H

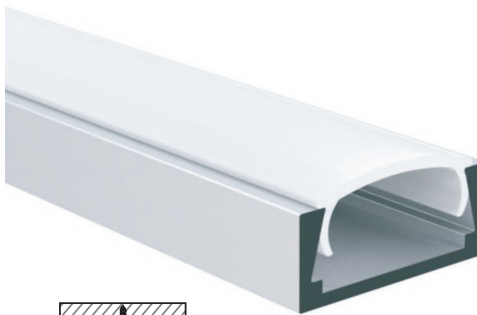

Cover: PC/PMMA/Clear/Milky





Silver Black White




Installation method

Silver Black White


LL-CS-121

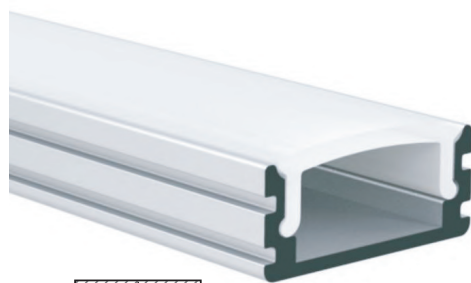

Cover: PC/PMMA/Clear/Milky




Silver Black White




Installation method


LL-YH-240



Cover: PC/PMMA/Clear/Milky




Silver Black White



Installation method

Silver Black White




LL-YH-240B



Cover: PC/PMMA/Clear/Milky





Silver Black White



Installation method


LL-YH-29B

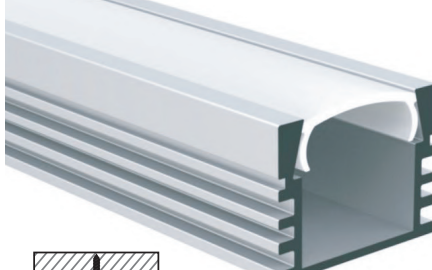

Cover: PC/PMMA/Clear/Milky



Silver Black White




Installation method

Silver Black White

LL-CK08




LL-YH-198A

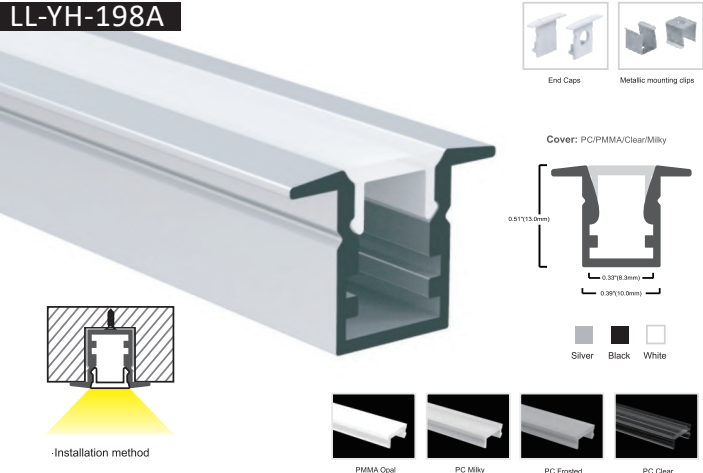

LL-CS324




LL-YH198

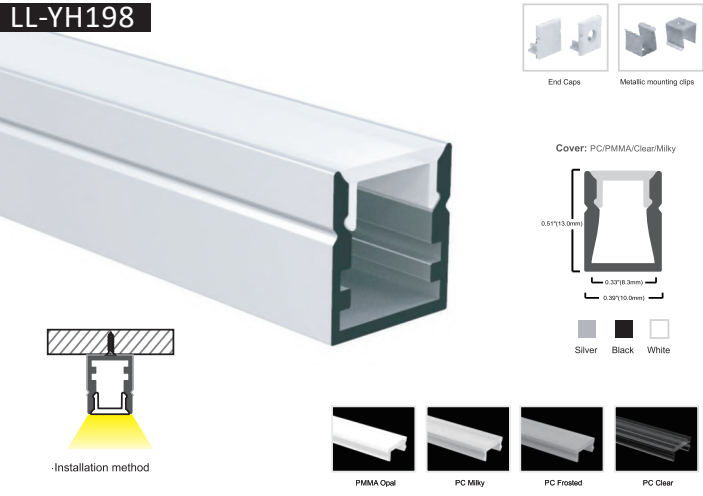

LL-CS400



LL-CS311

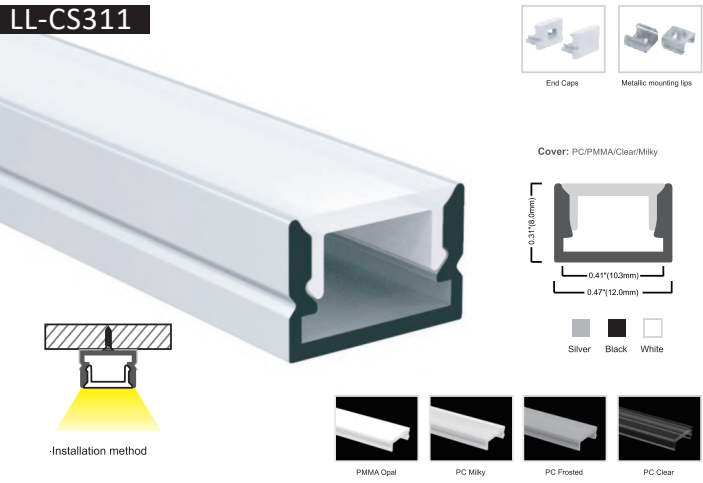



LL-CS183A




LL-CS401




LL-CS401A




LL-CS-324A

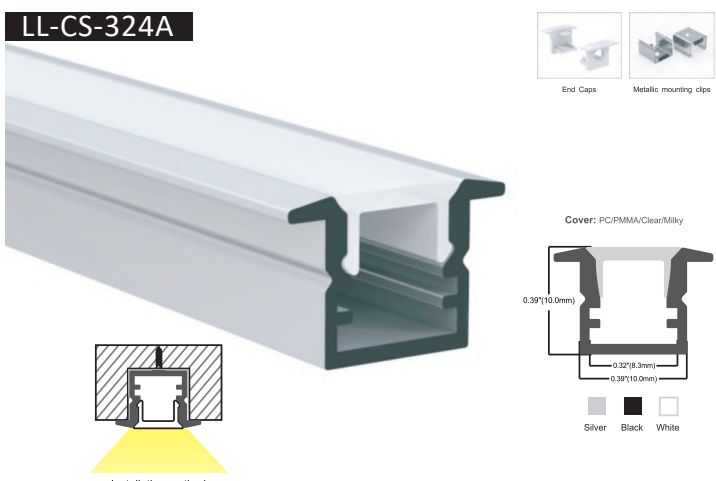

LL-CS183

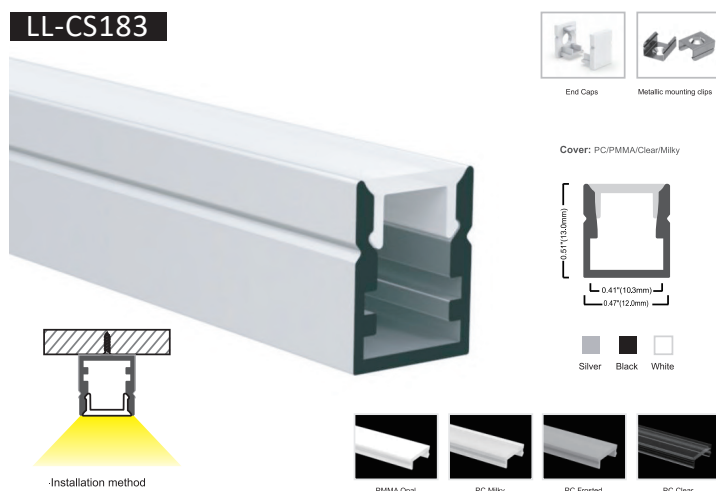


LL-YH-29

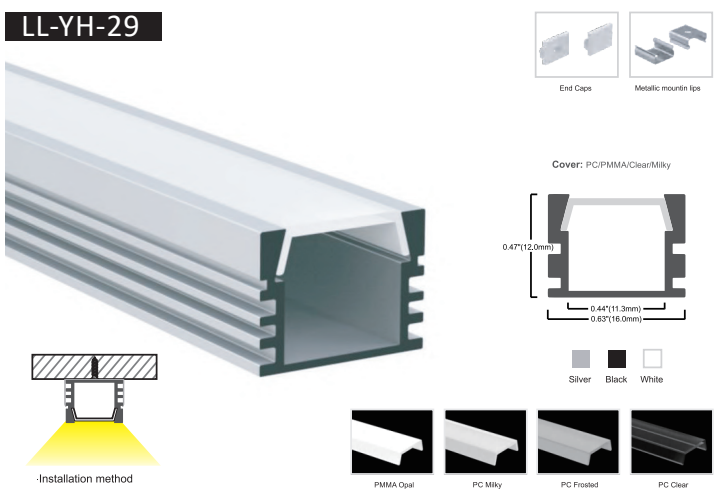





LL-CS-406B

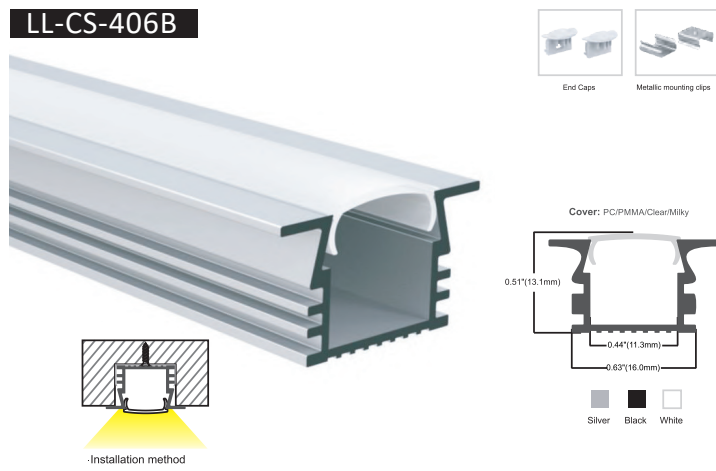


LL-YH-11

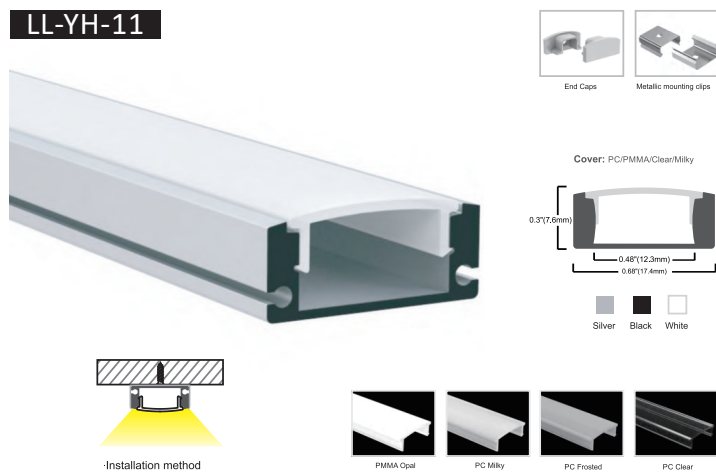


LL-CS-406

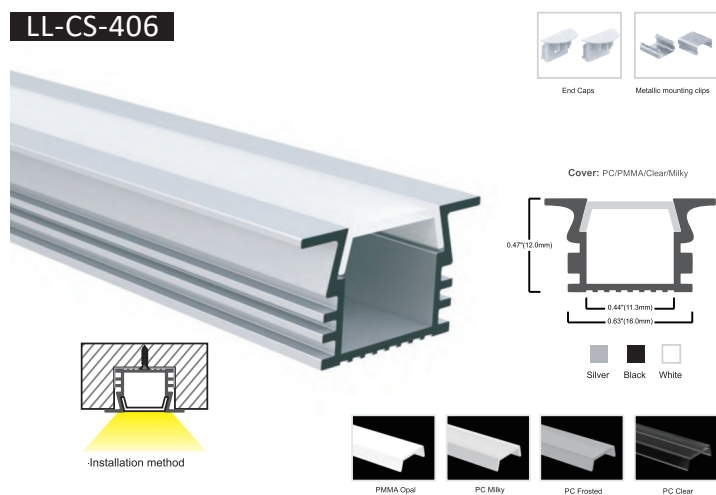


LL-YH-57

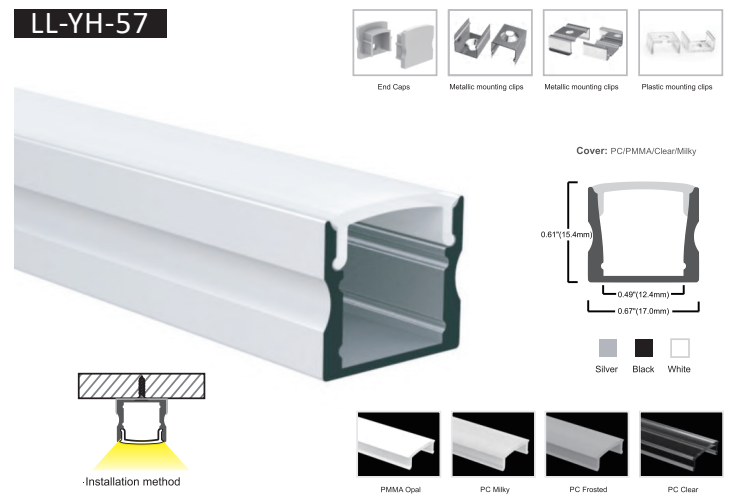


LL-YH-193

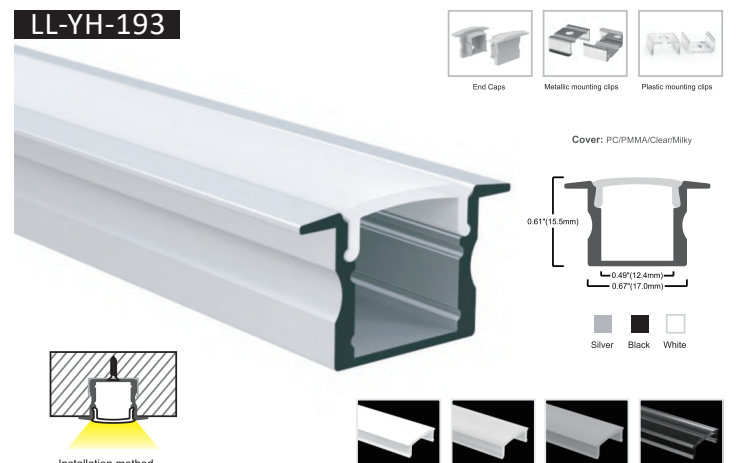


LL-CS385

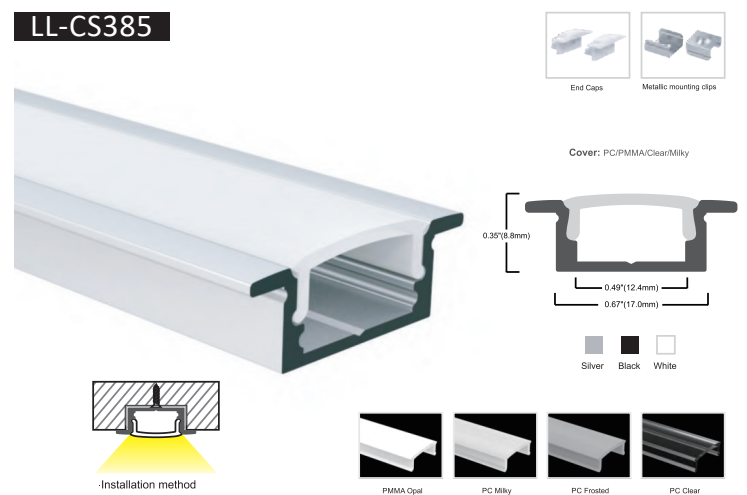


LL-CS-199

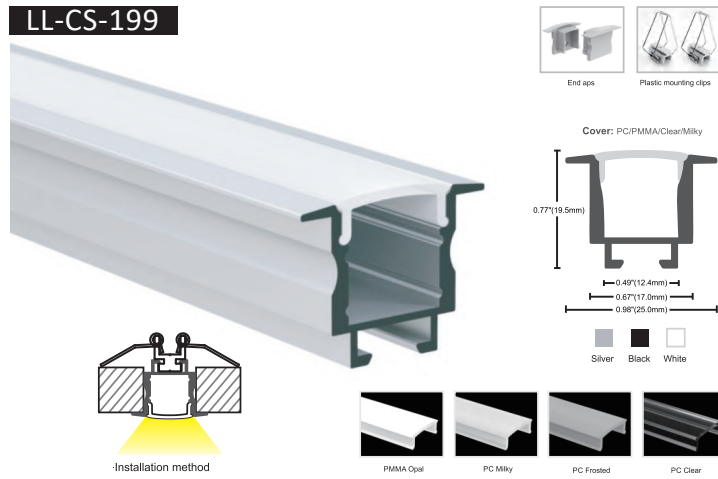


LL-YH-1113

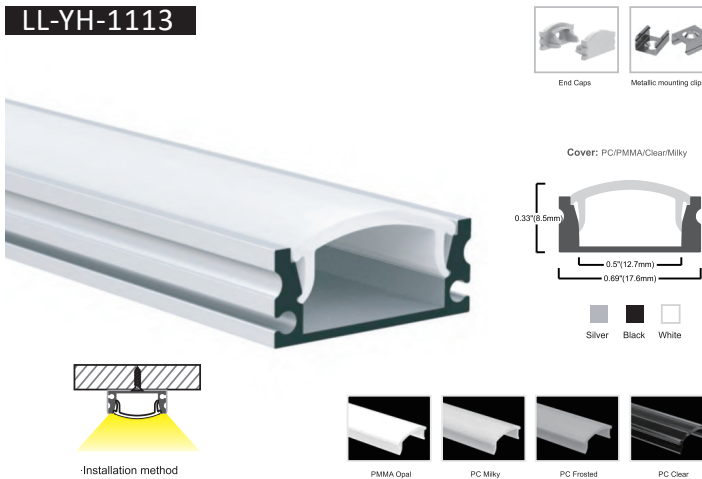


LL-YH-12

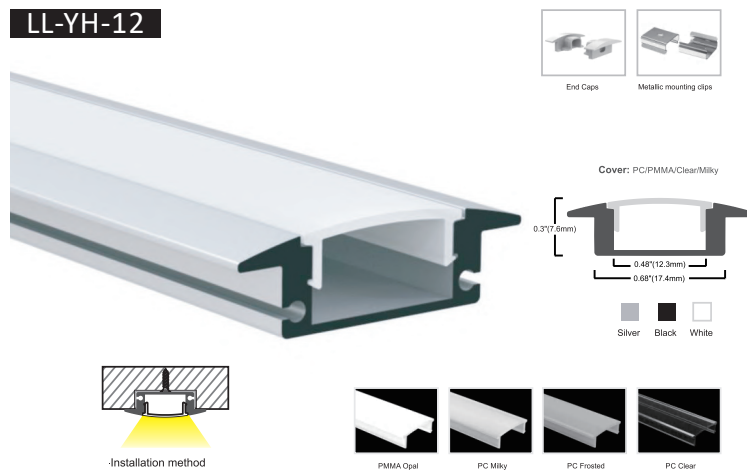

LL-YH-239

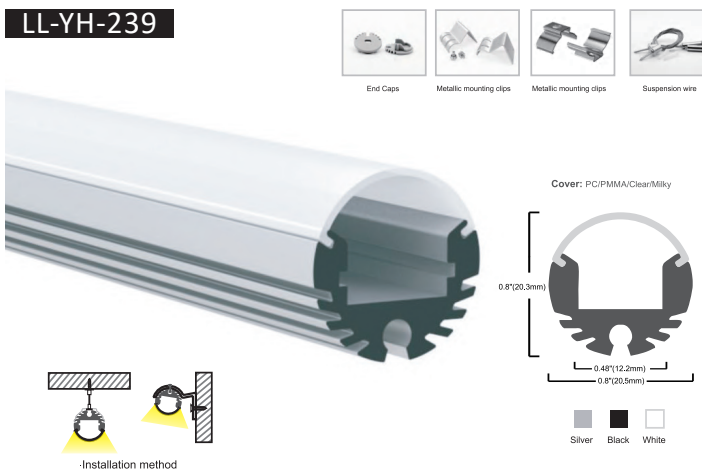

LL-YH-1213

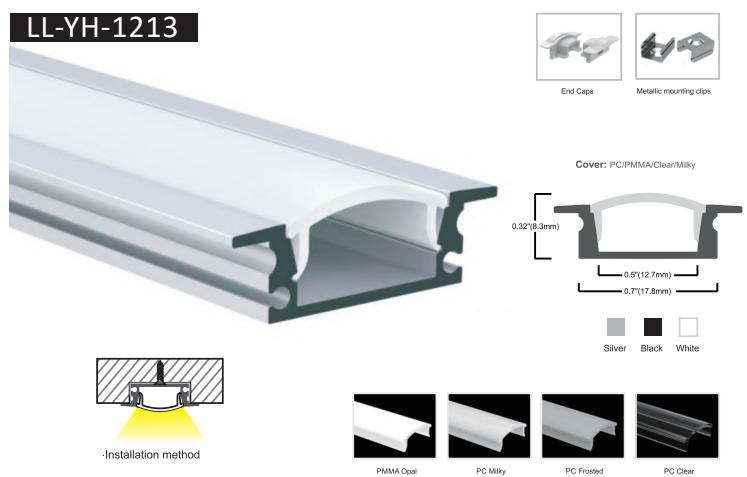


LL-CS-204







LL-CK08

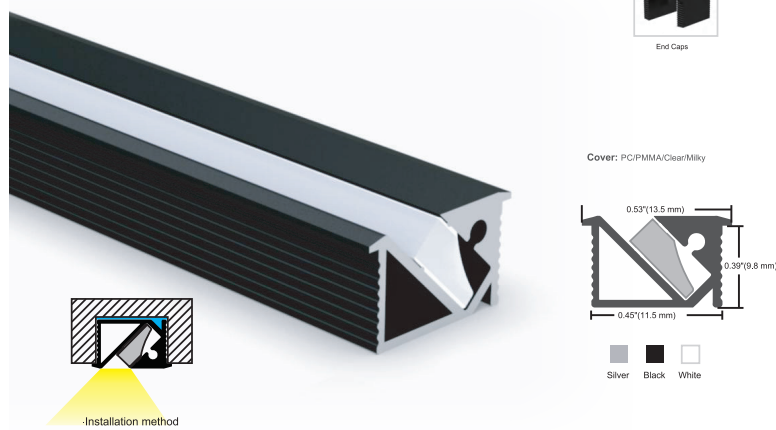

LL-CK11

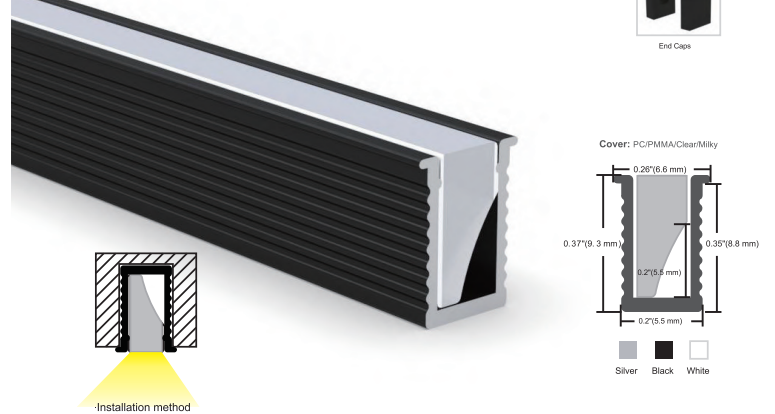

LL-CK12

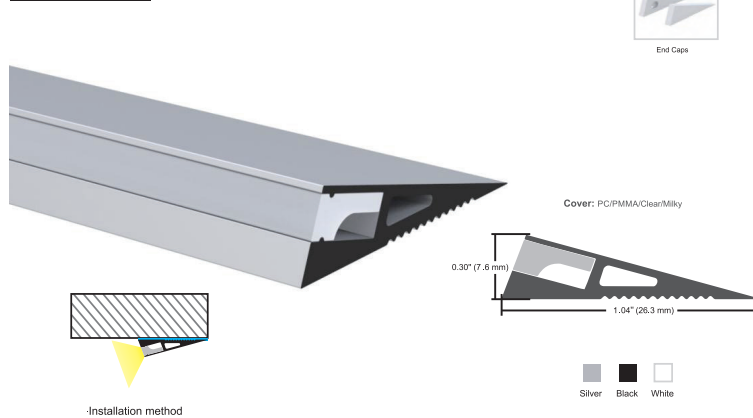

LL-CS8X8



LL-YH-231




LL-YH-2029







LL-YH-238

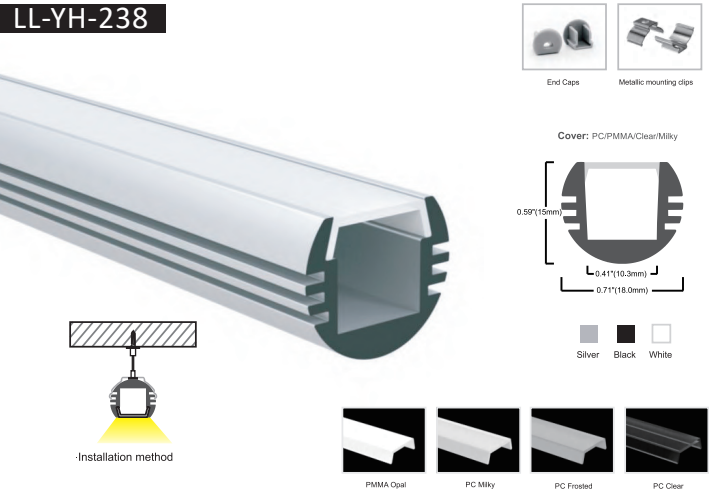

LL-YH-2051

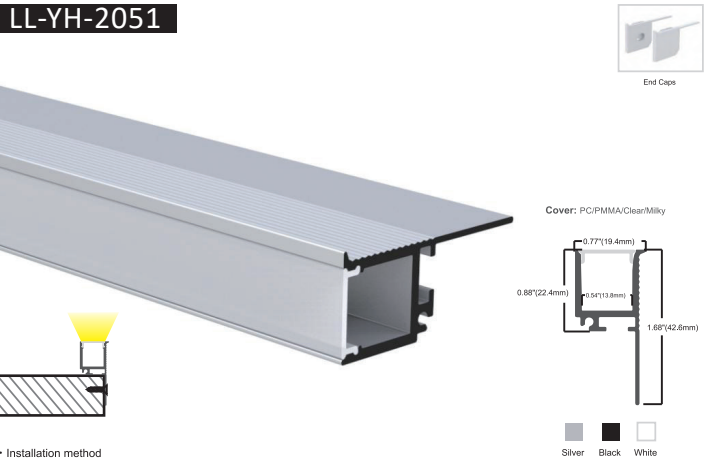


LL-CS-217

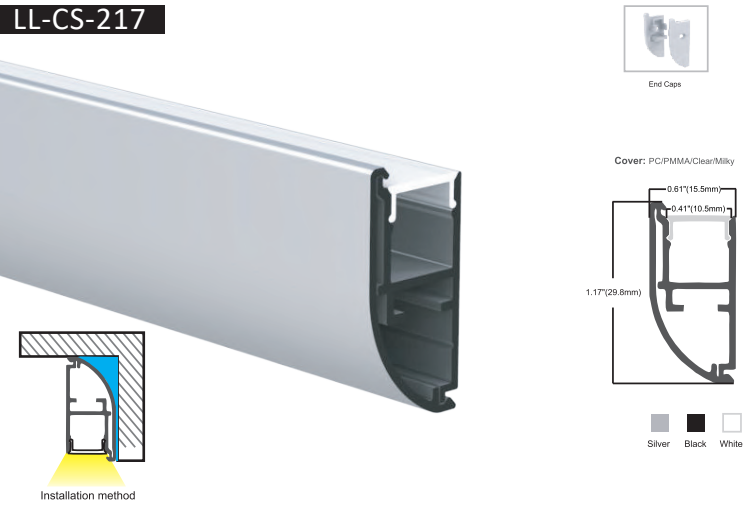


LL-CS-125




LL-YH-210

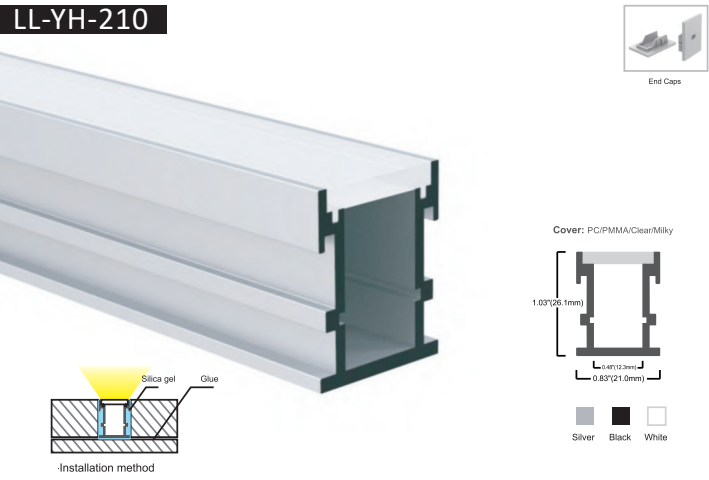


LL-CK-03

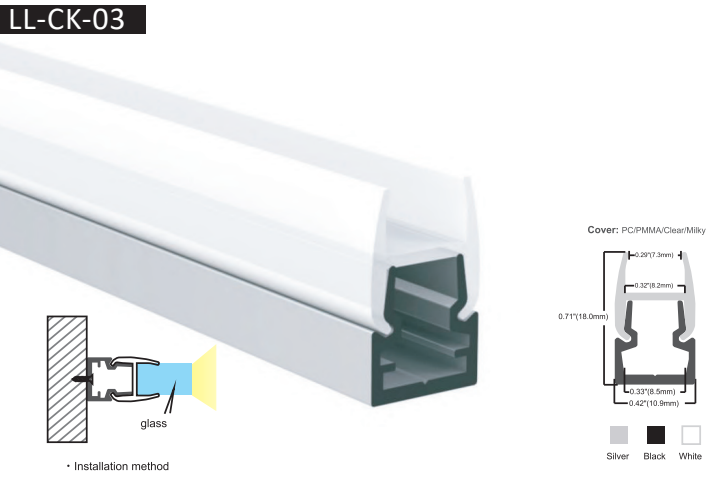


LL-YH-58

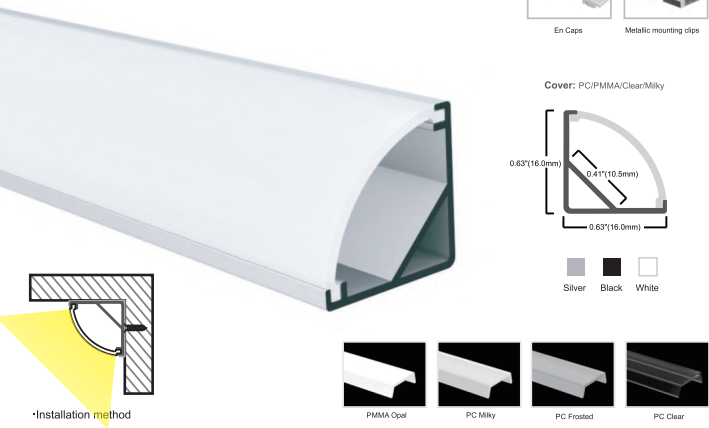


LL-YH-58A

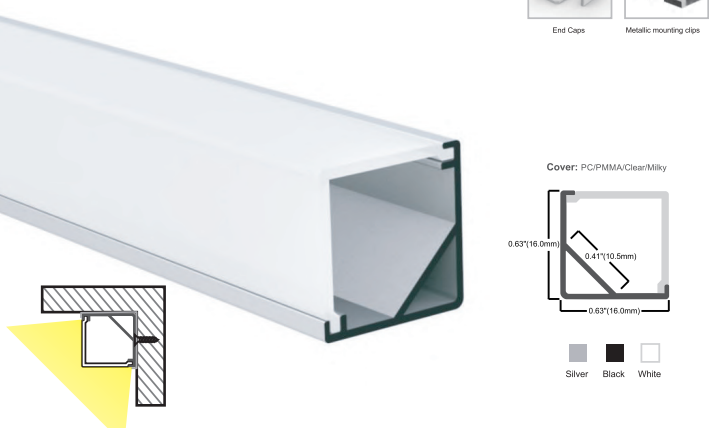


LL-CS-57

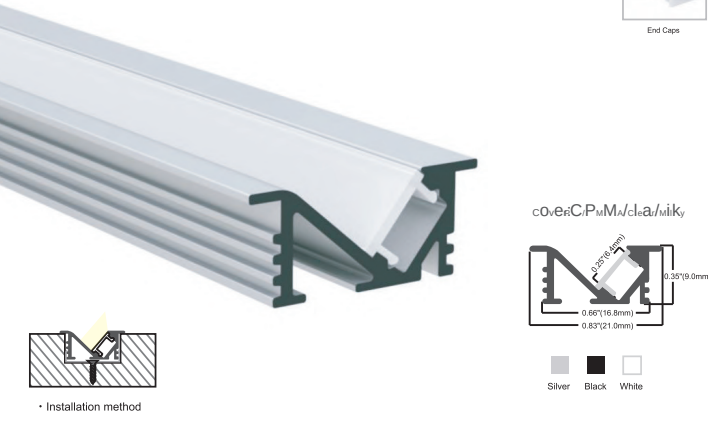


LL-CS-8016#

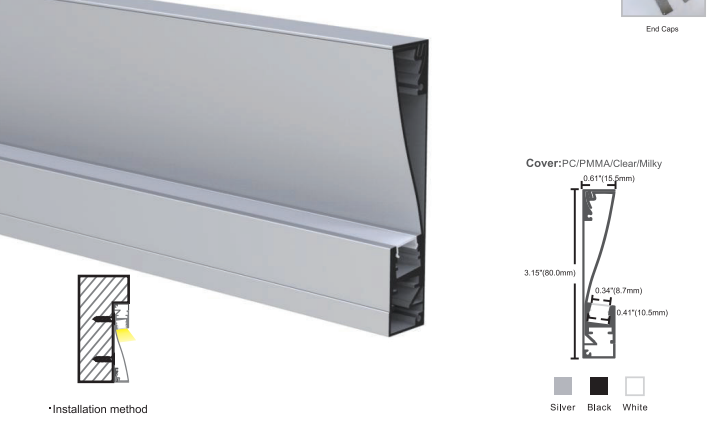

LL-CS-70

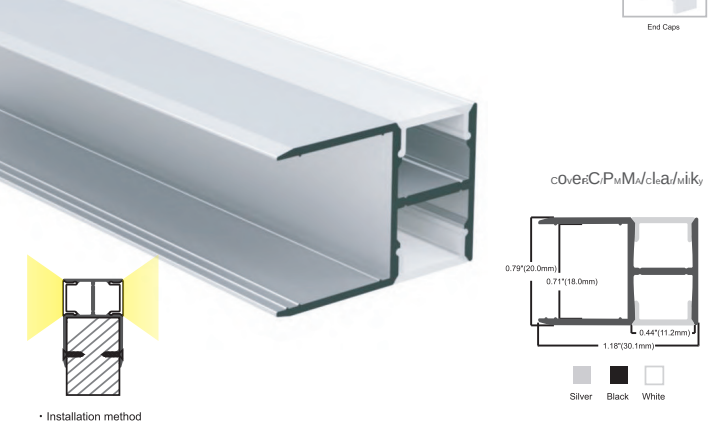

LL-YH195#

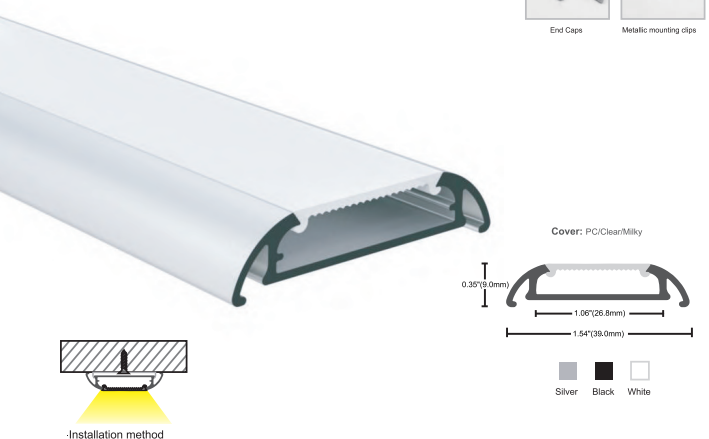





LL-CS285#





LL-CS-144#






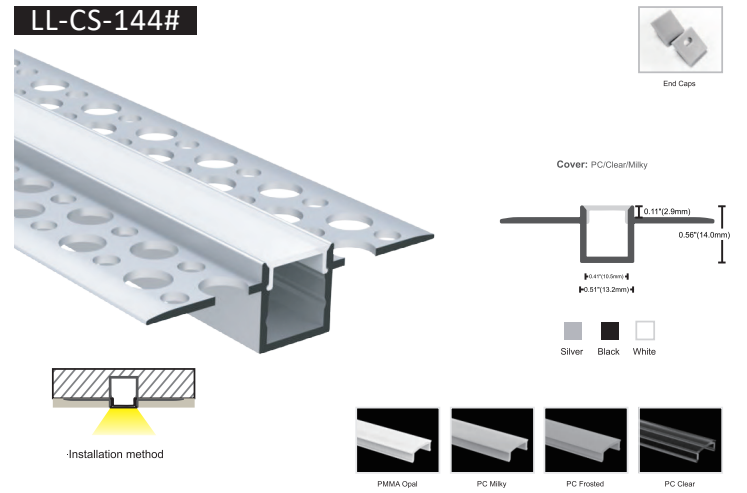


LL-CS-147#

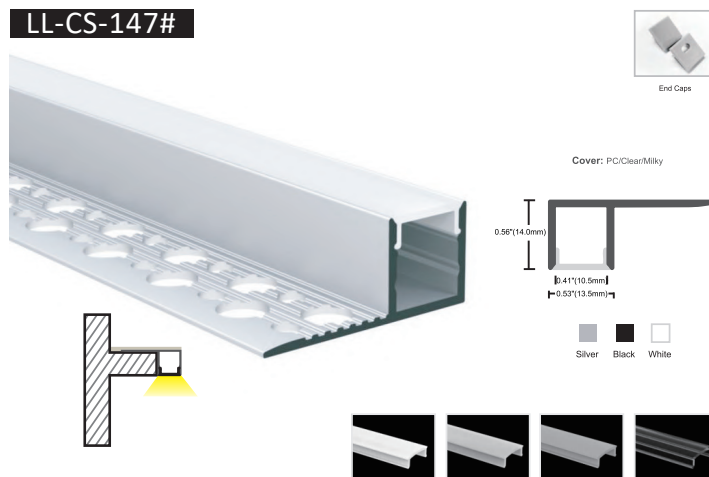


LL-CS-232#

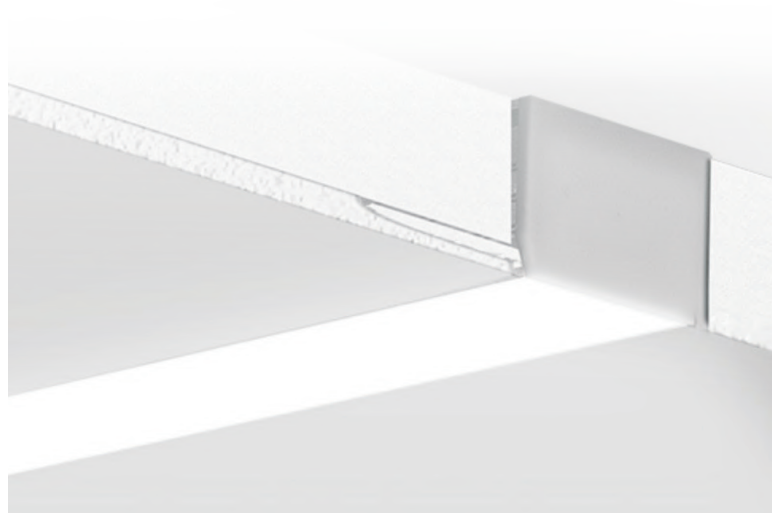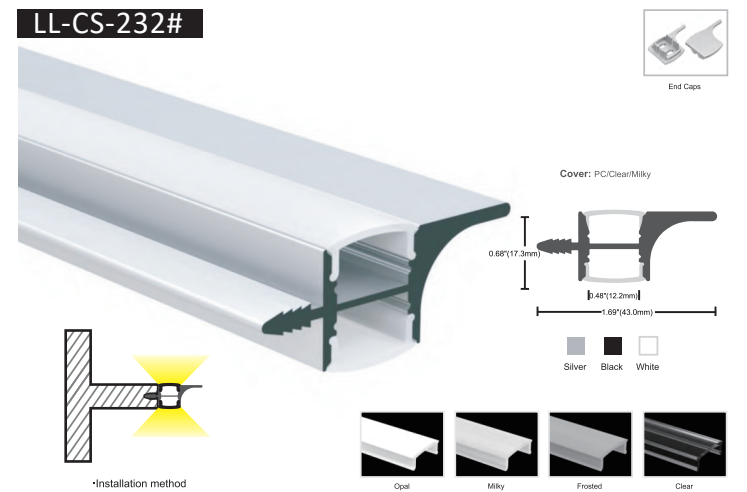

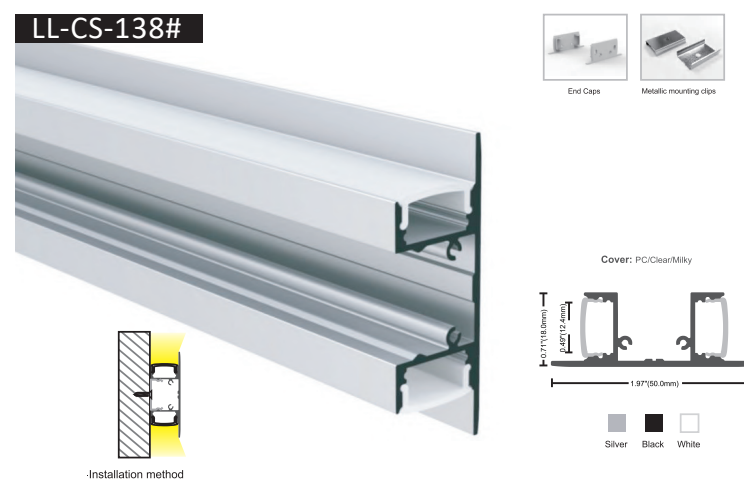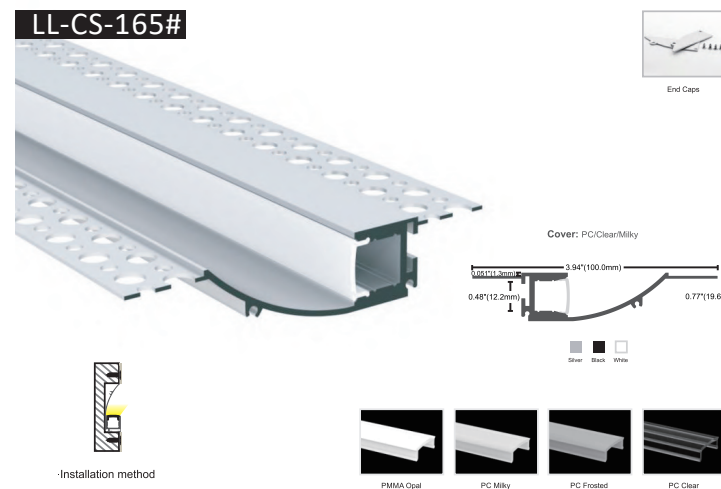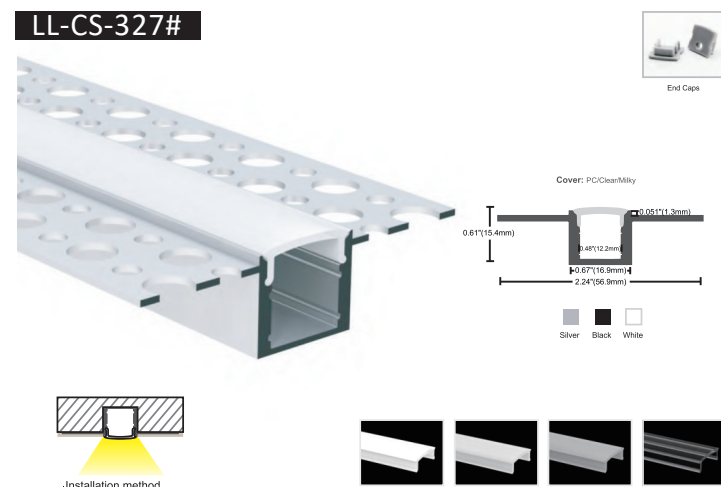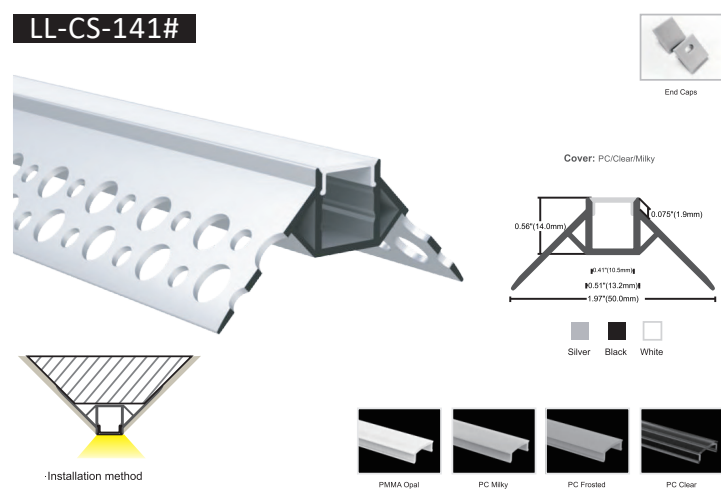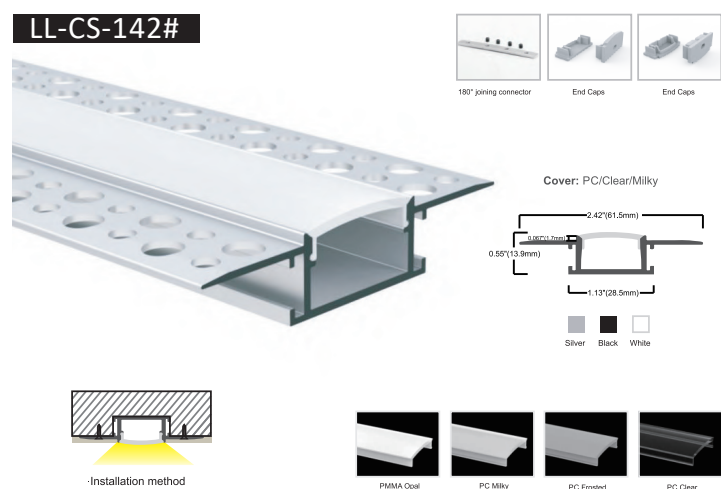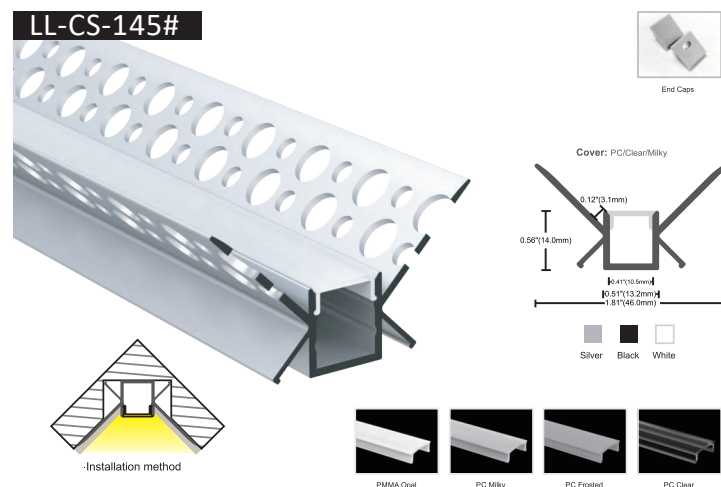





LL-CS-186#

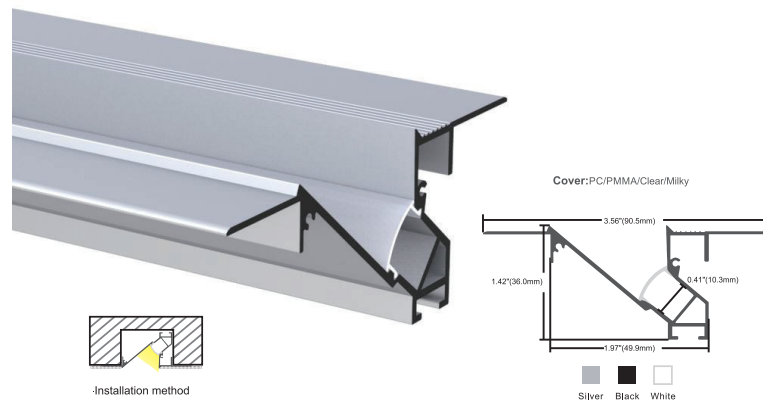


LL-CS-189#

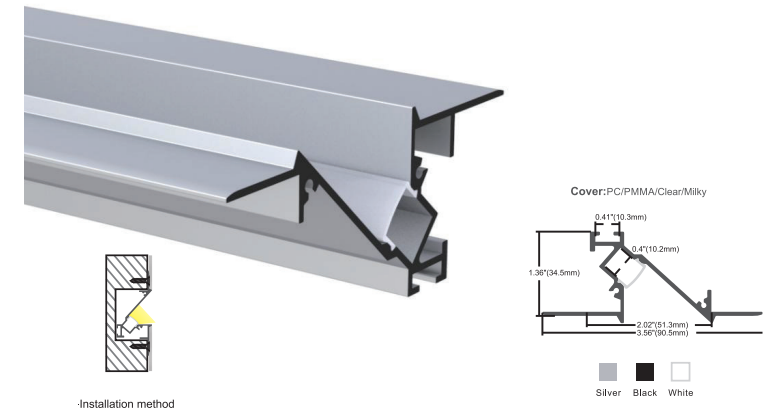


LL-YH61#

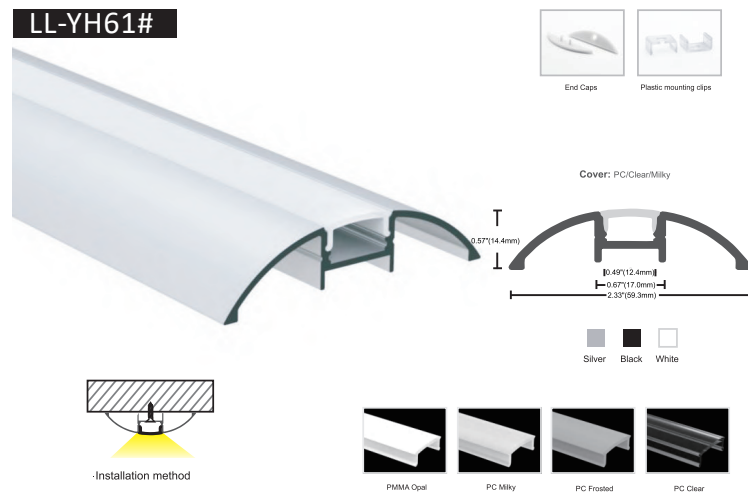


LL-YH2051#

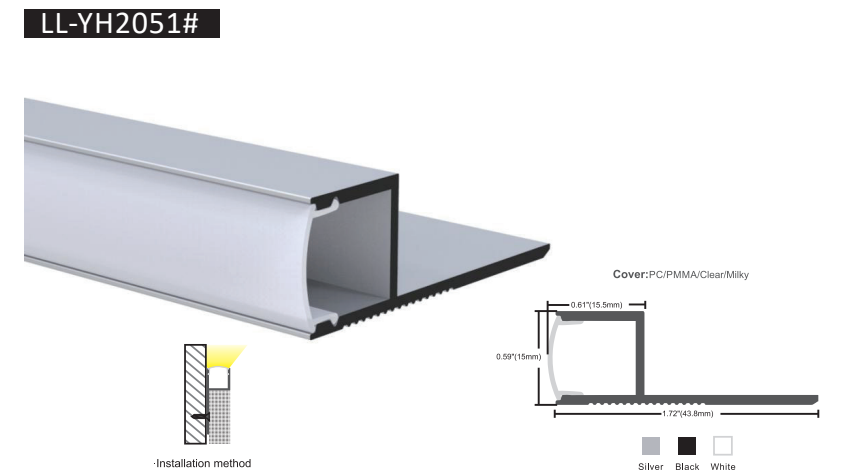


LL-CS-327A#

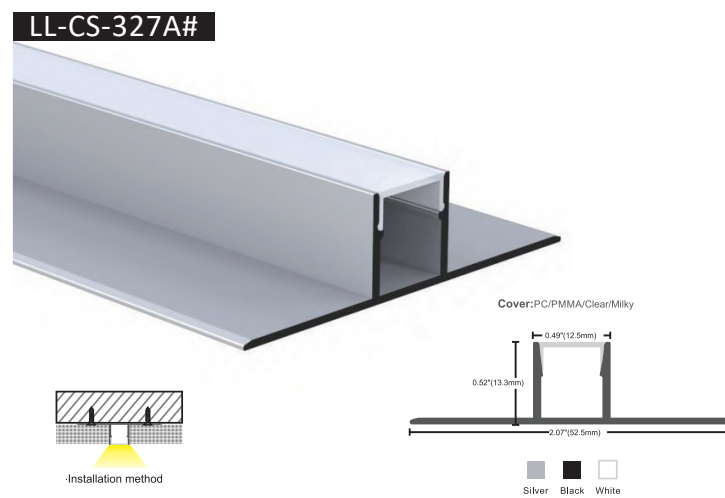


LL-CS-184#

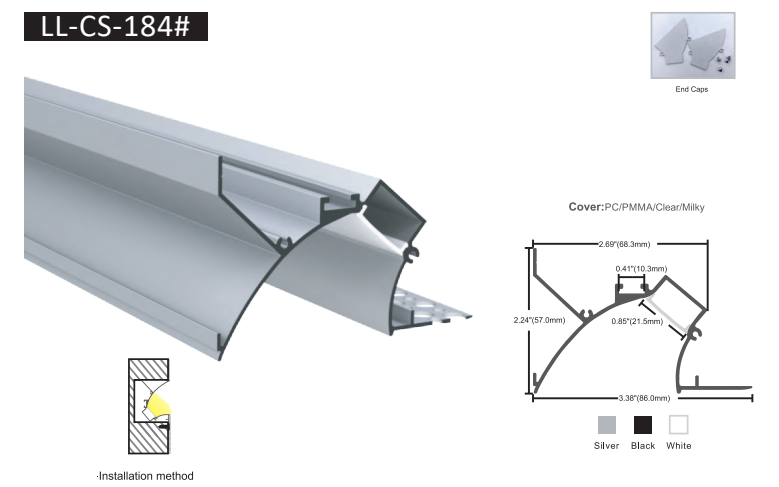


LL-YH2053#

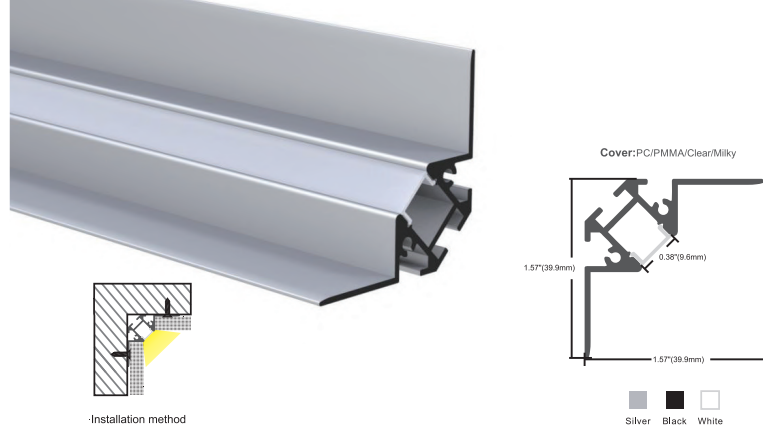


LL-YH2052#

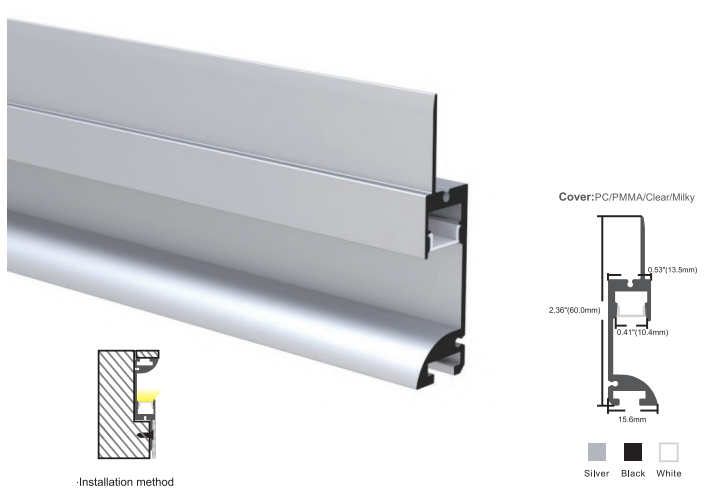


LL-CS-281#

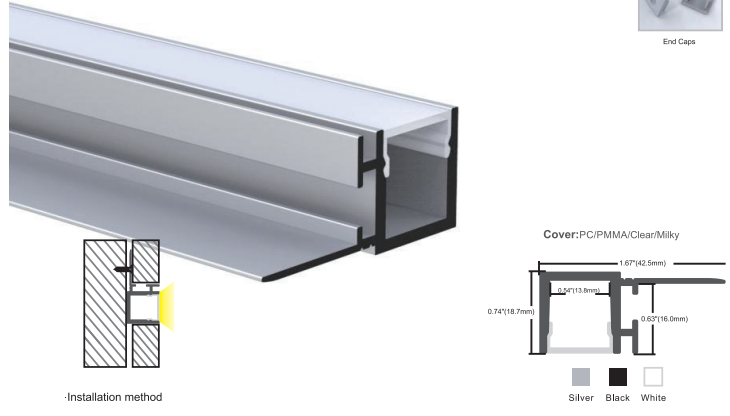


LL-CS-229#

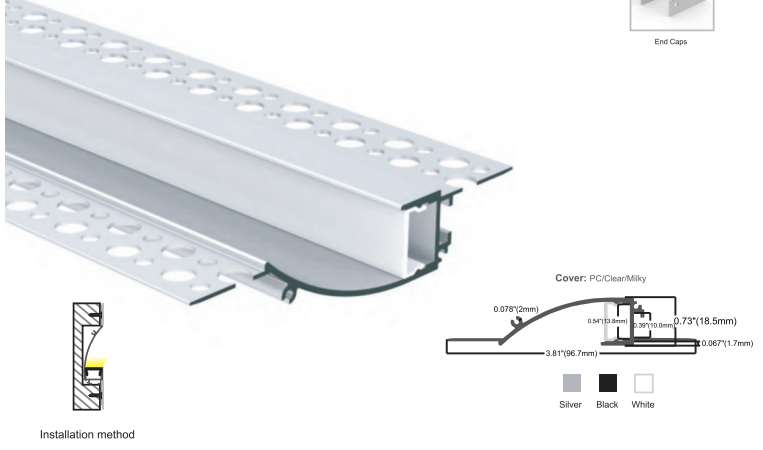

LL-YH2054#

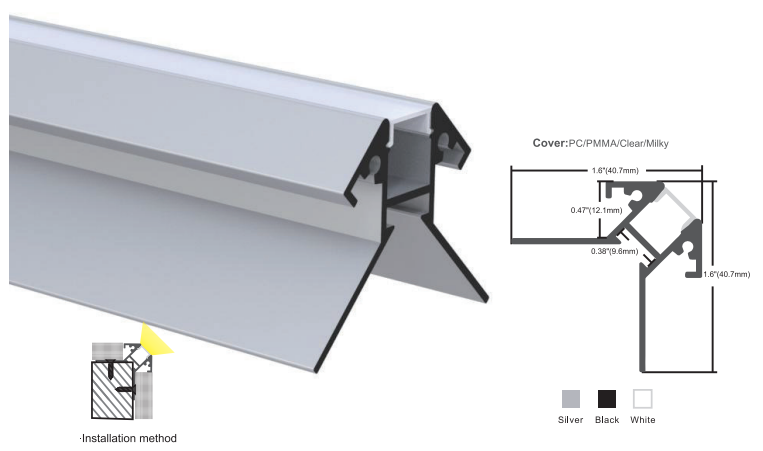

LL-YH2061#

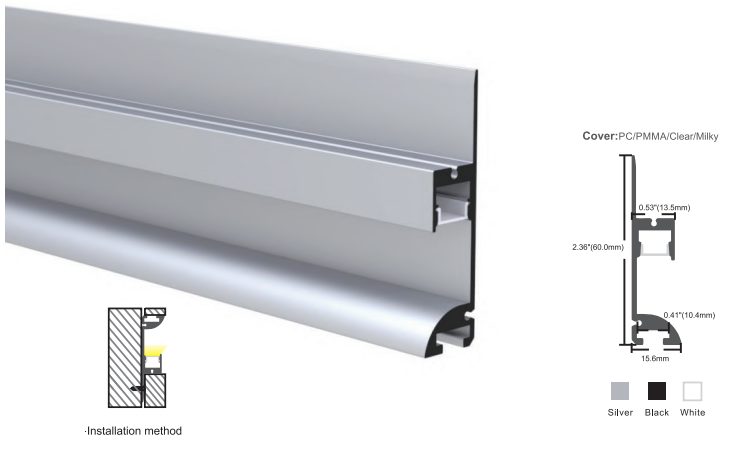




lightloop


LL-CS-296#




LL-YH-CS102

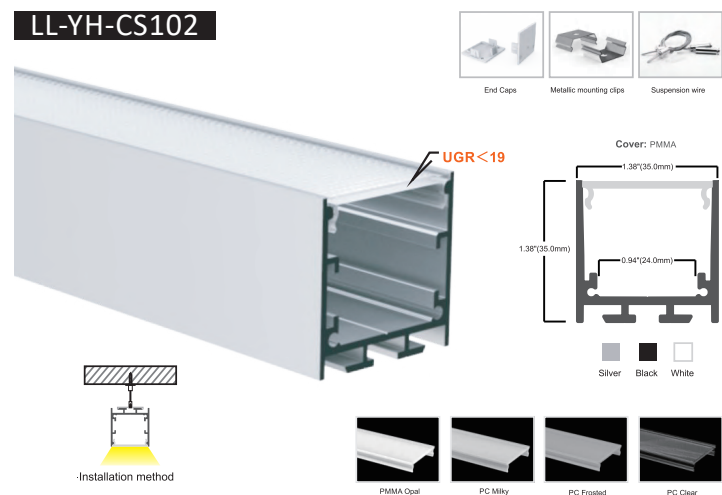


LL-YH2082#

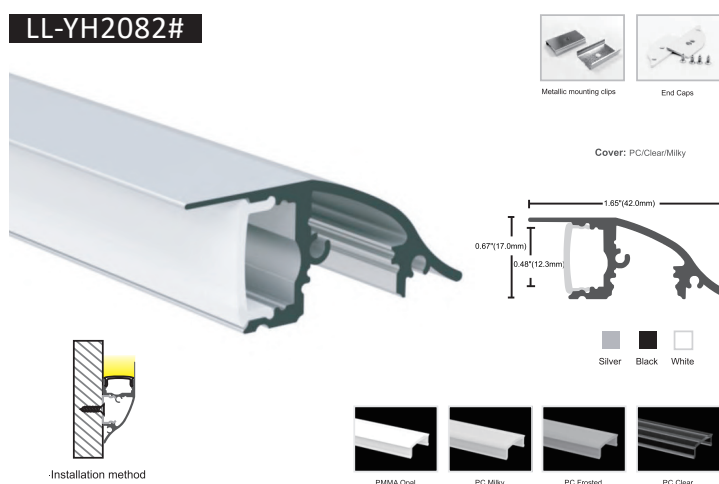


LL-CS-103#

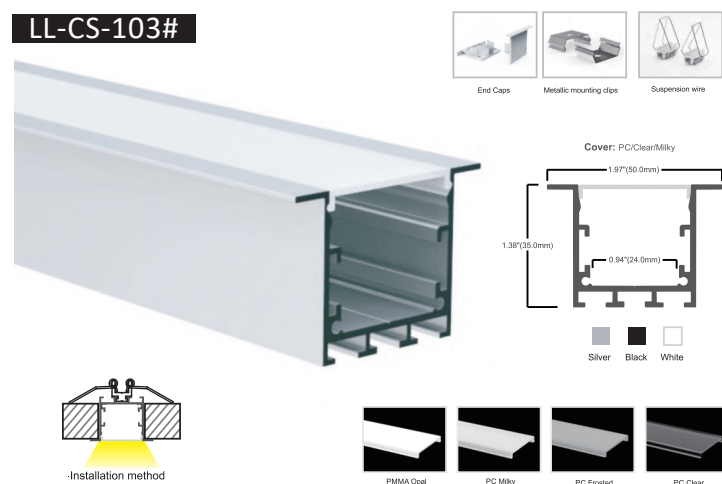





























































LL-CS-234#

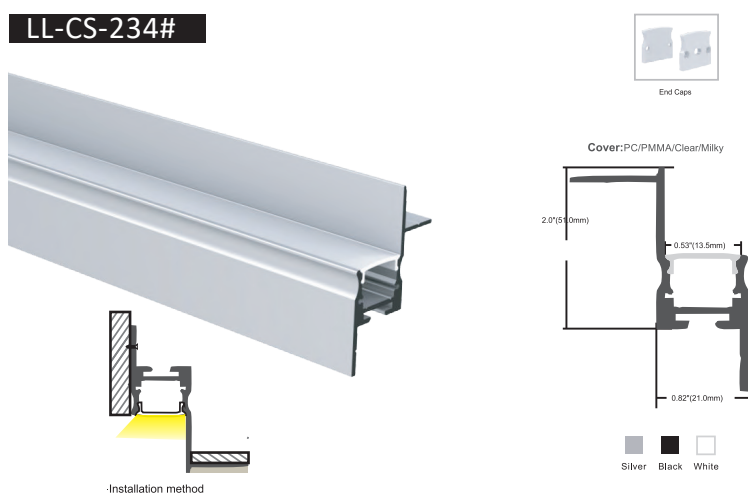

LL-CS-234A#

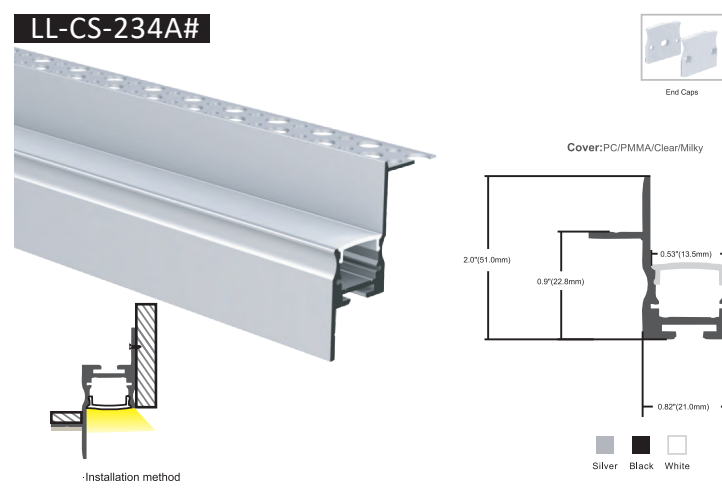

LED Profile sizing


							
							
							
							
							
							
							
							






LED Profile sizing


LED Profile sizing





LED Profile sizing

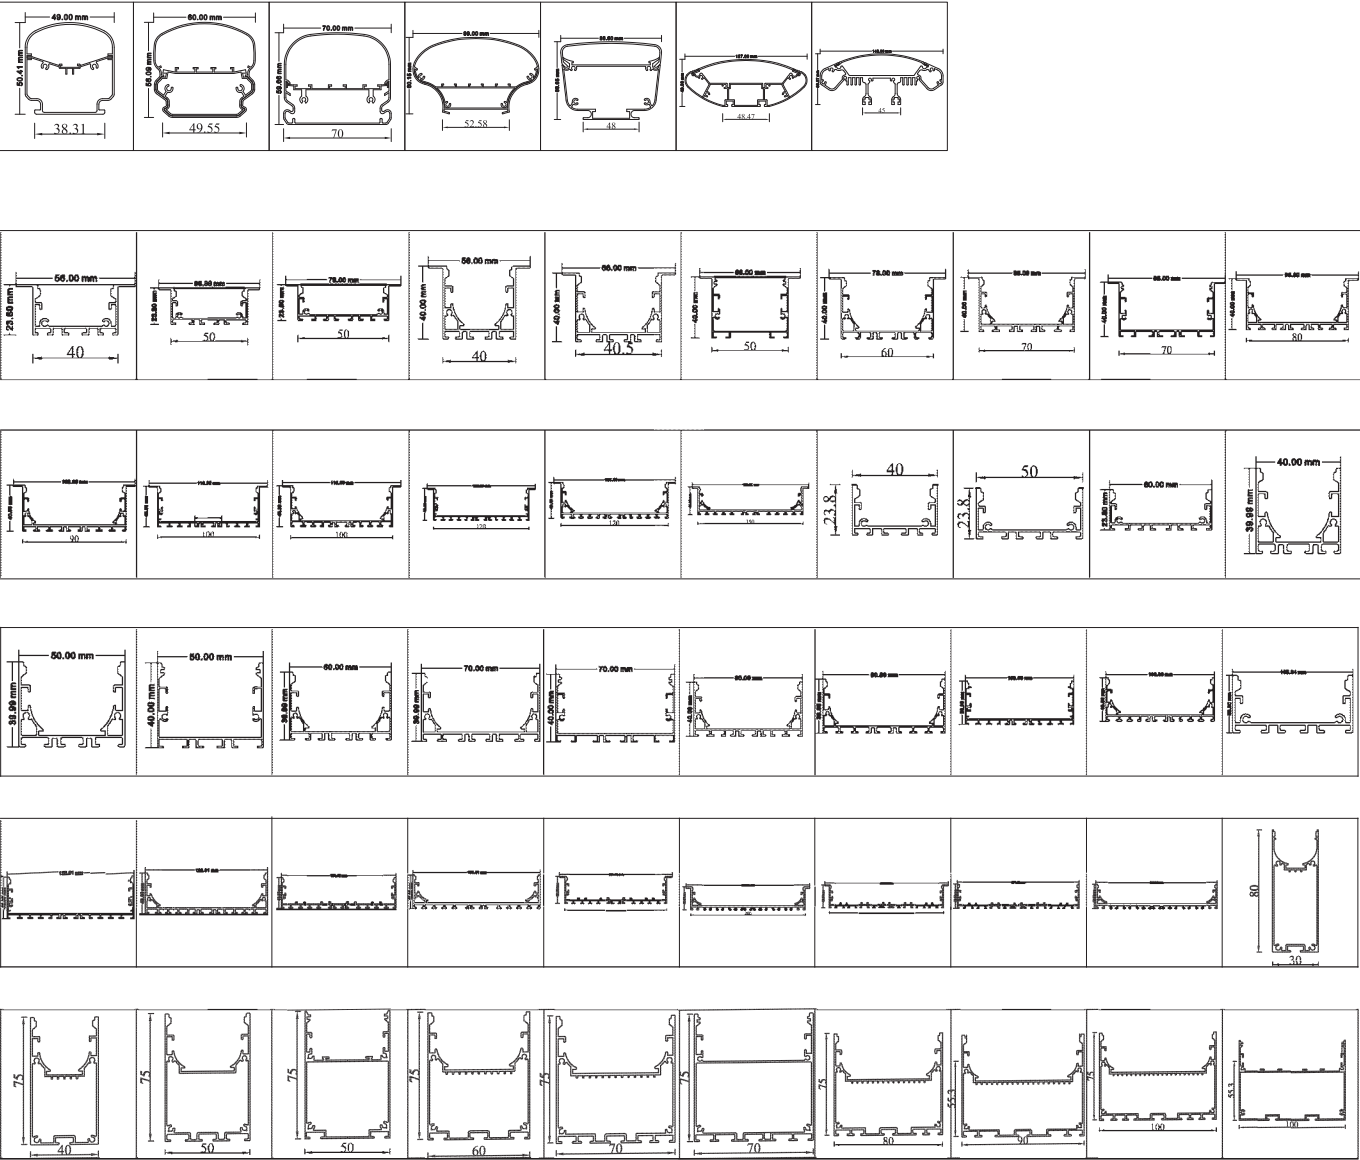

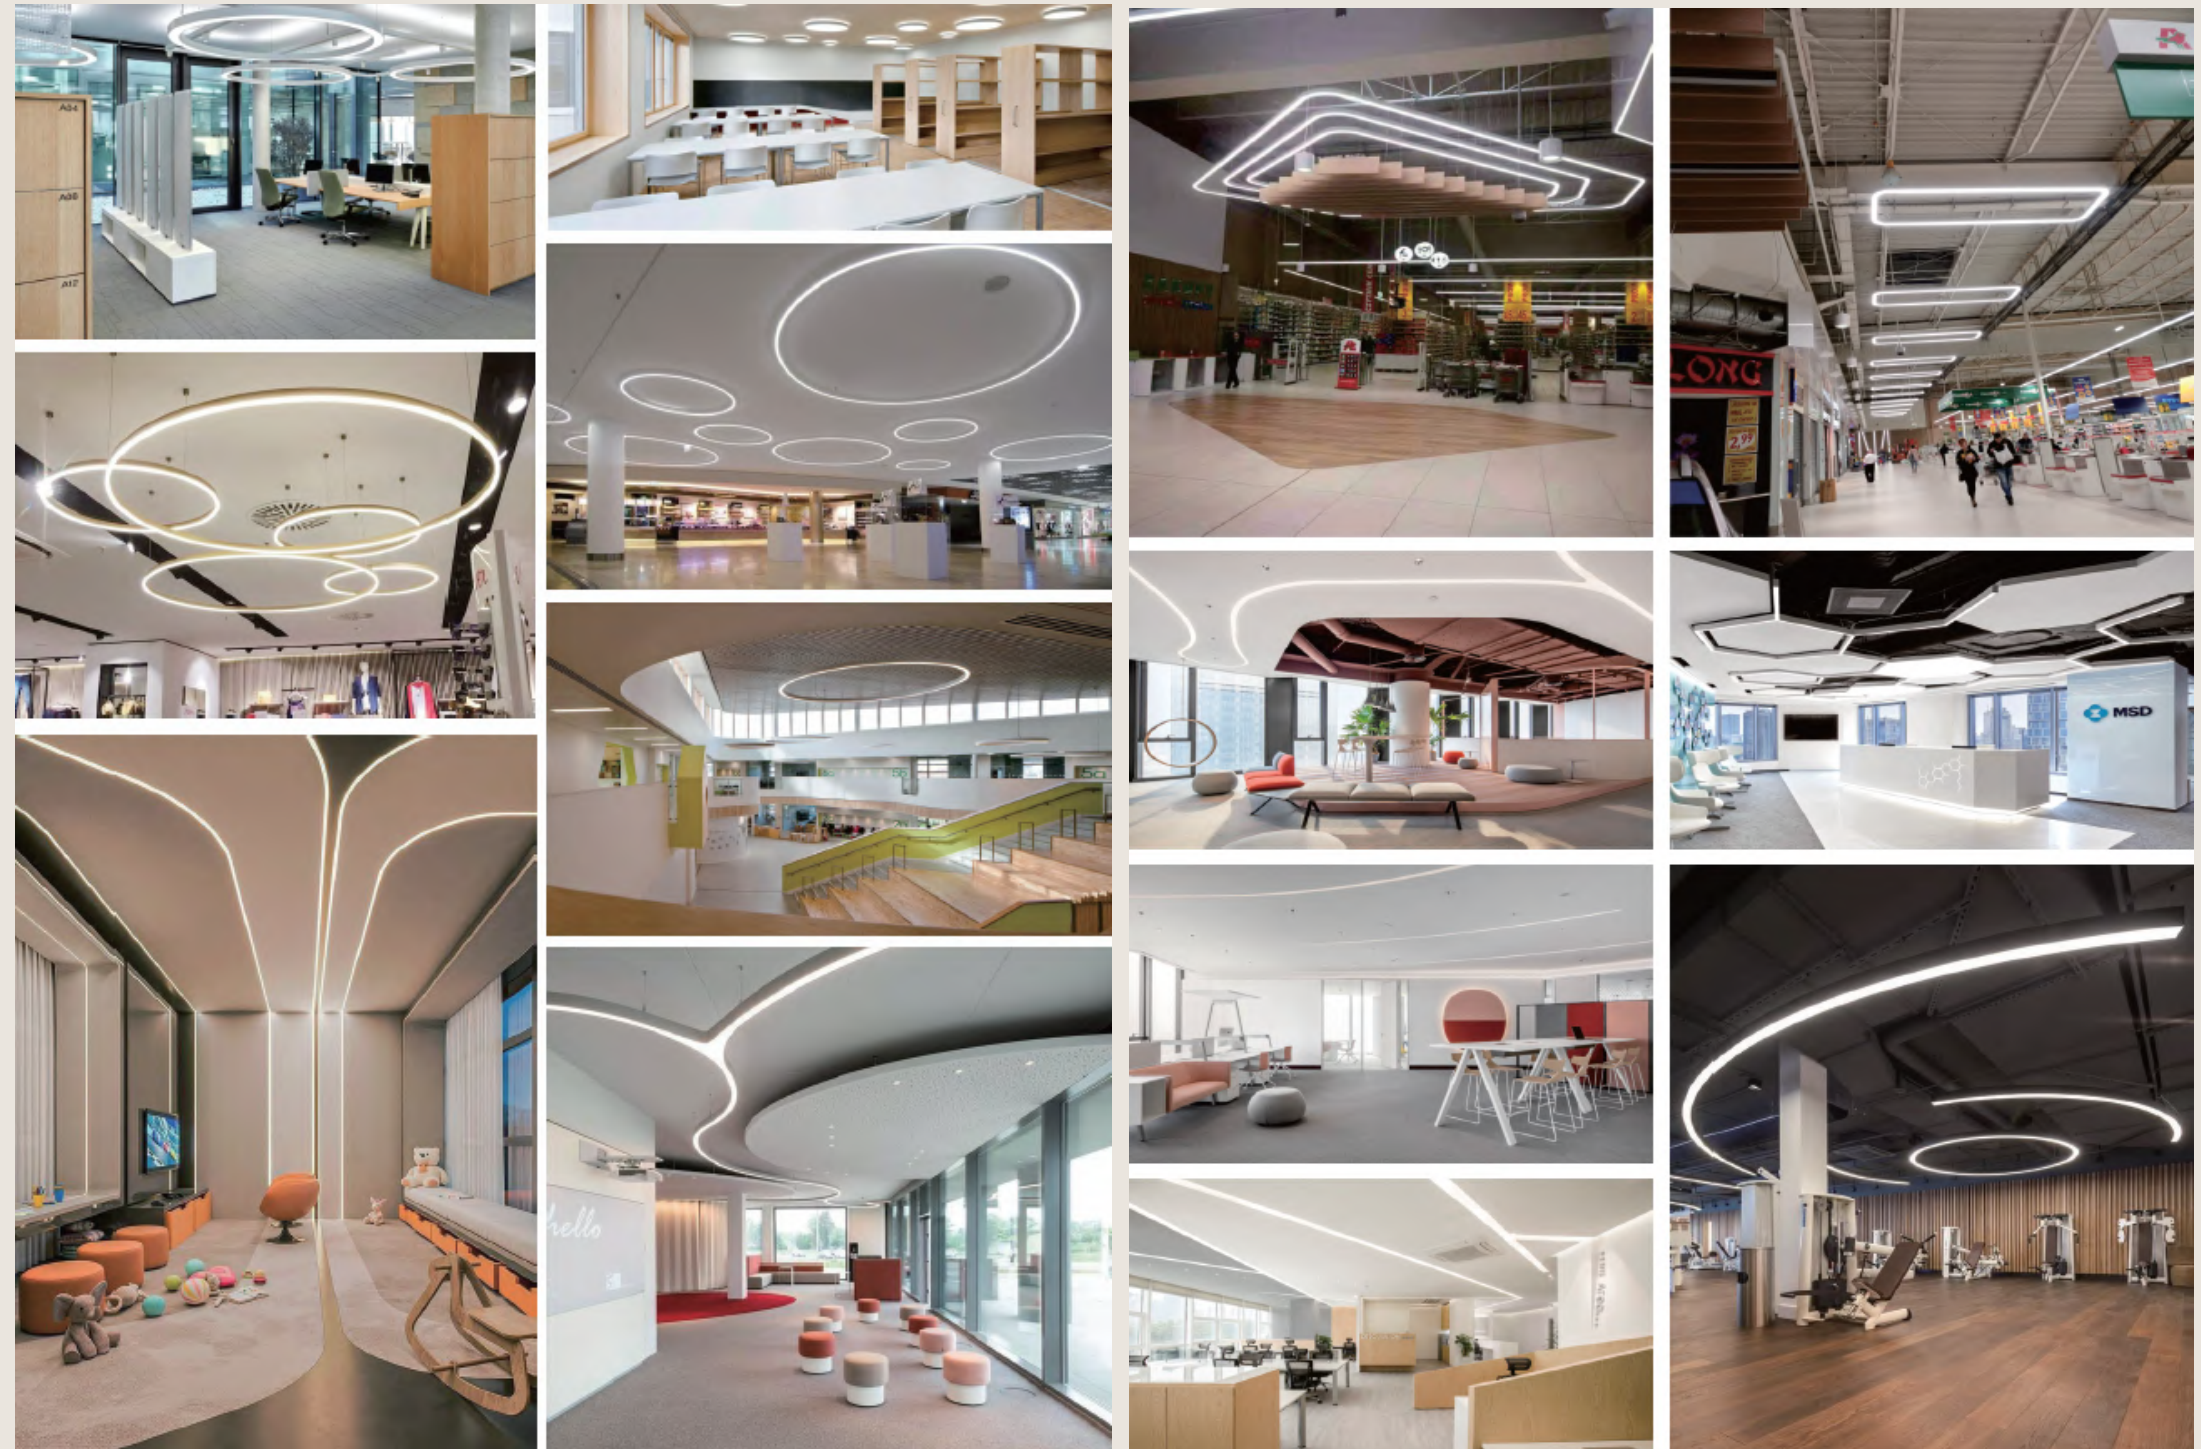


General Shape



Ring

CS-R020A-Ø600*30E-SL-PC1S
CS-R035B-R300/4*40E-WH-PC1S

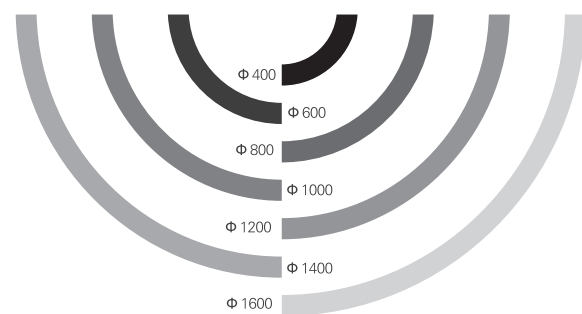

Circular

CS-C040A-Ø800C-SL-PC1S



Wave

CS-W3535-1000*100P-BL-SI2S



Runway / Square

CS-S035A-1000*400*50P-BL-PC2S
CS-S3535A-1200*598P-BL-SI2S



Ellipse



CS-E075-1000*50P-BL-PC2S





Square

CS-P075-1000*4P-BL-PC2S

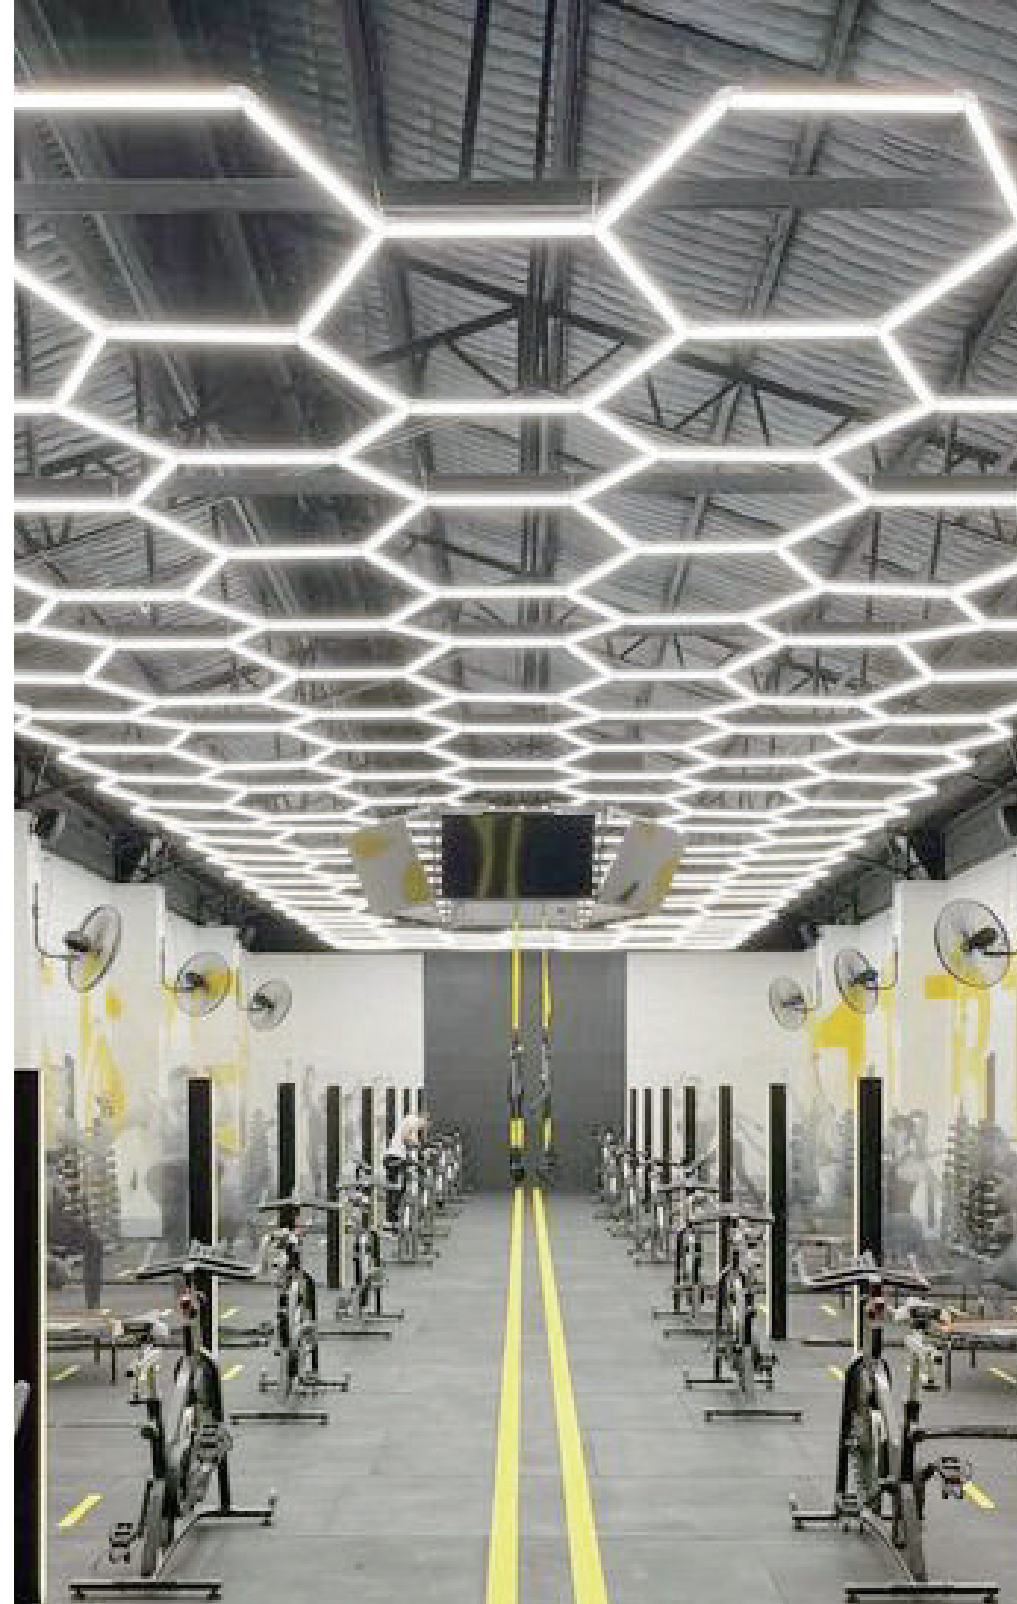


Hexagon

CS-P075-800*6P-BL-PC2S



Triangle

CS-P040-1000*3P-BL-PC2S







LED Neon Flex




Side lighting series

Single side lighting

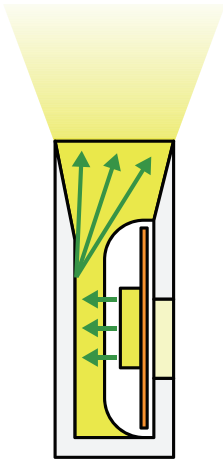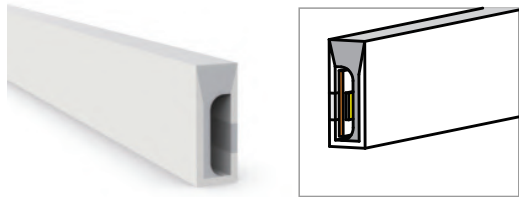



Product family size(mm)
 4*8mm/4*10mm/6*12mm/8*12mm/8*15mm/10*12mm/10*18mm
 12*12mm/12*20mm/14*14mm/16*16mm/20*20mm

Luminous angle	120°
Luminous direction	side ighting
Scissors mouth	Yes

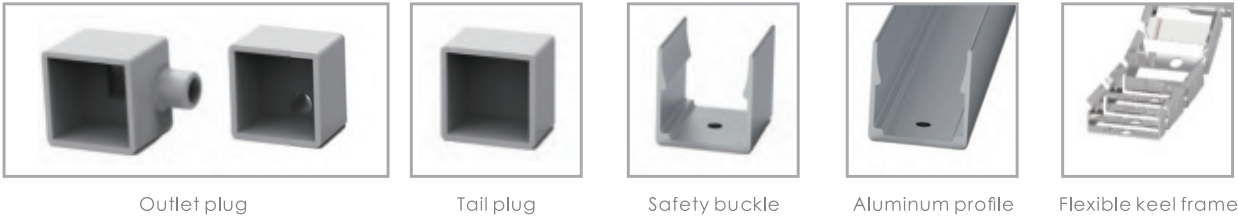

Side light series

Semicircular side light

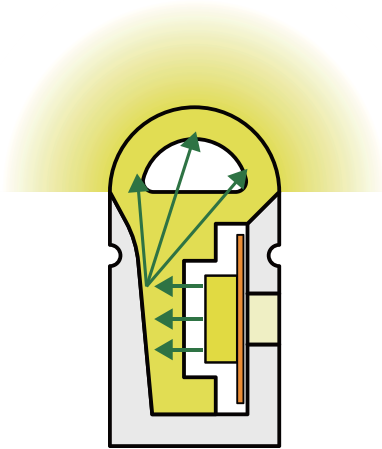
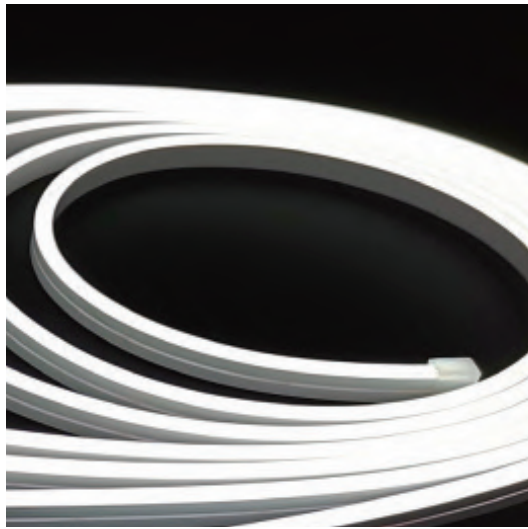


Product family size(mm)
 4*8mm/4*10mm/6*12mm/8*12mm/8*15mm/10*12mm/10*18mm
 12*12mm/12*20mm/14*14mm/16*16mm/20*20mm

Luminous angle	180°
Luminous direction	side ighting
Scissors mouth	Yes



Open band edge concealed series
Black Surface Luminous

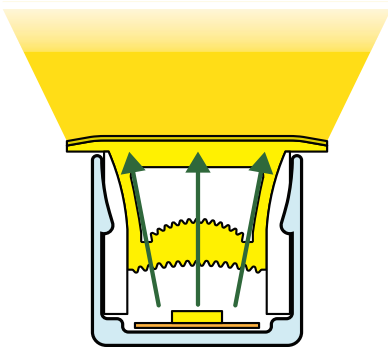
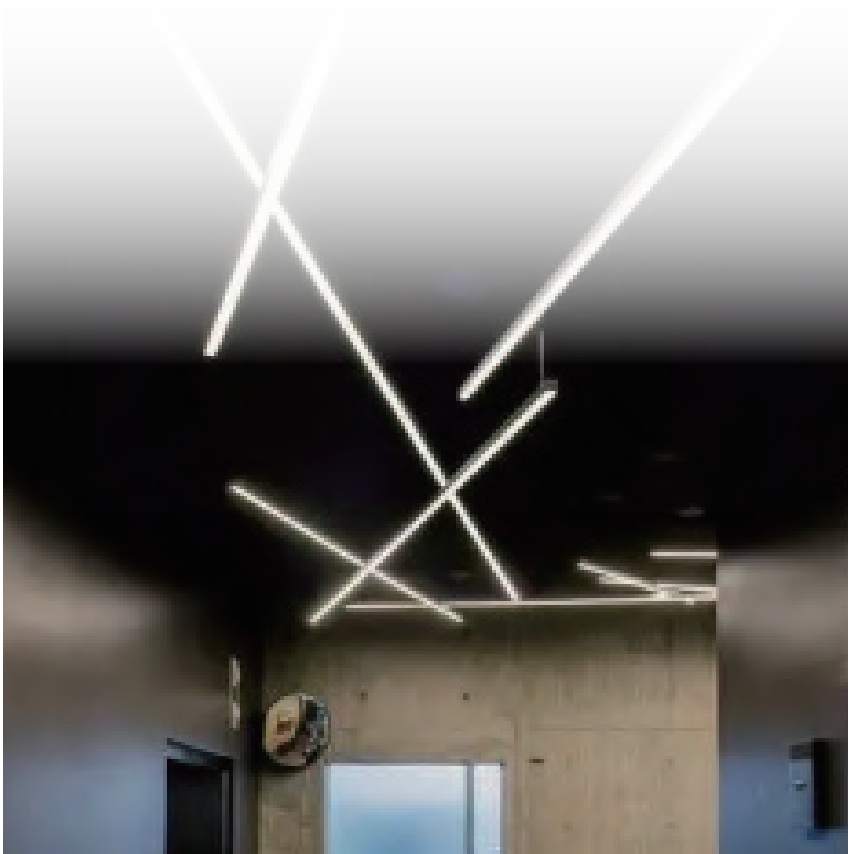


Product family size(mm)	
10*10mm/12*12mm/14*14mm/16*16mm/20*10mm/20*14mm 20*20mm/25*17mm/30*20mm/35*25mm/40*25mm/50*30mm 60*30mm/70*30mm/80*30mm/90*30mm/100*35mm/120*35mm	
Luminous angle	120°
Luminous direction	Top lighting
Scissors mouth	Yes



Aluminum profile


Open band edge concealed series
Black edge glow

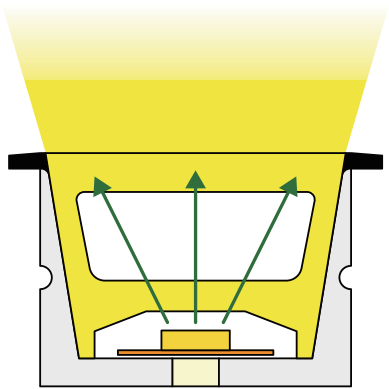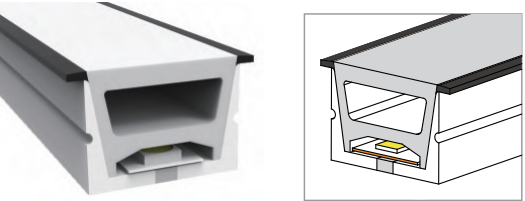

Product family size(mm)	
10*10mm/12*12mm/14*14mm/16*16mm/20*10mm/20*14mm 20*20mm/25*17mm/30*20mm/35*25mm/40*25mm/50*30mm 60*30mm/70*30mm/80*30mm/90*30mm/100*35mm/120*35mm	
Luminous angle	120°
Luminous direction	Top lighting
Scissors mouth	Yes



Safety buckle






Aluminum profile



Flexible keel frame

Side lighting series
Three side lighting

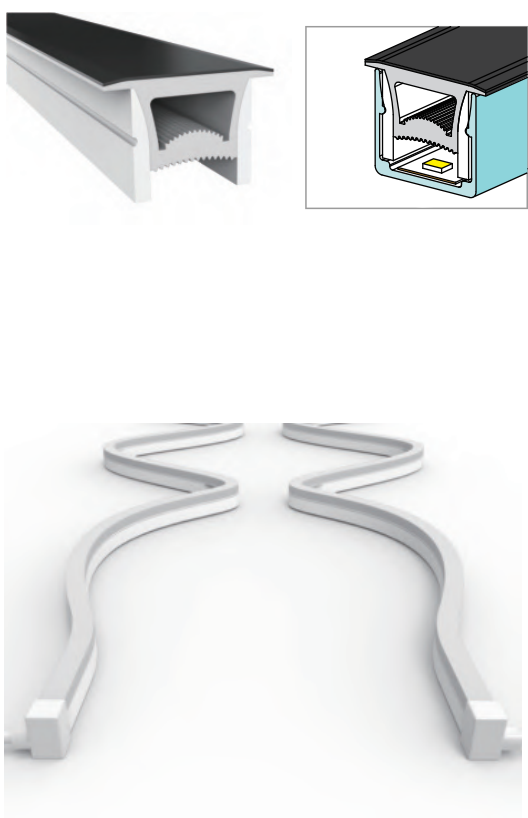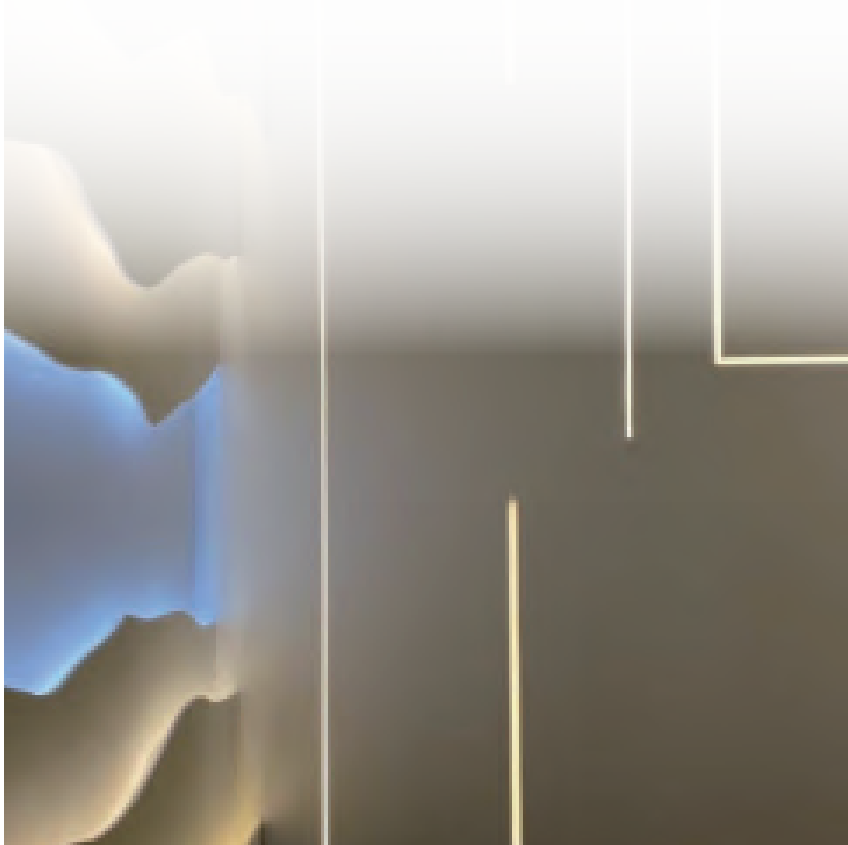


Product family size(mm)
4*8mm/4*10mm/6*12mm/8*12mm/8*15mm/10*12mm/10*18mm
12*12mm/12*20mm/14*14mm/16*16mm/20*20mm

Luminous angle	180°
Luminous direction	Side lighting
Scissors mouth	Yes



Side light series
Mushroom head side light



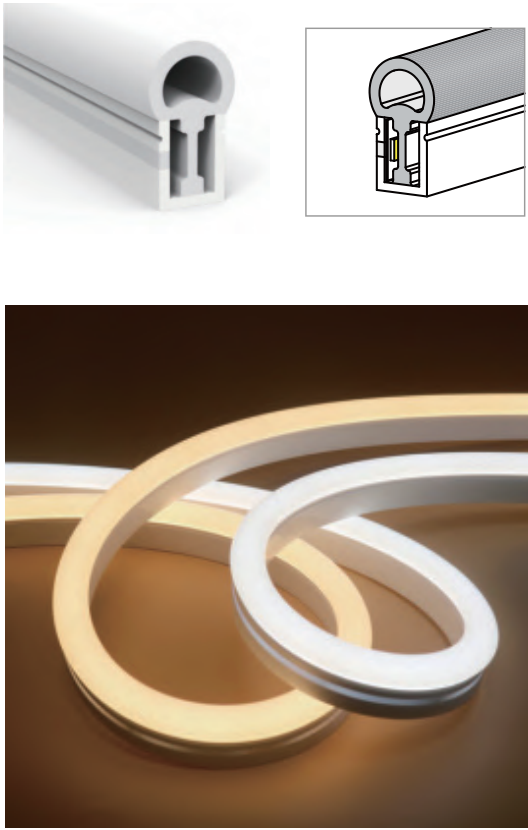


Product family size(mm)
8*15mm/8*17mm/10*20mm/10*23mm/10*25mm/12*25mm
15*25mm

Luminous angle	270°
Luminous direction	Side lighting
Scissors mouth	Yes






Front luminous series Household

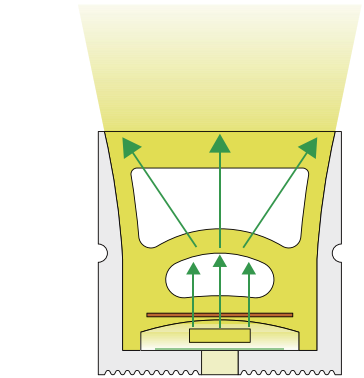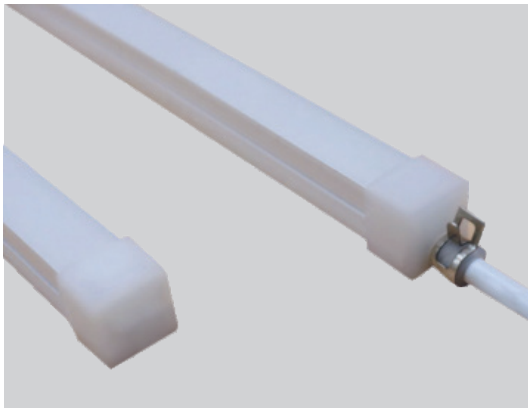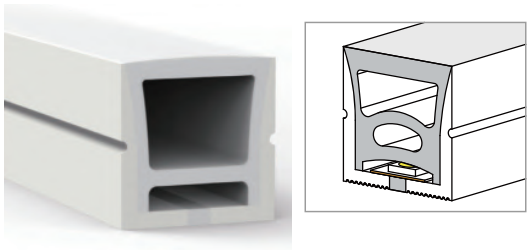


Product family size(mm)	
10*10mm/12*12mm/14*14mm/16*16mm/18*17mm/20*10mm 20*14mm/20*20mm/25*17mm/30*14mm/30*20mm/30*30mm 35*25mm/40*25mm/45*25mm/50*30mm/60*30mm/70*30mm 80*30mm/90*30mm/100*35mm/120*35mm	
Luminous angle	120°
Luminous direction	Top lighting
Scissors mouth	Yes







Front luminous series Project funds

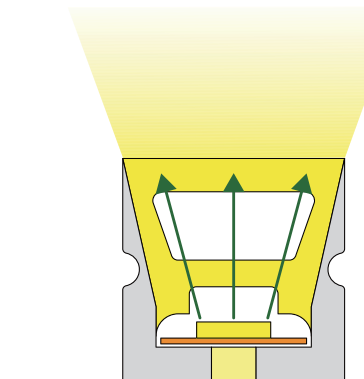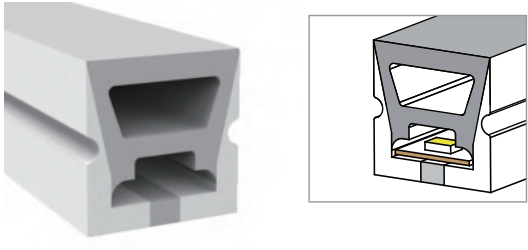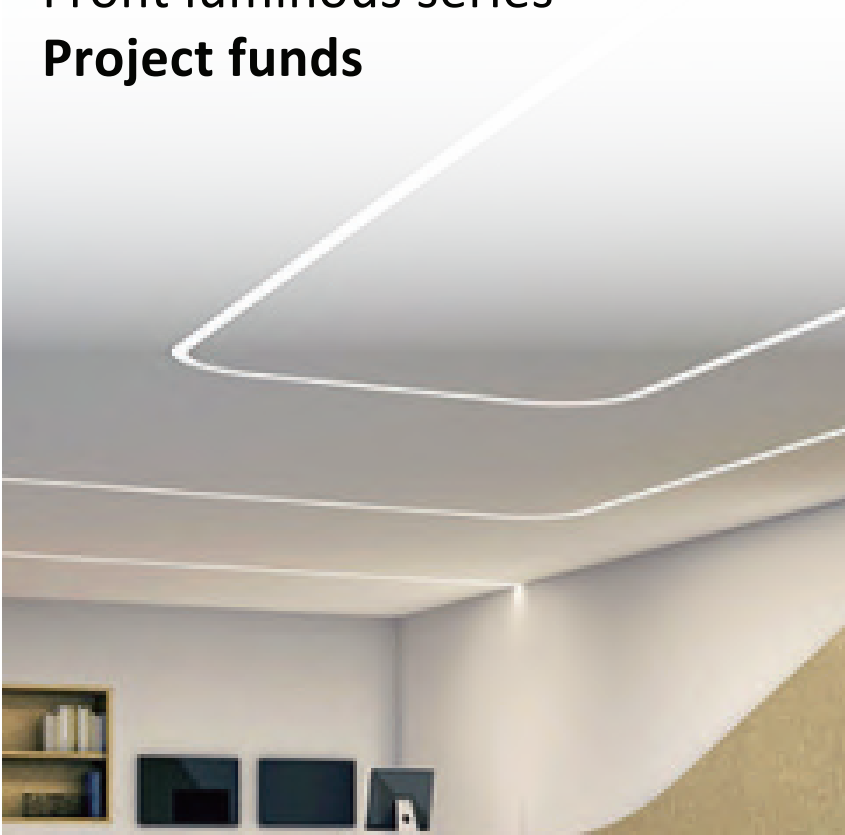

Product family size(mm)	
10*10mm/12*12mm/14*14mm/16*16mm/18*17mm/20*10mm 20*14mm/20*20mm/25*17mm/30*14mm/30*20mm/30*30mm 35*25mm/40*25mm/45*25mm/50*30mm/60*30mm/70*30mm 80*30mm/90*30mm/100*35mm/120*35mm	
Luminous angle	120°
Luminous direction	Top lighting
Scissors mouth	Yes

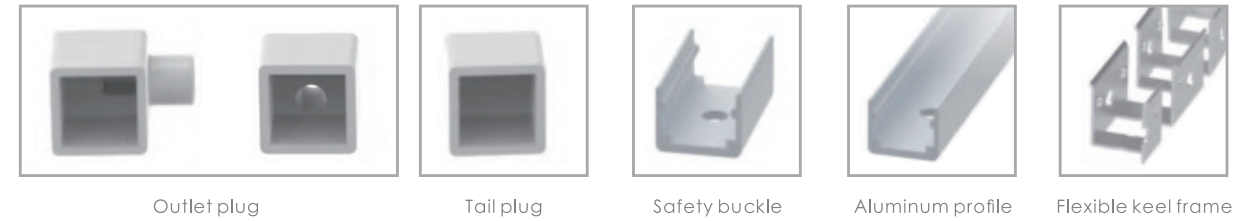

Side glow series
Three centimeter black side glow

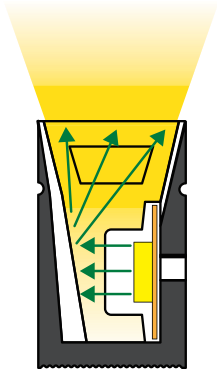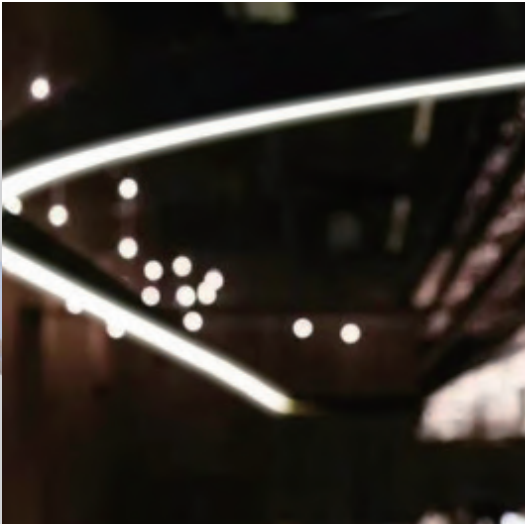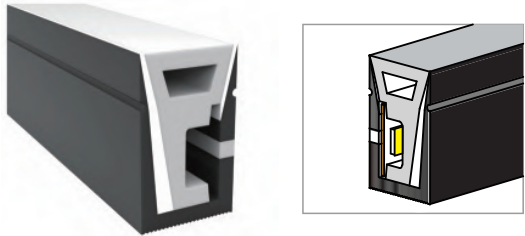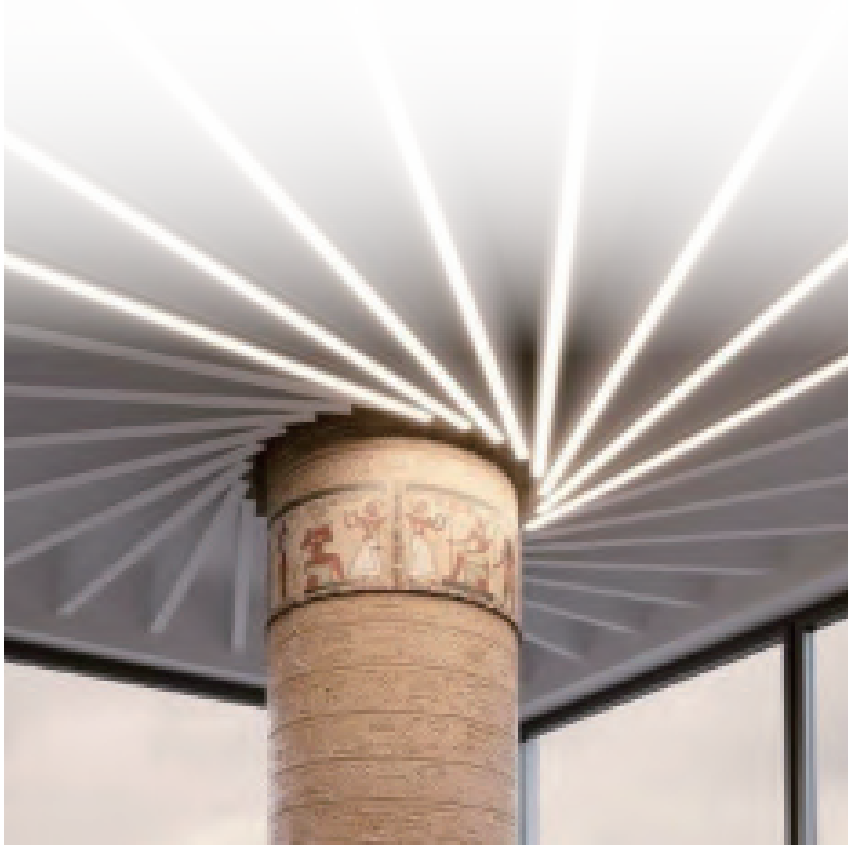

Product family size(mm)
4*8mm/4*10mm/6*12mm/8*12mm/8*15mm/10*12mm/10*18mm
12*12mm/12*20mm/14*14mm/16*16mm/20*20mm

Luminous angle	120°
Luminous direction	Side ighting
Scissors mouth	Yes



Outlet plug



Tail plug



Safety buckle






Aluminum profile




Flexible keel frame

Side light series
All black

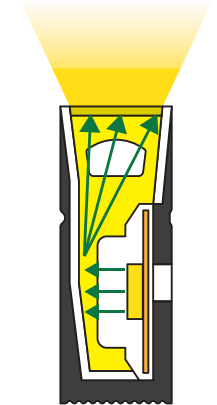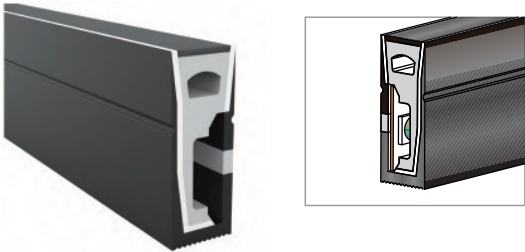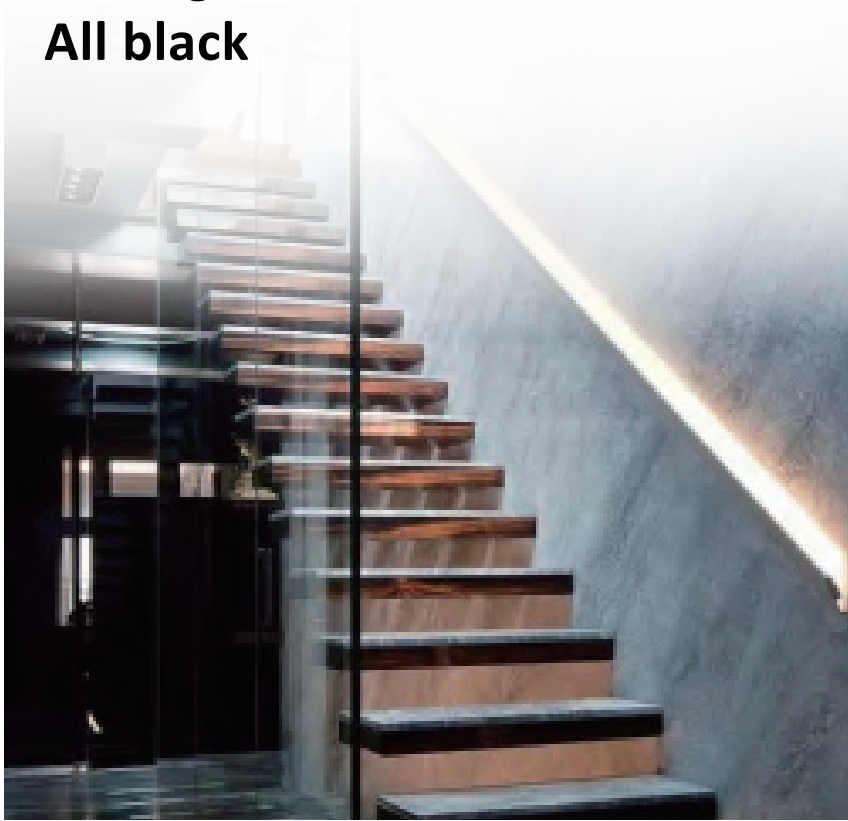

Product family size(mm)
4*8mm/4*10mm/6*12mm/8*12mm/8*15mm/10*12mm/10*18mm
12*12mm/12*20mm/14*14mm/16*16mm/20*20mm

Luminous angle	120°
Luminous direction	Side ighting
Scissors mouth	Yes

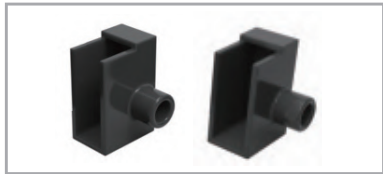


Outlet plug



Tail plug



Safety buckle





Aluminum profile



Flexible keel frame



Front luminous series
All black

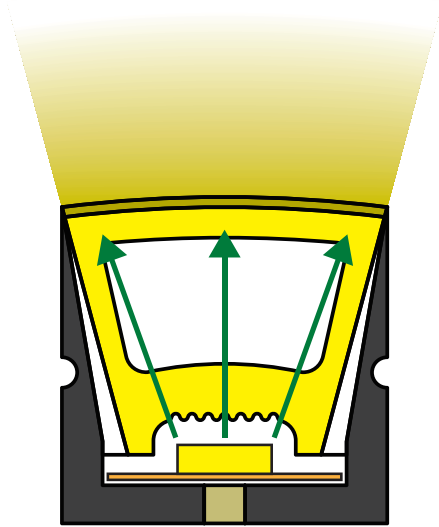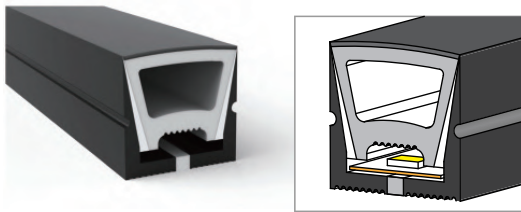

Product family size(mm)

10*10mm/12*12mm/14*14mm/16*16mm/18*17mm/20*10mm
20*14mm/20*20mm/25*17mm/30*14mm/30*20mm/30*30mm
35*25mm/40*25mm/45*25mm/50*30mm/60*30mm/70*30mm
80*30mm/90*30mm/100*35mm/120*35mm

Luminous angle	120°
Luminous direction	Top lighting
Scissors mouth	Yes




Outlet plug



Tail plug



Safety buckle






Aluminum profile



Flexible keel frame

Front luminous series
Black on three side

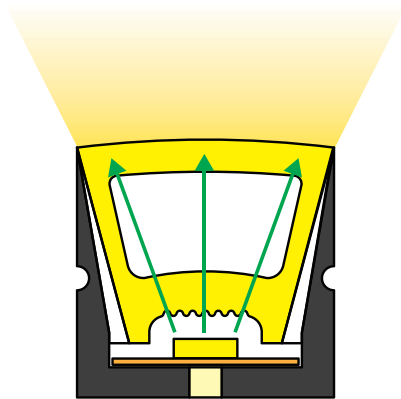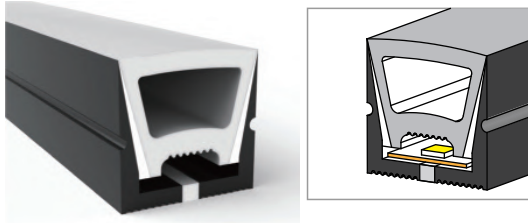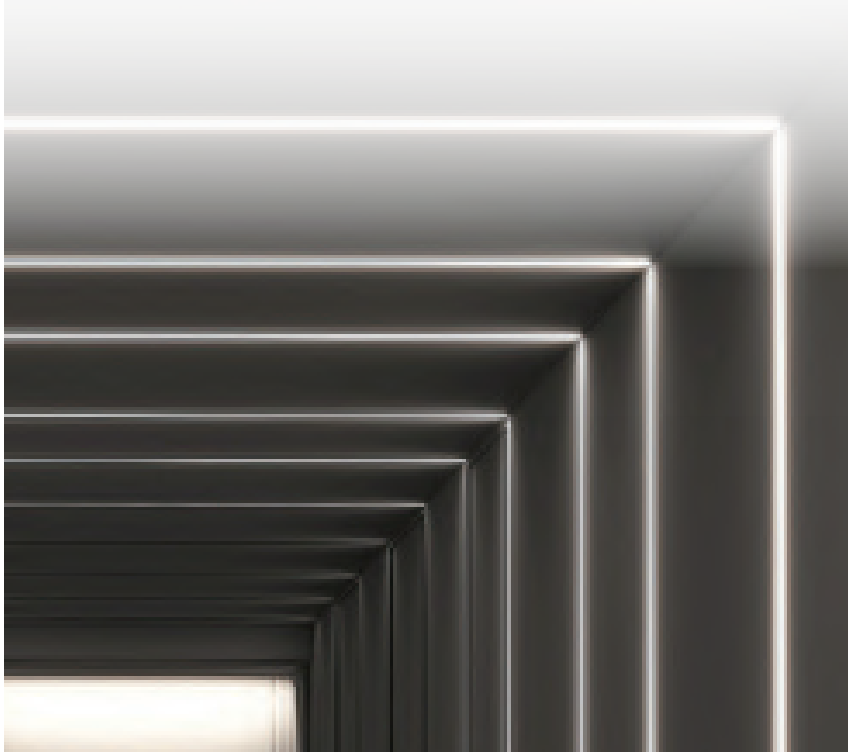


Product family size(mm)

10*10mm/12*12mm/14*14mm/16*16mm/18*17mm/20*10mm
20*14mm/20*20mm/25*17mm/30*14mm/30*20mm/30*30mm
35*25mm/40*25mm/45*25mm/50*30mm/60*30mm/70*30mm
80*30mm/90*30mm/100*35mm/120*35mm

Luminous angle	120°
Luminous direction	Top lighting
Scissors mouth	Yes




Outlet plug



Tail plug



Safety buckle






Aluminum profile



Flexible keel frame


Front luminous series Three side white

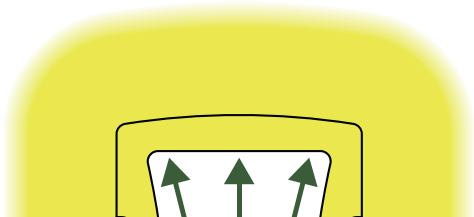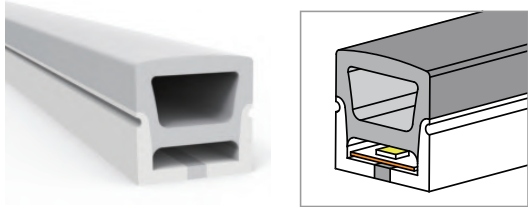


Outlet plug



Tail plug



Safety buckle







Aluminum profile

Product family size(mm)


10*10mm/12*12mm/14*14mm/16*16mm/18*17mm/20*10mm
20*14mm/20*20mm/25*17mm/30*14mm/30*20mm/30*30mm
35*25mm/40*25mm/45*25mm/50*30mm/60*30mm/70*30mm
80*30mm/90*30mm/100*35mm/120*35mm

Luminous angle	120°
Luminous direction	Top lighting
Scissors mouth	Yes

Side lighting series Multi purpose strong light lighting

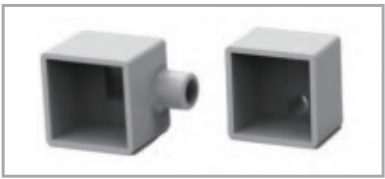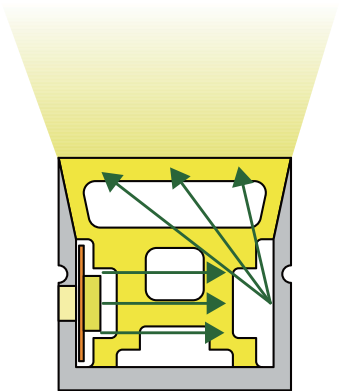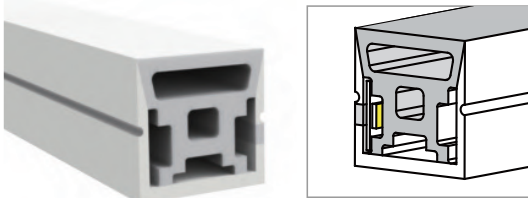

Outlet plug



Tail plug



Safety buckle



Aluminum profile





Flexible keel frame

Product family size(mm)

10*10mm/12*12mm/14*14mm/16*16mm/18*17mm/20*10mm
20*14mm/20*20mm/25*17mm/30*14mm/30*20mm/30*30mm
35*25mm/40*25mm/45*25mm/50*30mm/60*30mm/70*30mm
80*30mm/90*30mm/100*35mm/120*35mm

Luminous angle	120°
Luminous direction	Side ighting
Scissors mouth	Yes

360 degree luminous series Black surface

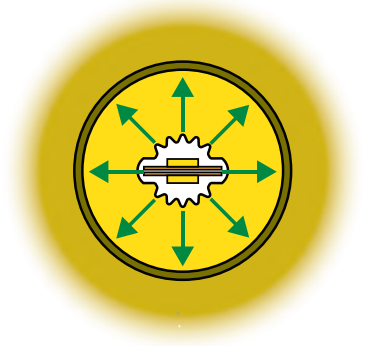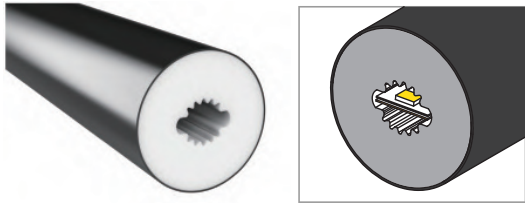

Outlet plug



Tail plug





Safety buckle

Product family size(mm)

φ12/φ13/φ16/φ20/φ22/φ26/φ33/φ40/φ50

Luminous angle	360°
Luminous direction	360 ° glow
Scissors mouth	Yes

Open band edge concealed series White surface glow

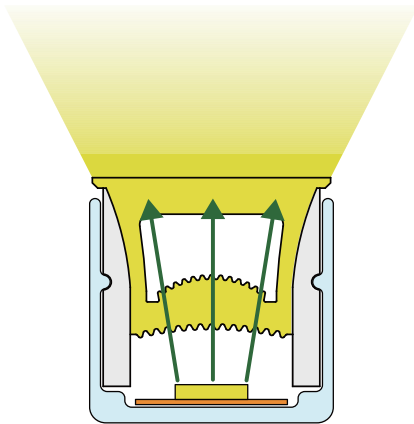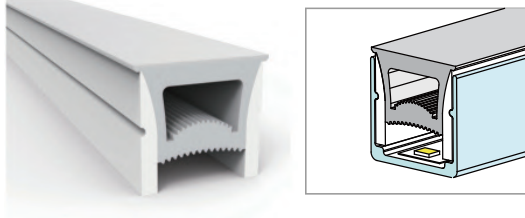


Aluminum profile



Product family size(mm)

10*10mm/12*12mm/14*14mm/16*16mm/20*10mm/20*14mm
20*20mm/25*17mm/30*20mm/35*25mm/40*25mm/50*30mm
60*30mm/70*30mm/80*30mm/90*30mm/100*35mm/120*35mm

Luminous angle	120°
Luminous direction	Top lighting
Scissors mouth	Yes



270 degree luminous series

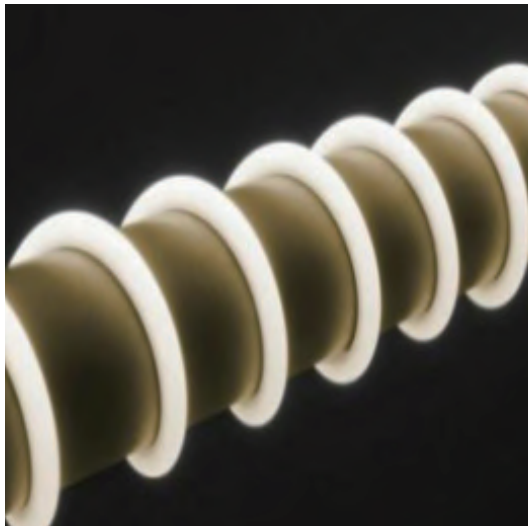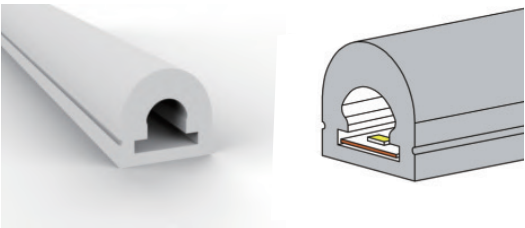

Product family size(mm)
13*13mm/15*13mm

Luminous angle	1800°
Luminous direction	side lighting
Scissors mouth	Yes



Outlet plug





Tail plug



Safety buckle

360 degree luminous series
white

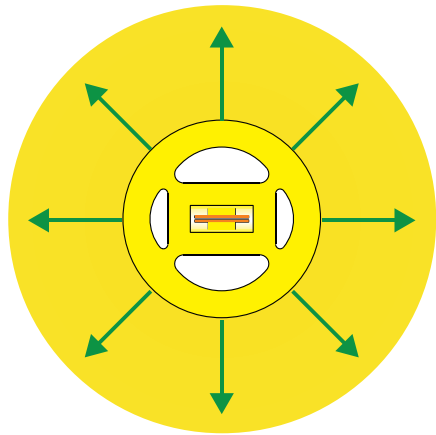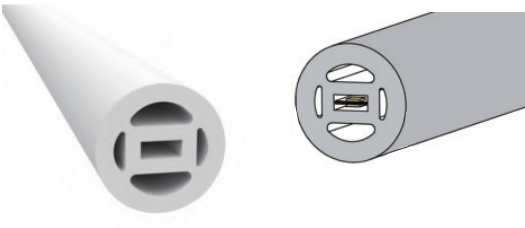

Product family size(mm)
φ12/φ13/φ16/φ20/φ22/φ26/φ33/φ40/φ50

Luminous angle	360°
Luminous direction	360 ° glow
Scissors mouth	Yes



Outlet plug





Tail plug




Safety buckle

LED Neon Flex Sizing

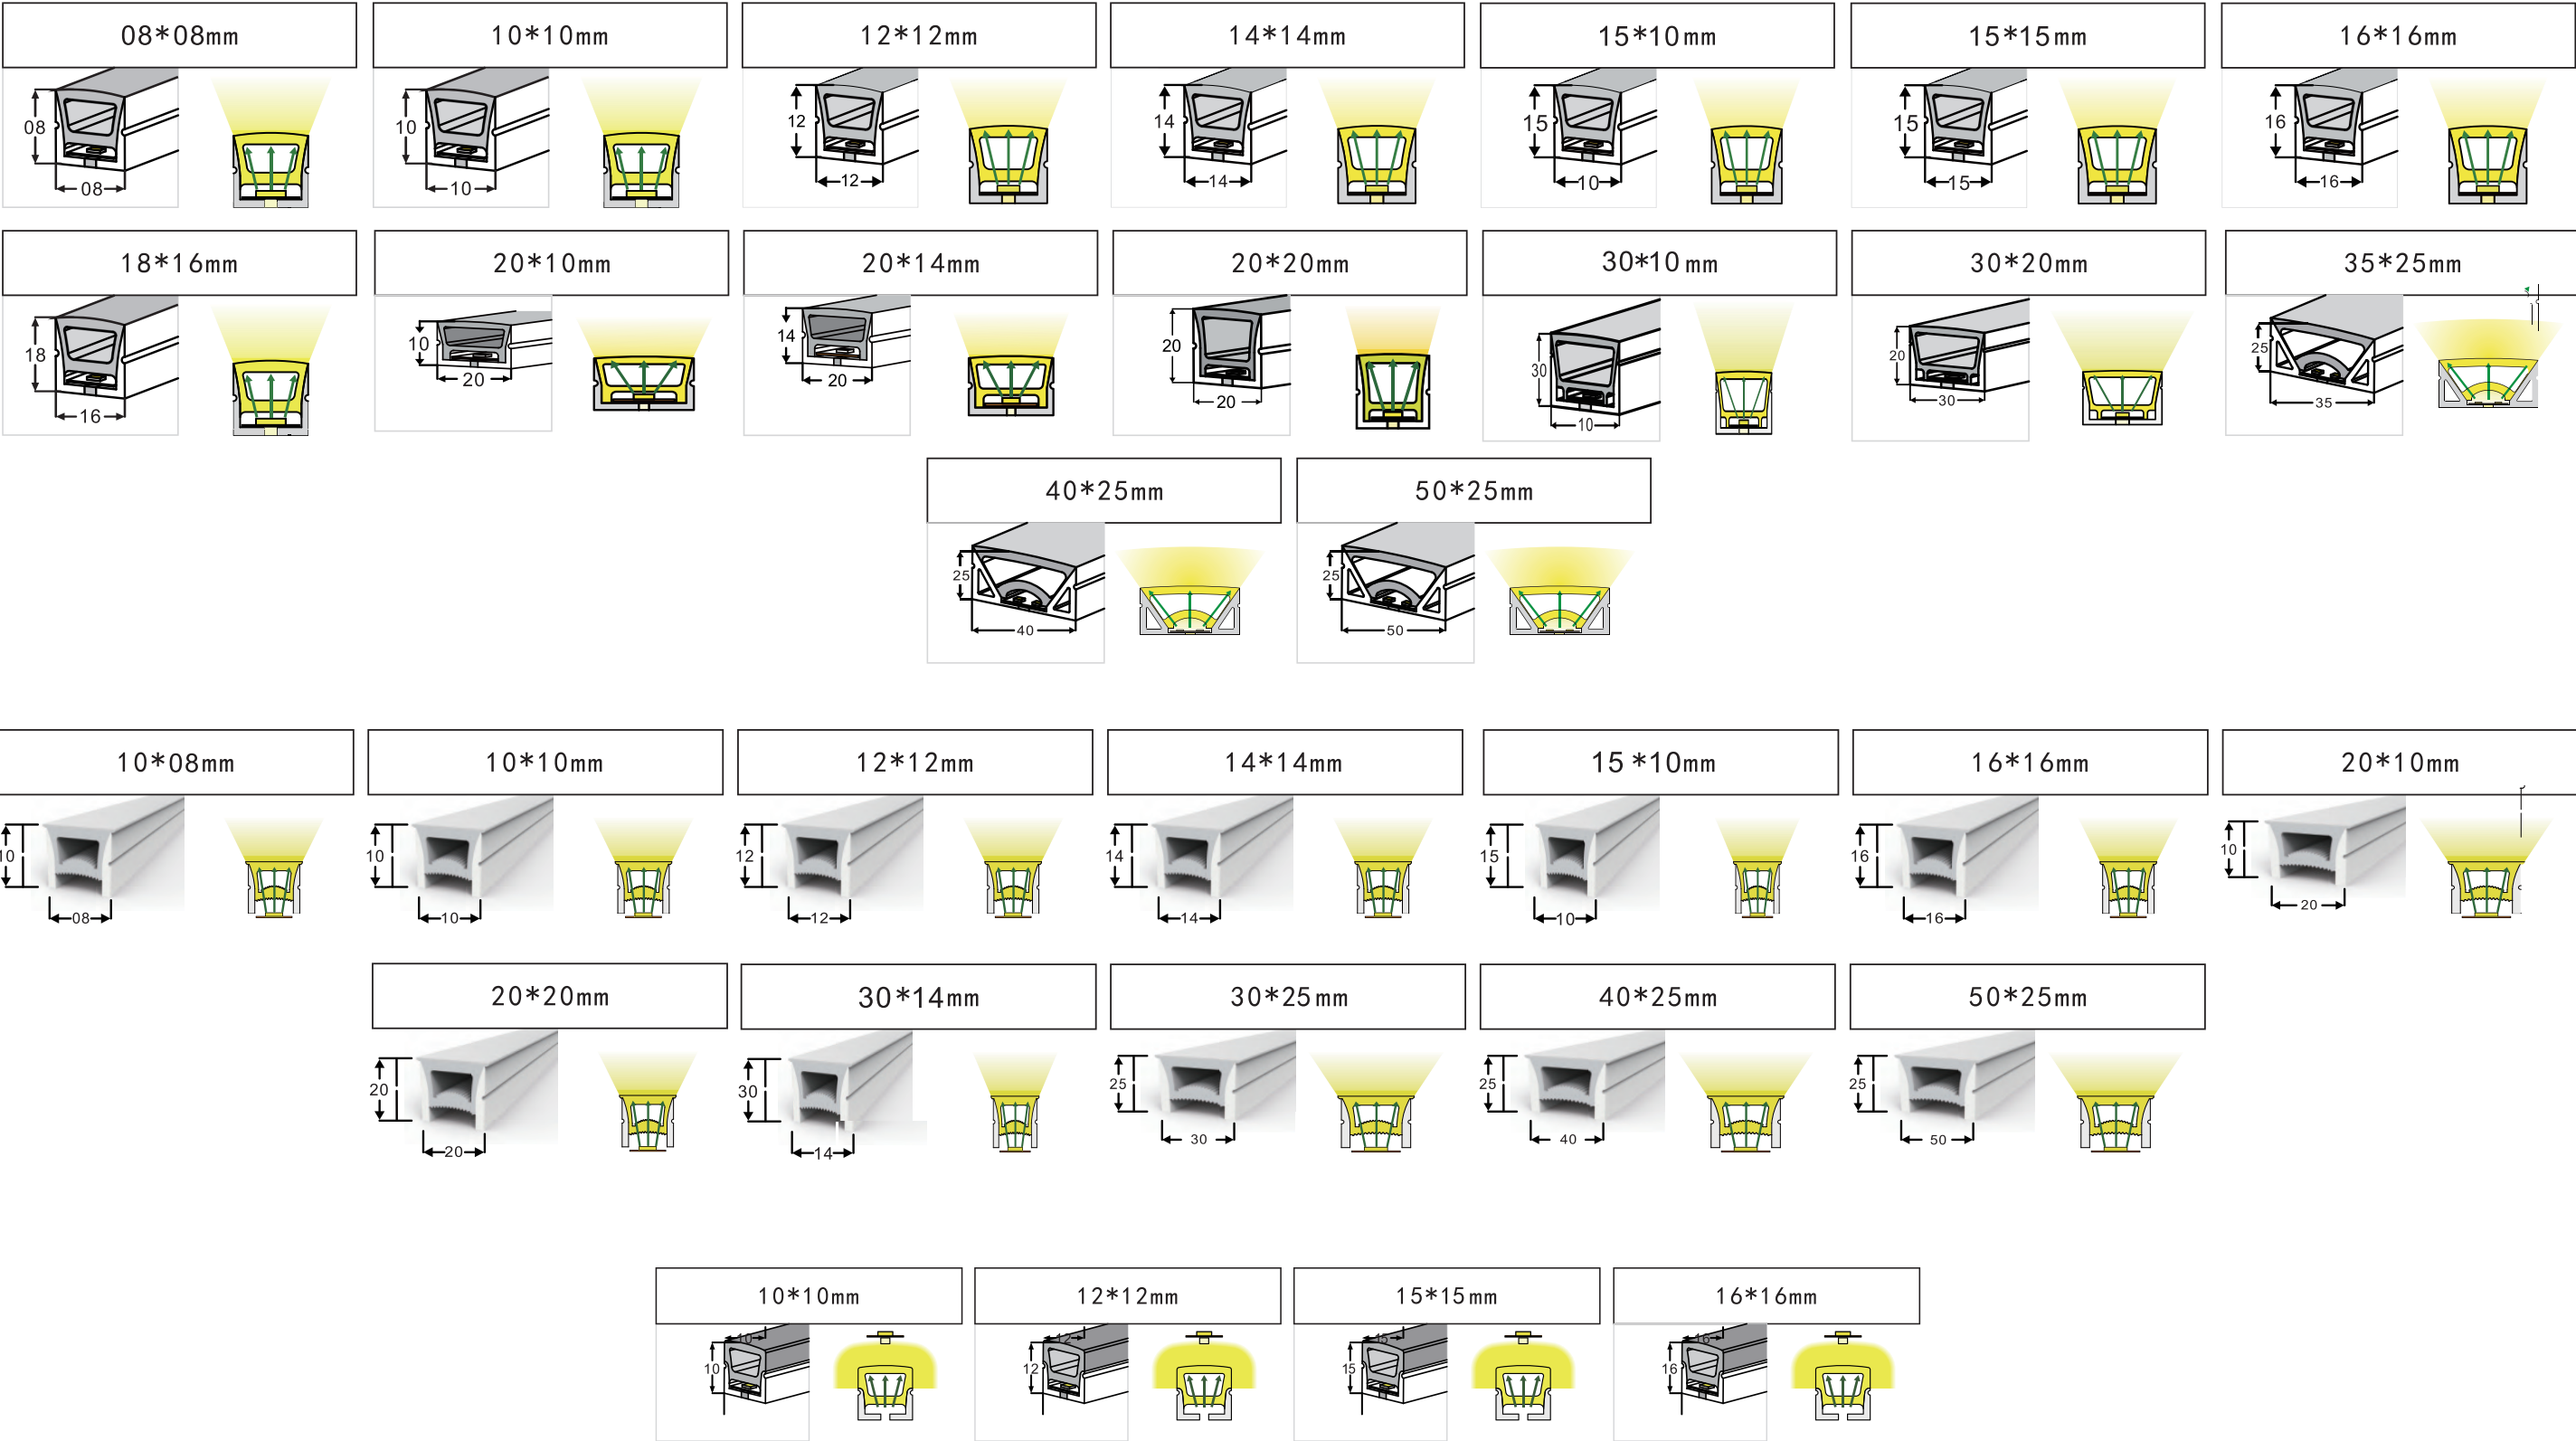

LED Neon Flex Sizing

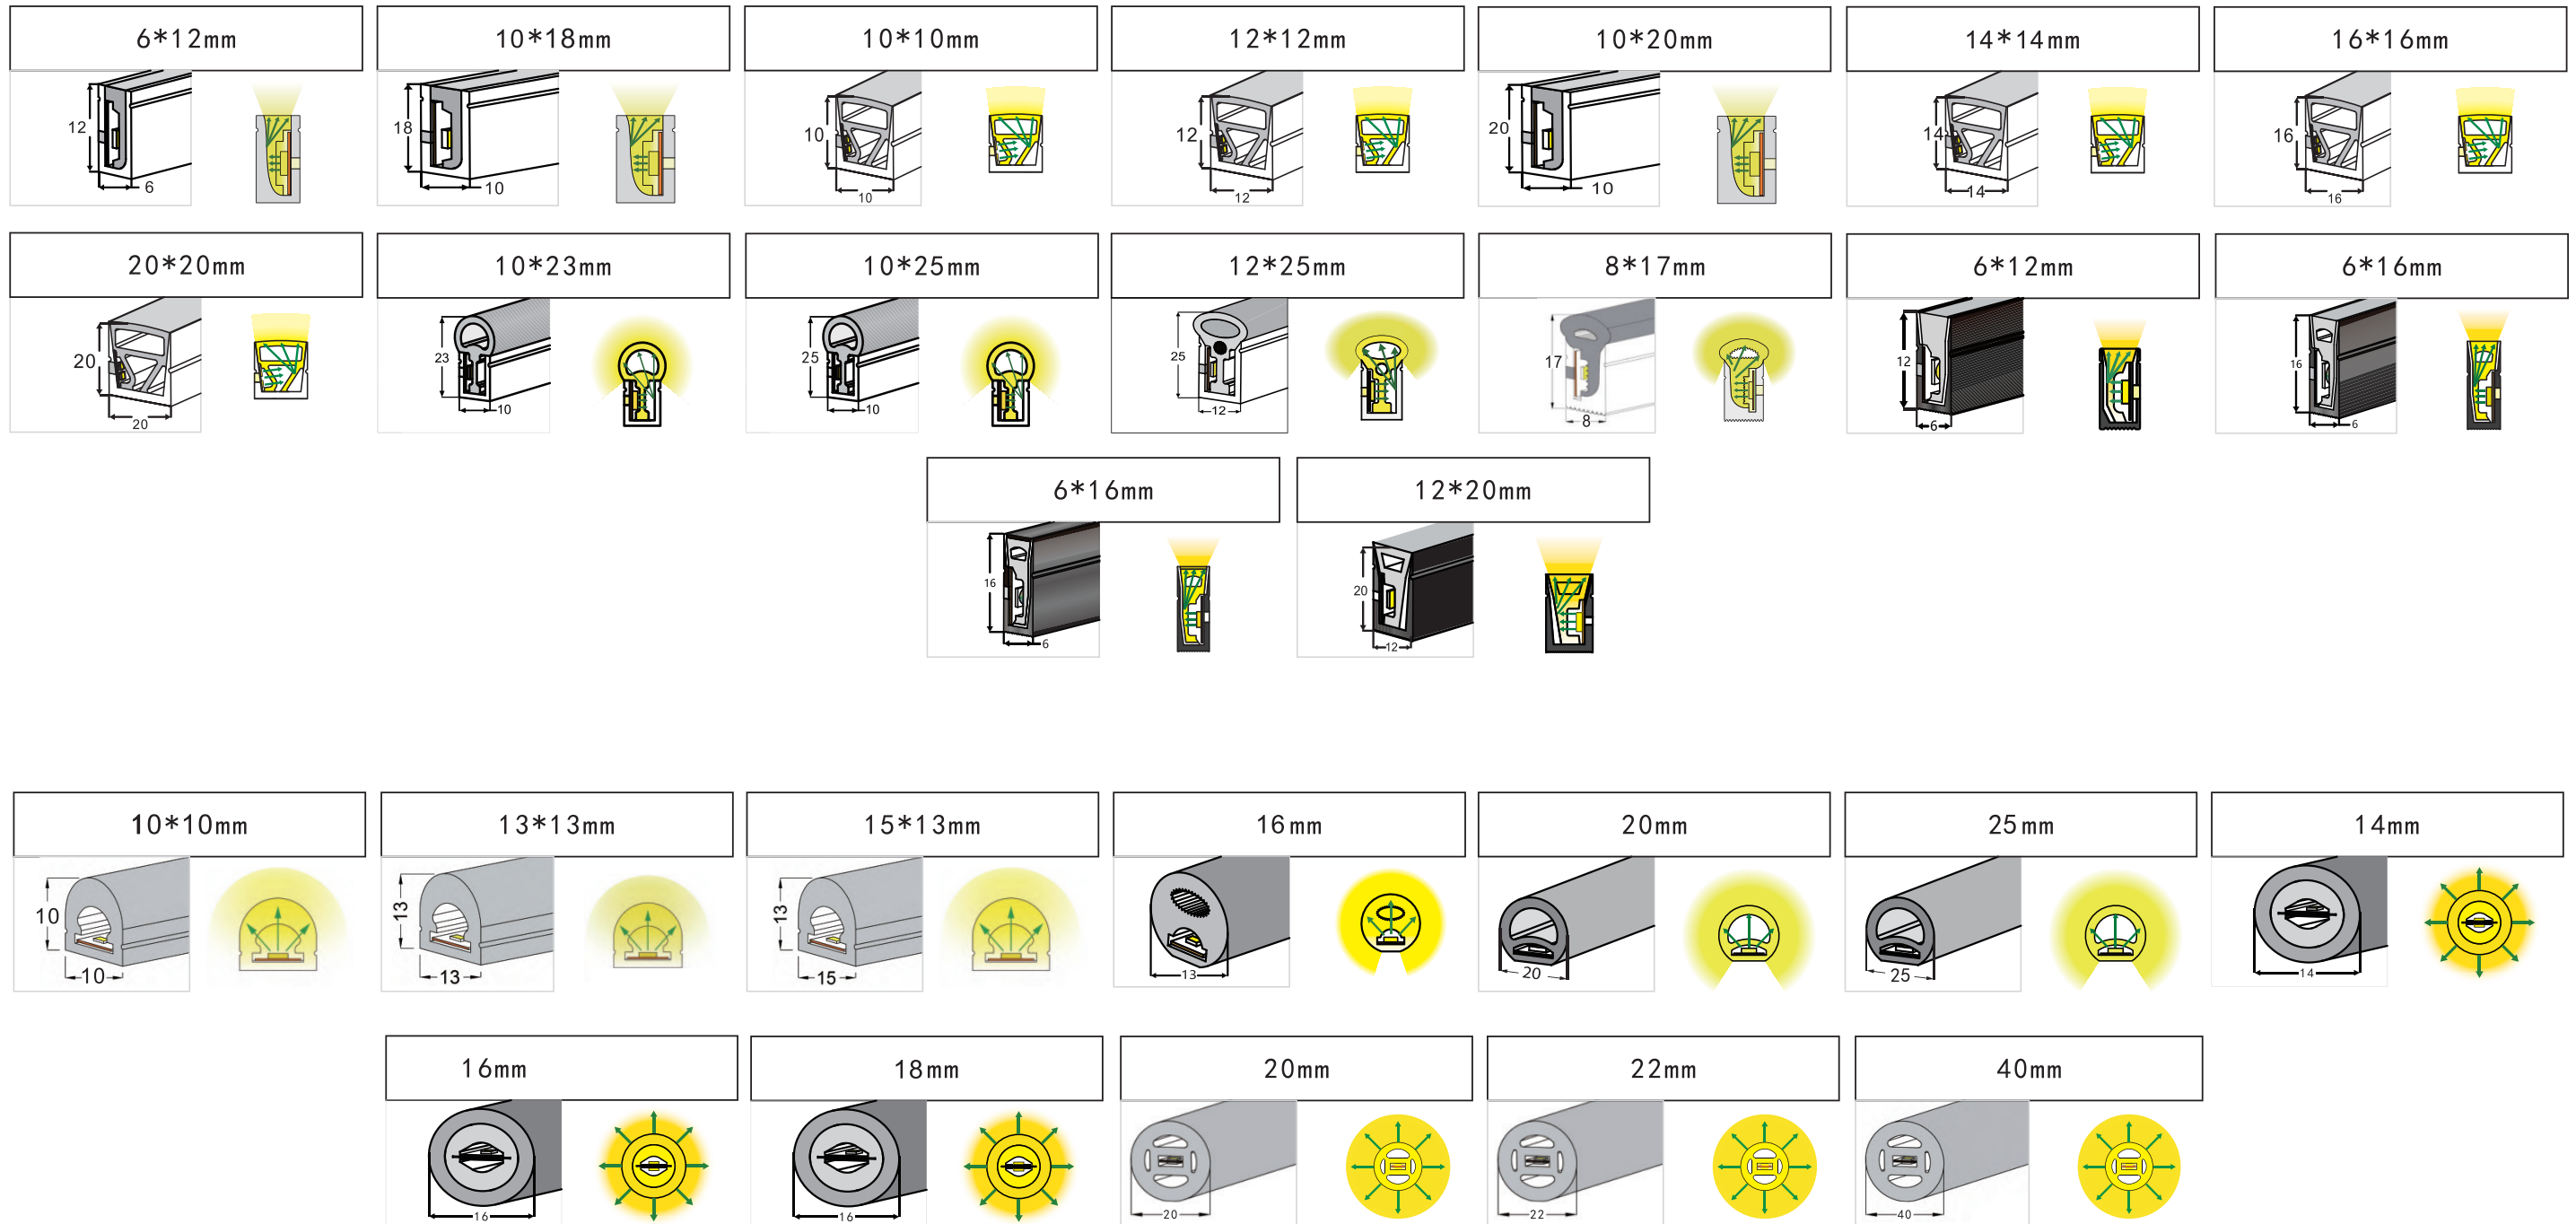

LED STRIP LIGHT






High Efficiency LED Strip



HF-2835-168-5mm-24V-4G

Feature

- 1. SMD2835,Cut with 4LED, RA>90
- 2. Higher energy saving
- 3. Ideal Light source for LED linear light
- 4. Hight brightness lighting at lower energy consumption
- 5. It reduce energy costs while reducing environmental impact


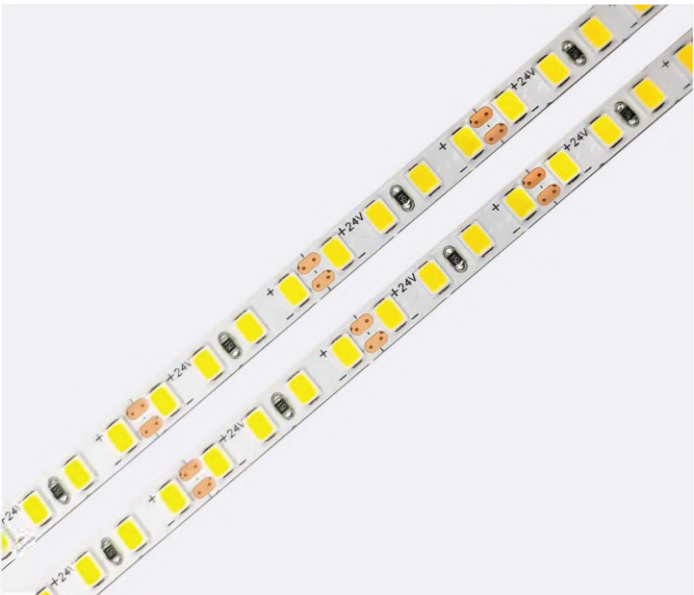


Electrical Parameters

Light Beads:	2835
LED Qty:	168pcs/m
Width:	5mm
Voltage:	DC24V
Power:	14W/m
CRI:	95
LM/m:	1840
LM/W:	131
Color:	3000K/4000K/6500K



Cut size



HF-2835-208-5mm-24V



Feature

- 1. SMD2835,Cut with 4LED, RA>90
- 2. Higher energy saving
- 3. Ideal Light source for LED linear light
- 4. Hight brightness lighting at lower energy consumption
- 5. It reduce energy costs while reducing environmental impact





Electrical Parameters

Light Beads:	2835
LED Qty:	208pcs/m
Width:	5mm
Voltage:	24V
Power:	10.1W/m
CRI:	95
LM/m:	1374
LM/W:	136
Color:	3000K/4000K/6500K



Cut size



HF-2835-168-5mm-24V-7G

Feature

- 1. SMD2835 ,RA>90,Cut with 7LED
- 2. Higher Energy Saving
- 3. Ideal Light source for Led Linear Light
- 4. Hight brightness lighting at lower energy consumption
- 5. It reduce energy costs while reducing environmental impact





Electrical Parameters

Light Beads:	2835
LED Qty:	168pcs/m
Width:	5mm
Voltage:	DC24V
Power:	13W/m
CRI:	82
LM/m:	1901
LM/W:	146
Color:	3000K/4000K/6500K



Cut size




HF-2835-120-8mm-24V



Feature

- 1. SMD2835 ,RA>90,Cut with 4LED
- 2. Higher Energy Saving
- 3. Ideal Light source for Led Linear Light
- 4. Hight brightness lighting at lower energy consumption
- 5. It reduce energy costs while reducing environmental impact

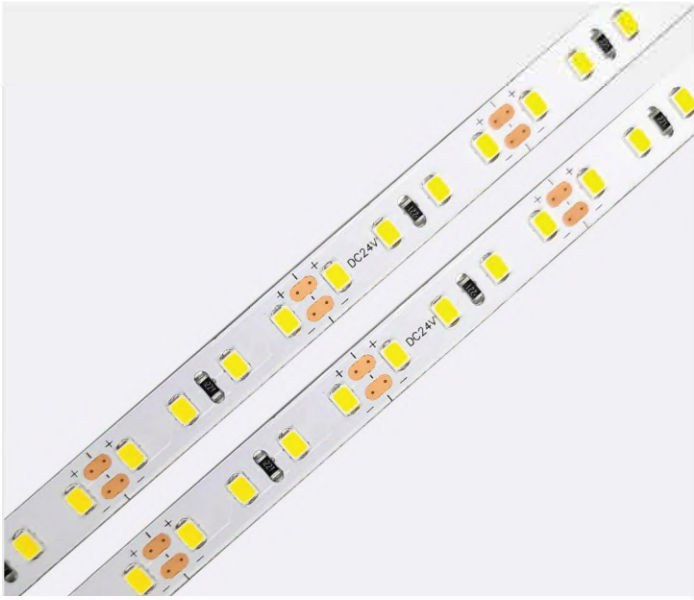


Electrical Parameters

Light Beads:	2535
LED Qty:	120pcs/m
Width:	8mm
Voltage:	DC24V
Power:	7.1W/m
CRI:	95
LM/m:	1048
LM/W:	146
Color:	3000K/4000K/6500K





Cut size



HF-2835-128-10mm-24V

Feature

- 1. SMD2835 ,RA>90
- 2. Higher Energy Saving
- 3. Ideal Light source for Led Linear Light
- 4. Hight brightness lighting at lower energy consumption
- 5. It reduce energy costs while reducing environmental impact

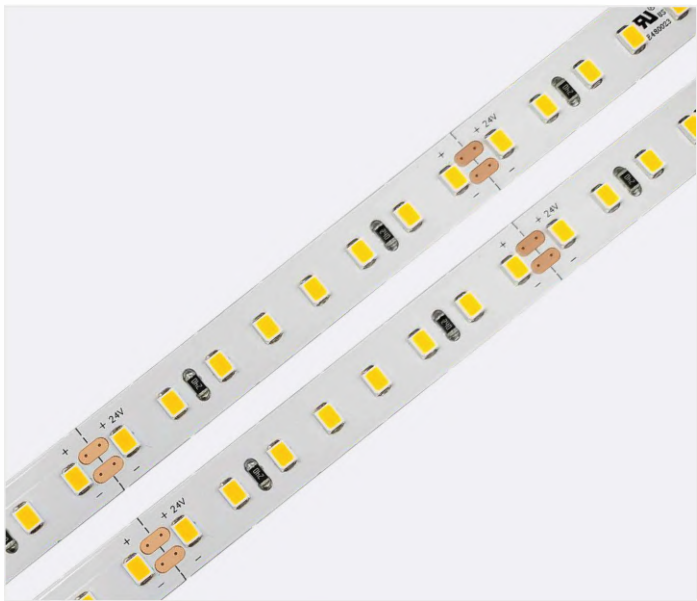


Electrical Parameters

Light Beads:	2835
LED Qty:	128pcs/m
Width:	10mm
Voltage:	24V
Power:	16.3W/m
CRI:	90
LM/m:	2461
LM/W:	150
Color:	3000K/4000K/6500K



Cut size

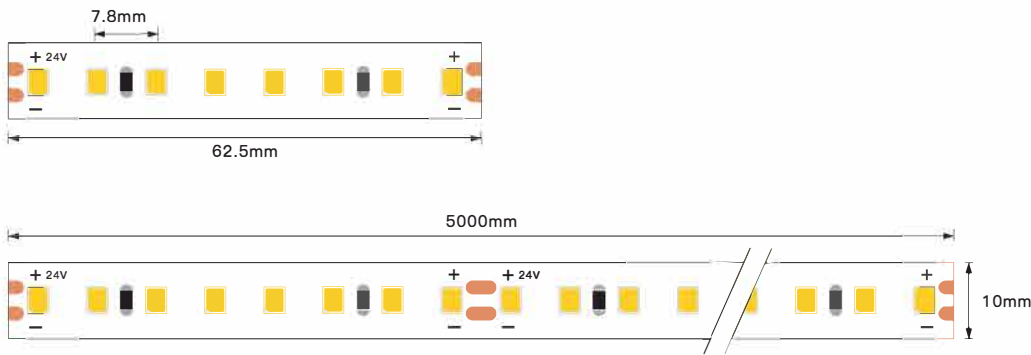


HF-2835-240-10mm-24V



Feature

- 1. SMD2835 ,RA>90
- 2. Higher Energy Saving
- 3. Ideal Light source for Led Linear Light
- 4. Hight brightness lighting at lower energy consumption
- 5. It reduce energy costs while reducing environmental impact

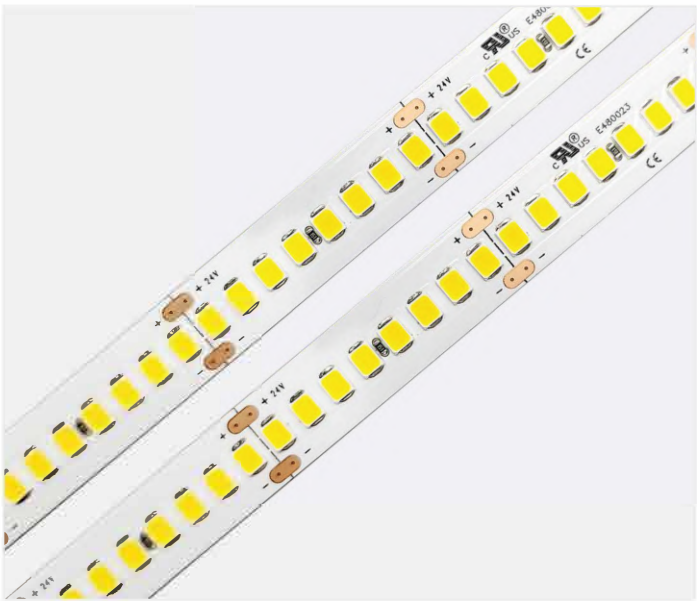


Electrical Parameters

Light Beads:	2835
LED Qty:	240pcs/m
Width:	10mm
Voltage:	24V
Power:	23W/m
CRI:	90
LM/m:	3783
LM/W:	141
Color:	3000K/4000K/6500K



Cut size

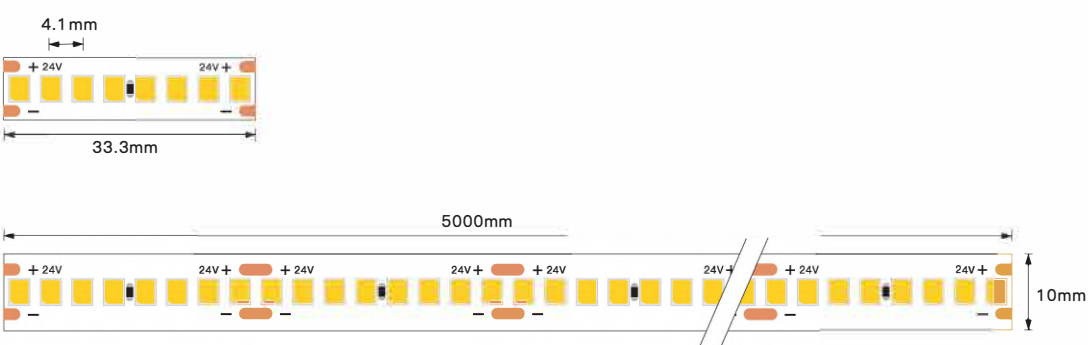



Narrow LED Strip



NW-1515-216-2.6mm

Feature

- 1. SMD 1515 LED, RA>90
- 2. Stable and low light decay, reliability
- 3. Narrow FPCB width:2.6mm
- 4. Suitable for very small size profile




Electrical Parameters

Light Beads:	1515	CE	RoHS	سابقة	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	216pcs/m								
Width:	2.6mm								
Voltage:	DC12/24V								
Power:	4.8W/M								
CRI:	93								
LM/M:	532								
Color:	3000K/4000K/6500K								



Cut size

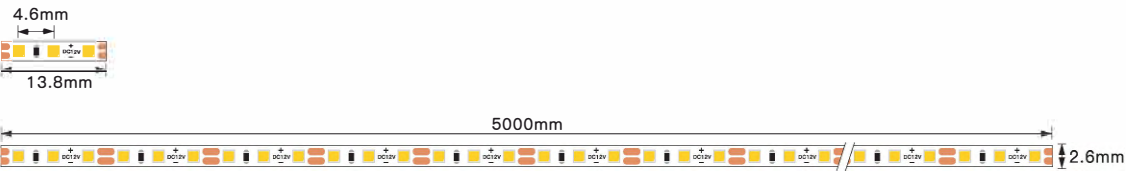


NW-2025-120-3mm



Feature

- 1. SMD 2025 LED, RA>90
- 2. Every LED can be cut
- 3. Narrow FPCB width:3mm
- 4. Suitable for very small size profile

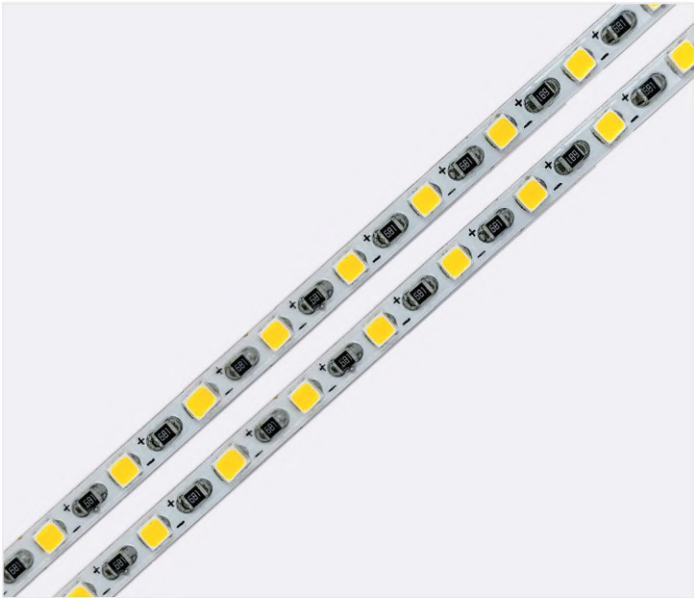


Electrical Parameters

Light Beads:	2025	CE	RoHS	سابقة	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	120pcs/m								
Width:	3mm								
Voltage:	DC12/24V								
Power:	7.2W/M								
CRI:	90/95								
LM/M:	697								
Color:	3000K/4000K/6500K								



Cut size

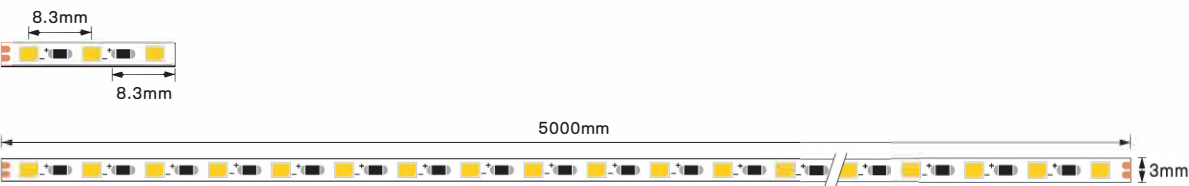

Feature

- 1. SMD 2025 LED, RA>90
- 2. Stable and low light decay, reliability
- 3. Narrow FPCB width:3mm
- 4. Suitable for very small size profile




Electrical Parameters

Light Beads:	2025	CE	RoHS	سابقة	CB	FUS E480023	UK CA	PS E	ErP
LED Qty:	168pcs/m								
Width:	3mm								
Voltage:	DC12V								
Power:	6.3W/M								
CRI:	90/95								
LM/M:	710								
Color:	3000K/4000K/6500K								




Cut size

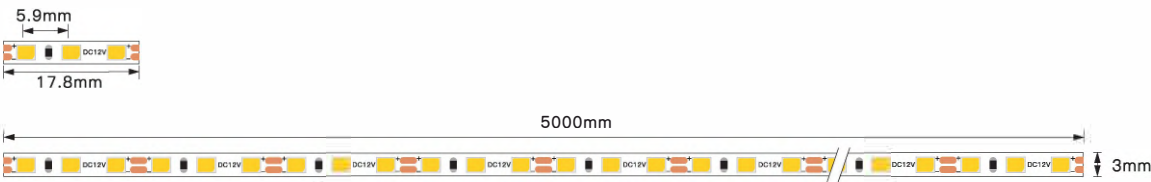

Feature

- 1. SMD 2025 LED, RA>90
- 2. Stable and low light decay, reliability
- 3. Narrow FPCB width:3mm
- 4. Suitable for very small size profile




Electrical Parameters

Light Beads:	2025	CE	RoHS	سابقة	CB	FUS E480023	UK CA	PS E	ErP
LED Qty:	192pcs/m								
Width:	3mm								
Voltage:	DC12V								
Power:	7.6W/M								
CRI:	90/95								
LM/M:	830								
Color:	3000K/4000K/6500K								



Cut size

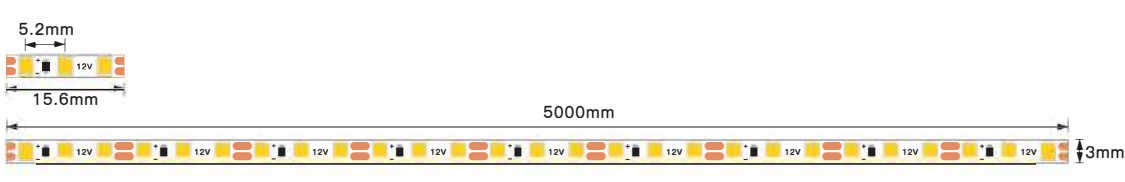

NW-2216-240-3mm

Feature

- 1. SMD 2025 LED, RA>90
- 2. Stable and low light decay, reliability
- 3. Narrow FPCB width:3mm
- 4. Suitable for very small size profile




Electrical Parameters

Light Beads:	2216	CE	RoHS	سابقة	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	240pcs/m								
Width:	3mm								
Voltage:	DC12V								
Power:	7W/M								
CRI:	90/95								
LM/M:	790								
Color:	3000K/4000K/6500K								



Cut size

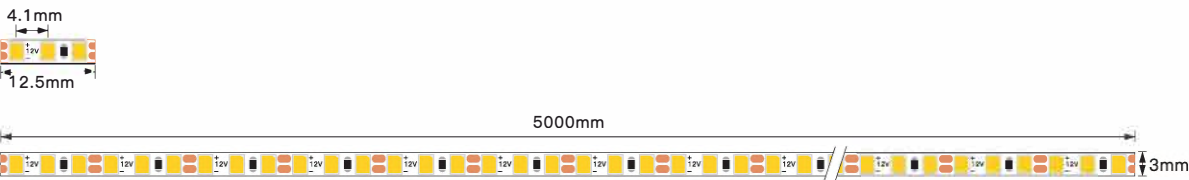


NW-2025-300-3mm



Feature

- 1. SMD 2025 LED, RA>90
- 2. Stable and low light decay, reliability
- 3. Narrow FPCB width:3mm
- 4. Suitable for very small size profile

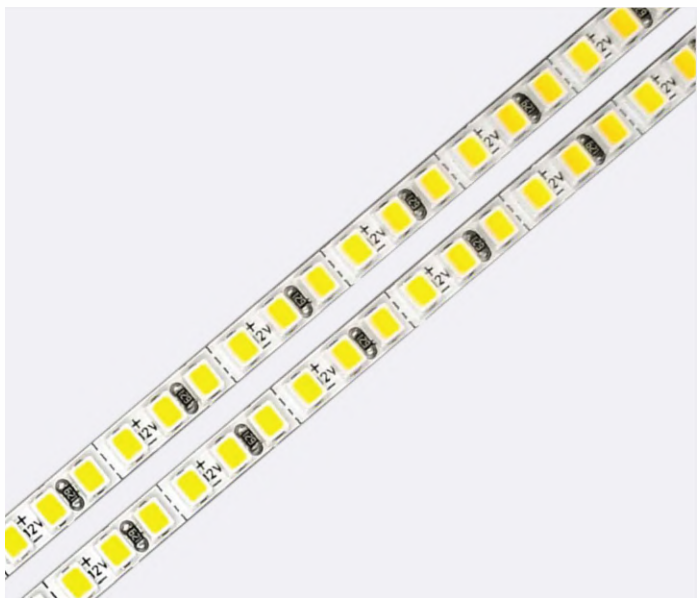


Electrical Parameters

Light Beads:	2025	CE	RoHS	سابقة	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	300pcs/m								
Width:	3mm								
Voltage:	DC12V								
Power:	7.2W/M								
CRI:	90/95								
LM/M:	880								
Color:	3000K/4000K/6500K								



Cut size

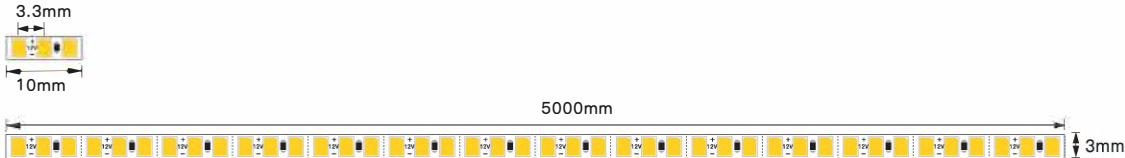

NW-2835-120-4mm-3G

Feature

- 1. Narrow FPCB width: 4mm
- 2. Double layer 2 oz copper PCB for good heat dissipation
- 3. Operate longer life and better for energy saving
- 4. Suitable for small size profile




Electrical Parameters

Light Beads:	2835	
LED Qty:	120pcs/m	
Width:	4mm	
Voltage:	DC12V	
Power:	6W/M	
CRI:	90/95	
LM/M:	720	
Color:	3000K/4000K/6500K	



Cut size

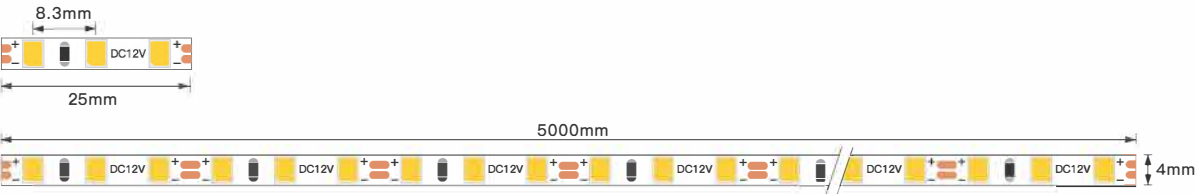


NW-2835-120-4mm-24V-4G



Feature

- 1. Narrow FPCB width: 4mm
- 2. With 24V voltage and cut with 4LED
- 3. Operate longer life and better for energy saving
- 4. Suitable for small size profile

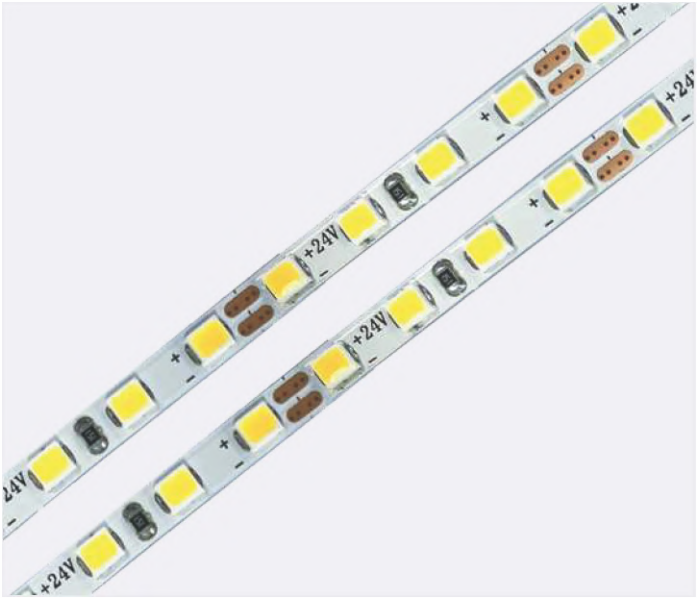


Electrical Parameters

Light Beads:	2835	
LED Qty:	120pcs/m	
Width:	4mm	
Voltage:	DC24V	
Power:	9.6W/M	
CRI:	90	
LM/M:	720	
Color:	3000K/4000K/6500K	



Cut size

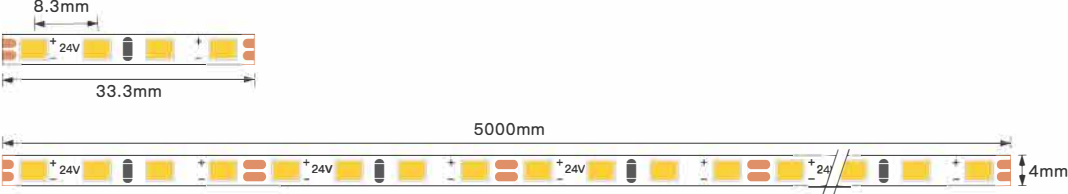



CCT Tunable LED Strip



CCT-2835-120-5mm-2Wire

Feature

- 1. SMD 2835 CCT 2 colors in 1 leds (Warm White & White)
- 2. Adjustable CCT & brightness with dimming controls
- 3. Stable and Low light decay, reliability
- 4. More uniform lighting
- 5. With 2 wire




Electrical Parameters

Light Beads:	2835
LED Qty:	120pcs/m
Width:	5mm
Voltage:	DC12V
Power:	9.6W/M
CRI:	90
LM/M:	750
Color:	2700-6500K



Cut size

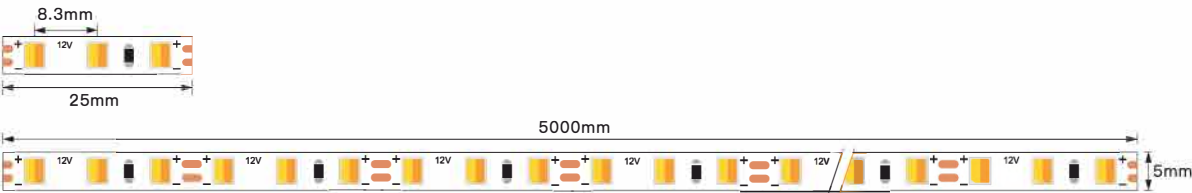

CCT-2835-168-5mm-2Wire

Feature

- 1. SMD 2835 CCT 2 colors in 1 leds (Warm White & White)
- 2. Adjustable CCT & brightness with dimming controls
- 3. Stable and Low light decay, reliability
- 4. More uniform lighting
- 5. Only with 2 wires




Electrical Parameters

Light Beads:	2835
LED Qty:	168pcs/m
Width:	5mm
Voltage:	DC12V
Power:	10W/M
CRI:	90
LM/M:	810
Color:	2700-6500K




Cut size

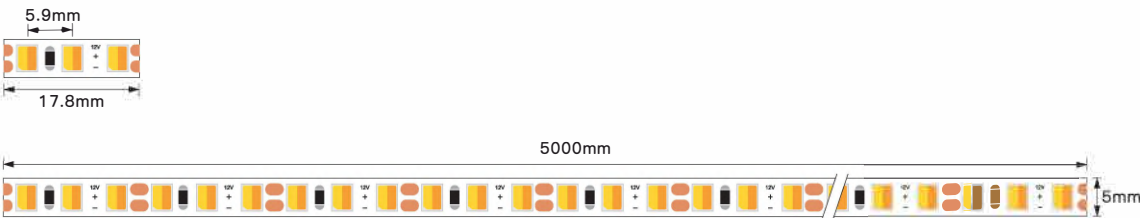

CCT-CF-2835-120-5mm-2Wire

Feature

- 1. Cut free design
- 2. SMD 2835 CCT 2 colors in 1 LED (Warm White & White)
- 3. Adjustable CCT & brightness with dimming controls
- 4. Stable and Low light decay, reliability
- 5. With 2 /3wires




Electrical Parameters

Light Beads:	2835							
LED Qty:	120pcs/m							
Width:	5/8mm							
Voltage:	DC12V							
Power:	7.5W/M							
CRI:	90							
LM/M:	760							
Color:	2700-6500K							



Cut size


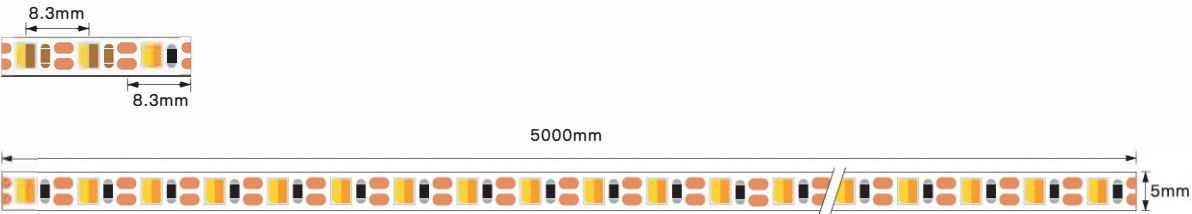


CCT-2835-120-8mm-2Wire



Feature

- 1. SMD 2835 CCT 2 colors in 1 leds (Warm White & White)
- 2. Adjustable CCT & brightness with dimming controls
- 3. Stable and Low light decay, reliability
- 4. More uniform lighting
- 5. With 2 wire

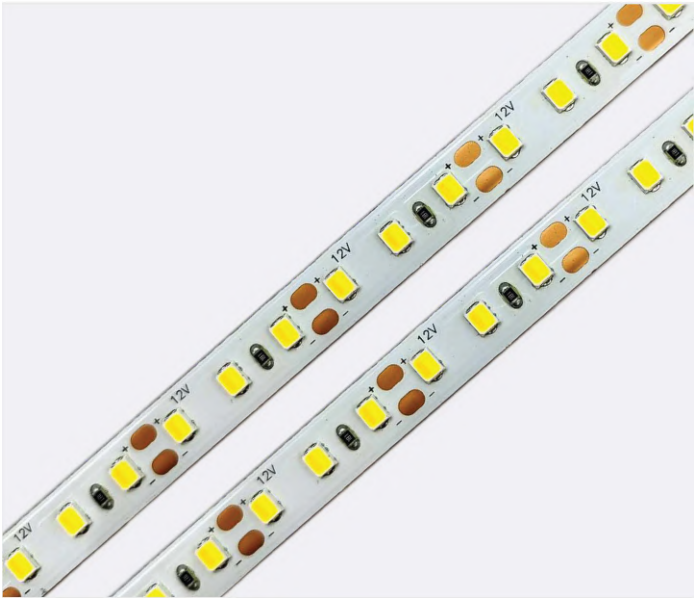


Electrical Parameters

Light Beads:	2835							
LED Qty:	120pcs/m							
Width:	8mm							
Voltage:	DC12V							
Power:	9.6W/M							
CRI:	90							
LM/M:	760							
Color:	2700-6500K							




Cut size

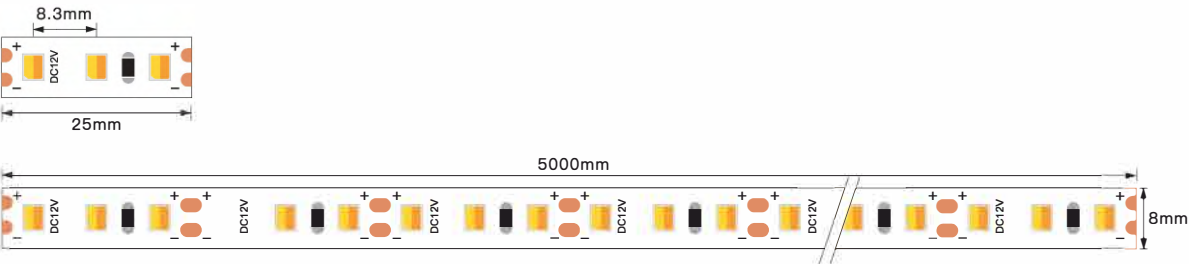

CCT-2835-120-5mm-3Wire

Feature

- 1. SMD 2835 CCT 2 colors in 1 leds (Warm White & White)
- 2. Adjustable CCT & brightness with dimming controls
- 3. Stable and Low light decay, reliability
- 4. More uniform lighting
- 5. With 3 wire

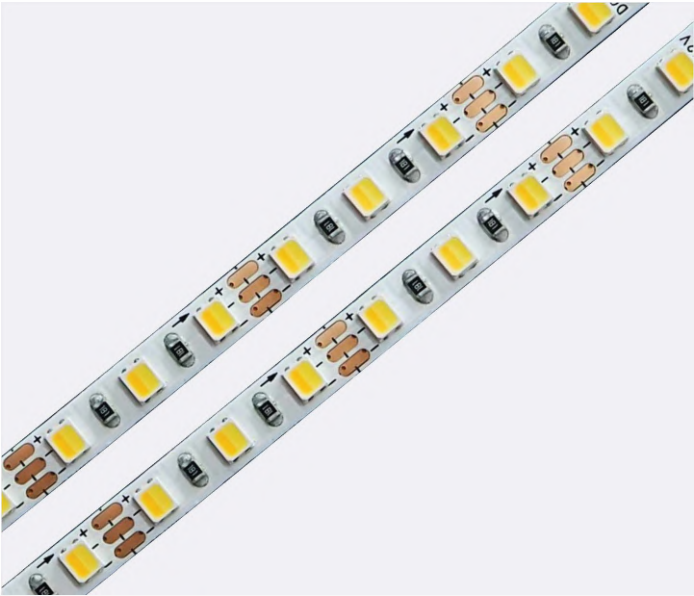


Electrical Parameters

Light Beads:	2835
LED Qty:	120pcs/m
Width:	5mm
Voltage:	DC12V
Power:	9.6W/M
CRI:	90
LM/M:	750
Color:	2700-6500K



Cut size

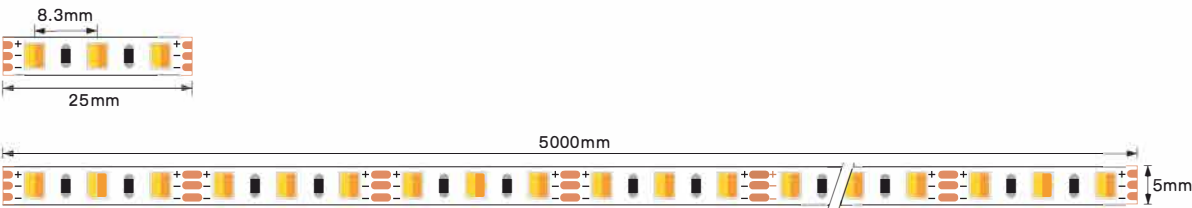

CCT-2835-120-8mm-3Wire

Feature

- 1. SMD 2835 CCT 2 colors in 1 leds (Warm White & White)
- 2. Adjustable CCT & brightness with dimming controls
- 3. Stable and Low light decay, reliability
- 4. More uniform lighting
- 5. With 3 wire




Electrical Parameters

Light Beads:	2835
LED Qty:	120pcs/m
Width:	8mm
Voltage:	DC12V
Power:	9.6W/M
CRI:	90
LM/M:	760
Color:	2700-6500K




Cut size

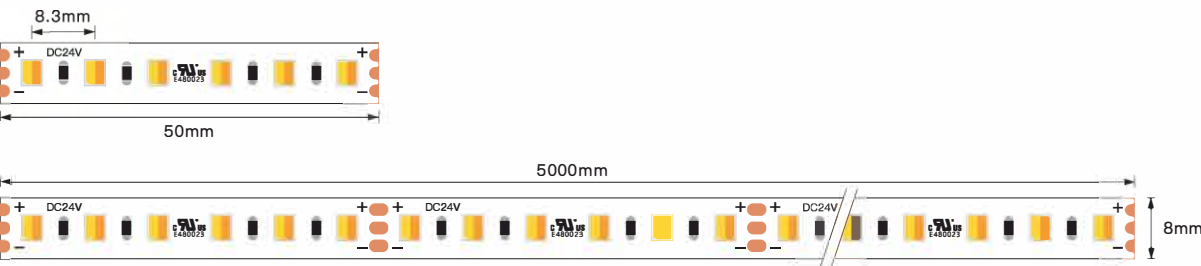

CCT-2835-120-8mm-3Wire(60+60)

Feature

- 1. Made by dual 2835 Top LED (Warm White & White)
- 2. Adjustable CCT & brightness with dimming controls
- 3. Stable and Low light decay, reliability

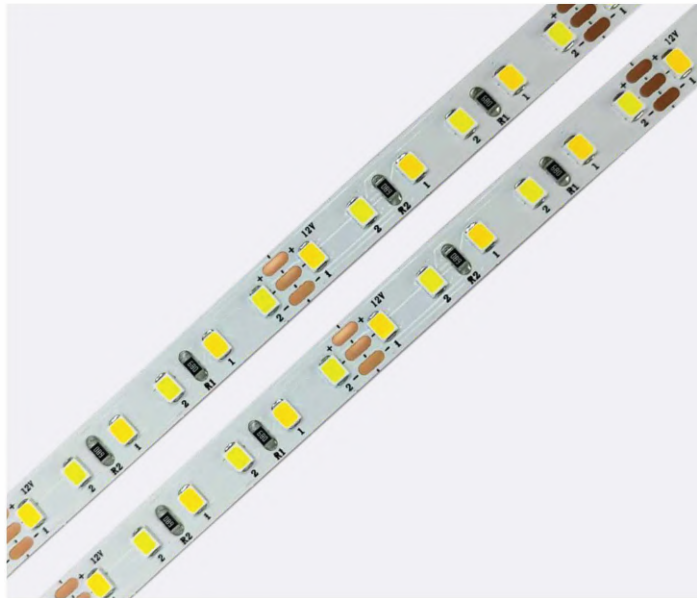


Electrical Parameters

Light Beads:	2835	
LED Qty:	120pcs/m	
Width:	8mm	
Voltage:	DC12V	
Power:	9.6W/M	
CRI:	90	
LM/M:	750	
Color:	3000+6500K	



Cut size

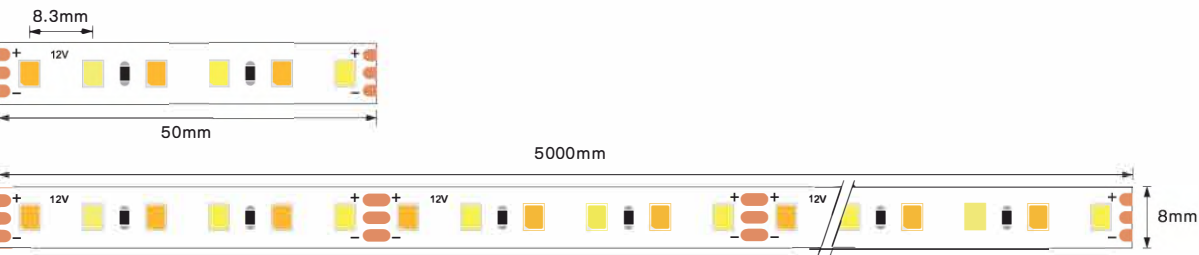

CCT-2835-240-10mm-D

Feature

- 1. Made by dual 2835 Top LEDs (Warm White & White)
- 2. Adjustable CCT & brightness with dimming controls
- 3. Double row with 240LED
- 4. Stable and Low light decay, reliability
- 5. Excellent color rendering, RA> 90




Electrical Parameters


Light Beads:	2835	
LED Qty:	240pcs/m	
Width:	10mm	
Voltage:	DC12V/24V	
Power:	14W/M	
CRI:	90	
LM/M:	1500	
Color:	3000K+6500K	



Cut size

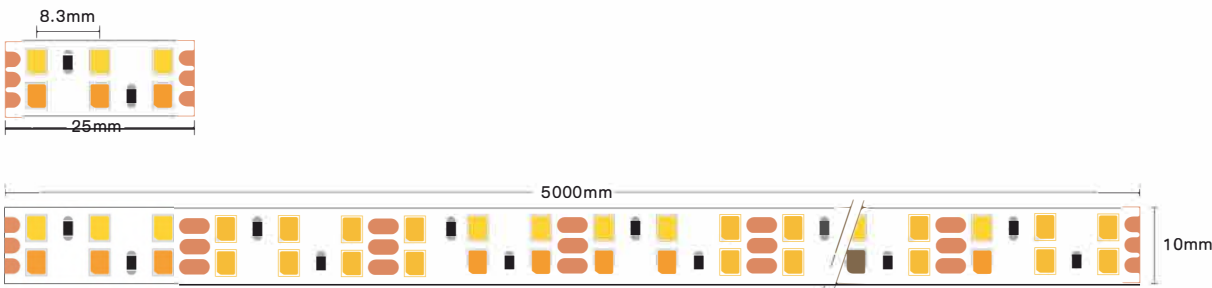


Cut Free LED Strip

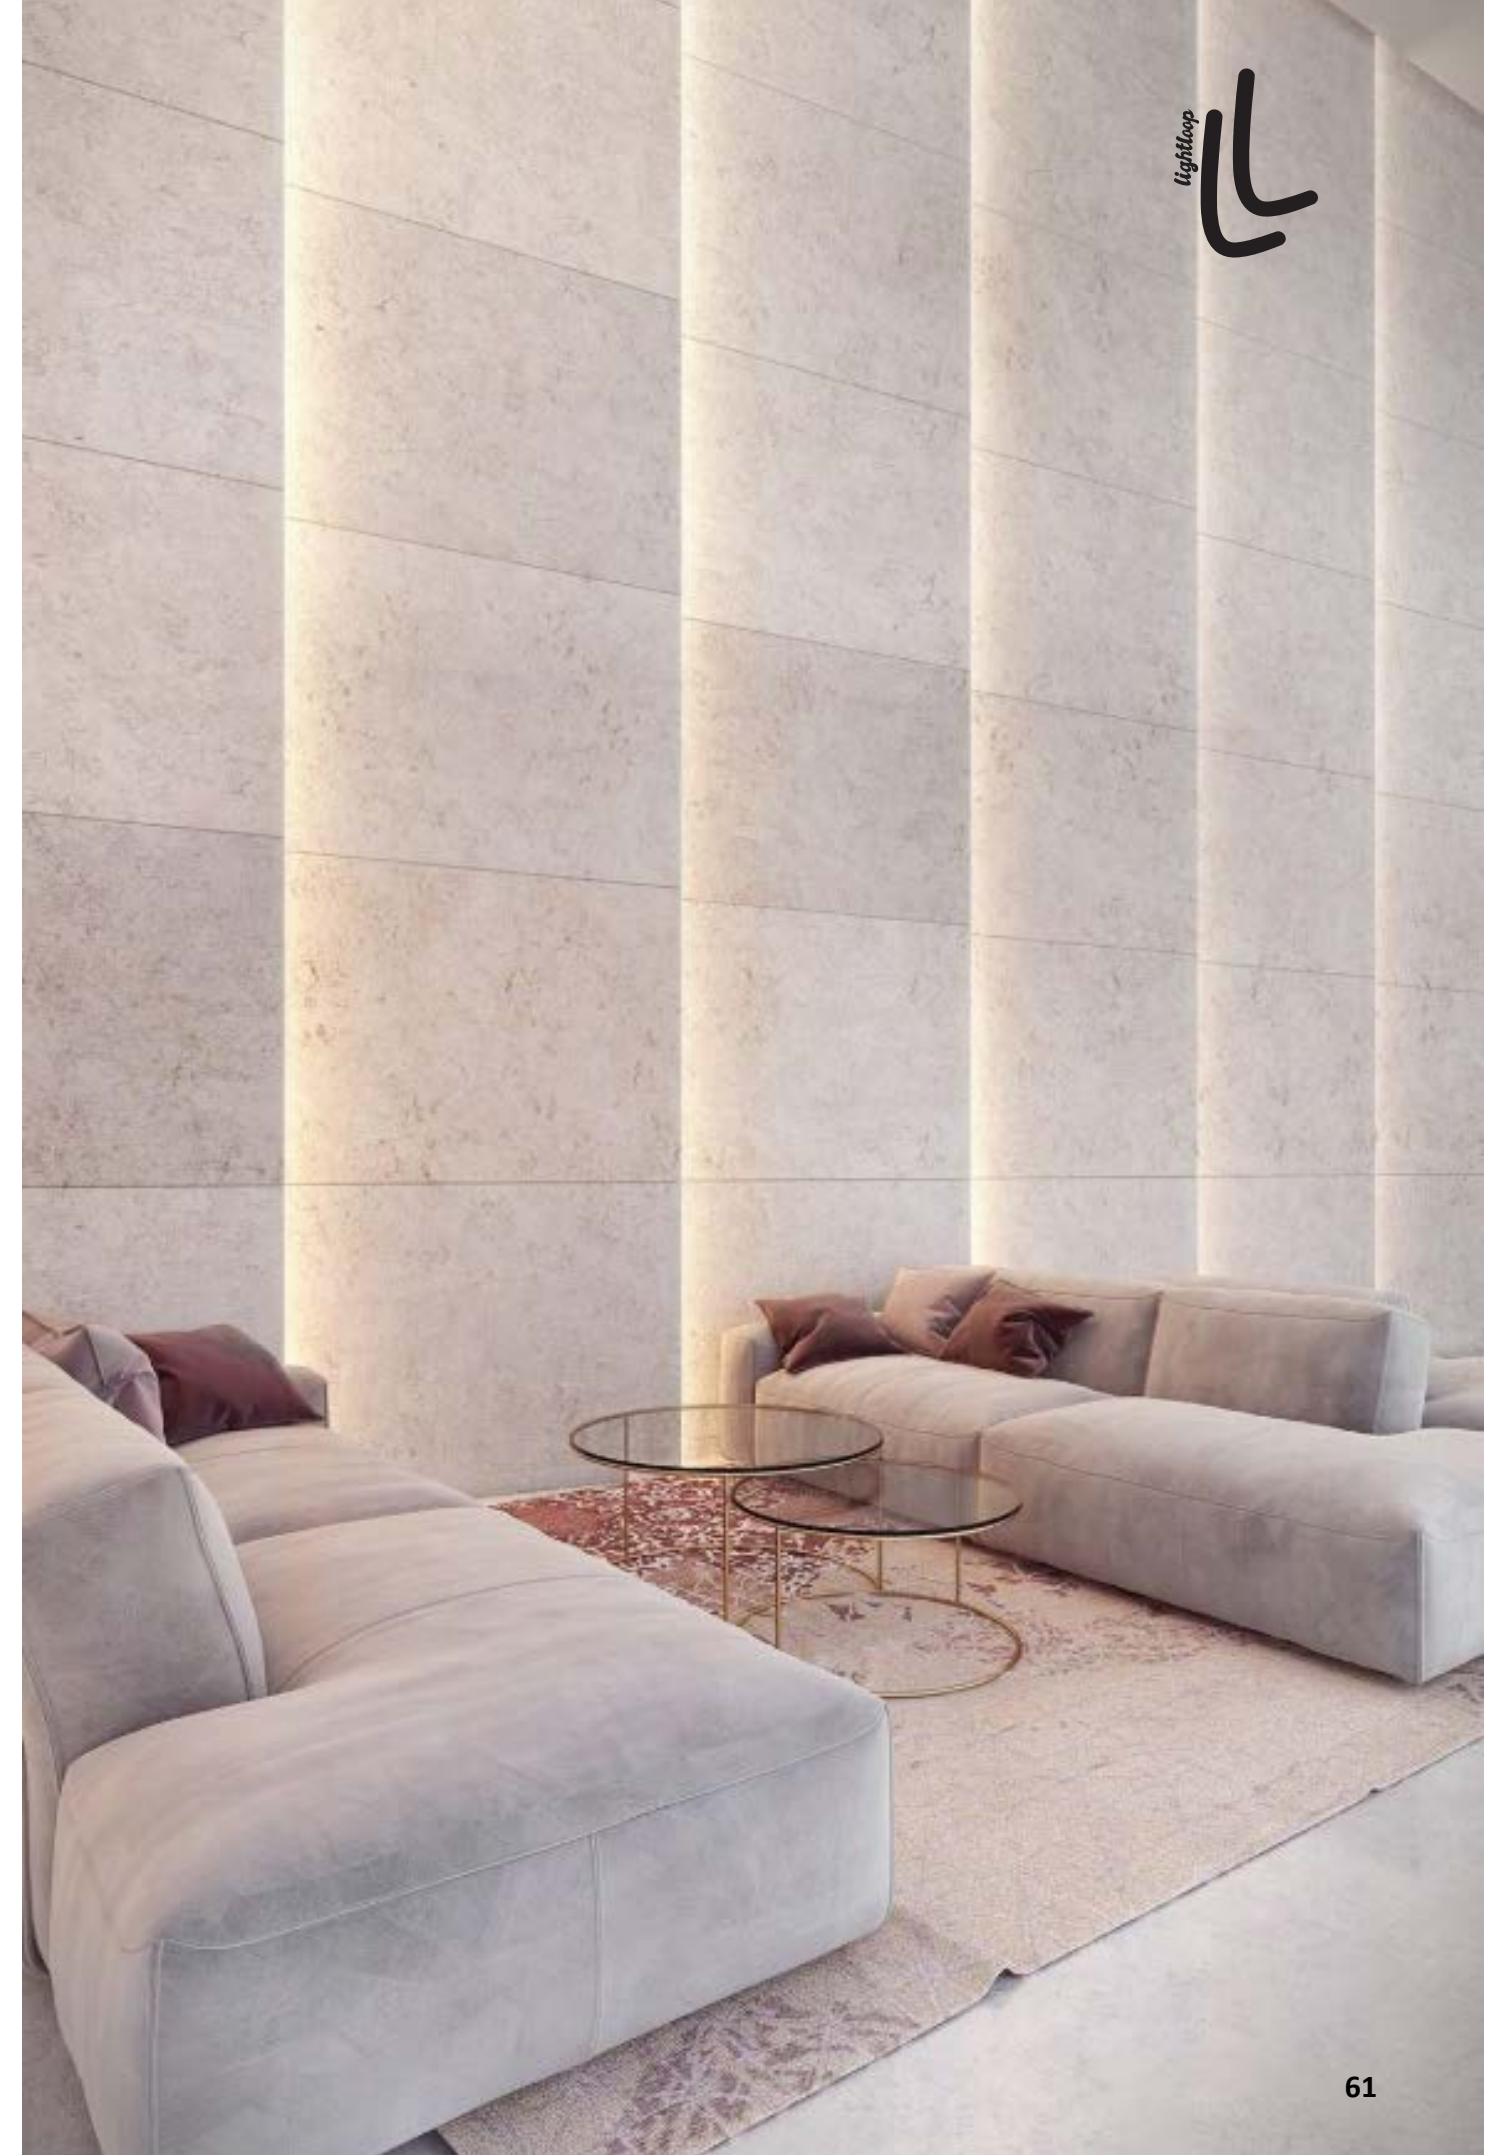

CF-2835-120-5mm

Feature

- 1. SMD 2835 LED, RA>90
- 2. Every LED can be cut
- 3. Stable and low light decay

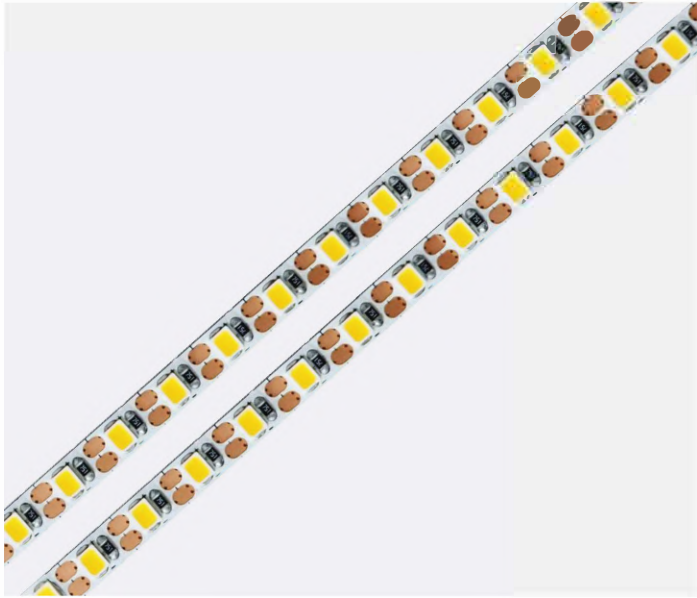


Electrical Parameters

Light Beads:	2835
LED Qty:	120pcs/m
Width:	5mm
Voltage:	DC12/24V
Power:	6.5W/M
CRI:	90
LM/M:	650
Color:	3000K/4000K/6500K



Cut size

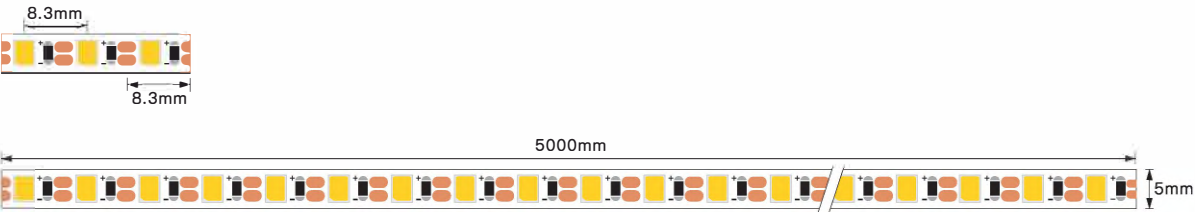


CF-2016-136-5mm



Feature

- 1. SMD 2016 LED, RA>90
- 2. Good product for cabinet
- 3. Double layer 2 oz copper PCB for good heat dissipation

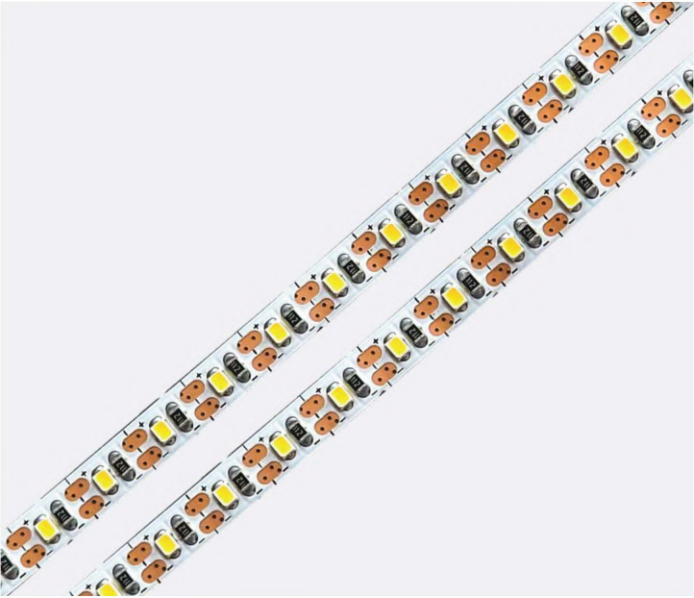


Electrical Parameters

Light Beads:	2016
LED Qty:	136pcs/m
Width:	5mm
Voltage:	DC12V
Power:	6.5W/M
CRI:	90
LM/M:	580
Color:	3000K/4000K/6500K



Cut size

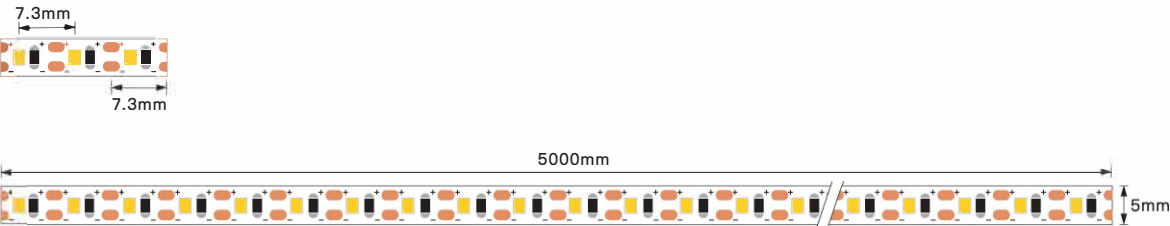

CF-2835-144-5mm

Feature

- 1. SMD 2835 LED, RA>90
- 2. Every LED can be cut
- 3. Stable and low light decay




Electrical Parameters

Light Beads:	2835
LED Qty:	144pcs/m
Width:	5mm
Voltage:	DC12V
Power:	9.3W/M
CRI:	92
LM/M:	739
Color:	3000K/4000K/6500K



Cut size

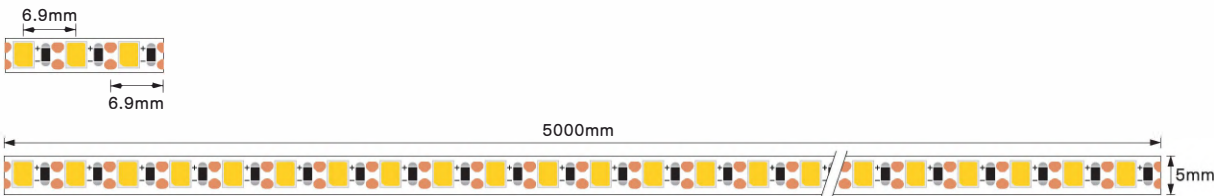

CF-2025-168-5mm



Feature

- 1. SMD 2025 LED, RA>90
- 2. Every LED can be cut
- 3. Stable and low light decay
- 4. Double layer 2 oz copper PCB for good heat dissipation
- 5. Longer operation life and better energy efficiency




Electrical Parameters

Light Beads:	2025
LED Qty:	168pcs/m
Width:	5mm
Voltage:	DC12V
Power:	9.6W/M
CRI:	90
LM/M:	660
Color:	3000K/4000K/6500K



Cut size

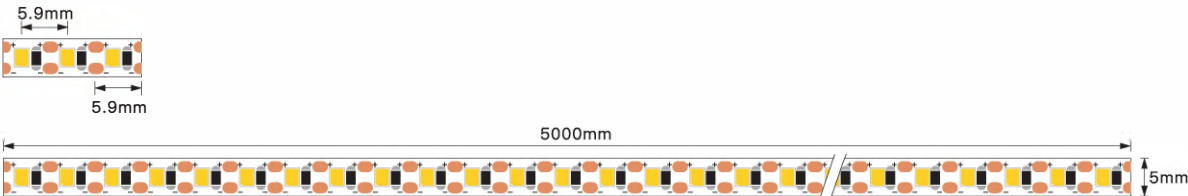

CF-2025-180-5mm

Feature

- 1. Cut free
- 2. SMD 2025 LED, RA>90
- 3. Stable and low light decay
- 4. Longer operation life and better energy efficiency
- 5. Suitable for cabinet/mirror/furniture




Electrical Parameters

Light Beads:	2025	CE	RoHS	سابقة	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	180pcs/m								
Width:	5mm								
Voltage:	DC12/24V								
Power:	6.8W/M								
CRI:	93								
LM/M:	731								
Color:	3000K/4000K/6500K								



Cut size

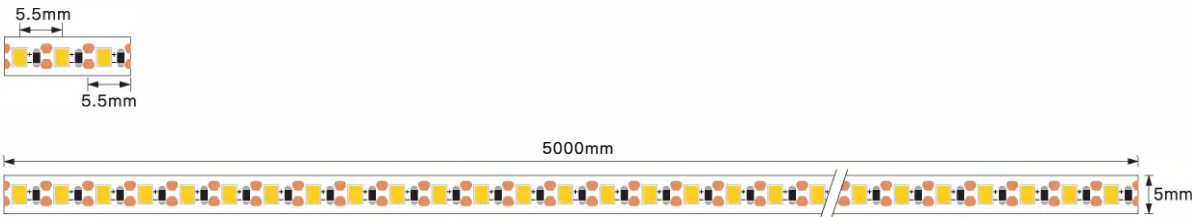


CF-2835-120-8mm



Feature

- 1. Cut free
- 2. SMD 2835 LED, RA>90
- 3. Stable and low light decay
- 4. Longer operation life and better energy efficiency
- 5. Suitable for cabinet/mirror/furniture

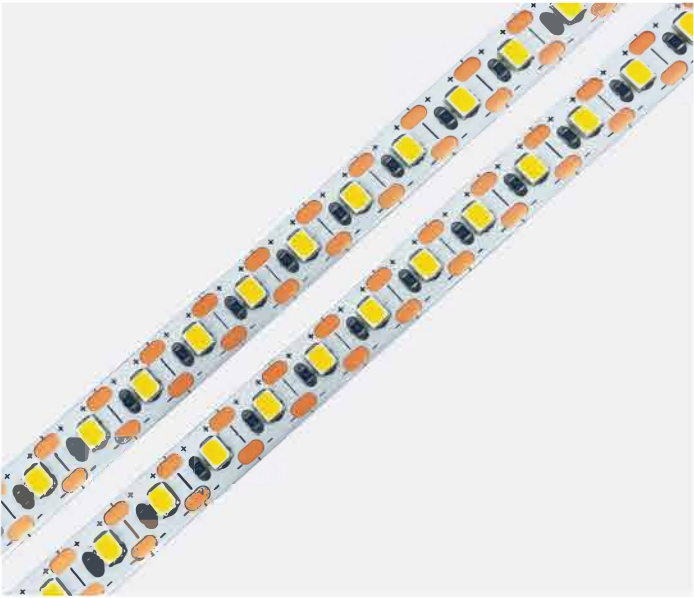


Electrical Parameters

Light Beads:	2835	CE	RoHS	سابقة	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	120pcs/m								
Width:	8mm								
Voltage:	DC12/24V								
Power:	8.5W/M								
CRI:	90								
LM/M:	760								
Color:	3000K/4000K/6500K								



Cut size

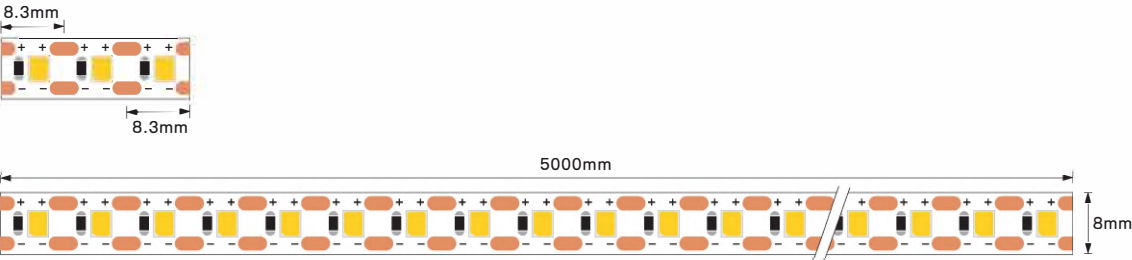

Soldering Free LED Strip



SF-2025-120-5mm

Feature

- 1. Every led is cut free design and without waste
- 2. Excellent color rendering,RA>90
- 3. Stable and Low light decay
- 4. Special new led strip for cabinet




Electrical Parameters

Light Beads:	2025
LED Qty:	120pcs/m
Width:	5mm
Voltage:	DC12V
Power:	6W/M
CRI:	90
LM/M:	510
Color:	3000K/4000K/6500K



Cut size

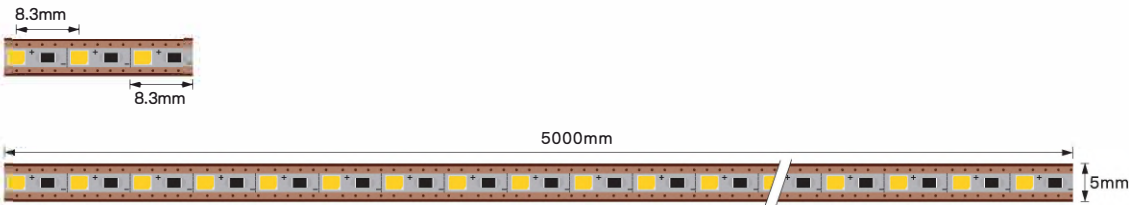

SF-2025-120-6.5mm



Feature

- 1. Gold-plated PCB to prevent oxidation
- 2. Every led cut free design
- 3. Excellent color rendering,RA>90
- 4. Special NEW led strip for cabinet




Electrical Parameters

Light Beads:	2025
LED Qty:	150pcs/m
Width:	6.5mm
Voltage:	DC12V
Power:	7.5W/M
CRI:	90
LM/M:	635
Color:	3000K/4000K/6500K




Cut size

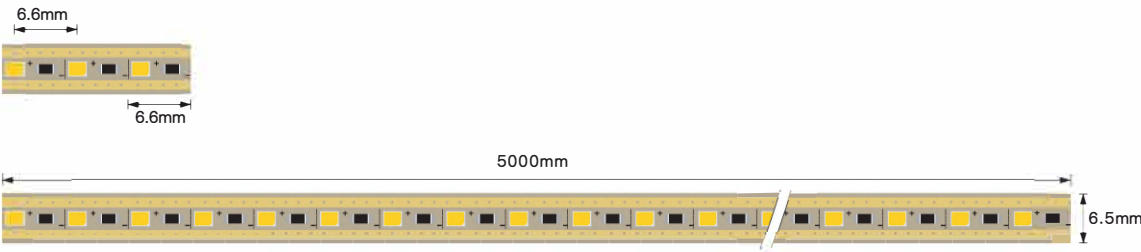

Cabinet LED Linear Light

Feature

- 1. Work with quick connector instead of solder wires, save time and cost
- 2. Cut free
- 3. Excellent color rendering up to Ra90
- 4. This design is to make the installation more convenient
- 5. Mainly used for cabinet




Electrical Parameters

Light Beads:	2025
LED Qty:	150pcs/m
Width:	6.8mm
Voltage:	DC12V
Power:	7.5W/M
CRI:	90
LM/M:	635
Color:	3000K/4000K/6500K



Cut size

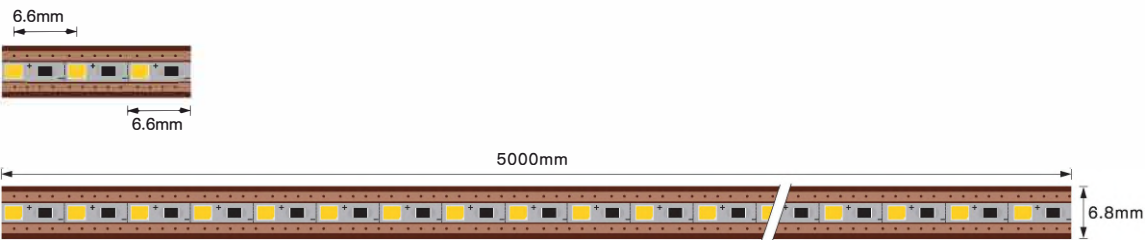


SF-2835-204-6.8mm



Feature

- 1. 2835 204LED/M with more brightness
- 2. Cut free
- 3. Excellent color rendering, RA>90
- 4. Special NEW led strip for cabinet




Electrical Parameters

Light Beads:	2835
LED Qty:	204pcs/m
Width:	6.8mm
Voltage:	DC12V
Power:	7.5W/M
CRI:	90
LM/M:	660
Color:	3000K/4000K/6500K



Cut size

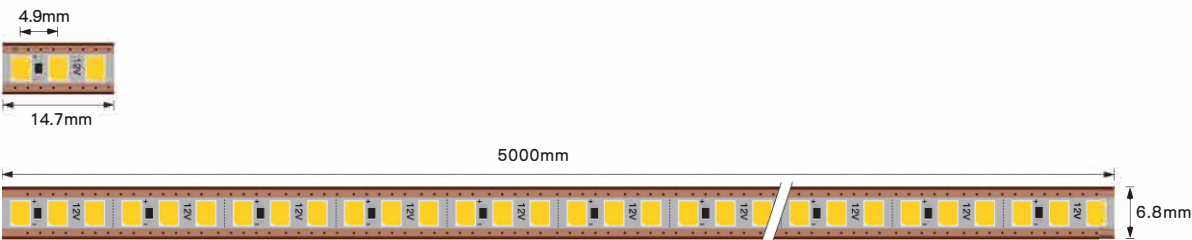

SF-2025-120-8mm

Feature

- 1. Every led is cut free design and without waste
- 2. Excellent color rendering,RA>90
- 3. Stable and Low light decay
- 4. Special new led strip for cabinet




Electrical Parameters

Light Beads:	2025	CE	RoHS	سابقة	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	120pcs/m								
Width:	8mm								
Voltage:	DC12V								
Power:	7.5W/M								
CRI:	90								
LM/M:	530								
Color:	3000K/4000K/6500K								



Cut size

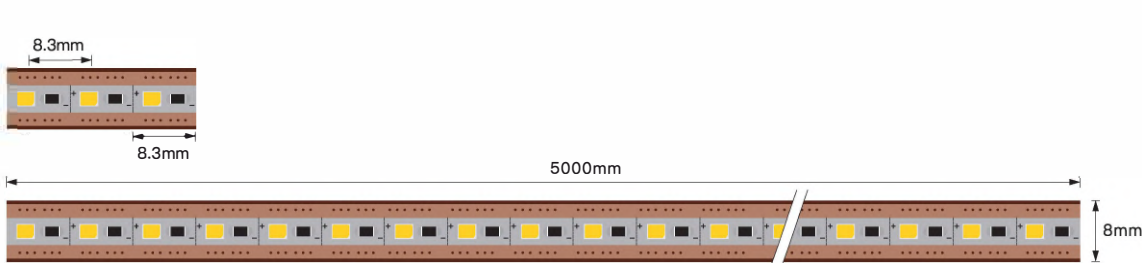


SF-2835-150-8mm



Feature

- 1. 2835 150LED/M with more brightness
- 2. Cut free design
- 3. Excellent color rendering,RA>90
- 4. Special NEW led strip for cabinet

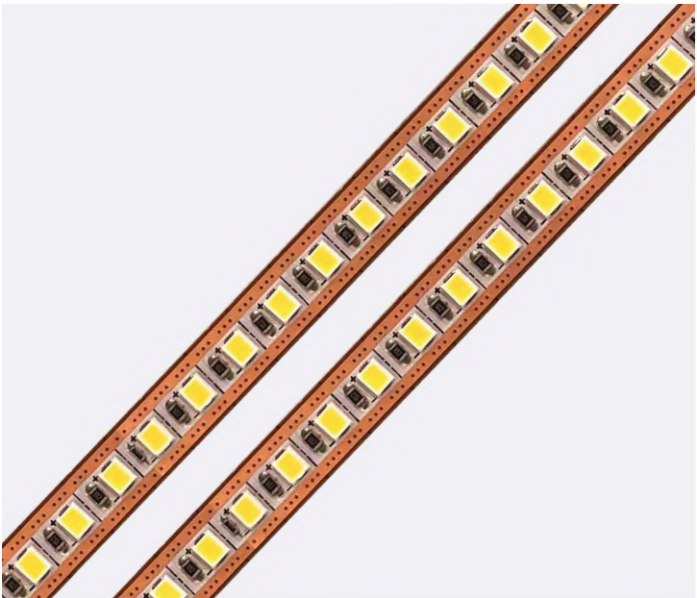


Electrical Parameters

Light Beads:	2835	CE	RoHS	سابقة	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	150pcs/m								
Width:	8mm								
Voltage:	DC12V								
Power:	7.5W/M								
CRI:	90								
LM/M:	630								
Color:	3000K/4000K/6500K								



Cut size

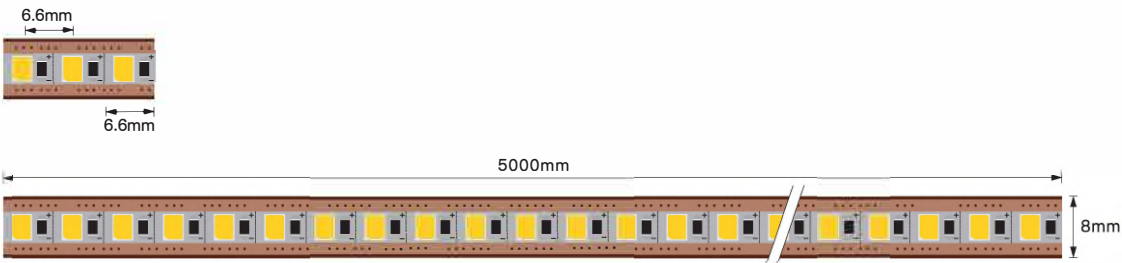


Regular LED Strip



RG-2216-240-4mm

Feature

- 1. Narrow FPCB width: 4mm
- 2. With 24V voltage and cut with 6LED
- 3. Operate longer life and better for energy saving
- 4. 240LED/M with uniform light
- 5. Suitable for small size profile




Electrical Parameters

Light Beads:	2216						
LED Qty:	240pcs/m						
Width:	4mm						
Voltage:	DC24V						
Power:	9.2W/M						
CRI:	95						
LM/M:	930						
Color:	3000K/4000K/6500K						



Cut size


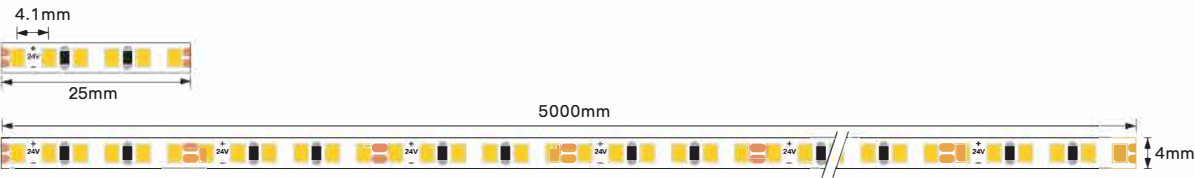


RG-2835-120-5mm



Feature

- 1. Narrow FPCB width:5mm
- 2. Stable and low light decay
- 3. Operate longer life and better for energy saving

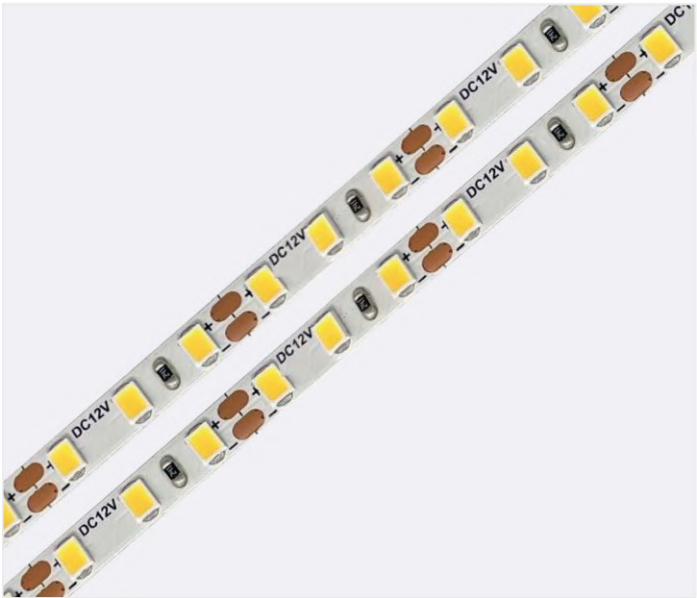


Electrical Parameters

Light Beads:	2835						
LED Qty:	120pcs/m						
Width:	5mm						
Voltage:	DC12V						
Power:	5.7/7.2/9.6W/M						
CRI:	90/95						
LM/M:	888						
Color:	3000K/4000K/6500K						




Cut size

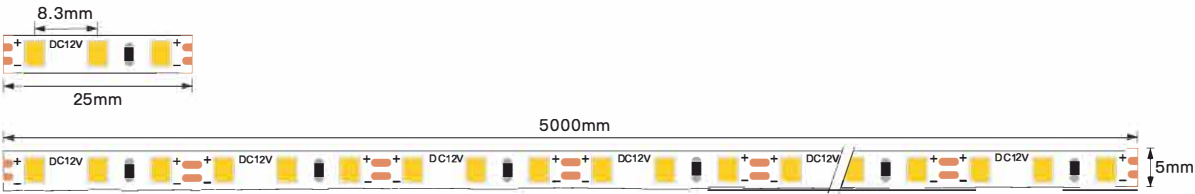

RG-2835-136-5mm

Feature

- 1. Small cut with 2LED/group and 136LED/M
- 2. SMD 2835 LED, RA>90
- 3. Narrow FPCB width:5mm
- 4. Achieving higher luminous output per unit power consumption




Electrical Parameters

Light Beads:	2835	CE RoHS سابقة CB UL E480023 UK CA PS E ErP
LED Qty:	136pcs/m	
Width:	5mm	
Voltage:	24V	
Power:	3.4W/m	
CRI:	90	
LM/m:	401	
Color:	3000K/4000K/6500K	



Cut size


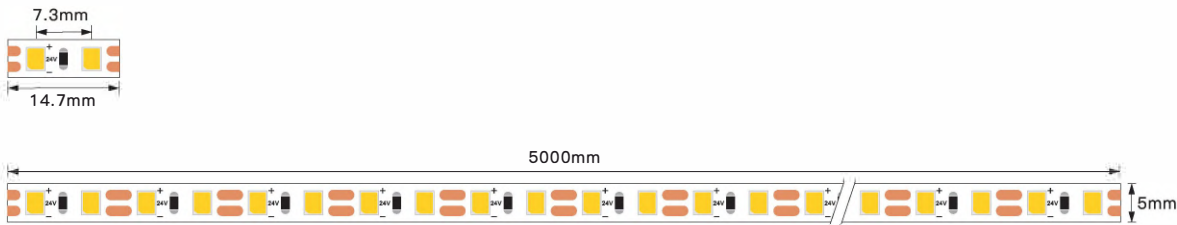


RG-2835-168-5mm



Feature

- 1. High brightness with 2835 led, Copper bracket
- 2. RA>80 Or RA>90
- 3. Stable and low light decay
- 4. Double layer 2 oz copper PCB for good heat dissipation
- 5. Longer operation life and better energy efficiency

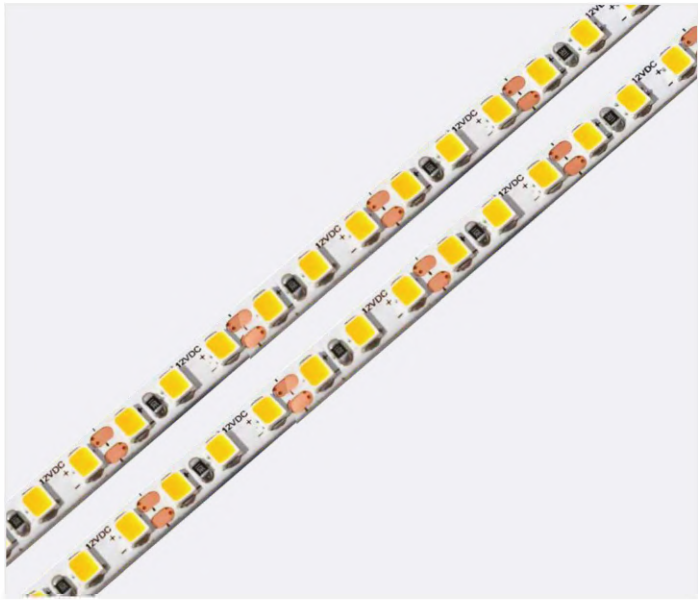


Electrical Parameters

Light Beads:	2835	CE RoHS سابقة CB UL E480023 UK CA PS E ErP
LED Qty:	168pcs/m	
Width:	5mm	
Voltage:	DC12V	
Power:	5W/M	
CRI:	80/90	
LM/M:	590	
Color:	3000K/4000K/6500K	




Cut size

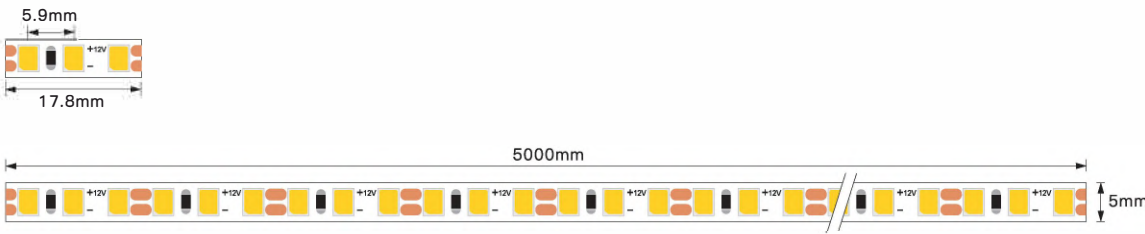

RG-2835-180-5mm

Feature

- 1. Small cut with 2LED/group and 180LED/M
- 2. Excellent color rendering,RA>95 or 97
- 3. Good product for small size cabinet linear light

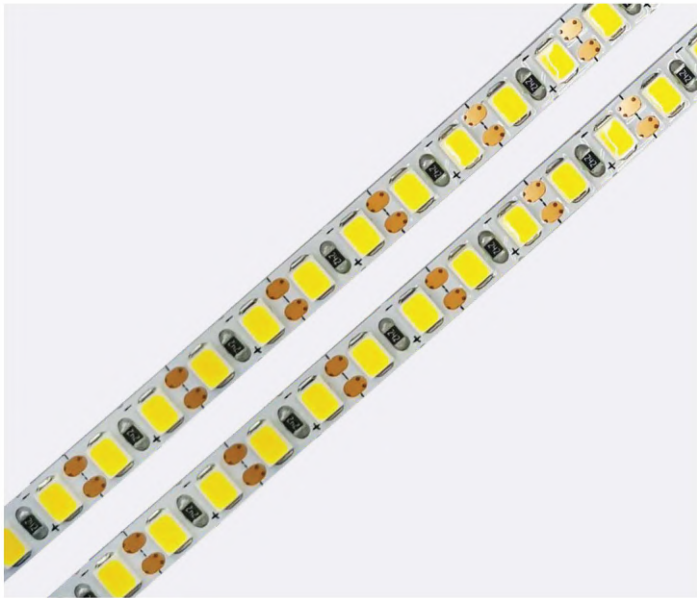


Electrical Parameters

Light Beads:	2835	CE	RoHS	سليمان	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	180pcs/m								
Width:	5mm								
Voltage:	DC24V								
Power:	7.5W/M								
CRI:	95/97								
LM/M:	686								
Color:	3000K/4000K/6500K								



Cut size

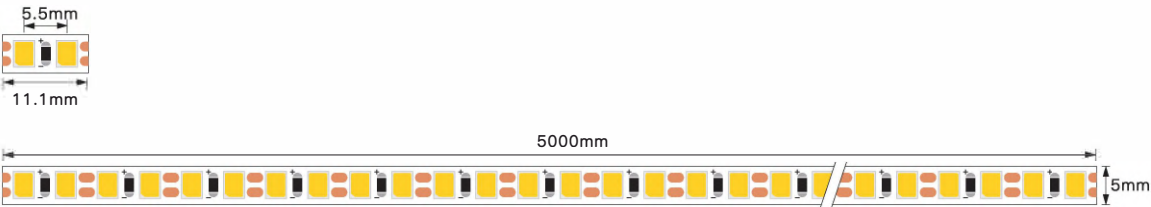


RG-2025-240-5mm



Feature

- 1. 2025 240LED/M with uniform light
- 2. Good product for small size cabinet linear light
- 3. Excellent color rendering,RA>90
- 4. 12V or 24v are availabel

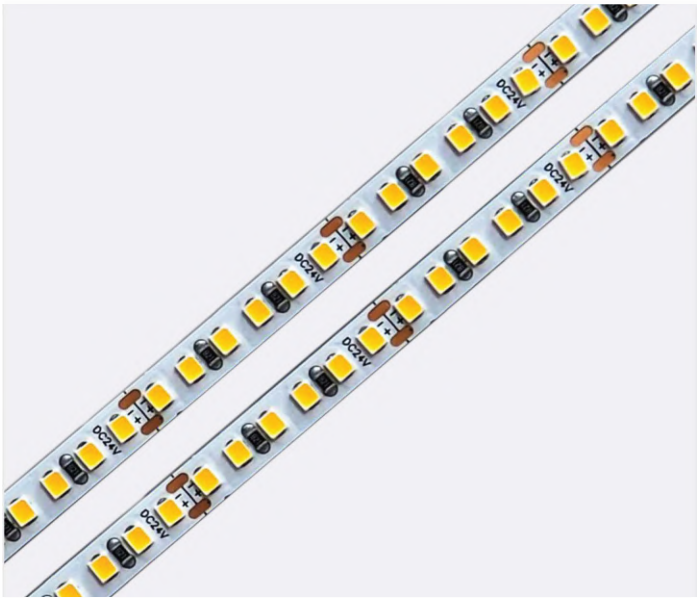


Electrical Parameters

Light Beads:	2025	CE	RoHS	سليمان	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	240pcs/m								
Width:	5mm								
Voltage:	DC24V								
Power:	6.5W/M								
CRI:	90								
LM/M:	550								
Color:	3000K/4000K/6500K								





Cut size

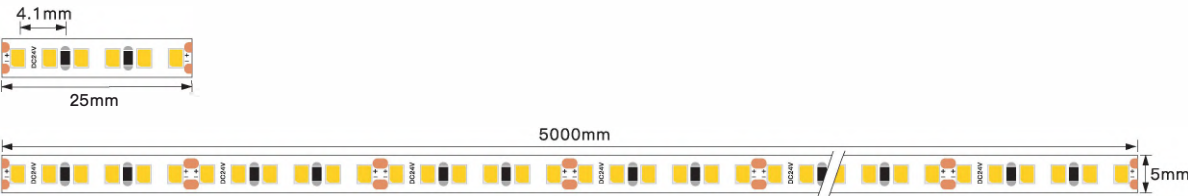

RG-1515-300-5mm

Feature

- 1. Narrow FPCB width:5mm
- 2. Stable and low light decay
- 3. Operate longer life and better for energy saving

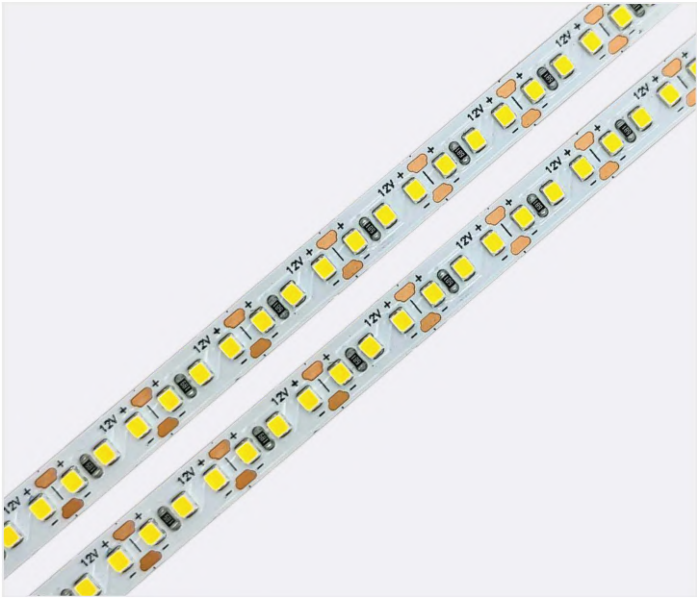


Electrical Parameters

Light Beads:	1515	CE	RoHS	سيانتر	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	300pcs/m								
Width:	5mm								
Voltage:	DC12V								
Power:	5W/m								
CRI:	90/95								
LM/M:	763								
Color:	3000K/4000K/6500K								



Cut size

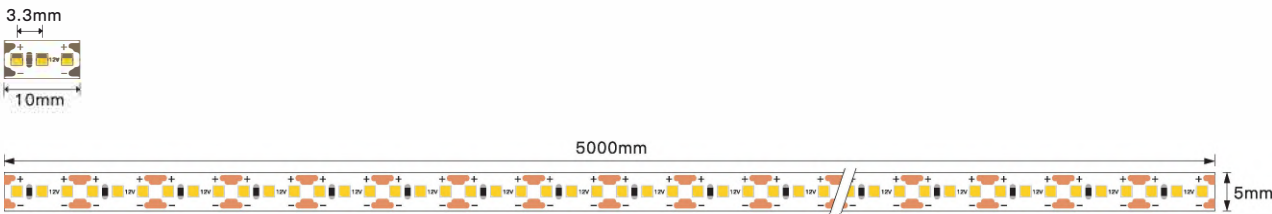

RG-1515-348-5mm



Feature

- 1. Narrow FPCB width:5mm
- 2. Stable and low light decay
- 3. Operate longer life and better for energy saving




Electrical Parameters

Light Beads:	1515	CE	RoHS	سيانتر	CB	UL US E480023	UK CA	PS E	ErP
LED Qty:	348pcs/m								
Width:	5mm								
Voltage:	DC12V								
Power:	7.3W/M								
CRI:	90								
LM/M:	816								
Color:	3000K/4000K/6500K								




Cut size

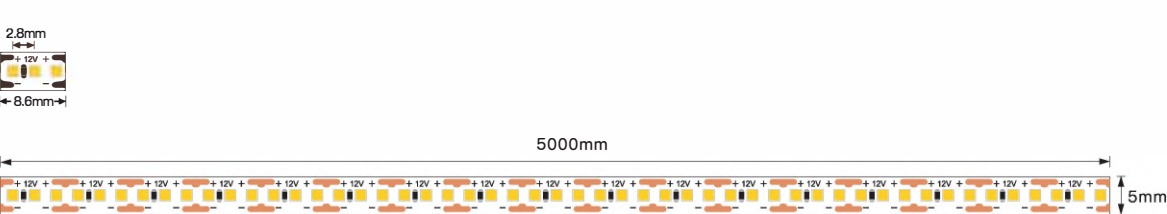

RG-2835-60-8mm

Feature

- 1. 2835LED with high brightness and copper bracket
- 2. Stabel and low light decay
- 3. It can be for sign letter/furniture/decoration

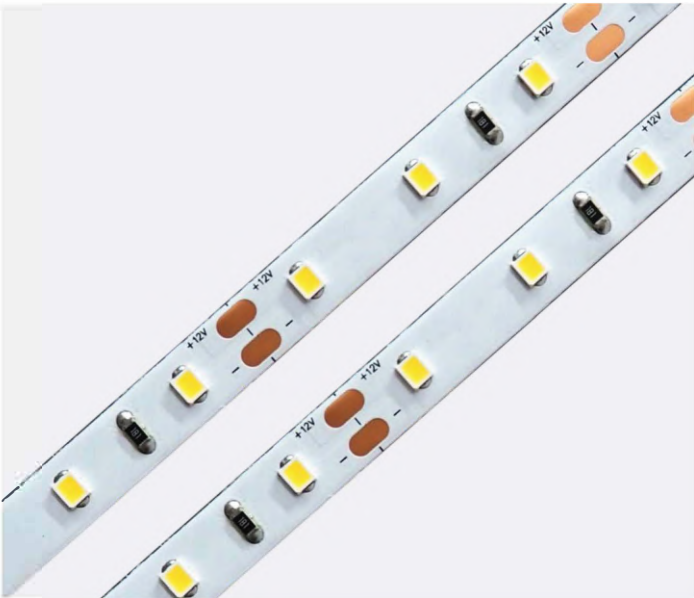


Electrical Parameters

Light Beads:	2835
LED Qty:	60pcs/m
Width:	8mm
Voltage:	DC12V
Power:	4.8W/M
CRI:	80/90
LM/M:	660
Color:	3000K/4000K/6500K



Cut size

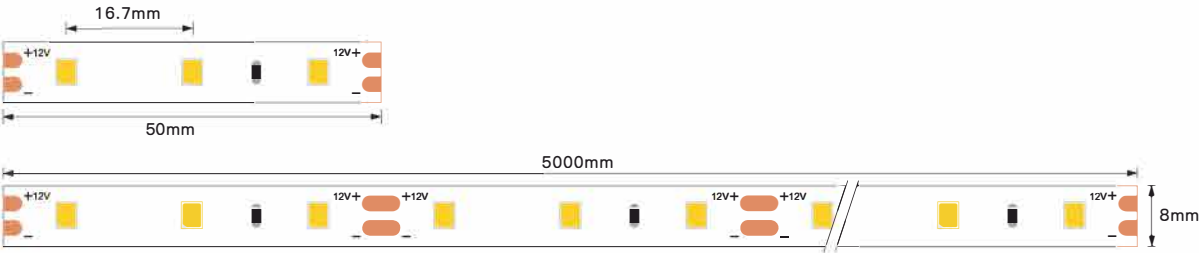

RG-2835-120-8mm



Feature

- 1. Stable and Low light decay
- 2. Excellent color rendering,RA>80 or 90
- 3. Double layer copper PCB for good heat dissipation
- 4. Custom wattage,2W/6W/9.6W/12W/M




Electrical Parameters

Light Beads:	2835
LED Qty:	120pcs/m
Width:	8mm
Voltage:	DC12V
Power:	8W/M
CRI:	90
LM/M:	905
Color:	3000K/4000K/6500K



Cut size

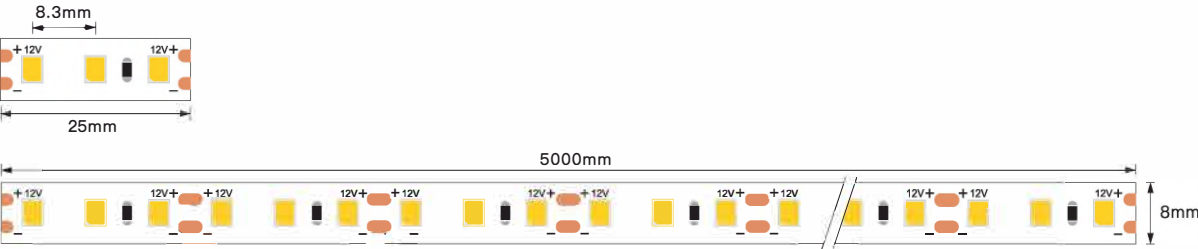

RG-2025-280-8mm

Feature

- 1. 280LED/M and 24V for project
- 2. Excellent color rendering,RA>90
- 3. Stable, low light decay with 3 OZ copper
- 4. Suitable for cabinet light/Celling/showcase




Electrical Parameters

Light Beads:	2025
LED Qty:	280pcs/m
Width:	8mm
Voltage:	DC24V
Power:	12.8W/M
CRI:	90
LM/M:	1664
Color:	3000K/4000K/6500K



Cut size

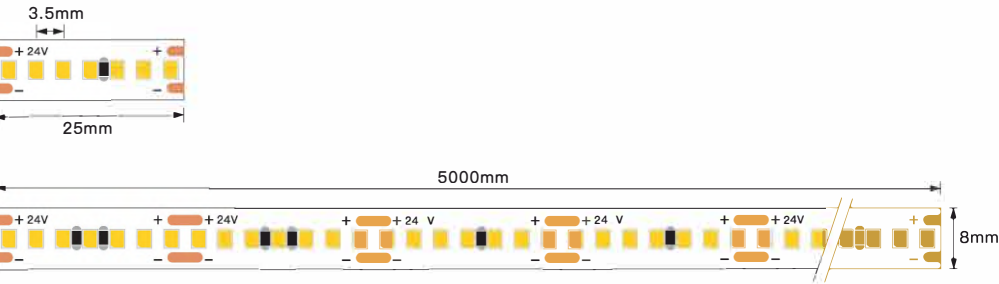

RG-5050-60-10mm



Feature

- 1. 5050 LED with high brightness and copper bracket
- 2. Stabel and low light decay
- 3. It can be for sign letter/furniture/decoration




Electrical Parameters

Light Beads:	5050
LED Qty:	60pcs/m
Width:	10mm
Voltage:	DC12V
Power:	12W/M
CRI:	90
LM/M:	1230
Color:	3000K/4000K/6500K




Cut size

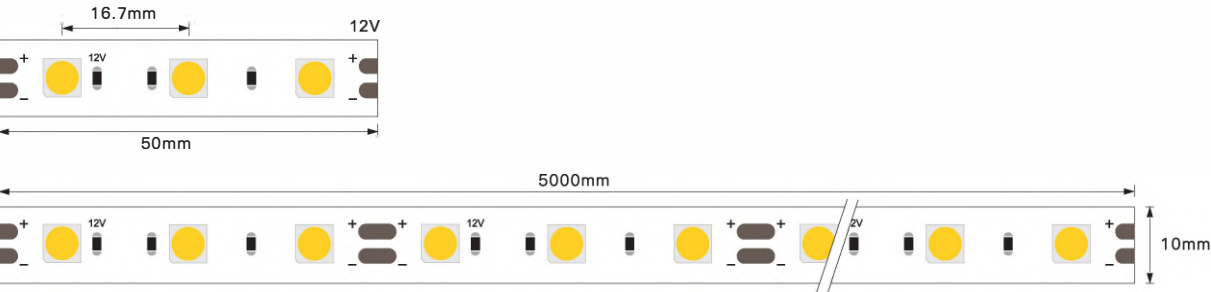

RG-2835-180-10mm

Feature

- 1.180LED/M and 24V for project
- 2. Excellent color rendering,RA>90
- 3. Stable and low light decay
- 4. Suitable for cabinet light/Celling/showcase




Electrical Parameters

Light Beads:	2835
LED Qty:	180pcs/m
Width:	10mm
Voltage:	DC24V
Power:	14W/M
CRI:	90
LM/M:	1300
Color:	3000K/4000K/6500K



Cut size

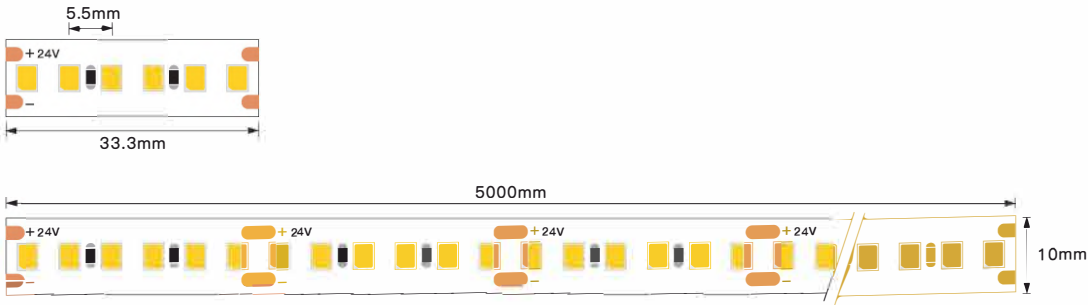

RG-2835-240-10mm-D



Feature

- 1. Double row with high brightness
- 2. Stable and Low light decay
- 3. Excellent color rendering,RA>80 or 90
- 4. Double layer copper PCB for good heat dissipation




Electrical Parameters

Light Beads:	2835
LED Qty:	240pcs/m
Width:	10mm
Voltage:	DC12V/24V
Power:	16W/M
CRI:	90
LM/M:	1870
Color:	3000K/4000K/5000K/6500K




Cut size

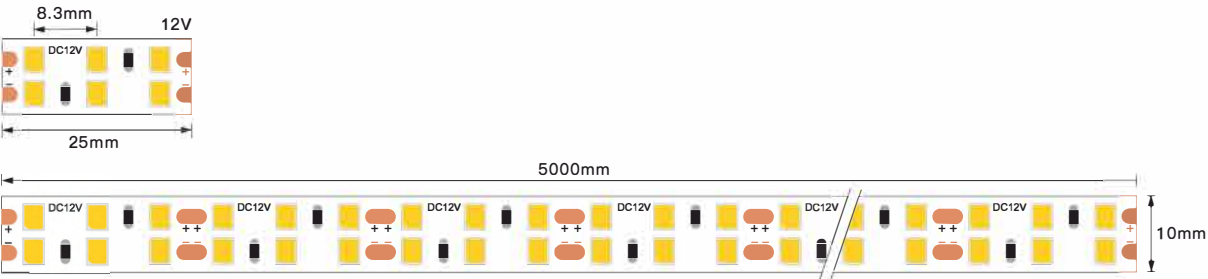

RG-2835-240-15mm

Feature

- 1. 2835 240LED/M with uniform light
- 2. Good product for small size cabinet linear light
- 3. Excellent color rendering,RA>90
- 4. 12V or 24v are availabel

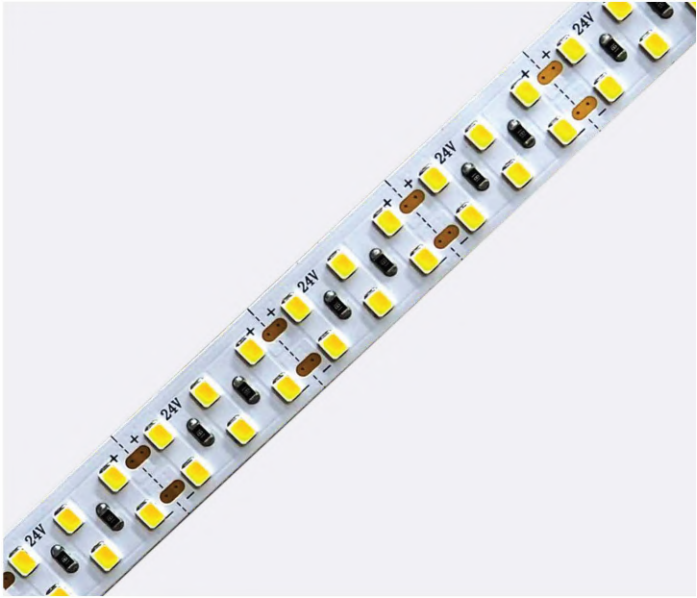


Electrical Parameters

Light Beads:	2835
LED Qty:	240pcs/m
Width:	15mm
Voltage:	DC24V
Power:	18.5W/M
CRI:	90/95
LM/M:	1810
Color:	3000K/4000K/5000K/6500K



Cut size

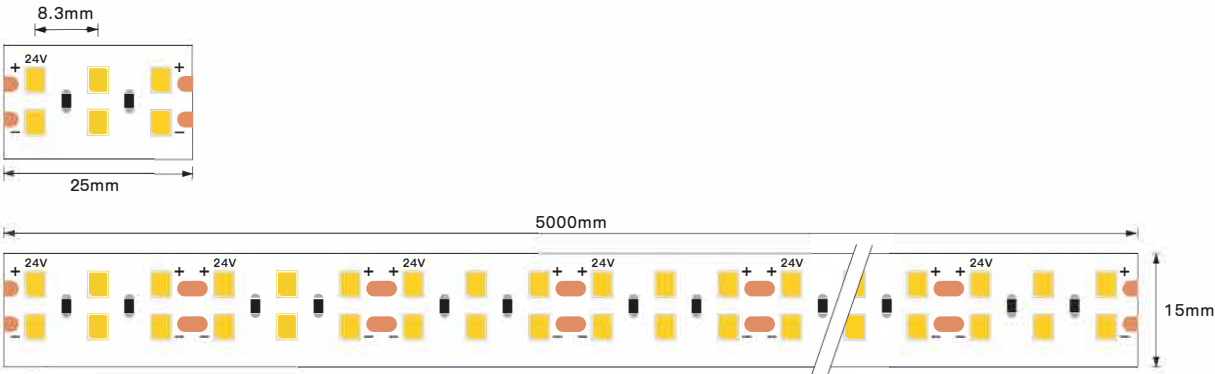


RG-2835-360-20mm



Feature

- 1. Excellent color rendering,RA>90 or 95
- 2. Double layer copper PCB for good heat dissipation
- 3. High brightness with 28W/m for project
- 4. Suitable for commercial lighting

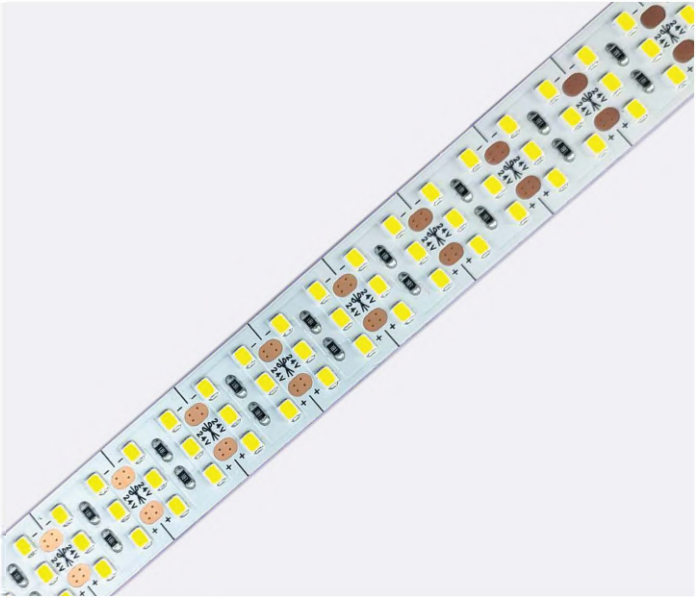


Electrical Parameters

Light Beads:	2835
LED Qty:	360pcs/m
Width:	20mm
Voltage:	DC24V
Power:	28W/M
CRI:	90/95
LM/M:	3100
Color:	3000K/4000K/5000K/6500K



Cut size

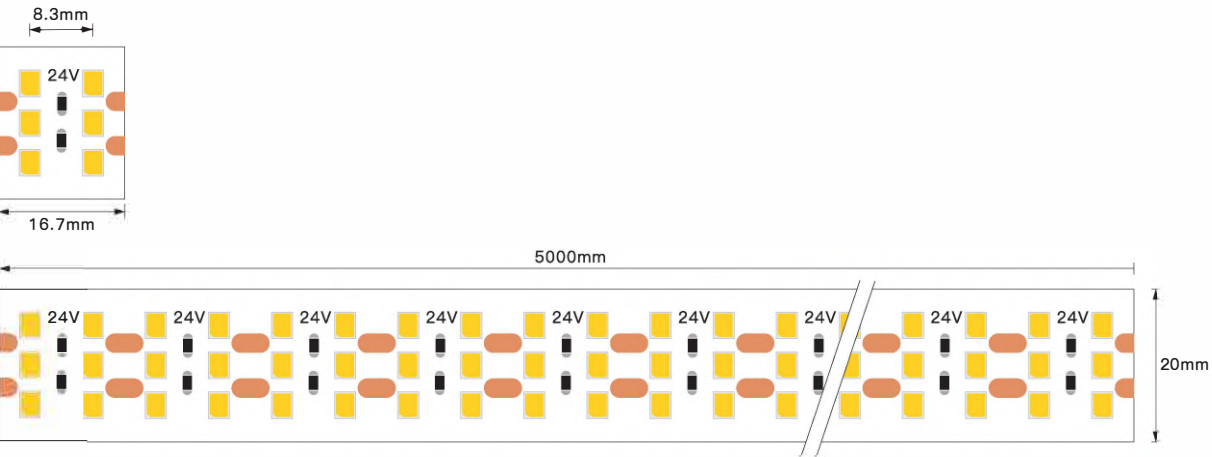

RG-S-2835-120-8mm

Feature

- 1. The S-shaped Zigzag design makes bending easier
- 2. It can be combined with special-shaped profile to design many lighting solutions
- 3. Excellent color rendering,RA>90




Electrical Parameters

Light Beads:	2835
LED Qty:	120pcs/m
Width:	8mm
Voltage:	DC24V
Power:	9.6W/M
CRI:	90
LM/M:	880
Color:	3000K/4000K/5000K/6500K



Cut size

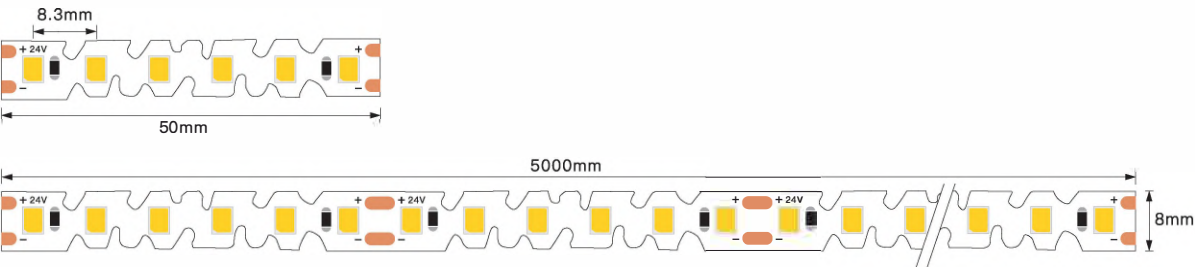


RG-S-CCT-2835-120-8mm



Feature

- 1. The S-shaped Zigzag design makes bending easier
- 2. It can be combined with special-shaped profile to design many lighting solutions
- 3. Excellent color rendering,RA>90
- 4. The color temperature can be adjusted from 2700K to 6500K




Electrical Parameters

Light Beads:	2835
LED Qty:	120pcs/m
Width:	8mm
Voltage:	DC24V
Power:	9.6W/M
CRI:	90
LM/M:	860
Color:	2700-6500K



Cut size

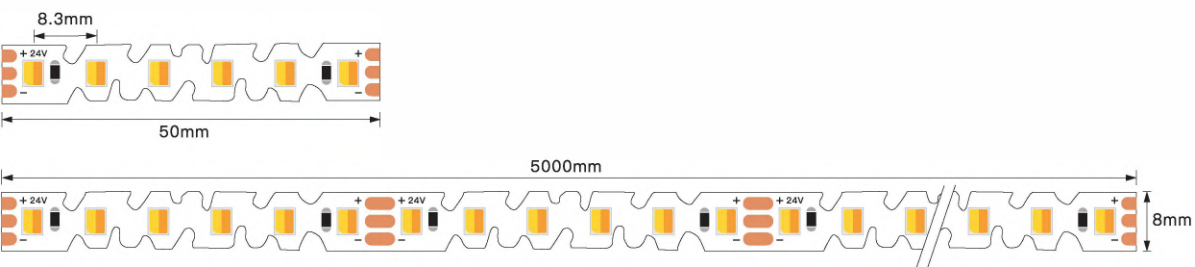



Zigzag LED Strip



ZZ-2835-120-6.5mm

Feature

- 1. The Unique S-type zigzag design allows for bending the strip easily
- 2. IP20 and IP67(Spray glue) are available
- 3. Work with separate neon to make neon sign
- 4. Mini letter/Resin letter/Super letter/Stainless steel letter
- 5. All colors are avaiabel,W/R/G/B/Ice blue/Pink/Purple/Yellow/Lemon yellow




Electrical Parameters

Light Beads:	2835
LED Qty:	120pcs/m
Width:	6.5mm
Voltage:	DC12V
Power:	7.2W/M
CRI:	80
LM/M:	675
Color:	3000K/4000K/6500K/10000K



Cut size

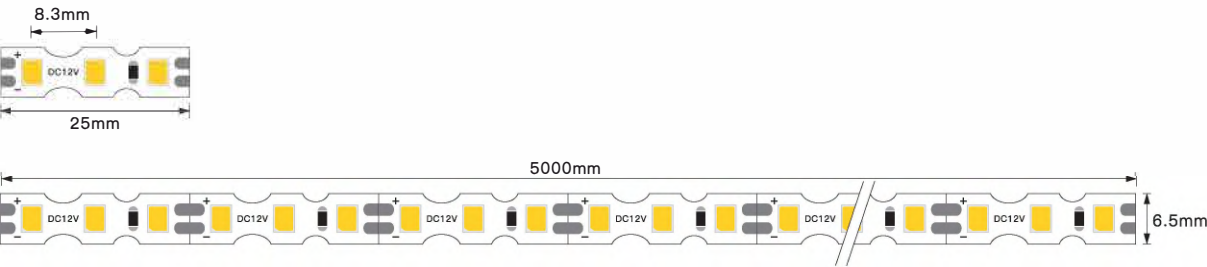

ZZ-RGB-3535-84-7mm



Feature

- 1. Specially designed for SIGN market
- 2. Low consumption and high brightness
- 3. The LED strip are rainproof Ip54
- 4. RGB color
- 5. For esin letter/Super letter/Stainless steel letter




Electrical Parameters

Light Beads:	3535
LED Qty:	84pcs/m
Width:	7mm
Voltage:	DC12V
Power:	14W/M
Color:	RGB




Cut size

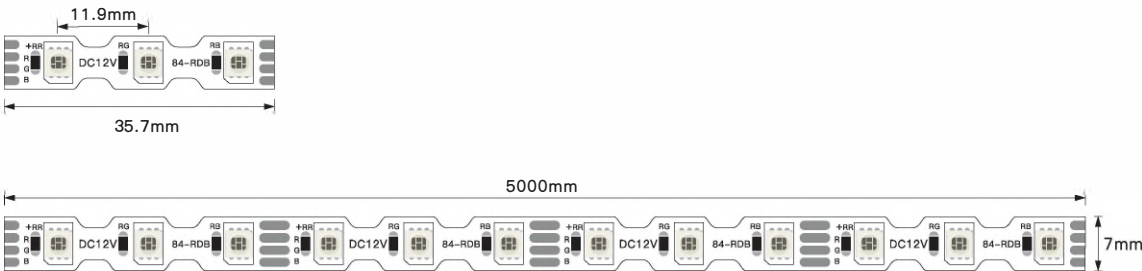

ZZ-2835-60-7.1mm

Feature

- 1. Specially designed for SIGN market with big LED chip
- 2. Low consumption and high brightness, lifespan up to 3-5 years
- 3. The LED strip are rainproof Ip54
- 4. Can be folded into 180 degree to be layout in shell
- 5. For Mini letter / Resin letter/Super letter/Stainless steelletter




Electrical Parameters

Light Beads:	2835
LED Qty:	60pcs/m
Width:	7.1mm
Voltage:	DC12V
Power:	10W/M
CRI:	80
LM/M:	905
Color:	R/G/B/Y/White



Cut size

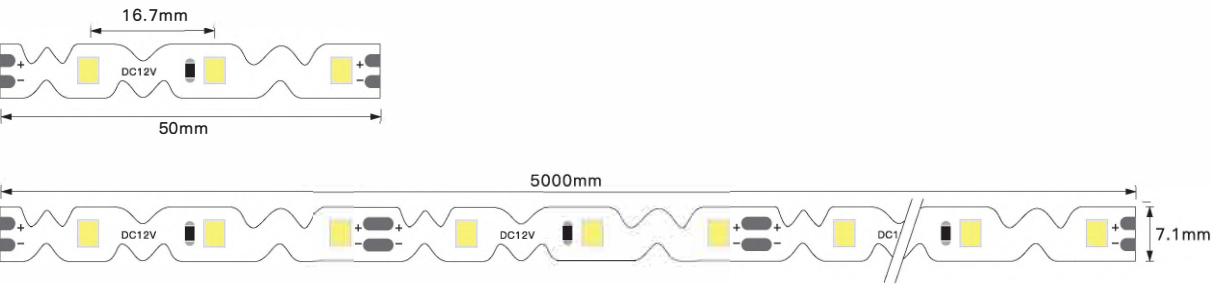


ZZ-2835-60-7.1mm-D



Feature

- 1. Specially zigzag designed for SIGN market with big LED chip
- 2. Double layer copper PCB,Low consumption, lifespan up to 3-5 years
- 3. The LED strip are rainproof Ip54
- 4. For Mini letter/Resin letter/Super letter/Stainless steelletter




Electrical Parameters

Light Beads:	2835
LED Qty:	60pcs/m
Width:	7.1mm
Voltage:	DC12V
Power:	10W/M
CRI:	80
LM/M:	910
Color:	3000K/4000K/5000K/6500K




Cut size

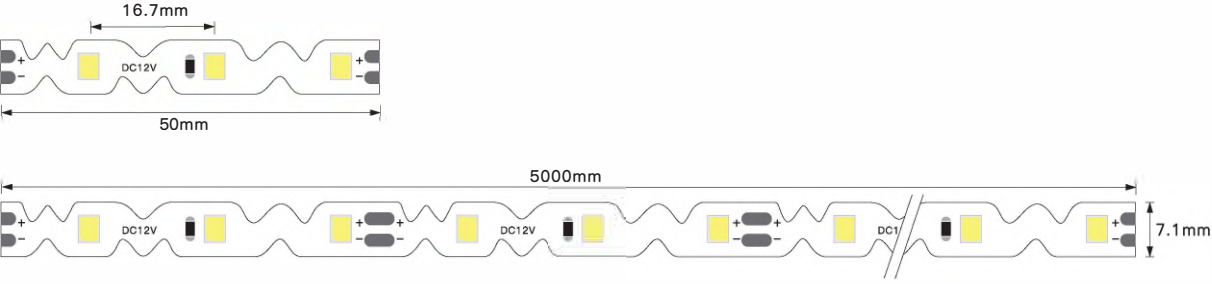

ZZ-5050-60-8.8mm

Feature

- 1. Easy to bend, stable quality and high brightness
- 2. The S-type zigzag design allows to make letters easier
- 3. IP20 and IP67(Spray glue) are available
- 4. 5/10/20M/roll
- 5. For Super letter/Boundless letter/Stainless steel letter




Electrical Parameters

Light Beads:	5050
LED Qty:	60pcs/m
Width:	8.8mm
Voltage:	DC12V
Power:	12W/M
CRI:	80
LM/M:	1200
Color:	3000K/4000K/6500K/10000K



Cut size

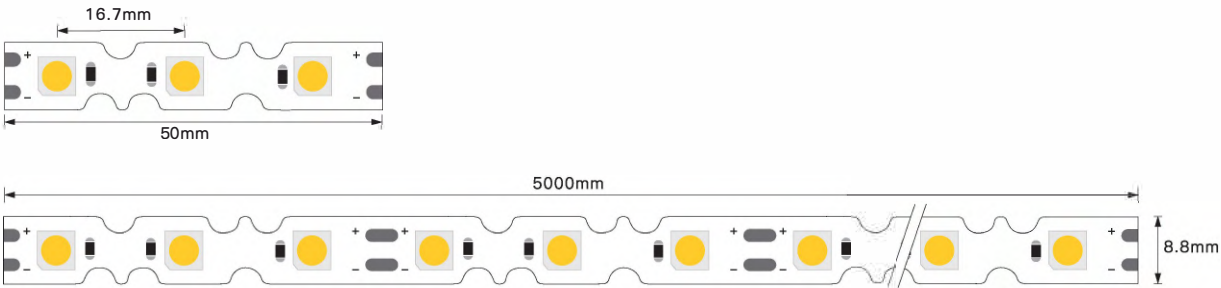

ZZ-6060-36-8.8mm



Feature

- 1. The light will be more uniform
- 2. Cut free and Maintenance-free
- 3. Flexible and easy to bend
- 4. Large beam angel 160 degree
- 5. For Super letter/Boundless letter/Stainless steel letter




Electrical Parameters

Light Beads:	6060
LED Qty:	36pcs/m
Width:	8.8mm
Voltage:	DC12V
Power:	14W/M
CRI:	80
LM/M:	1230
Color:	3000K/4000K/6500K/10000K



Cut size

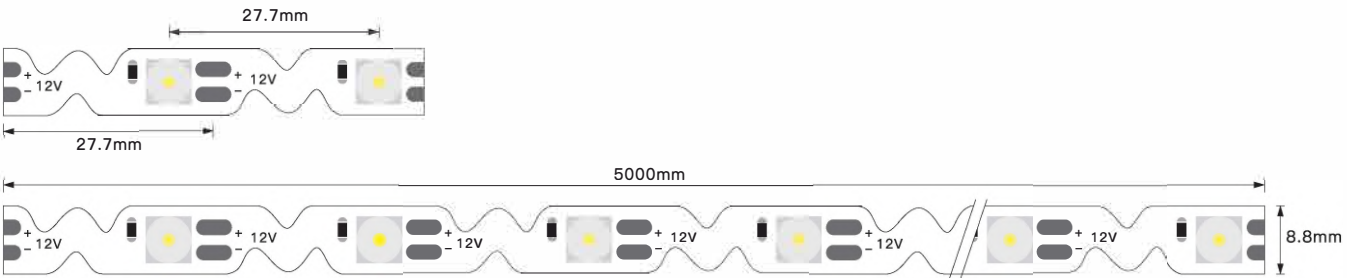




COB LED Strip



COB-312-8mm

Feature

- 1. Perfect uniform illumination soft and comfortable
- 2. High cost performance
- 3. 180-degree beam angle,CRI 90
- 4. For cabinet /furniture/showcase

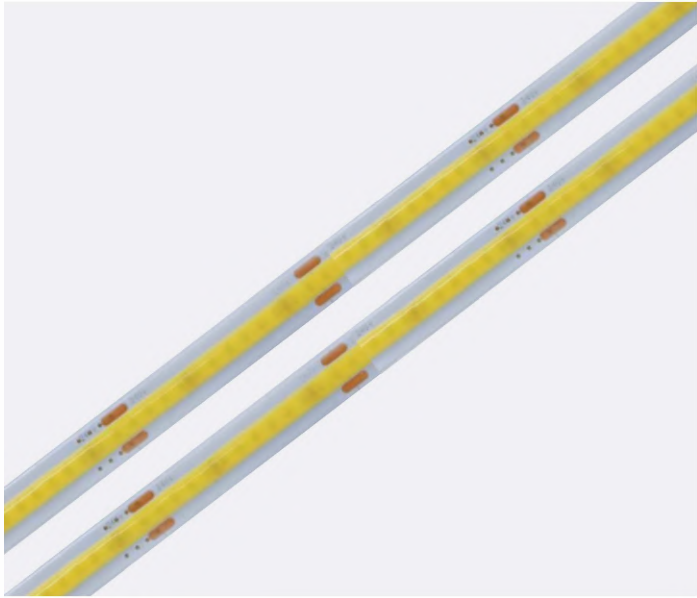


Electrical Parameters

Light Beads:	COB	       
LED Qty:	312pcs/m	
Width:	8mm	
Voltage:	DC12V	
Power:	10W/M	
CRI:	90	
LM/M:	840	
Color:	3000K/4500K/6500K	



Cut size

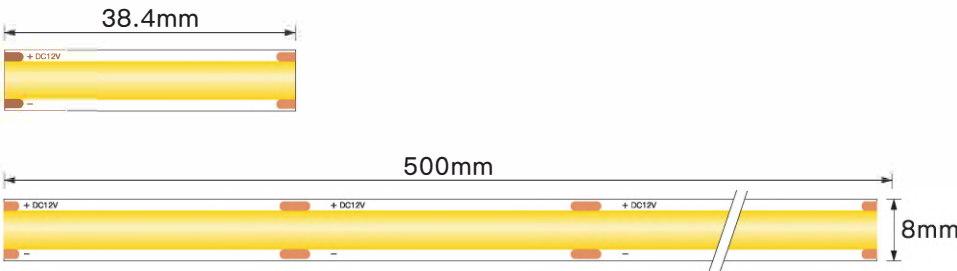

COB-320-8mm



Feature

- 1. Perfect uniform illumination soft and comfortable
- 2. Unparalleled linear light effect
- 3. High cost performance
- 4. 180-degree beam angle,CRI 90
- 5. High density good linear effect




Electrical Parameters

Light Beads:	COB	       
LED Qty:	320pcs/m	
Width:	8mm	
Voltage:	DC12V	
Power:	10W/M	
CRI:	90	
LM/M:	840	
Color:	3000K/4000K/6500K	





Cut size

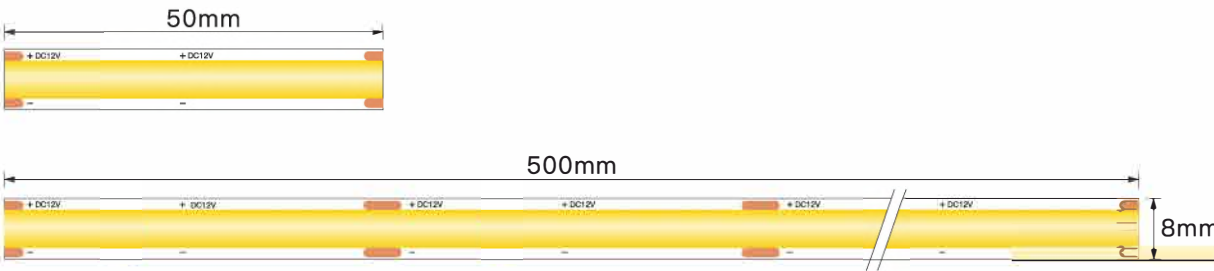

COB-400-5mm

Feature

- 1. Perfect uniform illumination soft and comfortable
- 2. No dark dot spots
- 3. Unparalleled linear light effect
- 4. High cost performance
- 5. Narrow FPCB width: 5mm
- 6. High density good linear effect

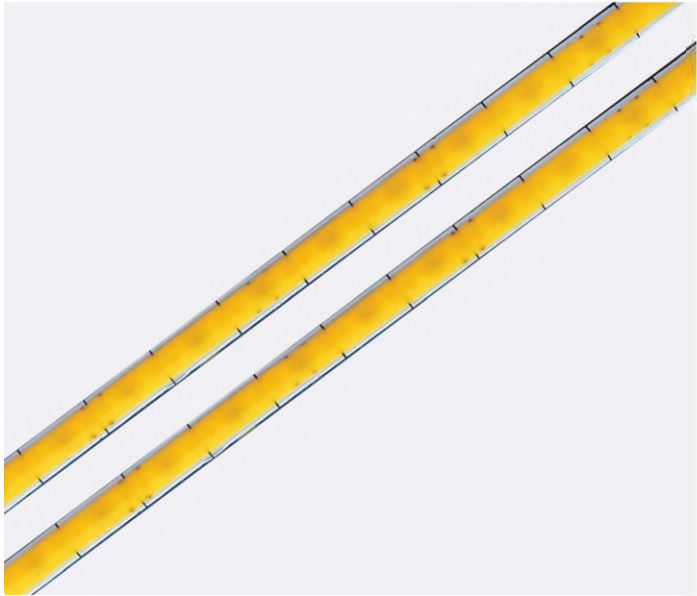


Electrical Parameters

Light Beads:	COB
LED Qty:	400pcs/m
Width:	5mm
Voltage:	DC12V
Power:	11W/M
CRI:	90
LM/M:	1200
Color:	3000K/4000K/6500K



Cut size

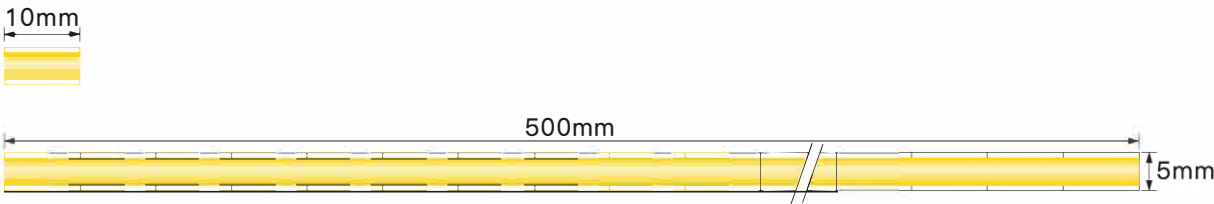

COB-480-8mm

Feature

- 1. Perfect uniform illumination soft and comfortable
- 2. No dark dot spots
- 3. Unparalleled linear light effect
- 4. High cost performance
- 5. 180-degree beam angle,CRI 90
- 6. High density good linear effect




Electrical Parameters

Light Beads:	COB
LED Qty:	480pcs/m
Width:	8mm
Voltage:	DC12V
Power:	12W/M
CRI:	90
LM/M:	1420
Color:	3000K/4000K/6500K




Cut size

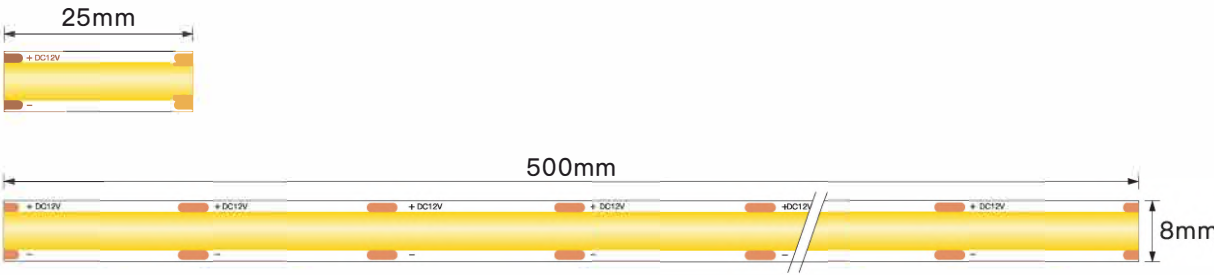

COB-CF-528-8mm

Feature


- 1. Perfect uniform illumination, soft and comfortable
- 2. Cut free
- 3. Stable and low light decay
- 4. Double layer 2 oz copper PCB for good heat dissipation
- 5. Longer operation life and better energy efficiency

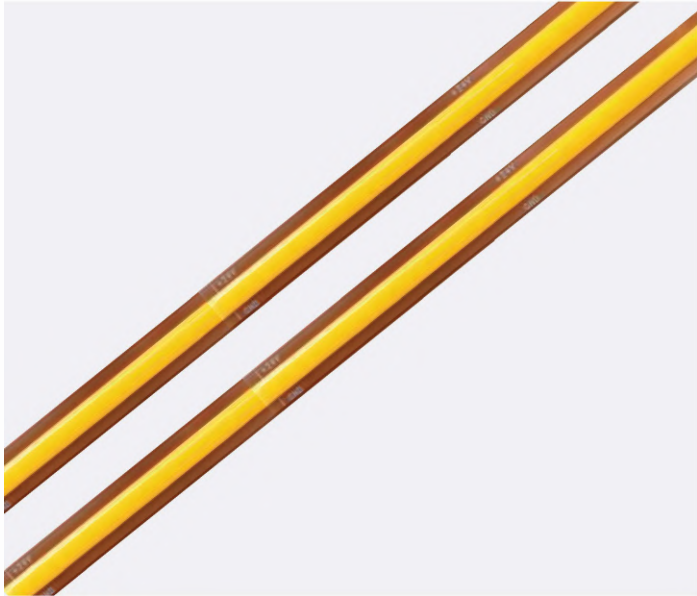

Electrical Parameters

Light Beads:	COB	CE RoHS سابقة CB UL US E480023 UK CA PS E ErP
LED Qty:	528pcs/m	
Width:	8mm	
Voltage:	DC12V	
Power:	13W/M	
CRI:	90	
LM/M:	1320	COB Ra 90/95 DC 12/24V 5000h 120° 5/1mm IP20 IP67
Color:	3000K/4000K/6500K	

Cut size

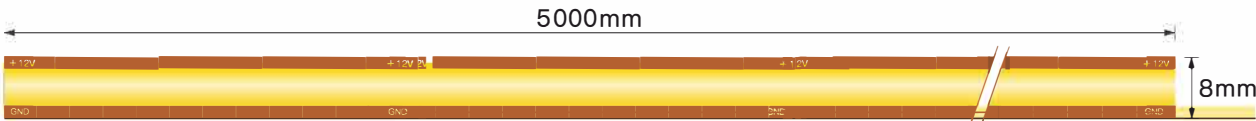

COB-RGB-576-8/10mm



Feature

- 1. Perfect uniform illumination, soft and comfortable
- 2. No dark dot spots
- 3. RGB Color
- 4. Thick double layer 2 oz copper PCB for good heat dissipation
- 5. 180-degree beam angle




Electrical Parameters

Light Beads:	COB	CE RoHS سابقة CB UL US E480023 UK CA PS E ErP
LED Qty:	576pcs/m	
Width:	8/10mm	
Voltage:	12/24V	
Power:	14W/M	
Color:	RGB	





Cut size

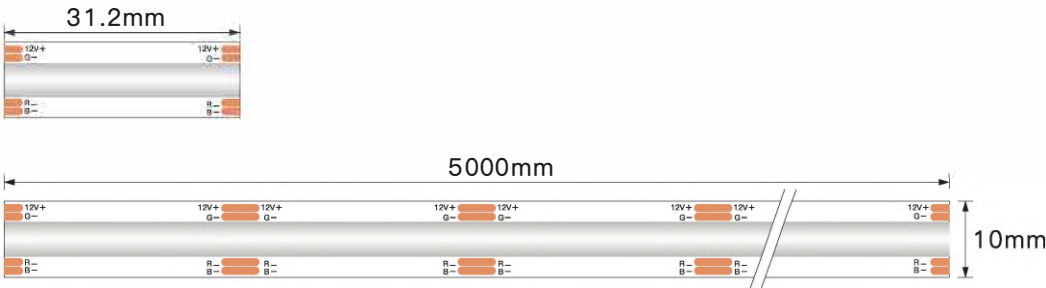

COB-CCT-600-8mm-2 Wire

Feature

- 1. Perfect uniform illumination, soft and comfortable
- 2. No dark dot spots
- 3. CCT White: 2700K-6500K with 2 wire
- 4. 180-degree beam angle,CRI 90
- 5. High density good linear effect

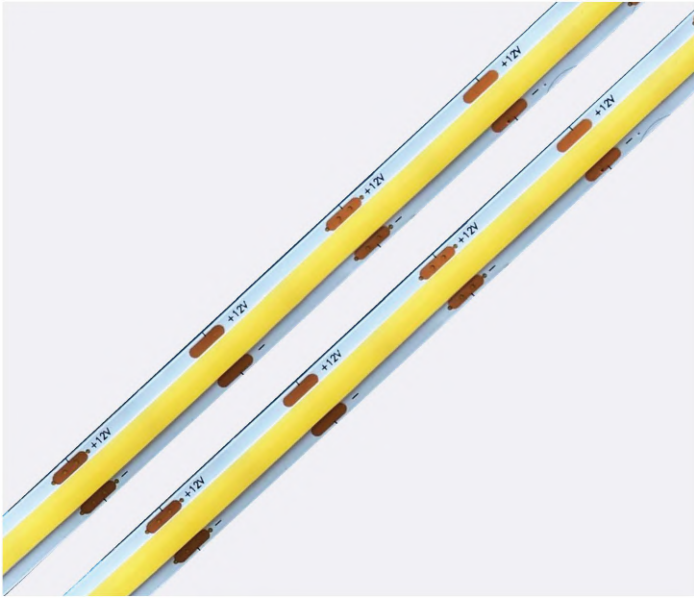


Electrical Parameters

Light Beads:	COB
LED Qty:	600pcs/m
Width:	8mm
Voltage:	24V
Power:	14W/M
CRI:	90
LM/M:	635
Color:	2700-6500K



Cut size


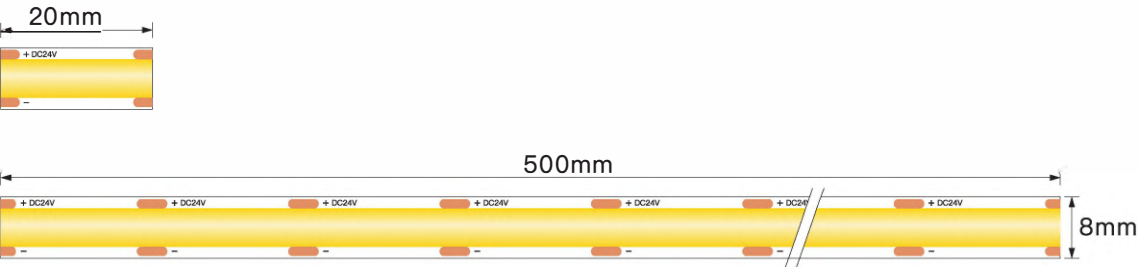


COB-CCT-608-8mm-3 Wire



Feature

- 1. Perfect uniform illumination, soft and comfortable
- 2. No dark dot spots
- 3. CCT White: 2700K-6500K
- 4. Thick double layer 2 oz copper PCB for good heat dissipation
- 5. 180-degree beam angle,CRI 90
- 6. High density good linear effect

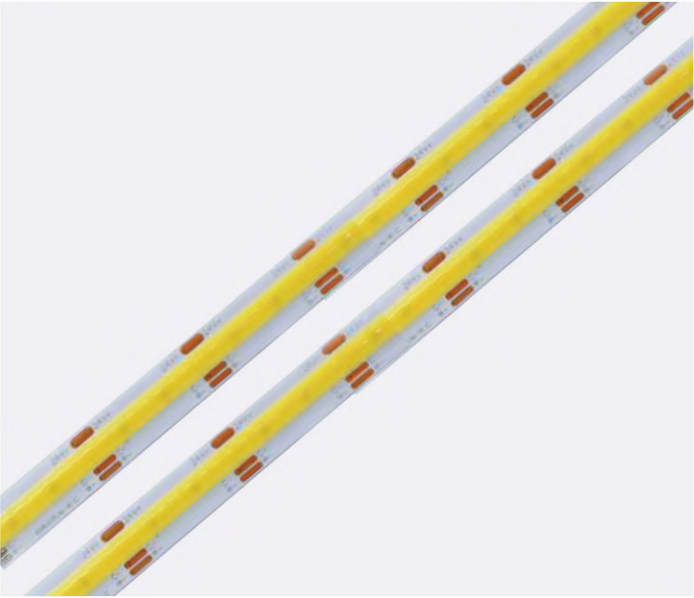


Electrical Parameters

Light Beads:	COB
LED Qty:	608pcs/m
Width:	8mm
Voltage:	12V
Power:	12W/M
CRI:	90
LM/M:	635
Color:	2700-6500K



Cut size

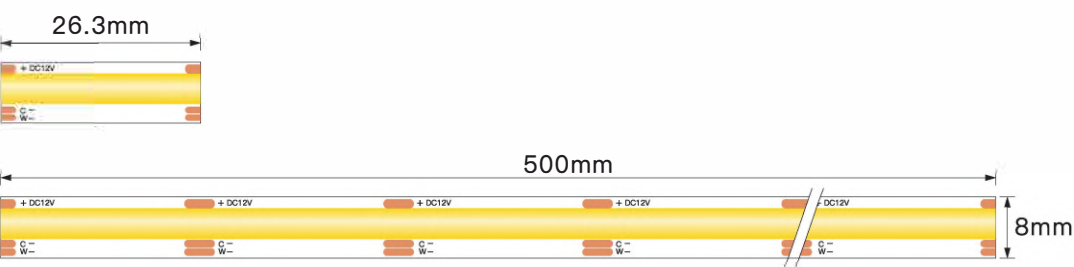



RGB LED Strip

RGB-3535-120-8mm

Feature

- 1. RGB Color
- 2. Thick double layer 2 oz copper PCB for good heat dissipation
- 3. Long life, good stability, and energy saving
- 4. RGB LED strip control the color and brightness remotely




Electrical Parameters

Light Beads:	3535
LED Qty:	120pcs/m
Width:	8mm
Voltage:	DC12/24V
Power:	9.6W/M
Color:	RGB



Cut size

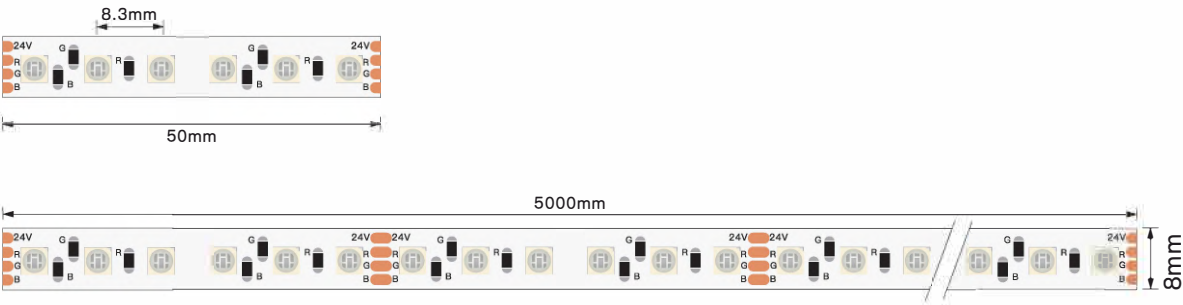

RGB-5050-60-10mm

Feature

- 1. RGB Color
- 2. Thick double layer 2 oz copper PCB for good heat dissipation
- 3. Long life, good stability, and energy saving
- 4. RGB LED strip control the color and brightness remotely




Electrical Parameters

Light Beads:	5050
LED Qty:	60pcs/m
Width:	10mm
Voltage:	DC12/24V
Power:	14.4W/M
Color:	RGB



Cut size

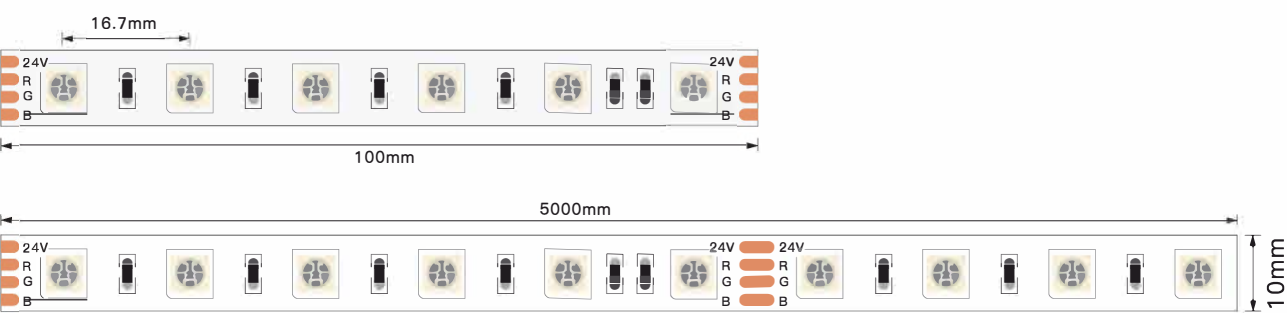

RGBW-5050-60-10/12mm


Feature

- 1. RGBW Color,RGB+3000K/4000k/6500K White
- 2. Thick double layer 2 oz copper PCB for good heat dissipation
- 3. Long life, good stability, and energy saving
- 4. RGBW LED strip control the color and brightness remotely




Electrical Parameters

Light Beads:	5050	CE RoHS سليمان CB UL E480023 UK CA PS E ErP
LED Qty:	60pcs/m	
Width:	10mm/12mm	
Voltage:	DC12/24V	
Power:	19.2W/M	
Color:	RGBW	



Cut size

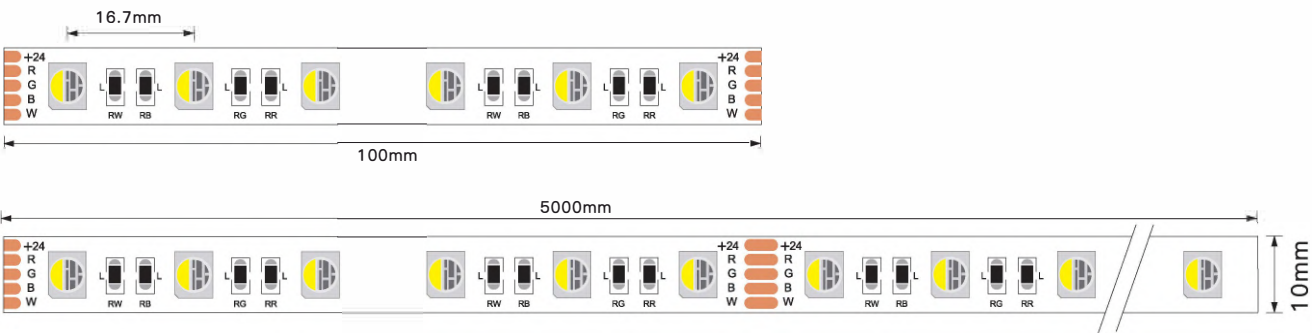


RGBWW-5050-60-12mm



Feature

- 1. RGBWW Color,5 in one , RGB+2700K-6500K
- 2. Thick double layer 2 oz copper PCB for good heat dissipation
- 3. Long life, good stability, and energy saving
- 4. RGBWW LED strip control the color and brightness remotely

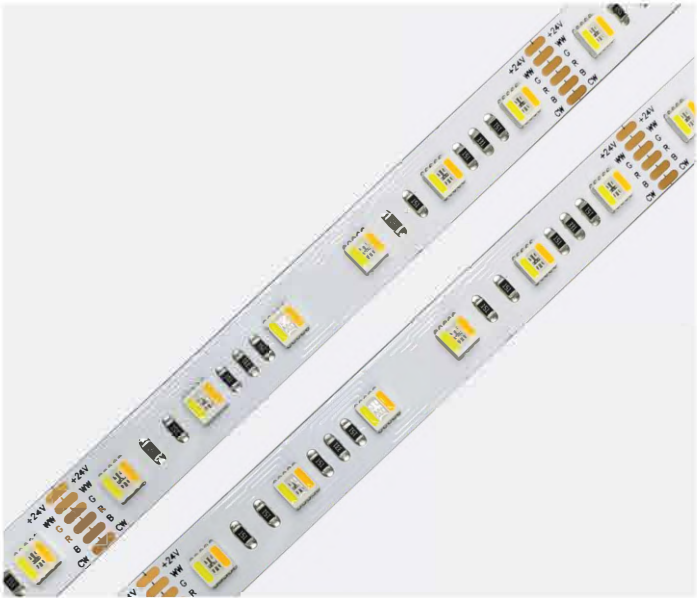


Electrical Parameters

Light Beads:	5050	CE RoHS سليمان CB UL E480023 UK CA PS E ErP
LED Qty:	60pcs/m	
Width:	12mm	
Voltage:	DC12/24V	
Power:	24W/M	
Color:	RGB+2700K-6500K	



Cut size

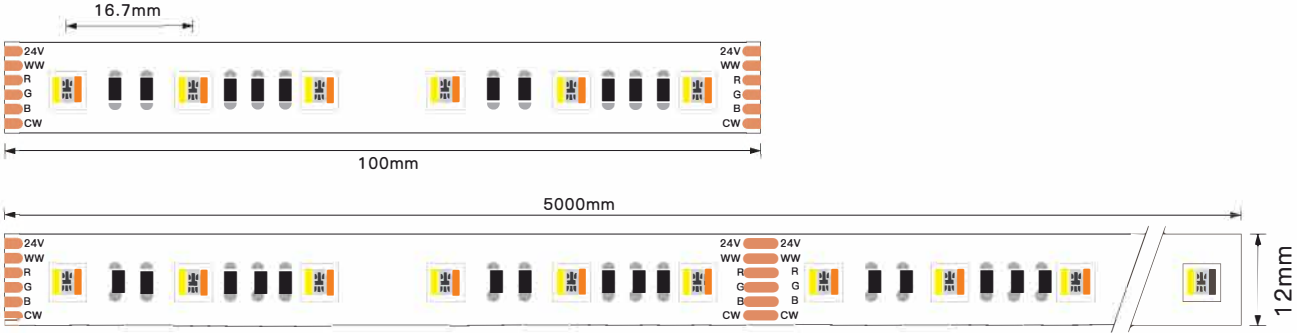

our "CLIENTS"

We are trusted by a variety of leading businesses, including industrial plants, hotels, retail outlets, and major real estate developments.

Our projects reflect our ability to tailor lighting solutions to meet diverse client.

our "TEAM"

Our expert team brings extensive experience in lighting procurement and installation.

We are dedicated to delivering the best solutions to meet the specific needs of every client.

Contact Us

Light Loop

Pracha Uthit Road, Klong Bung Plakot,
Nai Klong Bung Plakot Subdistrict, Phra Samut Chedi District,
Samut Prakan Province 10290

Phone: +66 82-919-9941

Email: sales@constufftrading.com

