



DOWNLIGHT

"Bring you beyond"




Contents

	CHAPTER	PAGE
01	LINAN Series	02-147
02	Stella Series	148-193
03	Parker Series	194-229
04	Conner Series	230-251
05	Saira Series	252-267
06	Una Series	268-277
07	Tianyue Series	278-347

	CHAPTER	PAGE
08	NICE Series	348-361
09	Adjustable spot Series	362-398
10	CHUCK Series	399-407
11	1004 Series	408-413
12	1007 Series	414-415
13	Cutting Light Series	416-418

LINAN

LINAN XQ1003 SERIES NEW UPGRADE

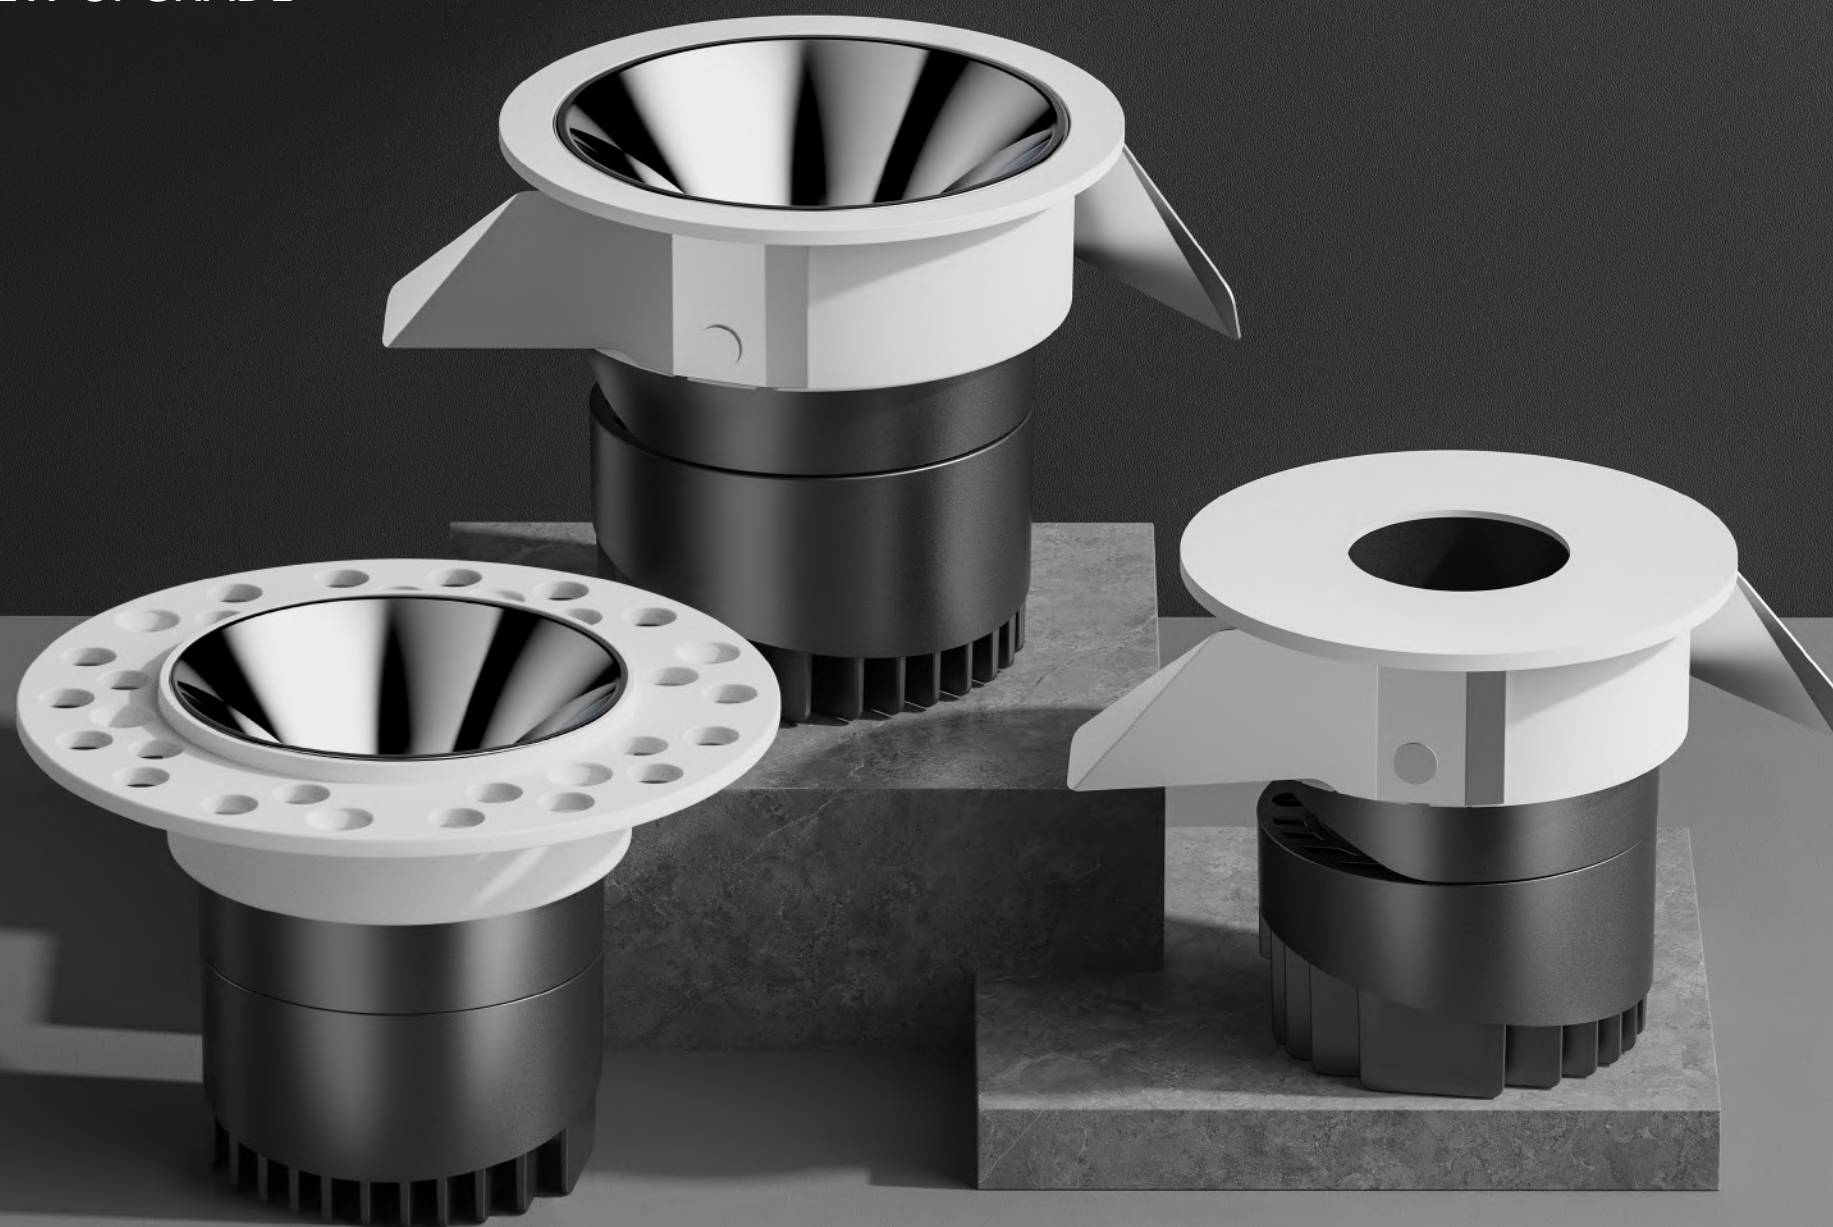

Iconic elements, continue the classic



First Generation






In 2016, the first generation of Linan products were created,reflector cup version with cut hole 50, 75, 95 and 120 mm.

After several years, we have upgraded the Linan series as a whole (the previously ordered products are now made into nomal products) through market information collection and customization requirements, as well as the customer's requirements for the performance and material properties of some products used by various usage scenarios.


The cut hole made in the upgraded version are 55, 65, 75, 95, 120, 150 square single head and double head, Round beam and Anti-glare kit. Among them, 65 and 75 have made Round beam(Metal seamless), and 75 openings also have reflector cup (H: 102mm) and lenses (H: 92mm).

Second Generation

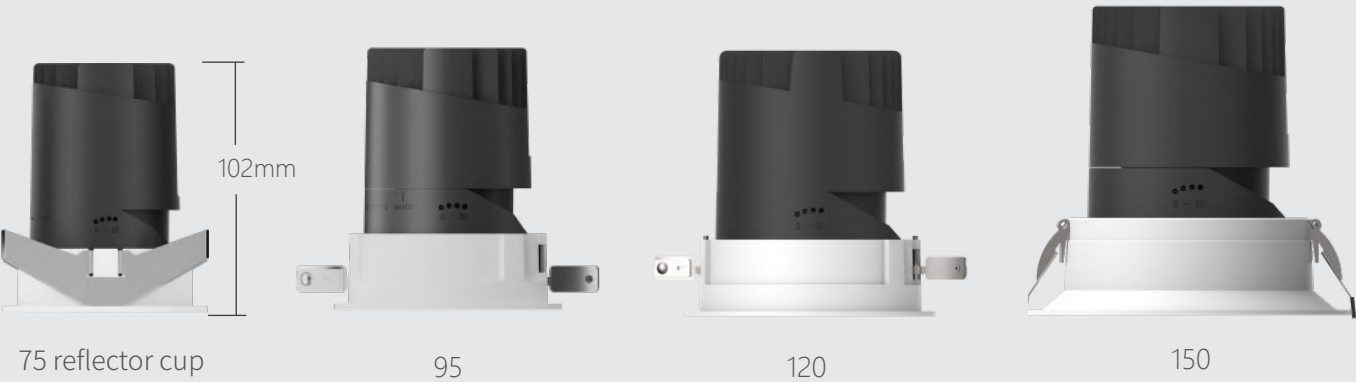
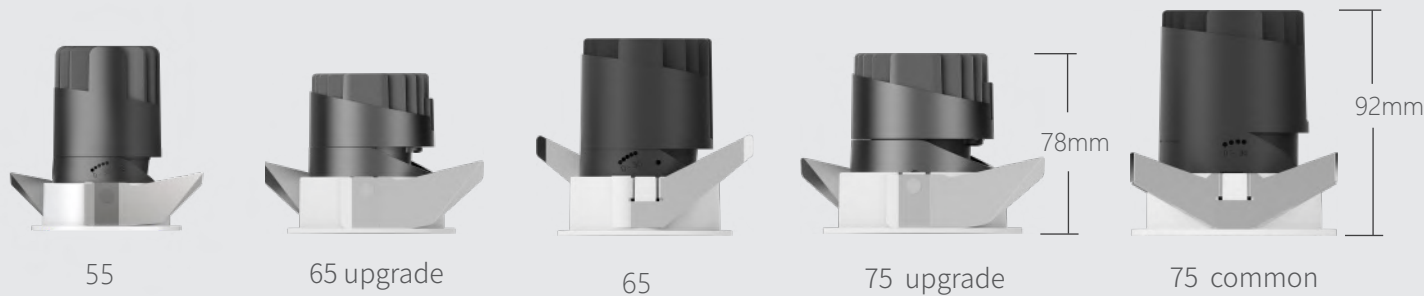



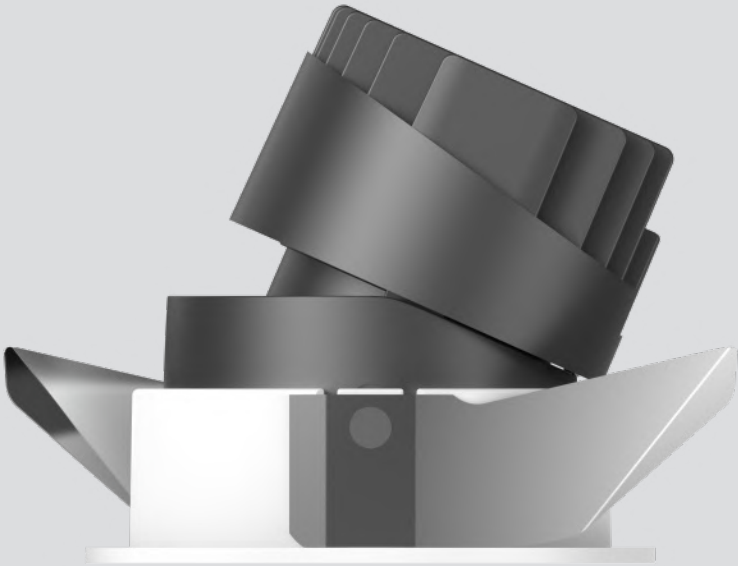



Adjustable

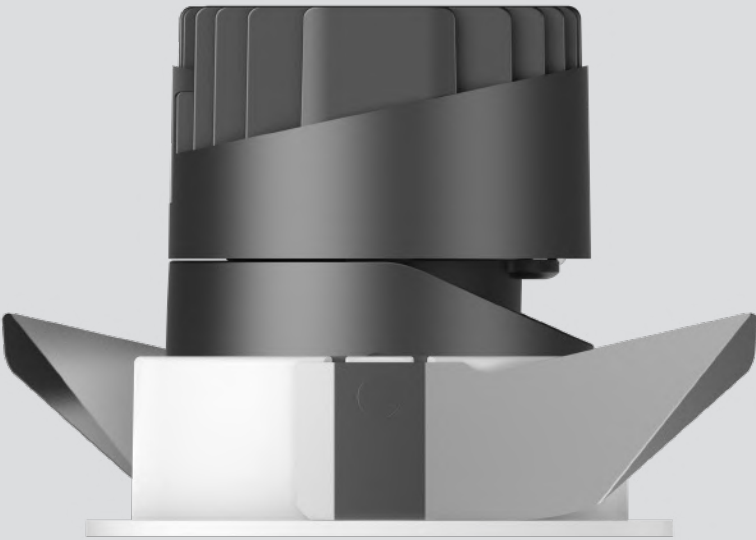

Direct

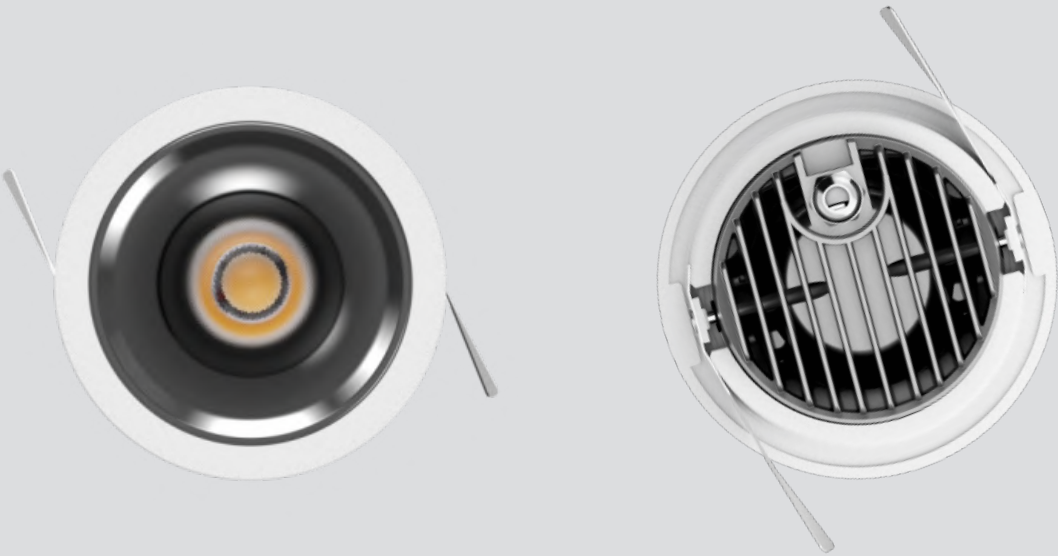
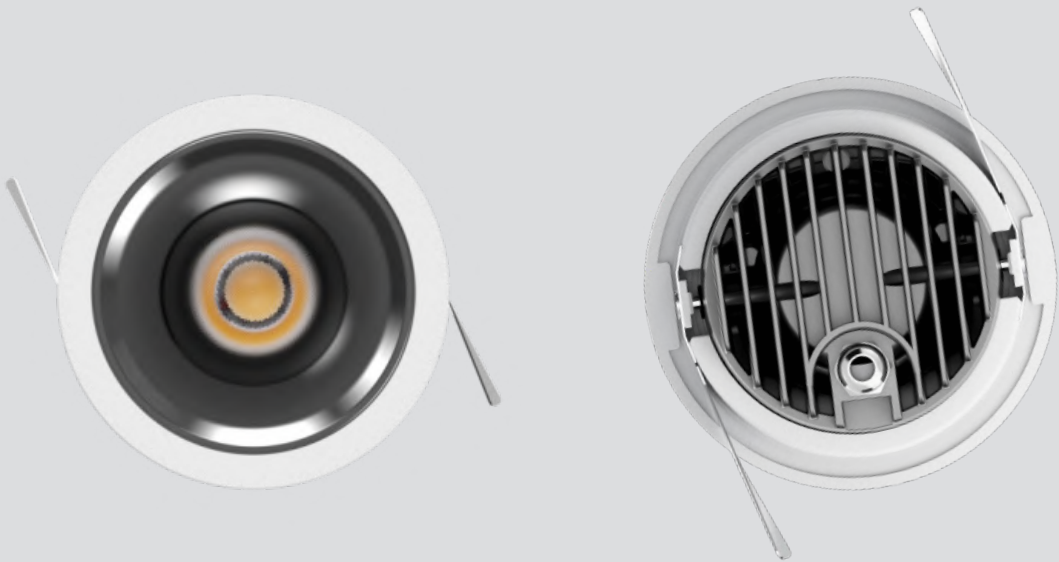


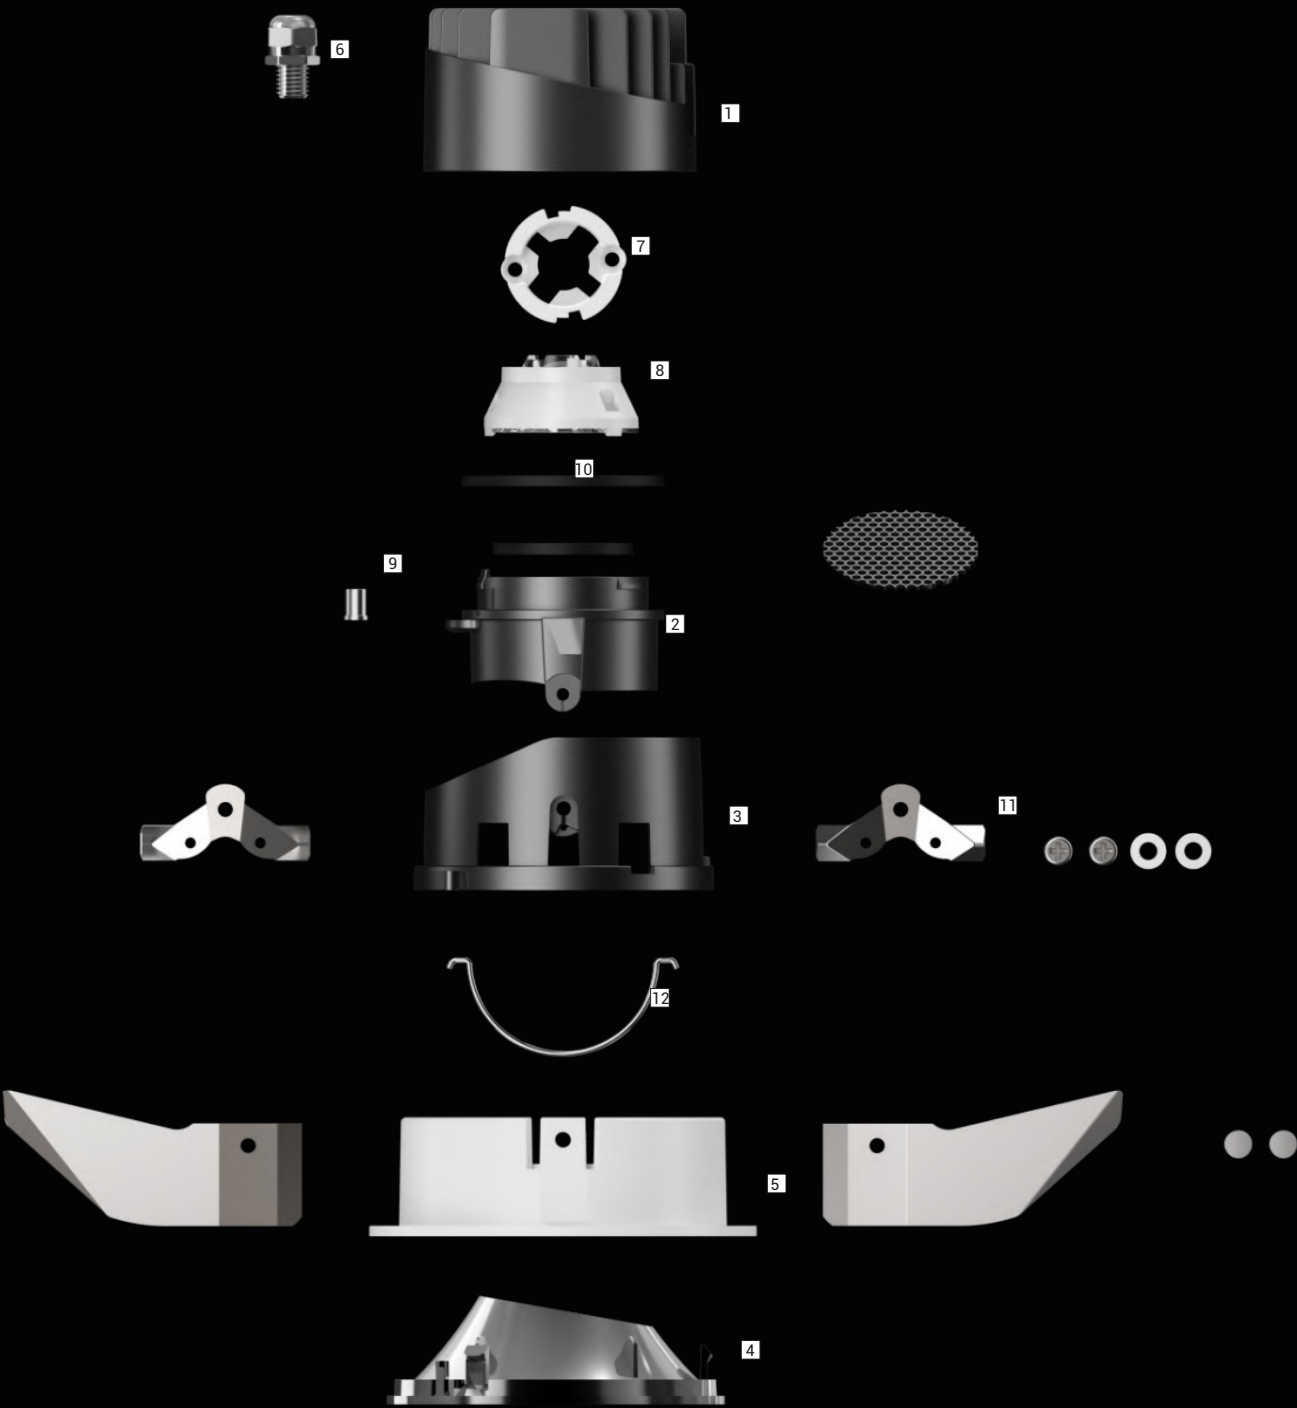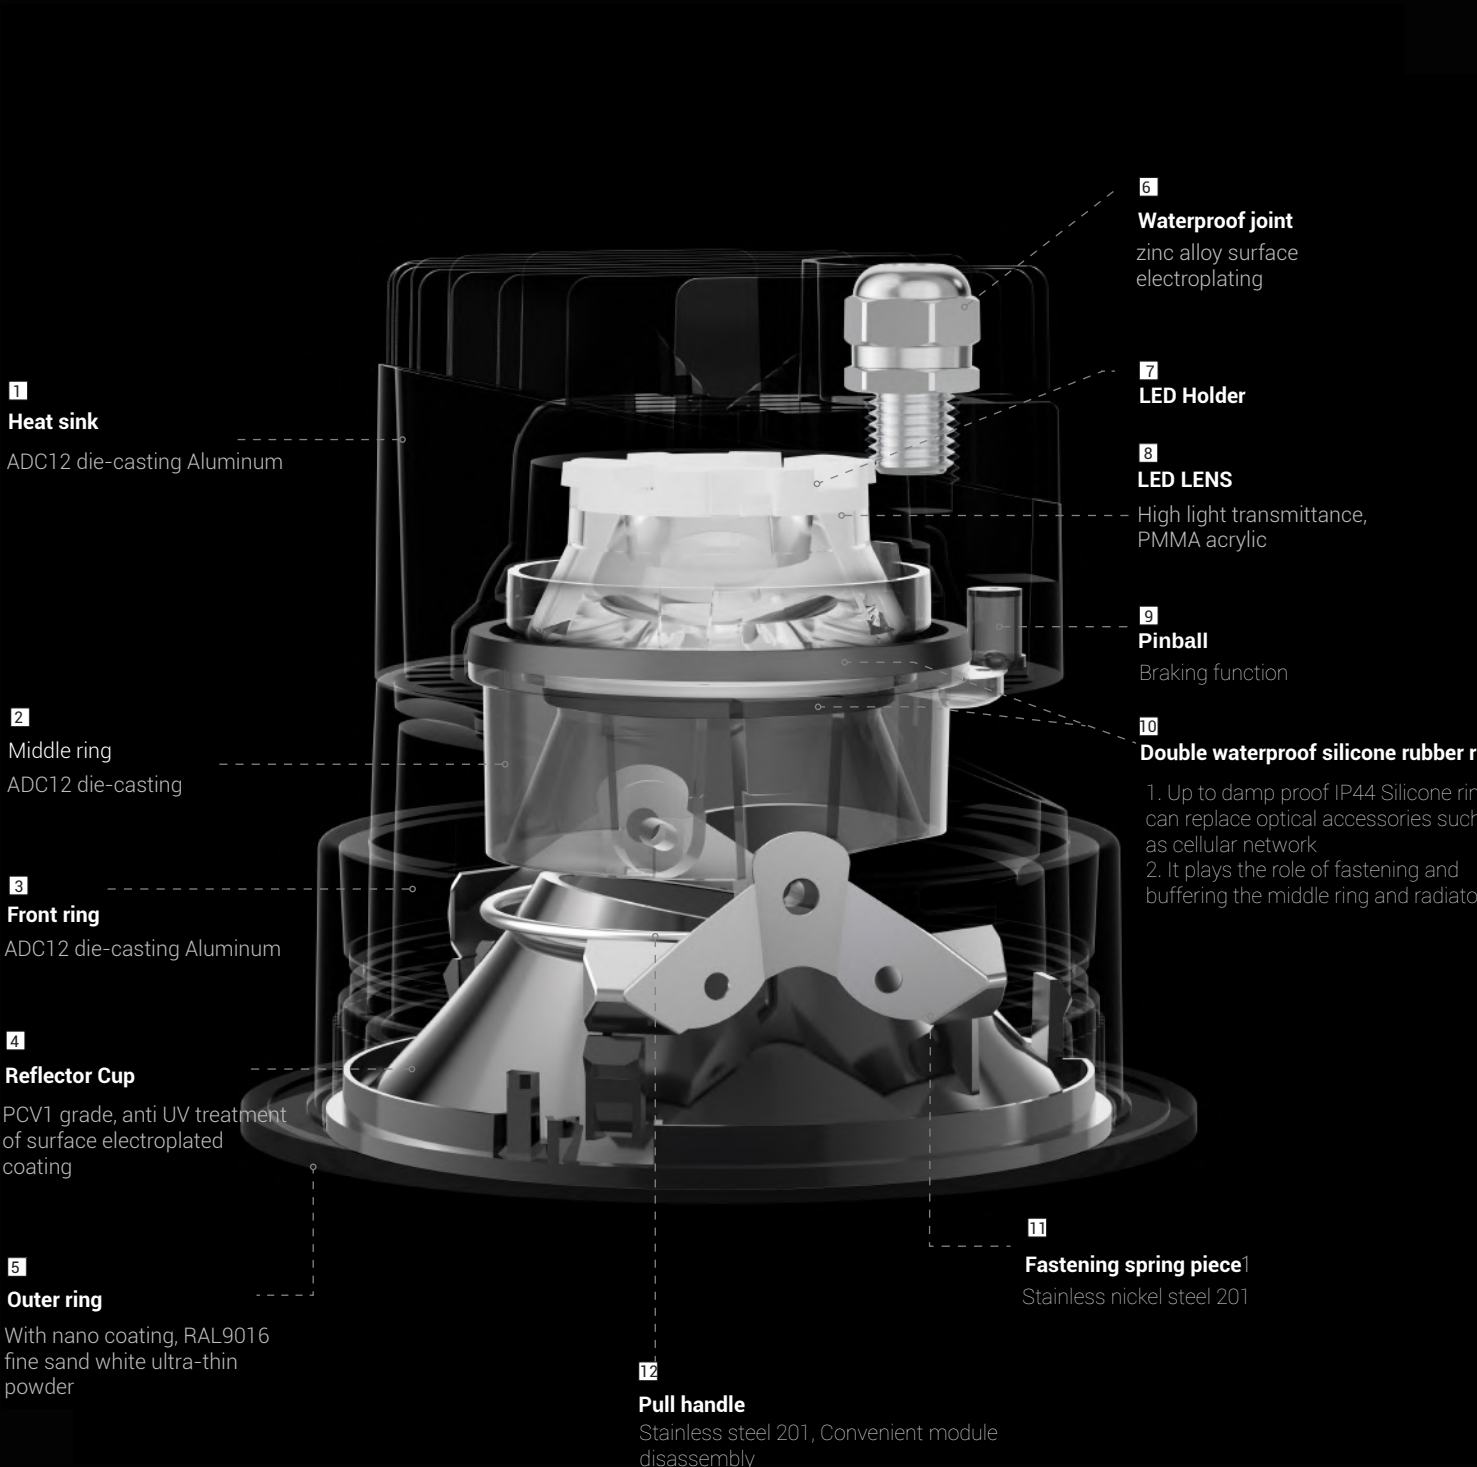

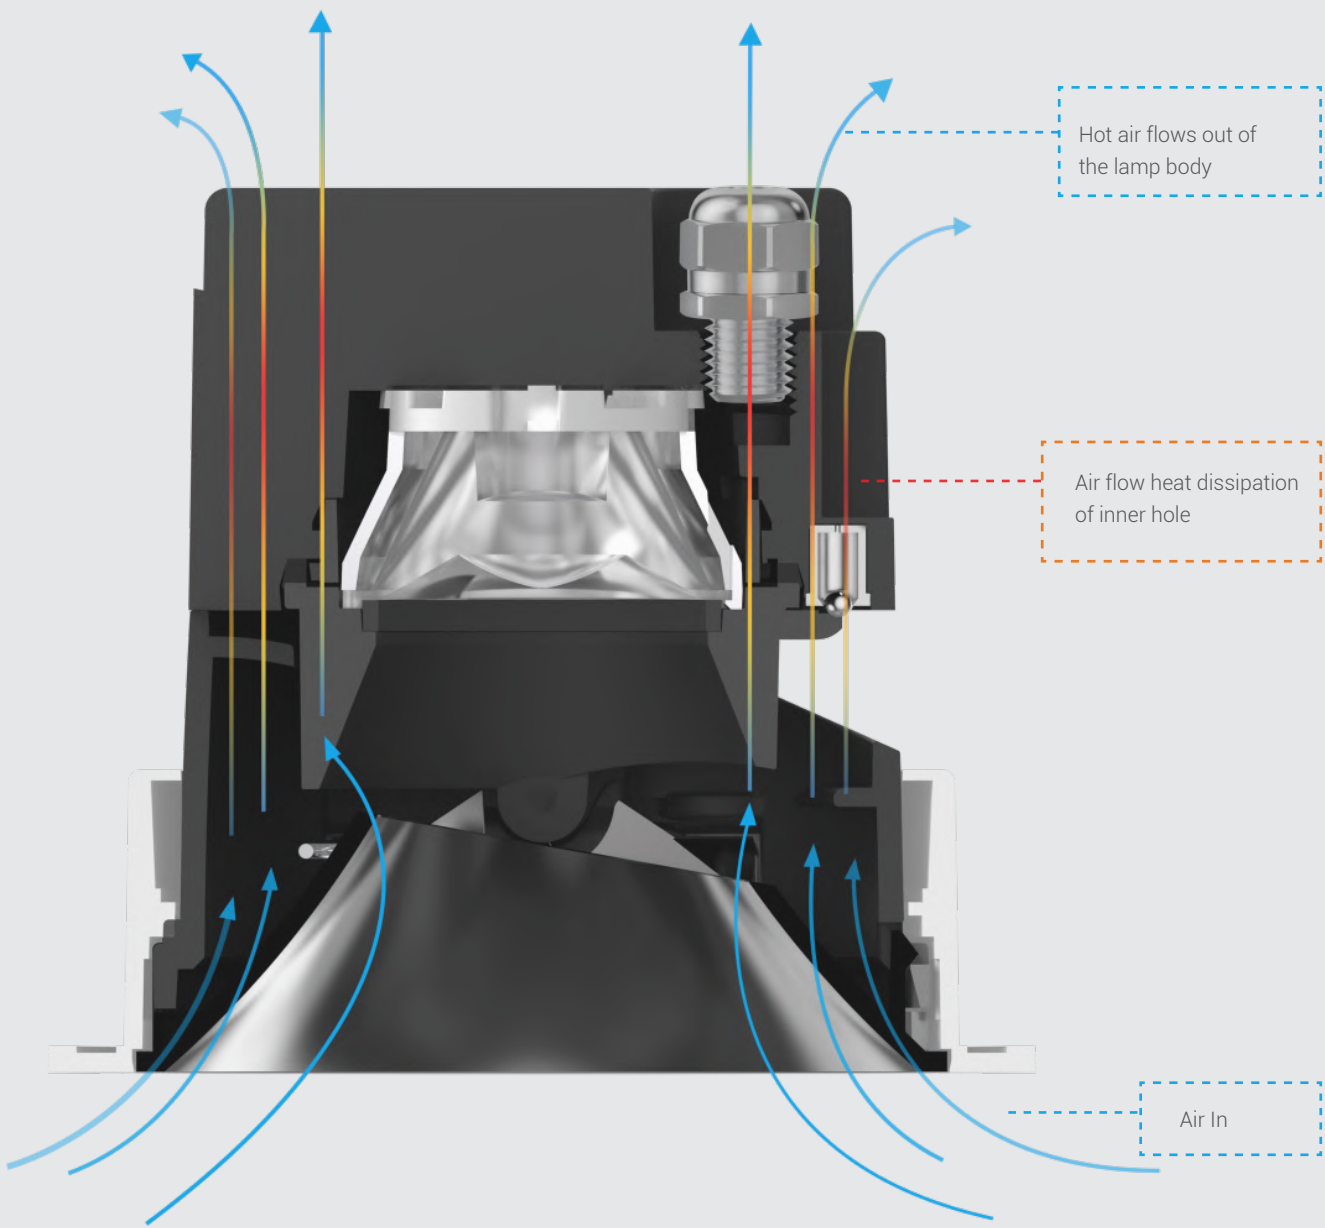

Radiator simulation


Die-casting aluminum heat dissipation structure, the heat is derived from the inner hole of the heatsink, and when the air flow rises from the inner hole, the heat is exported with the air.

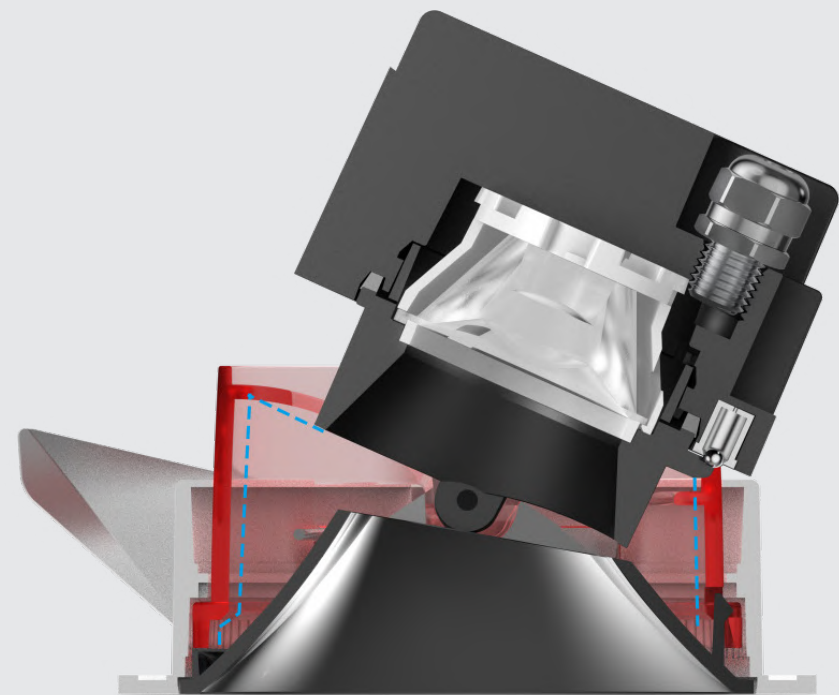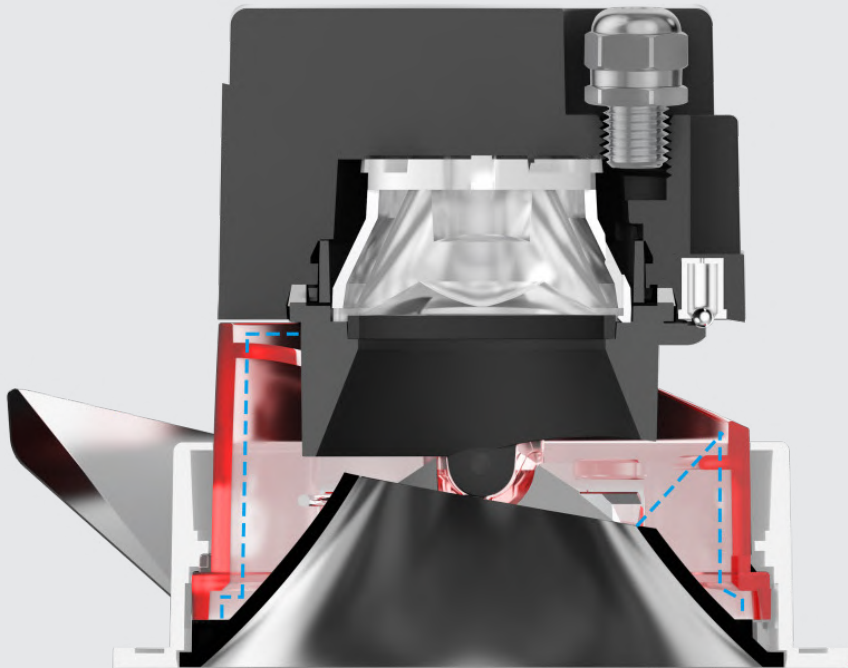

The red part is the adjustment middle ring, and light leakage prevention design show in the schematic diagram

Light leakage prevention design

Through the full surrounding middle ring design,
The direct lighting or adjustable light of the lamp is completely leakage prevention design, and effectively block the dazzling stray light and residual light

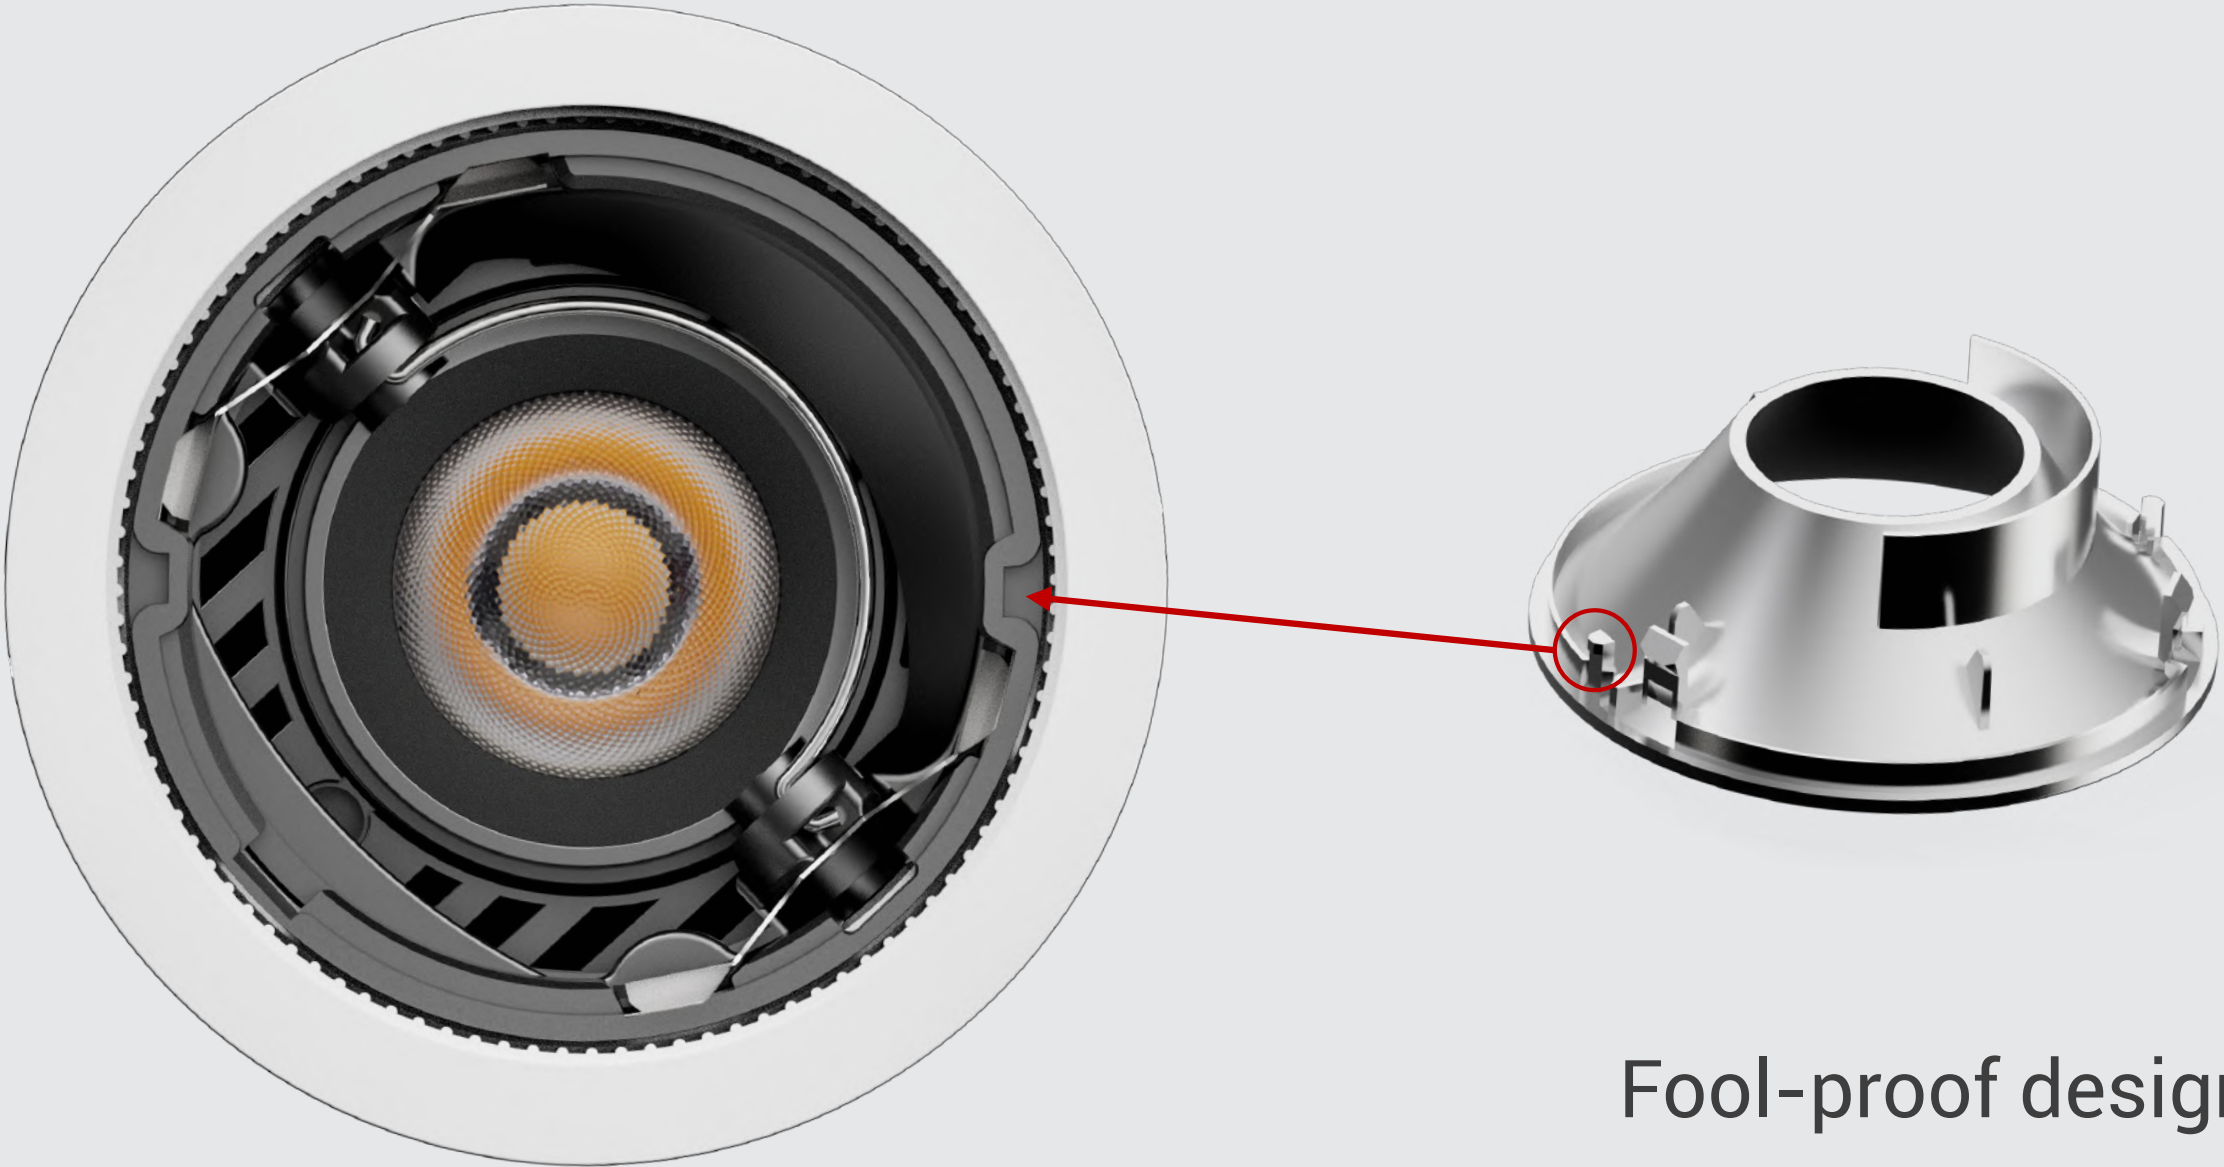

Fool-proof design

Snap the reflector cover into the marked hole, Effectively fool-proof




1

Take out reflector cover



2

Rotatable adjustment

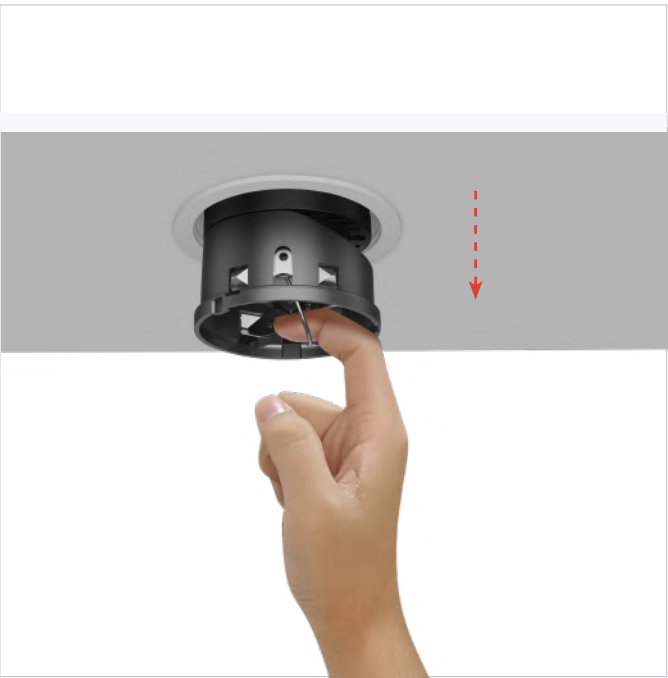


3

Pull out the module


Unique Pull handle design

Pull ring design, convenient
for tank adjustment and disassembly

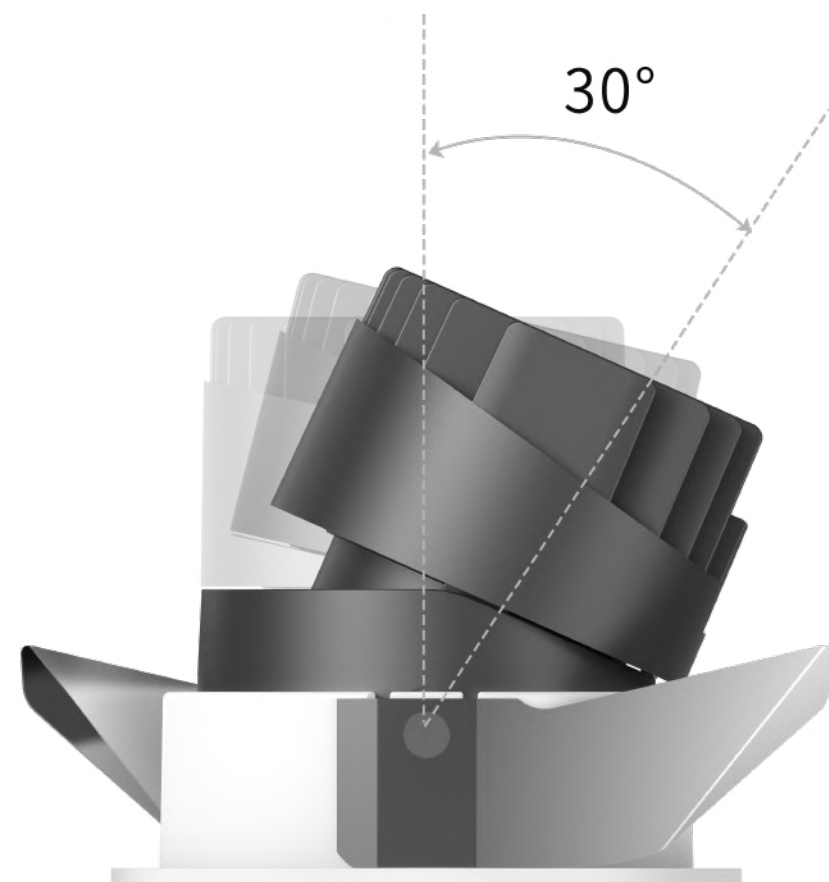

0~30°

Stepless regulation 0~30° at any angle

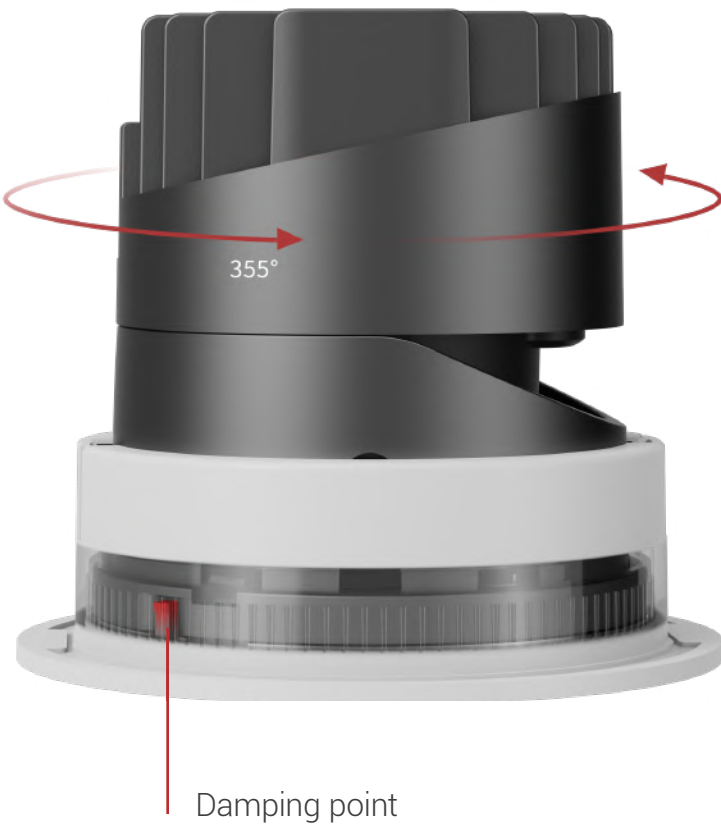

355°



Positioning groove 355° Horizontal rotation

Horizontal rotation of 355 ° , with positioning point, damping to Fool-proof and prevent winding.



PINBALL+SILICONE RING

After rotating the front ring to the correct position, the metal pinball will automatically pop out into the groove, fasten the heatsink, and play a double-layer shockproof role with the silicone ring.

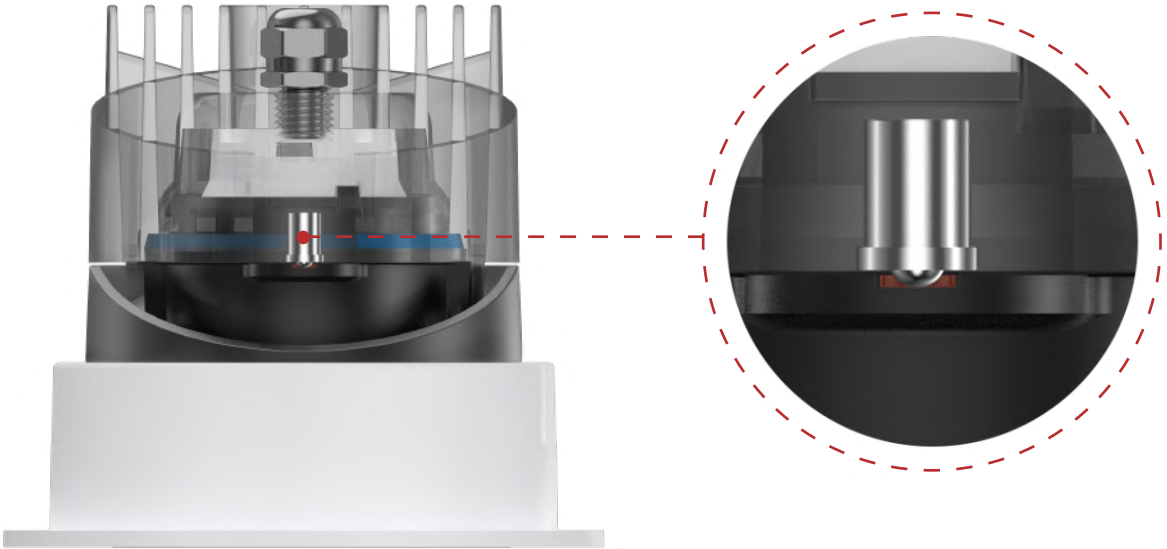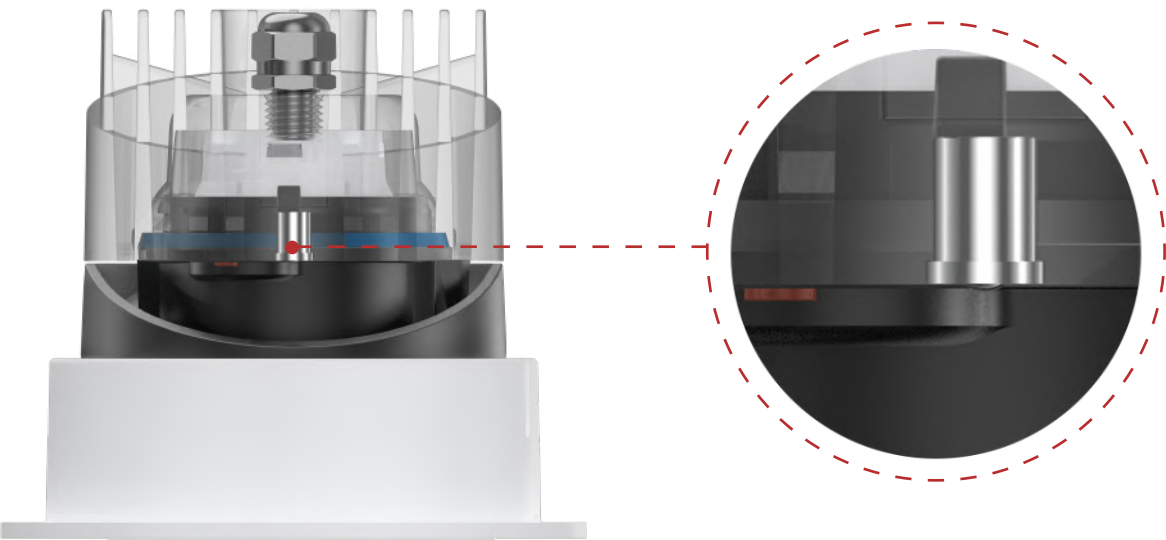


Note: The red part indicates the groove, and the blue part indicates the silicone ring



Frame

Frame: Frame with edge, Frame trimless, and Round beam (Metal seamless)

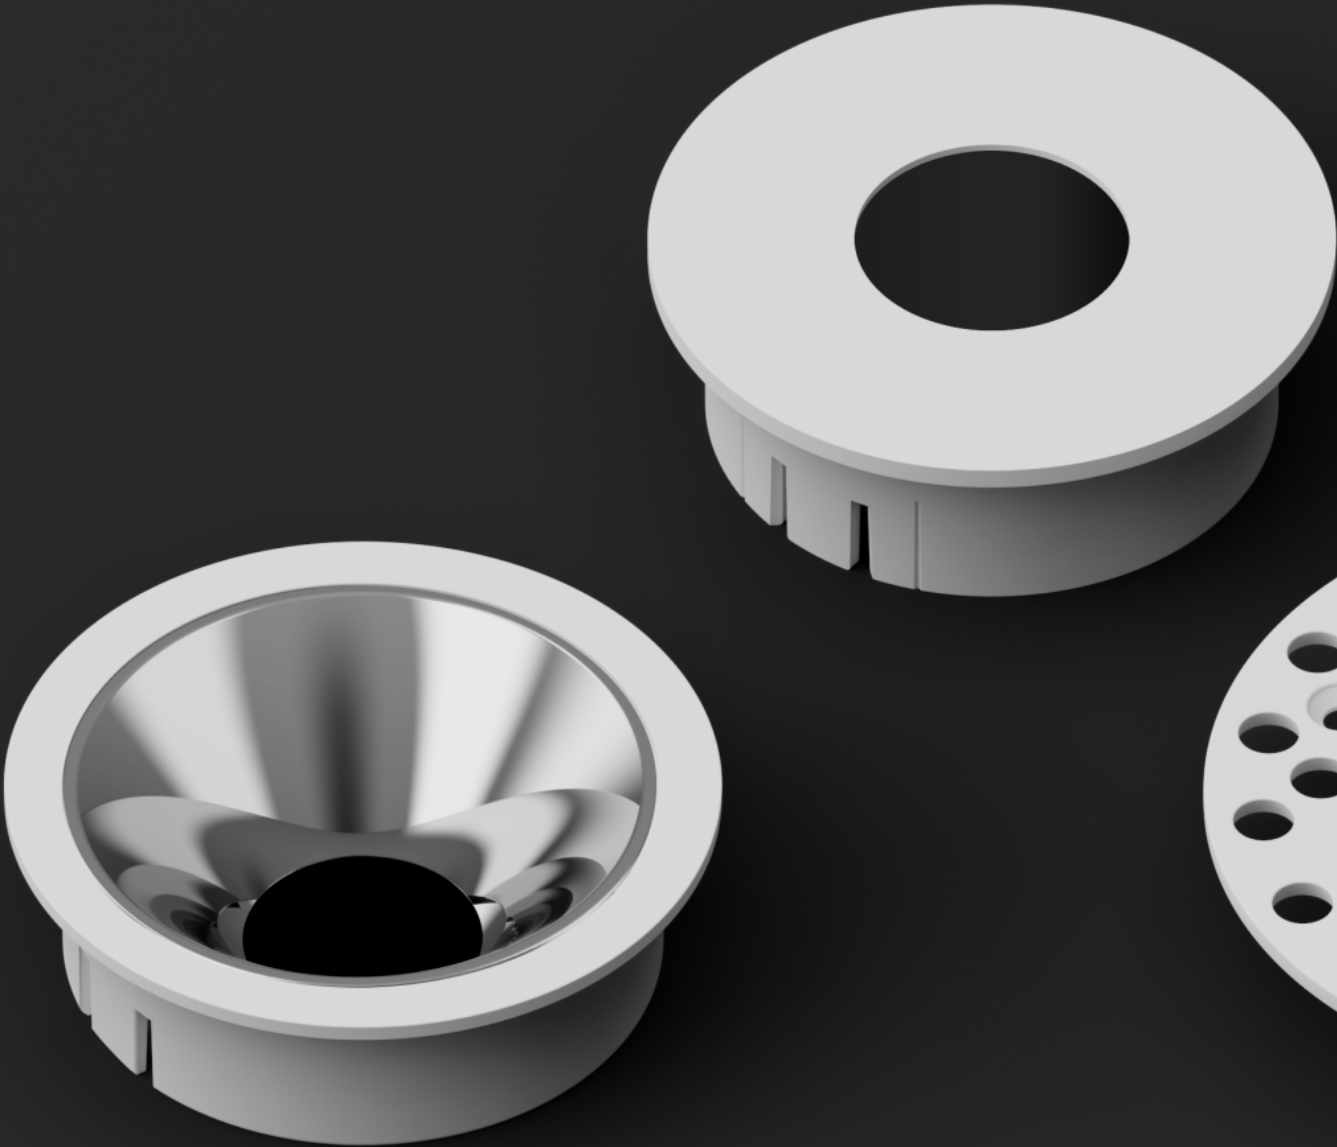


Frame with edge

● Round beam frame (Metal seamless)
eliminating the common frame with gaps



● Previous generation
Round beam frame with gaps

● Integrated Trimless

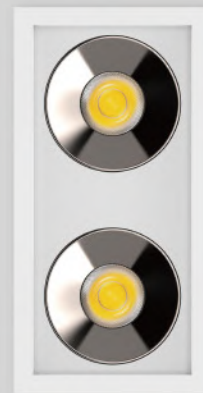

Everything

Circular / Square / brimless


4 variety of styles and lighting effects can be selected according to the lighting effect and surface ring.Each face ring has its own unique light effect





Spring

A variety of springs are available for quick installation,
suitable for various ceiling thicknesses

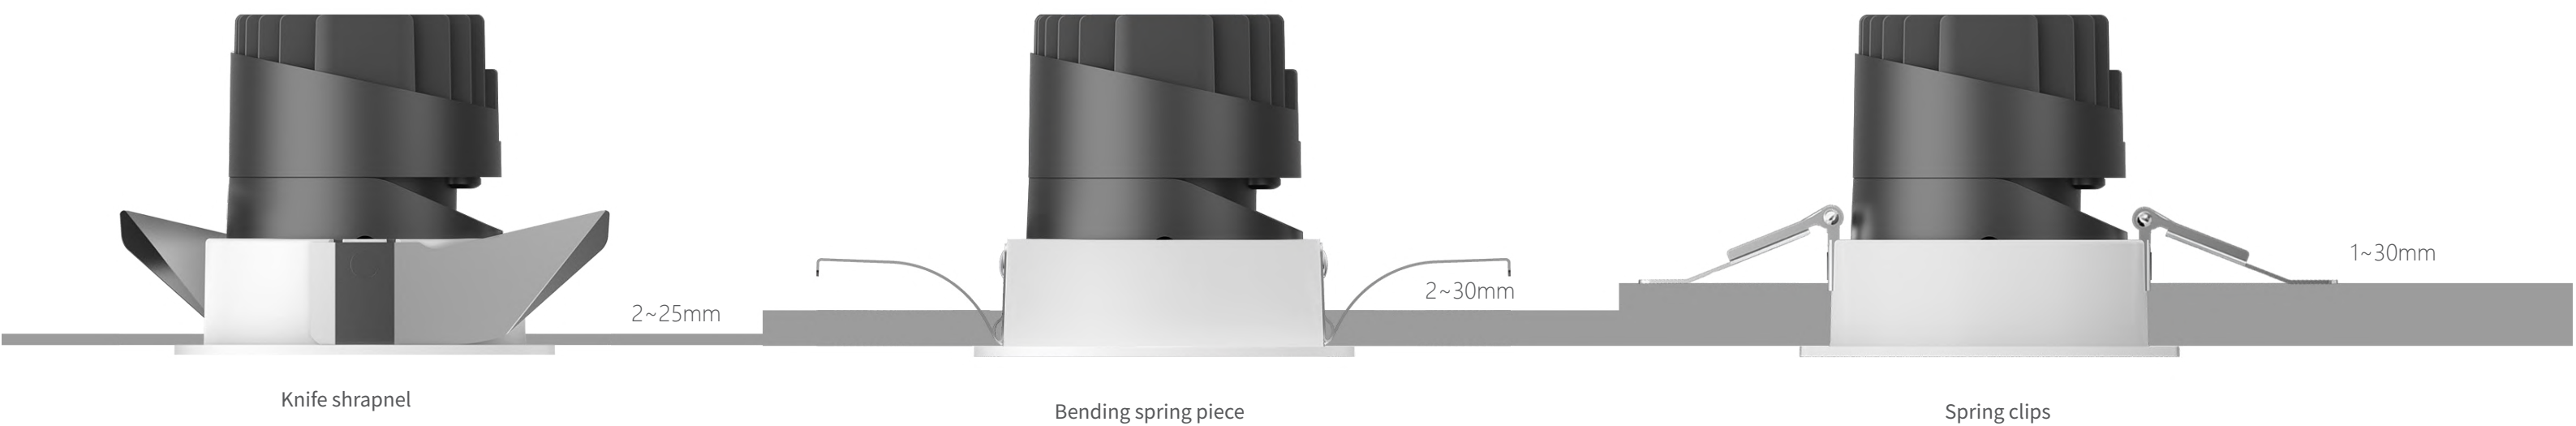

Available in 6 colors Suitable for different decoration environments



The reflector is precisely designed with electroplating (anti UV) and nano paint technology, which is suitable for different soft decoration environments






Optical Fitting On demand transformation

Five optical Fitting are optional, which can realize the change of spot shape, full lamp UGR and other technical parameters to meet the lighting needs of different scenes

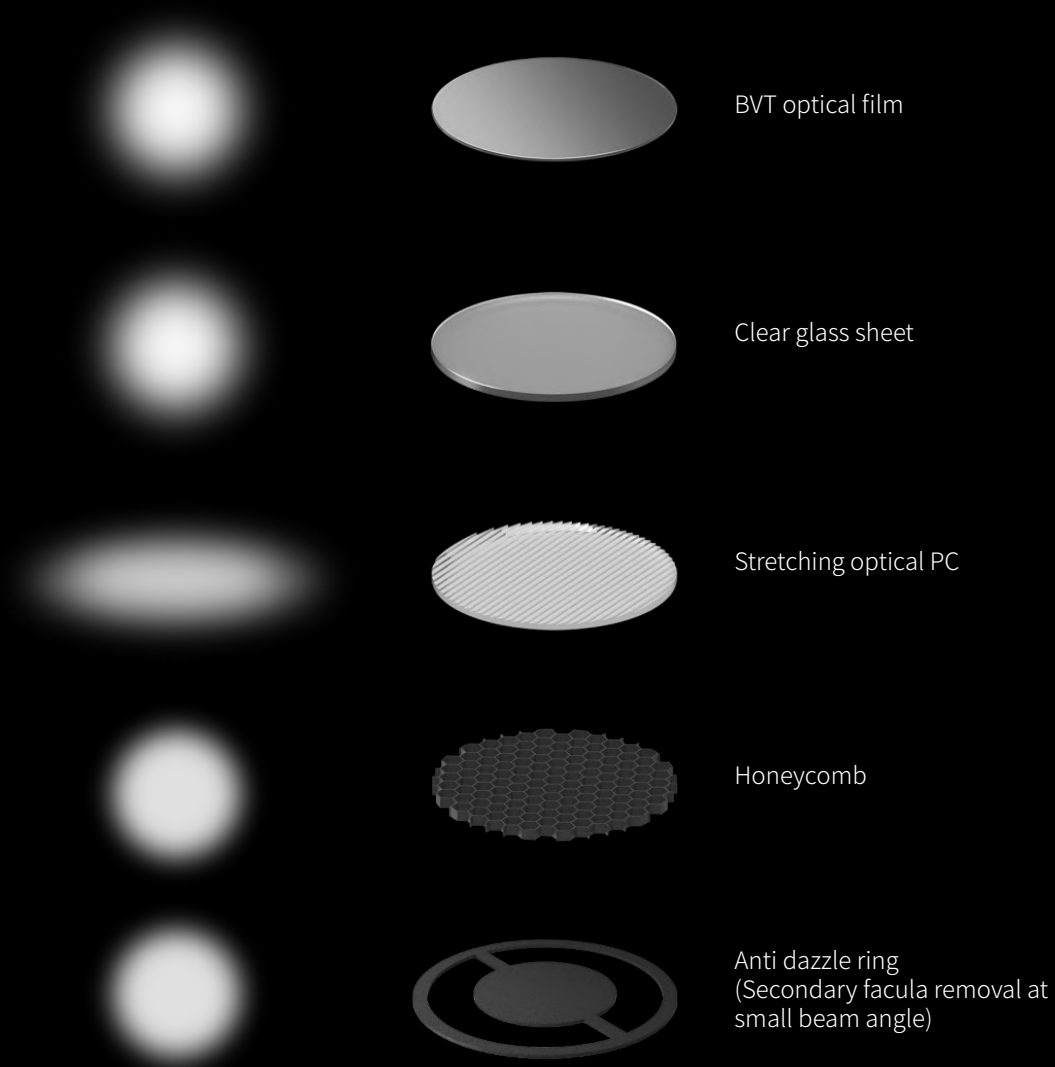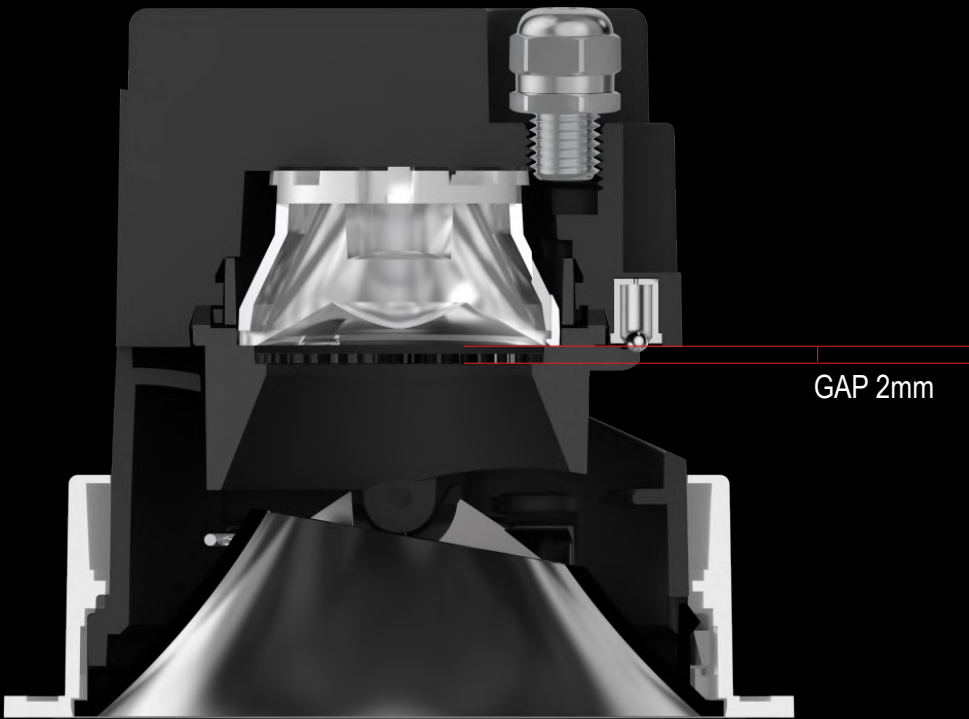

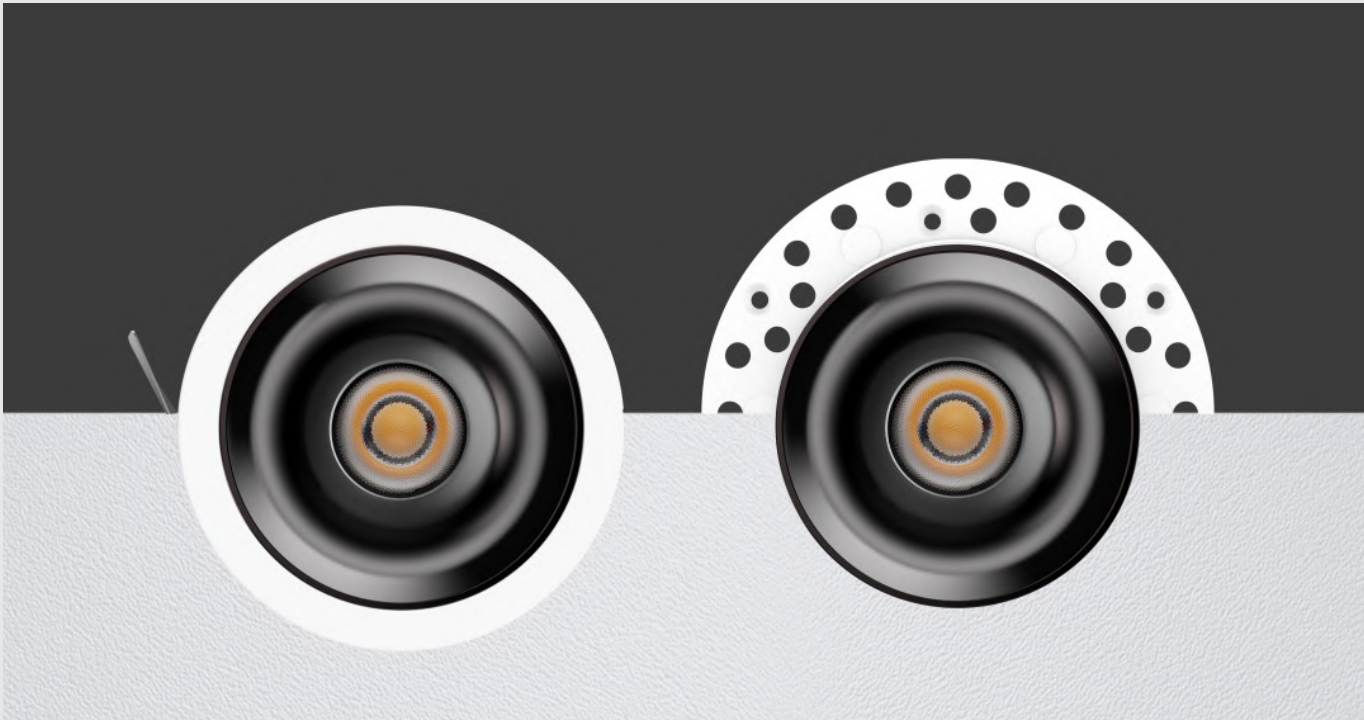


Integrated narrow edge

Integrated trimless

PMMA high luminous rate

Ribbed structure lens

The ribbed structure design is adopted, with its own anti glare effect, so that the light is interwoven at the center of the upper end of the reflector, effectively reducing stray light, and the light spot transition is even, more soft and comfortable

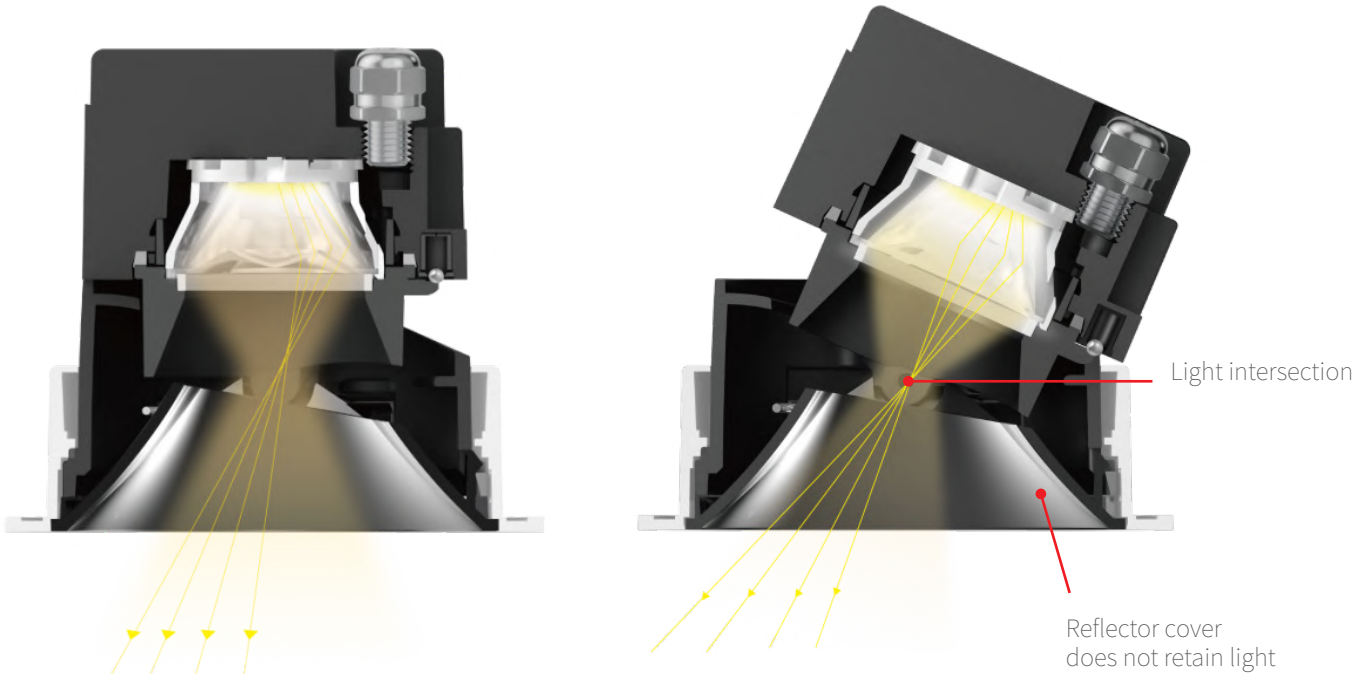



No stray light, Round spot


No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable

Light spot effect

8°	12°	15°	24°	36°	55°

Deep Anti-Glare

In general, the horizontal view of human activities in space is 30 degrees, so the anti glare shielding of spotlights should be more than 30 degrees to effectively prevent glare

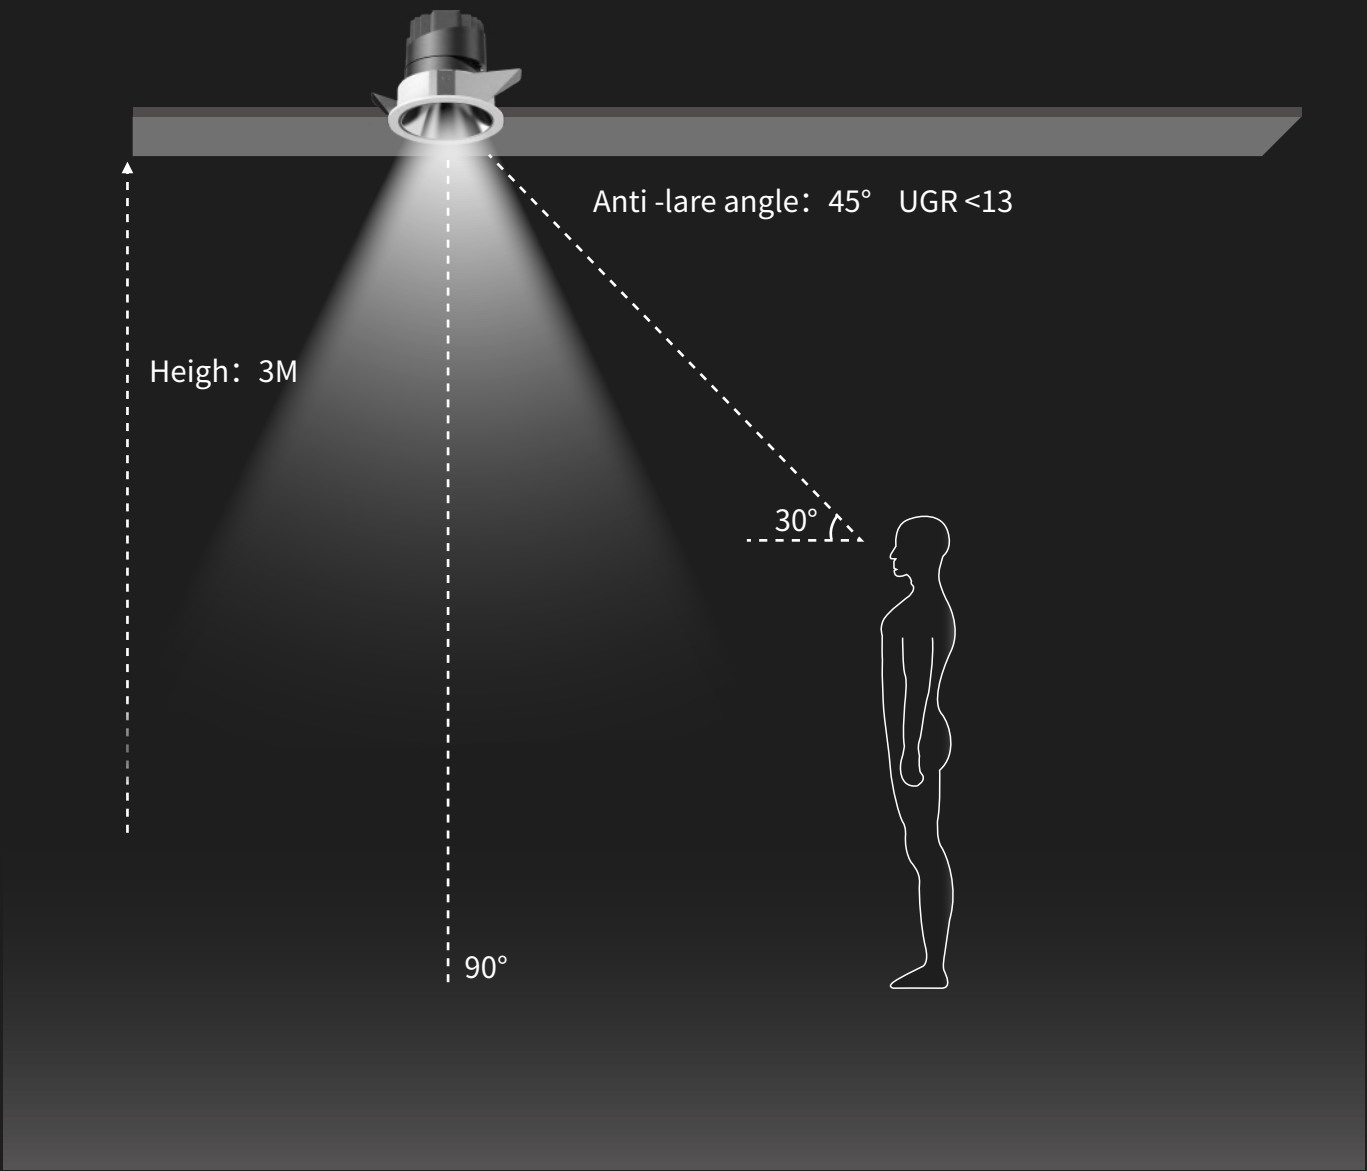

Practical application lighting effect





Fixed ground lighting effect





Adjustable wall lighting effect

Light distribution curves XQ1003-55



Model: XQ-1003-55-15°
LED Model: CXM-4
Angle: 15°

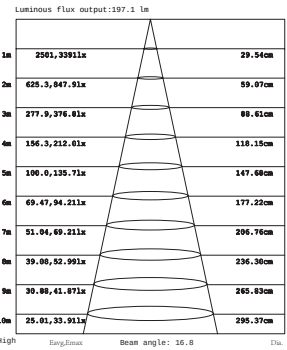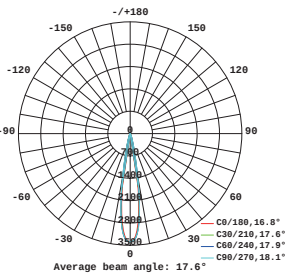



Model: XQ-1003-55-24°
LED Model: CXM-6
Angle: 24°

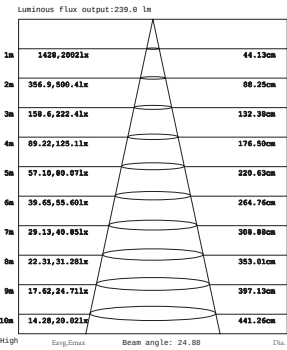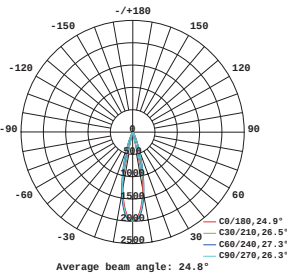



Model: XQ-1003-55-36°
LED Model: CXM-6
Angle: 36°

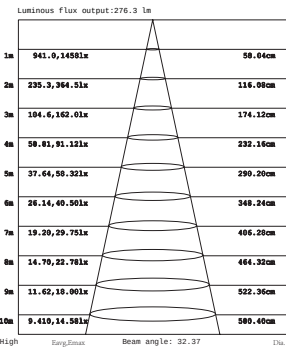



Model: XQ-1003-55-55°
LED Model: CXM-6
Angle: 55°

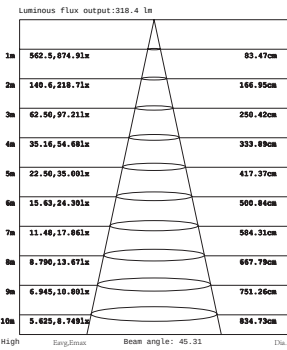



Model: XQ-1003-75s-10°
LED MODEL: CXM-4
Angle: 10°

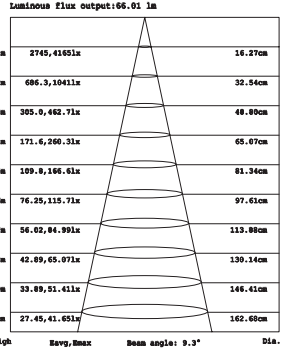



Model: XQ-1003-75s-15°
LED MODEL: CXM-6
Angle: 15°

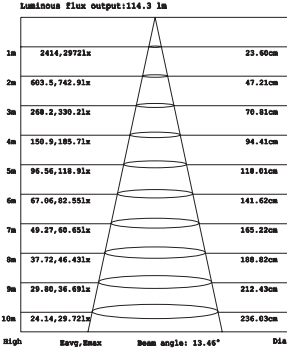

Model: XQ-1003-75s-24°
LED MODEL: CXM-6
Angle: 24°

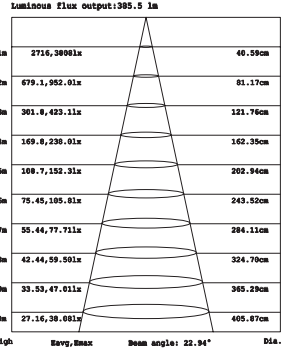



Model: XQ-1003-75s-36°
LED MODEL: CXM-6
Angle: 36°

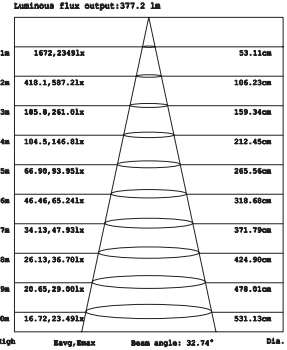



Light distribution curves XQ1003-65s



Model: XQ-1003-65s-15°
LED Model: CXM-4
Angle: 15°

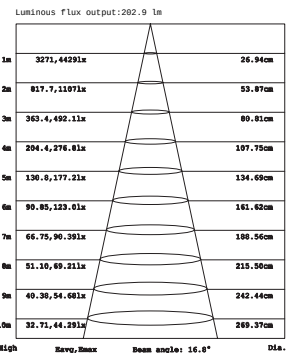



Model: XQ-1003-65s-24°
LED Model: CXM-4
Angle: 24°

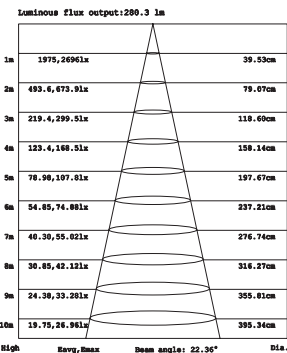



Model: XQ-1003-65s-36°
LED Model: CXM-4
Angle: 36°

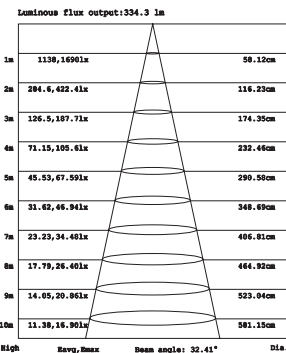



Model: XQ-1003-65s-50°
LED MODEL: CXM-6
Angle: 55°

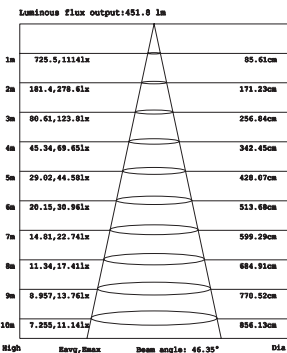

Model: XQ-1003-75s-55°
LED MODEL: CXM-6
Angle: 55°

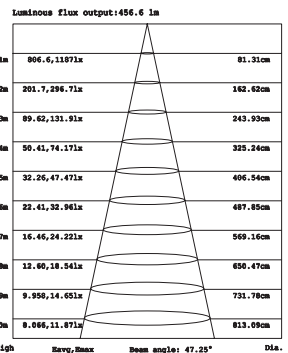



Model: XQ-1003-75s-55°
LED MODEL: CXA1507
Angle: 55°

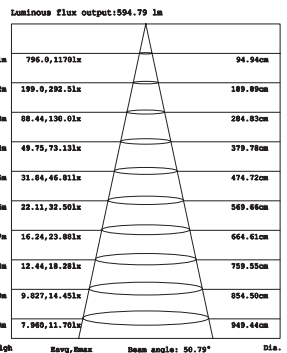



Linan round Edged

NEW Model: XQ-100301E55
Power: 8W
Beam angle: 15° / 24° / 36° / 55°
Cutout: Ø55mm
Size(WxH): Ø63x76mm / Ø63x78mm
Standard holder: **CREE** 1304

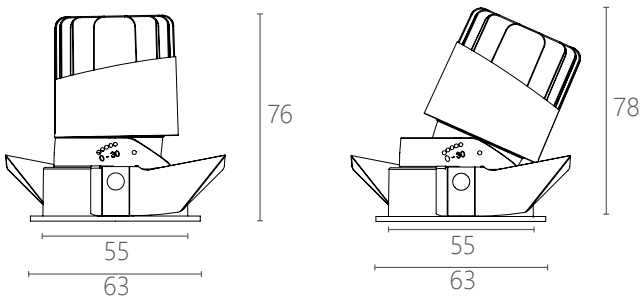

Adjustable
XQ100302E55





Round beam
XQ100303E55



Holistic Trimless Fixed

NEW Model: XQ-100301T55-YT
Power: 8W
Beam angle: 15° / 24° / 36° / 55°
Cutout: Ø55mm
Size(WxH): Ø86x76mm / Ø86x78mm
Standard holder: **CREE** 1304

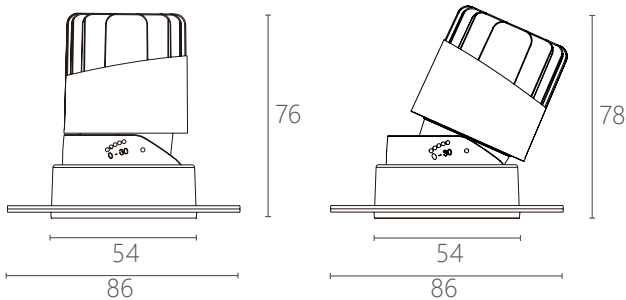

Adjustable
XQ100302T55-YT



Holistic Trimless Round beam
XQ100303T55-YT

Reßector cover :



Reßector cover :





Linan square Edged single head



Linan square Edged double head



Linan square Edged three head










Linan Square Trimless single head



Linan Square Trimless double head



Linan Square Trimless three head

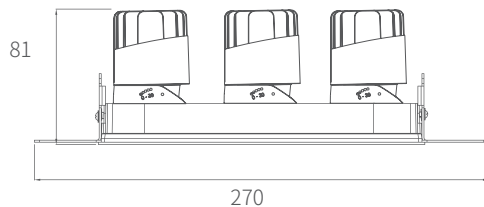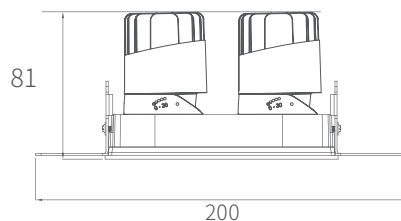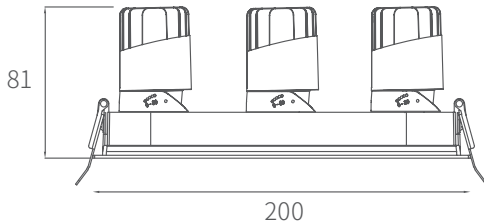

NEW Model: XQ- 100302P55

Power: 8W
Beam angle: 15° / 24° / 36° / 55°
Cutout: 60X60 mm
Size(WxH): 68X68X81mm
Standard holder: **CREE** 1304

NEW Model: XQ- 100302P55-2

Power: 2x8W
Beam angle: 15° / 24° / 36° / 55°
Cutout: 130X60mm
Size(WxH): 135X68X81mm
Standard holder: **CREE** 1304

NEW Model: XQ- 100302P55-3

Power: 3x8W
Beam angle: 15° / 24° / 36° / 55°
Cutout: 196x60mm
Size(WxH): 200X68X81mm
Standard holder: **CREE** 1304

NEW Model: XQ- 100302PT55

Power: 8W
Beam angle: 15° / 24° / 36° / 55°
Cutout: 62 X60 mm
Size(WxH): 138X68X81mm
Standard holder: **CREE** 1304

NEW Model: XQ- 100302PT55-2

Power: 2x8W
Beam angle: 15° / 24° / 36° / 55°
Cutout: 132X60mm
Size(WxH): 200X68X81mm
Standard holder: **CREE** 1304


NEW Model: XQ- 100302PT55-3

Power: 3x8W
Beam angle: 15° / 24° / 36° / 55°
Cutout: 198x60mm
Size(WxH): 270X68X81mm
Standard holder: **CREE** 1304


Reßector cover:



Reßector cover:





10W



Linan round Edged

NEW Model: XQ-100301E65s-JS
Power: 10W
Beam angle: 15° / 24° / 36° / 55°
Cutout: Ø65mm
Size(WxH): Ø72.5x72mm / Ø72.5x75mm
Standard holder: **CREE** 1304

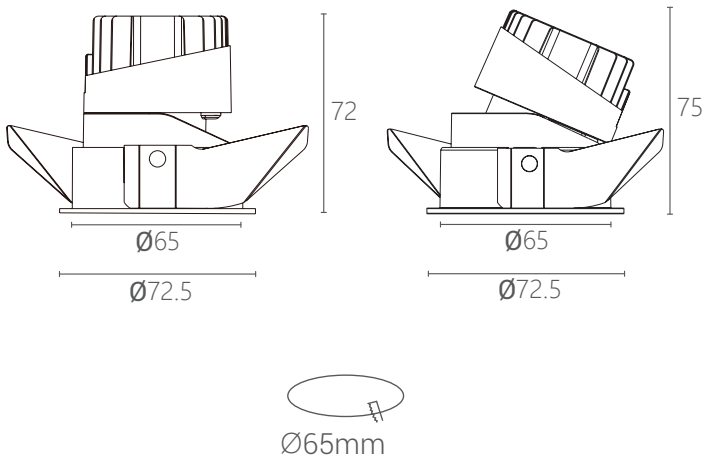

Adjustable
XQ100302E65s-JS




Round beam
XQ100303E65s-JS



Holistic Trimless Fixed

NEW Model: XQ-100301T65s-YT-JS
Power: 10W
Beam angle: 15° / 24° / 36° / 55°
Cutout: Ø65mm
Size(WxH): Ø98x72mm / Ø98x75mm
Standard holder: **CREE** 1304

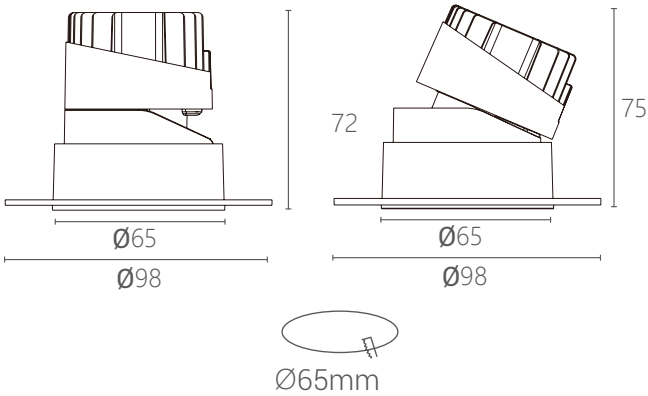


Adjustable
XQ100302T65s-YT-JS



Holistic Trimless Round beam
XQ100303T65s-YT-JS




12W



Linan round Edged

NEW Model: XQ-100301E75s-JS
Power: 12W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: Ø75mm
Size(WxH): Ø86x78mm/Ø86x83mm
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

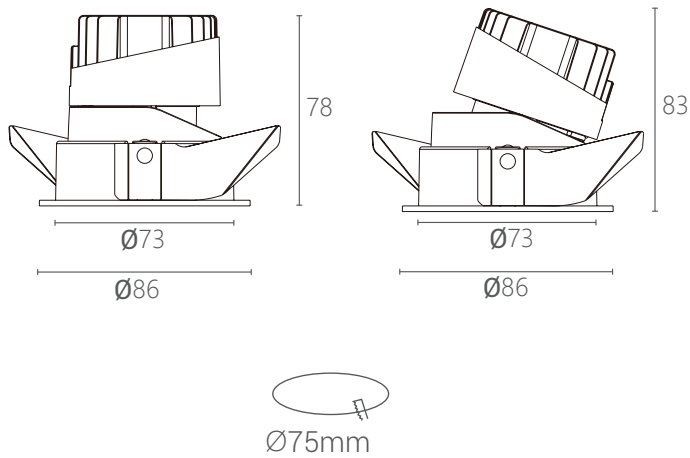

Adjustable
XQ100302E75s-JS




Round beam
XQ100303E75s-JS



Holistic Trimless Fixed

NEW Model: XQ-100301T75s-YT-JS
Power: 12W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: Ø75mm
Size(WxH): Ø108x78mm/Ø108x83mm
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

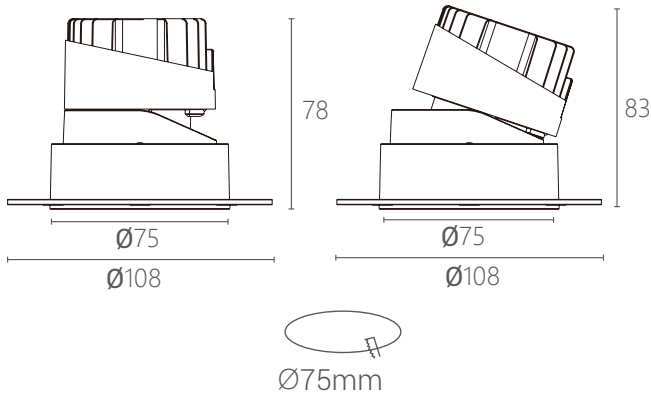

Adjustable
XQ100302T75s-YT-JS




Holistic Trimless Round beam
XQ100303T75s-YT-JS





Linan round Edged

NEW Model: XQ-100301T75s-JS
Power: 12W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: Ø75mm
Size(WxH): Ø86x78mm / Ø86x83mm
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

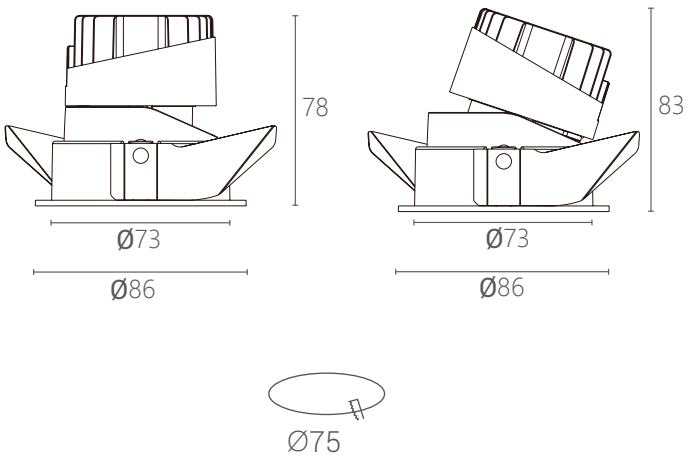

Adjustable
XQ100302T75s-JS




Round beam
XQ100303T75s-JS




Square Fixed single head


NEW Model: XQ-100301P75S-JS
Power: 12W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 75mm
Size(WxH): 85x80mm / 130x80mm
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

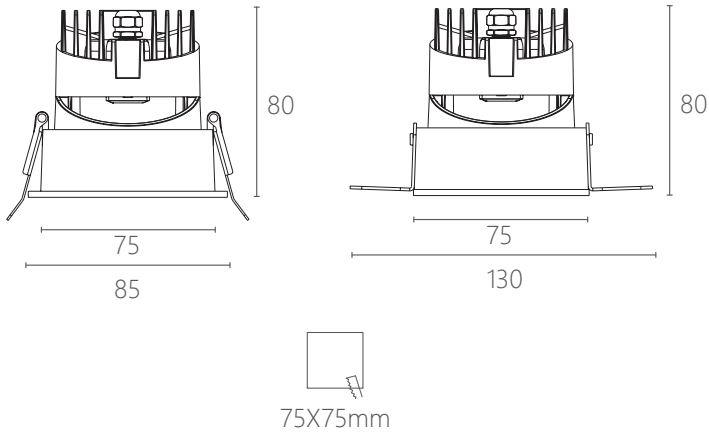

Adjustable
XQ-100302P75s-JS

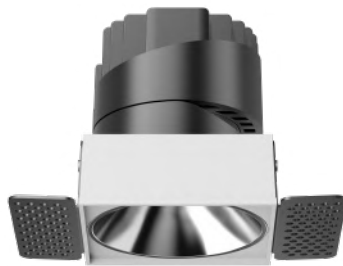


Trimless Fixed
XQ-100301PT75s-JS

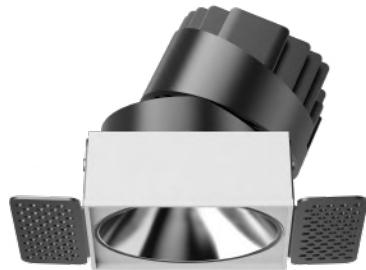

Trimless Adjustable
XQ-100302PT75s-JS





12W

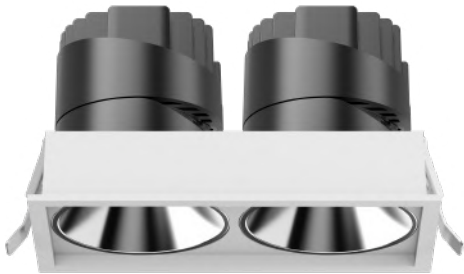



Double head

NEW Model: XQ-100302P75S-JS-2
Power: 12Wx2
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 75x150mm
Size(WxH): 160x85xH80mm
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

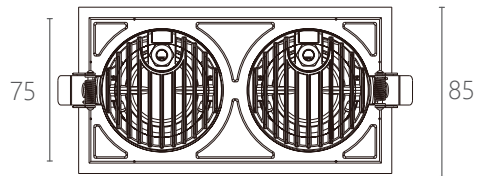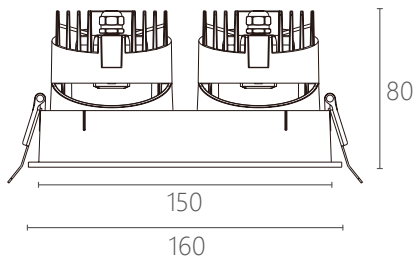

Double head Trimless

NEW Model: XQ-100302PT75S-JS-2
Power: 12Wx2
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 75x150mm
Size(WxH): 205x75xH80mm
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

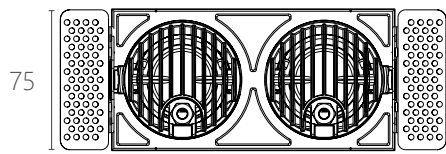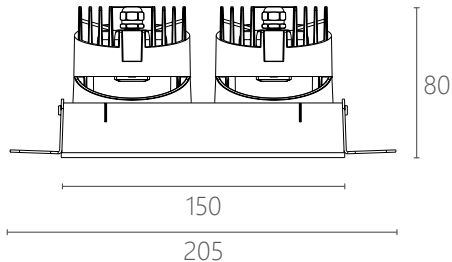

Reflector cover:






Linan series



Family Design

Full range of spotlights, different choices for different needs

The outerring can be selected in a variety of styles

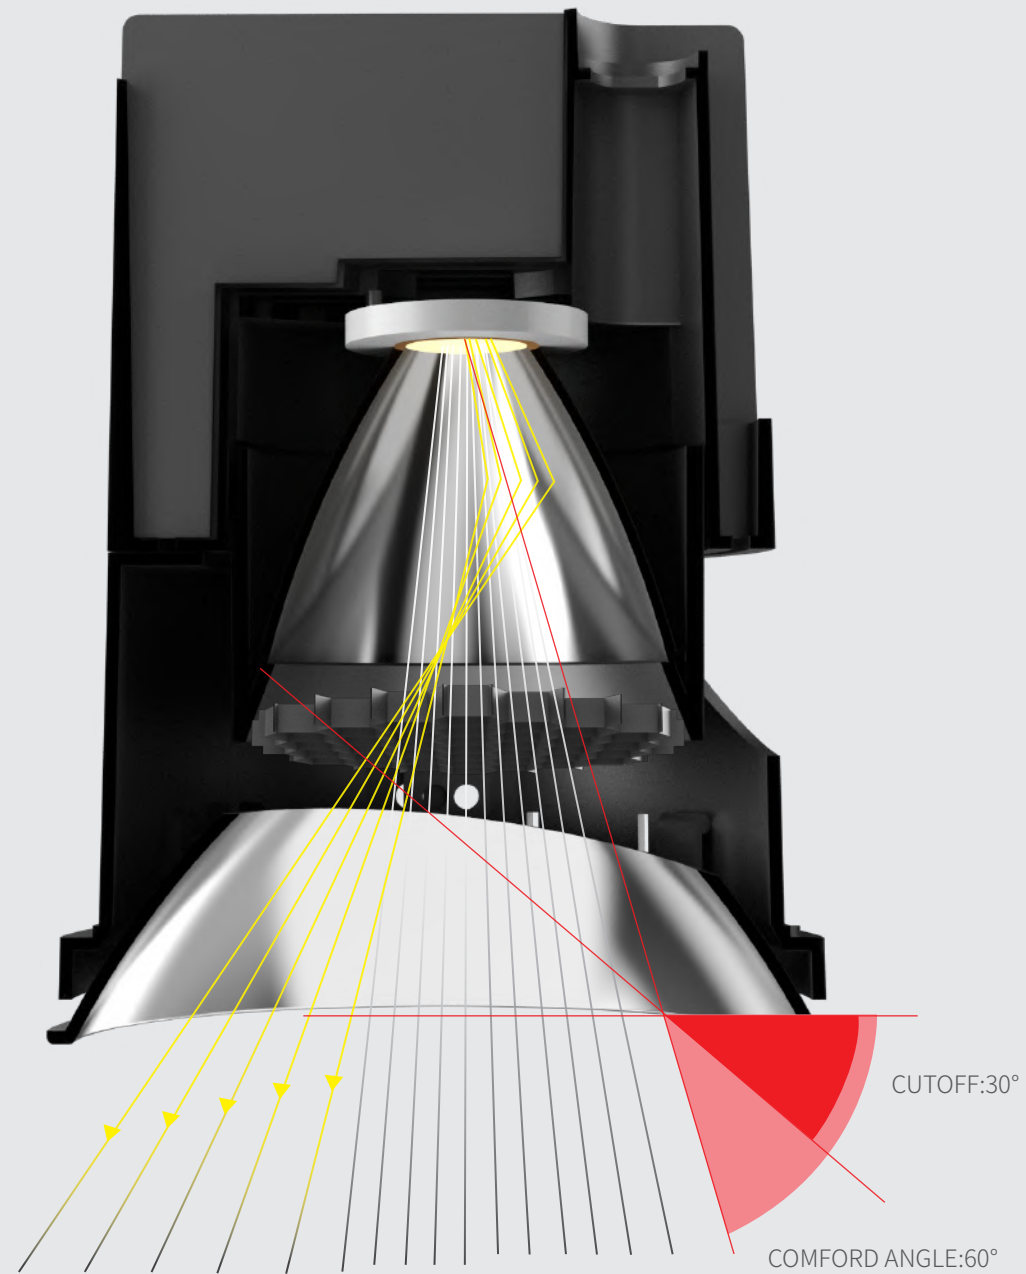


Dark light technology

Deep reflection cup, UGR < 16

Lengthen the distance between the light source and the light outlet and
improve the anti glare performance

The light is filtered by reflective cup and anti glare honeycomb to
effectively reduce excess light beams

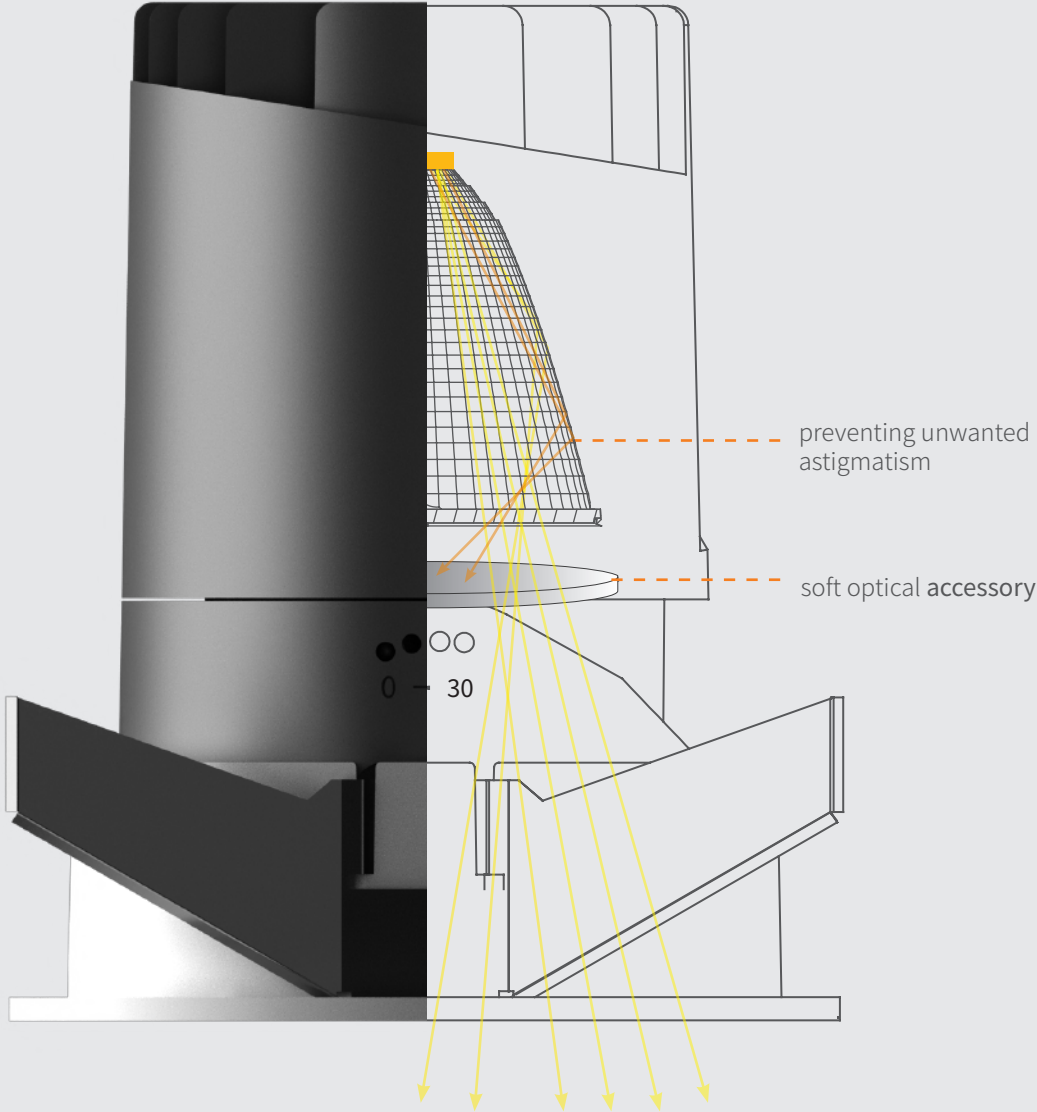

Antiglare fittings

Create a soft atmosphere and split the light source into small beams by
match soft optical accessories
Raducing glare , provides a balance and soft light environment.
different luminous effects provide by different sofr optical accessory.



Frosted PC





Stripd PC



Diamod PC




Honey Comb

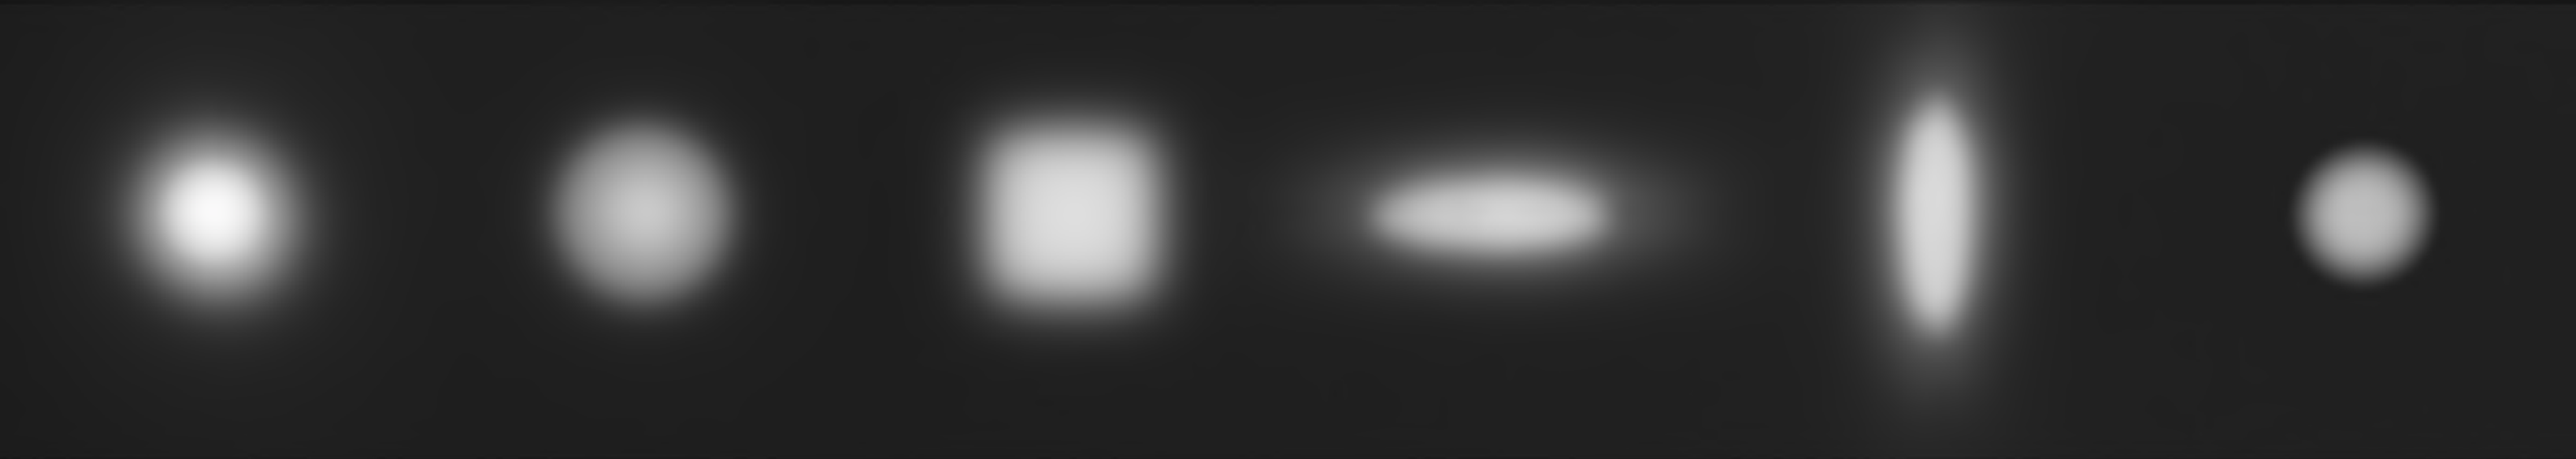


PC glass

24° beam angle




Frosted PC

Frosted glass filters out soft light and further strengthens the diffusion effect of light, so as to reduce the possibility of glare and provide a uniform and soft light environment.



Diamond PC

Square light spot, through atomization or diffusion, makes the light diffuse evenly and softer, so as to reduce the stimulation of lamps to human eyes, achieve anti glare effect, and generally have the function of optical beam expansion.



Striped PC

The stretch pattern spot can be stretched laterally or linearly according to the direction. Its function is to pull the circular spot into an elliptical spot. It can concentrate the light spot in one direction, illuminate the area as wide as possible in that direction, and reduce the waste of light in other directions (mainly in the direction of the minor axis of the ellipse) (reduce stray light).



Honey Comb

Excessive soft light source effect of edge light and shade can effectively prevent excess astigmatism and allow direct light to pass through, so as to prevent glare, protect eyes and prevent glare. UGR is less than 16.




Soft and colorful

CRI>95


Ultra high color rendering, let the object show the original color

Soft light and shadow, overflowing color

Deduce the real light effect environment



Anti glare effect

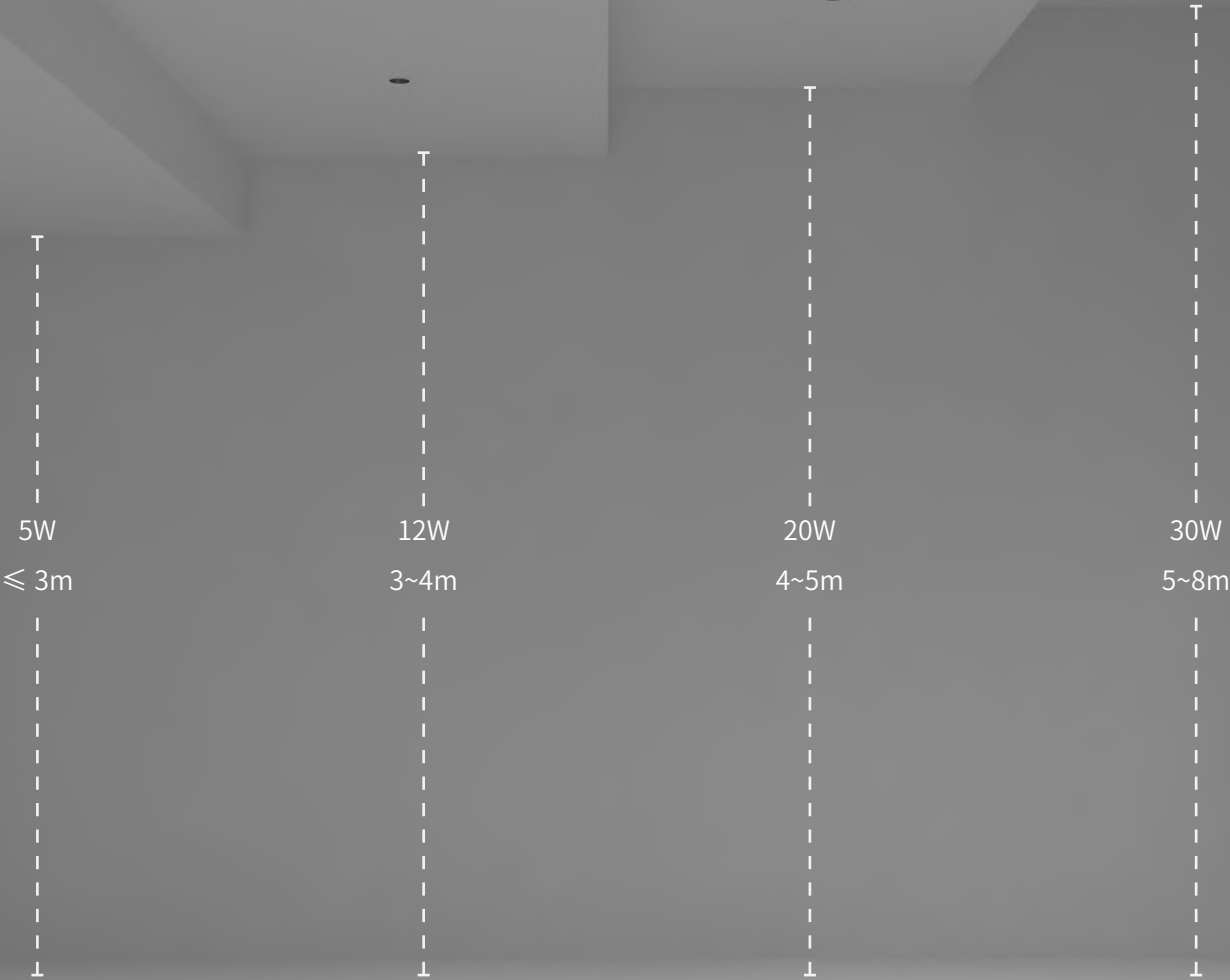

Anti glare soft light ultimate light effect

Anti dazzle soft light

Series coverage 5W / 12W / 20W / 30W
Suitable floor height 3M ~ 8M



Ad justable

Oval beam







Precise control of light

Different rings are available to create a different
flare atmosphere and superior light

Optional Adjustable/Fixed/Oval beam/Round beam

Round beam

fixed

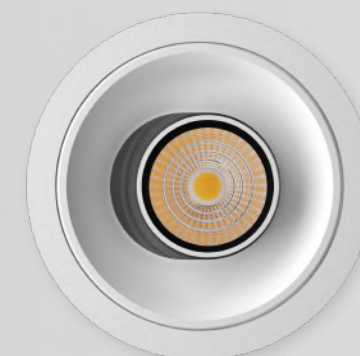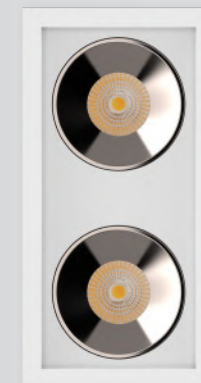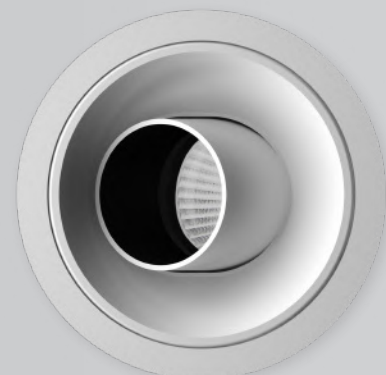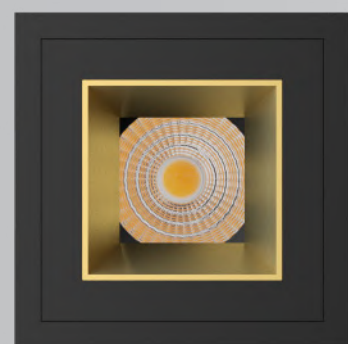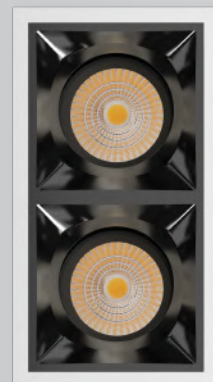

Everything

Circular / Square / brimless


A variety of styles and lighting effects can be selected according to the lighting effect and surface ring
Each face ring has its own unique light effect




Fixed




Adjustable



Trimless

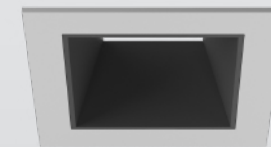

square

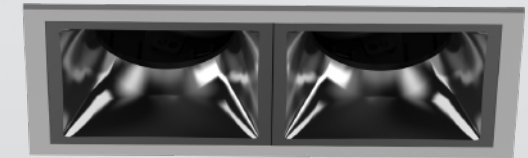

Double head

Multiple mounting structures

Fixed / Adjustable / Trimless

Reasonable installation structure
Keep the smallpox simple, natural and visual consistency



The 75mm opening specification can be selected with lens, and the whole lamp height is smaller, which is more suitable for the scene with low ceiling







Beauty, more than one

The reflector is available in 6 colors to meet the needs of different occasions

The reflector is precisely designed, electroplated and nano spray painted

Comfortable light type with high reflection efficiency and high efficiency

Sand gold	White	Chrome	Silver	Pearl Black	Black
					
					
					
					

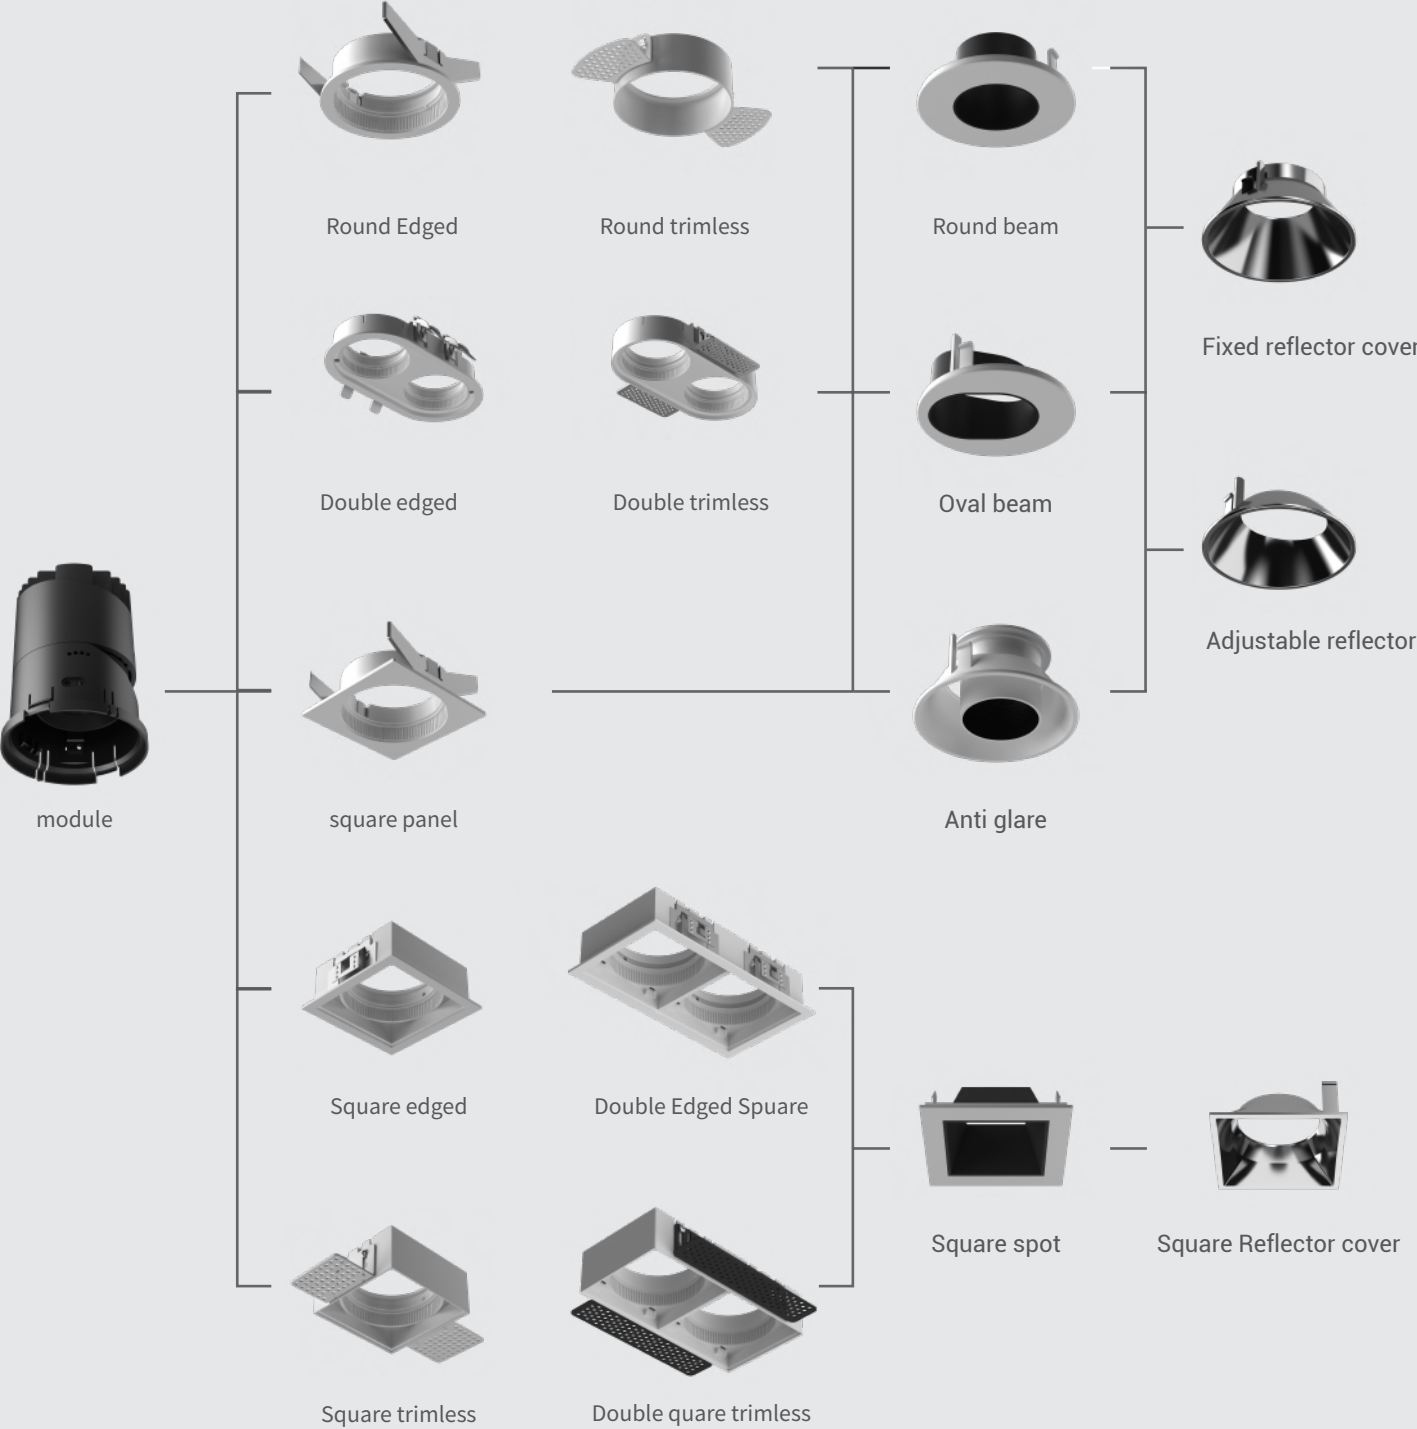

Modularization

Independently designed product appearance
Snap on modular structure, easy and convenient installation and maintenance






10W module



15W module



MR16



MR16 Round edged



MR16 Round trimless



MR16 round edged double head




MR16 round Trimless double head



MR16 square edged



MR16 square Trimless

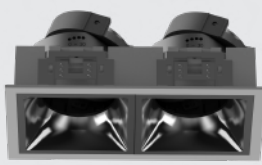

MR16 square Double head



MR16 square Trimless double head



MR16 oval beam edged



MR16 Oval beam trimless



MR16 Oval beam edged double head



MR16 Oval beam Trimless double head



MR16 Anti-glare edged





MR16 Anti-glare trimless



MR16 Anti-glare edged double head




MR16 Anti-glare trimless double head

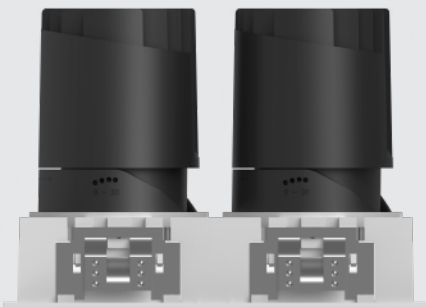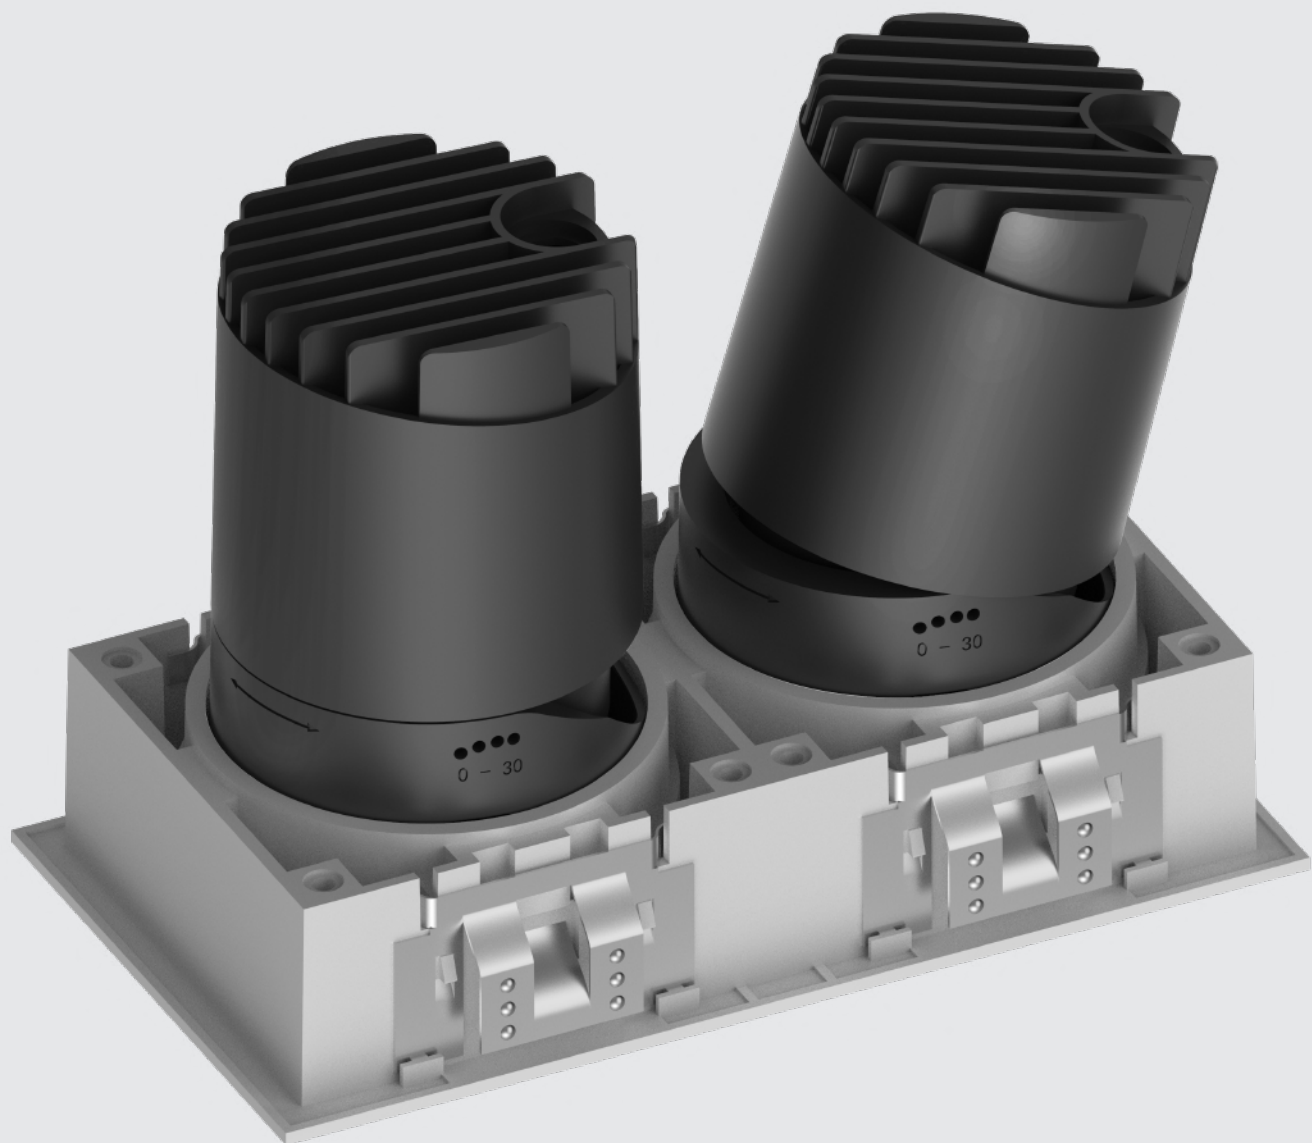


One piece face ring

Replace the new integrated surface ring to provide sufficient illumination for the high-rise space


Square face frame provides flexible lighting



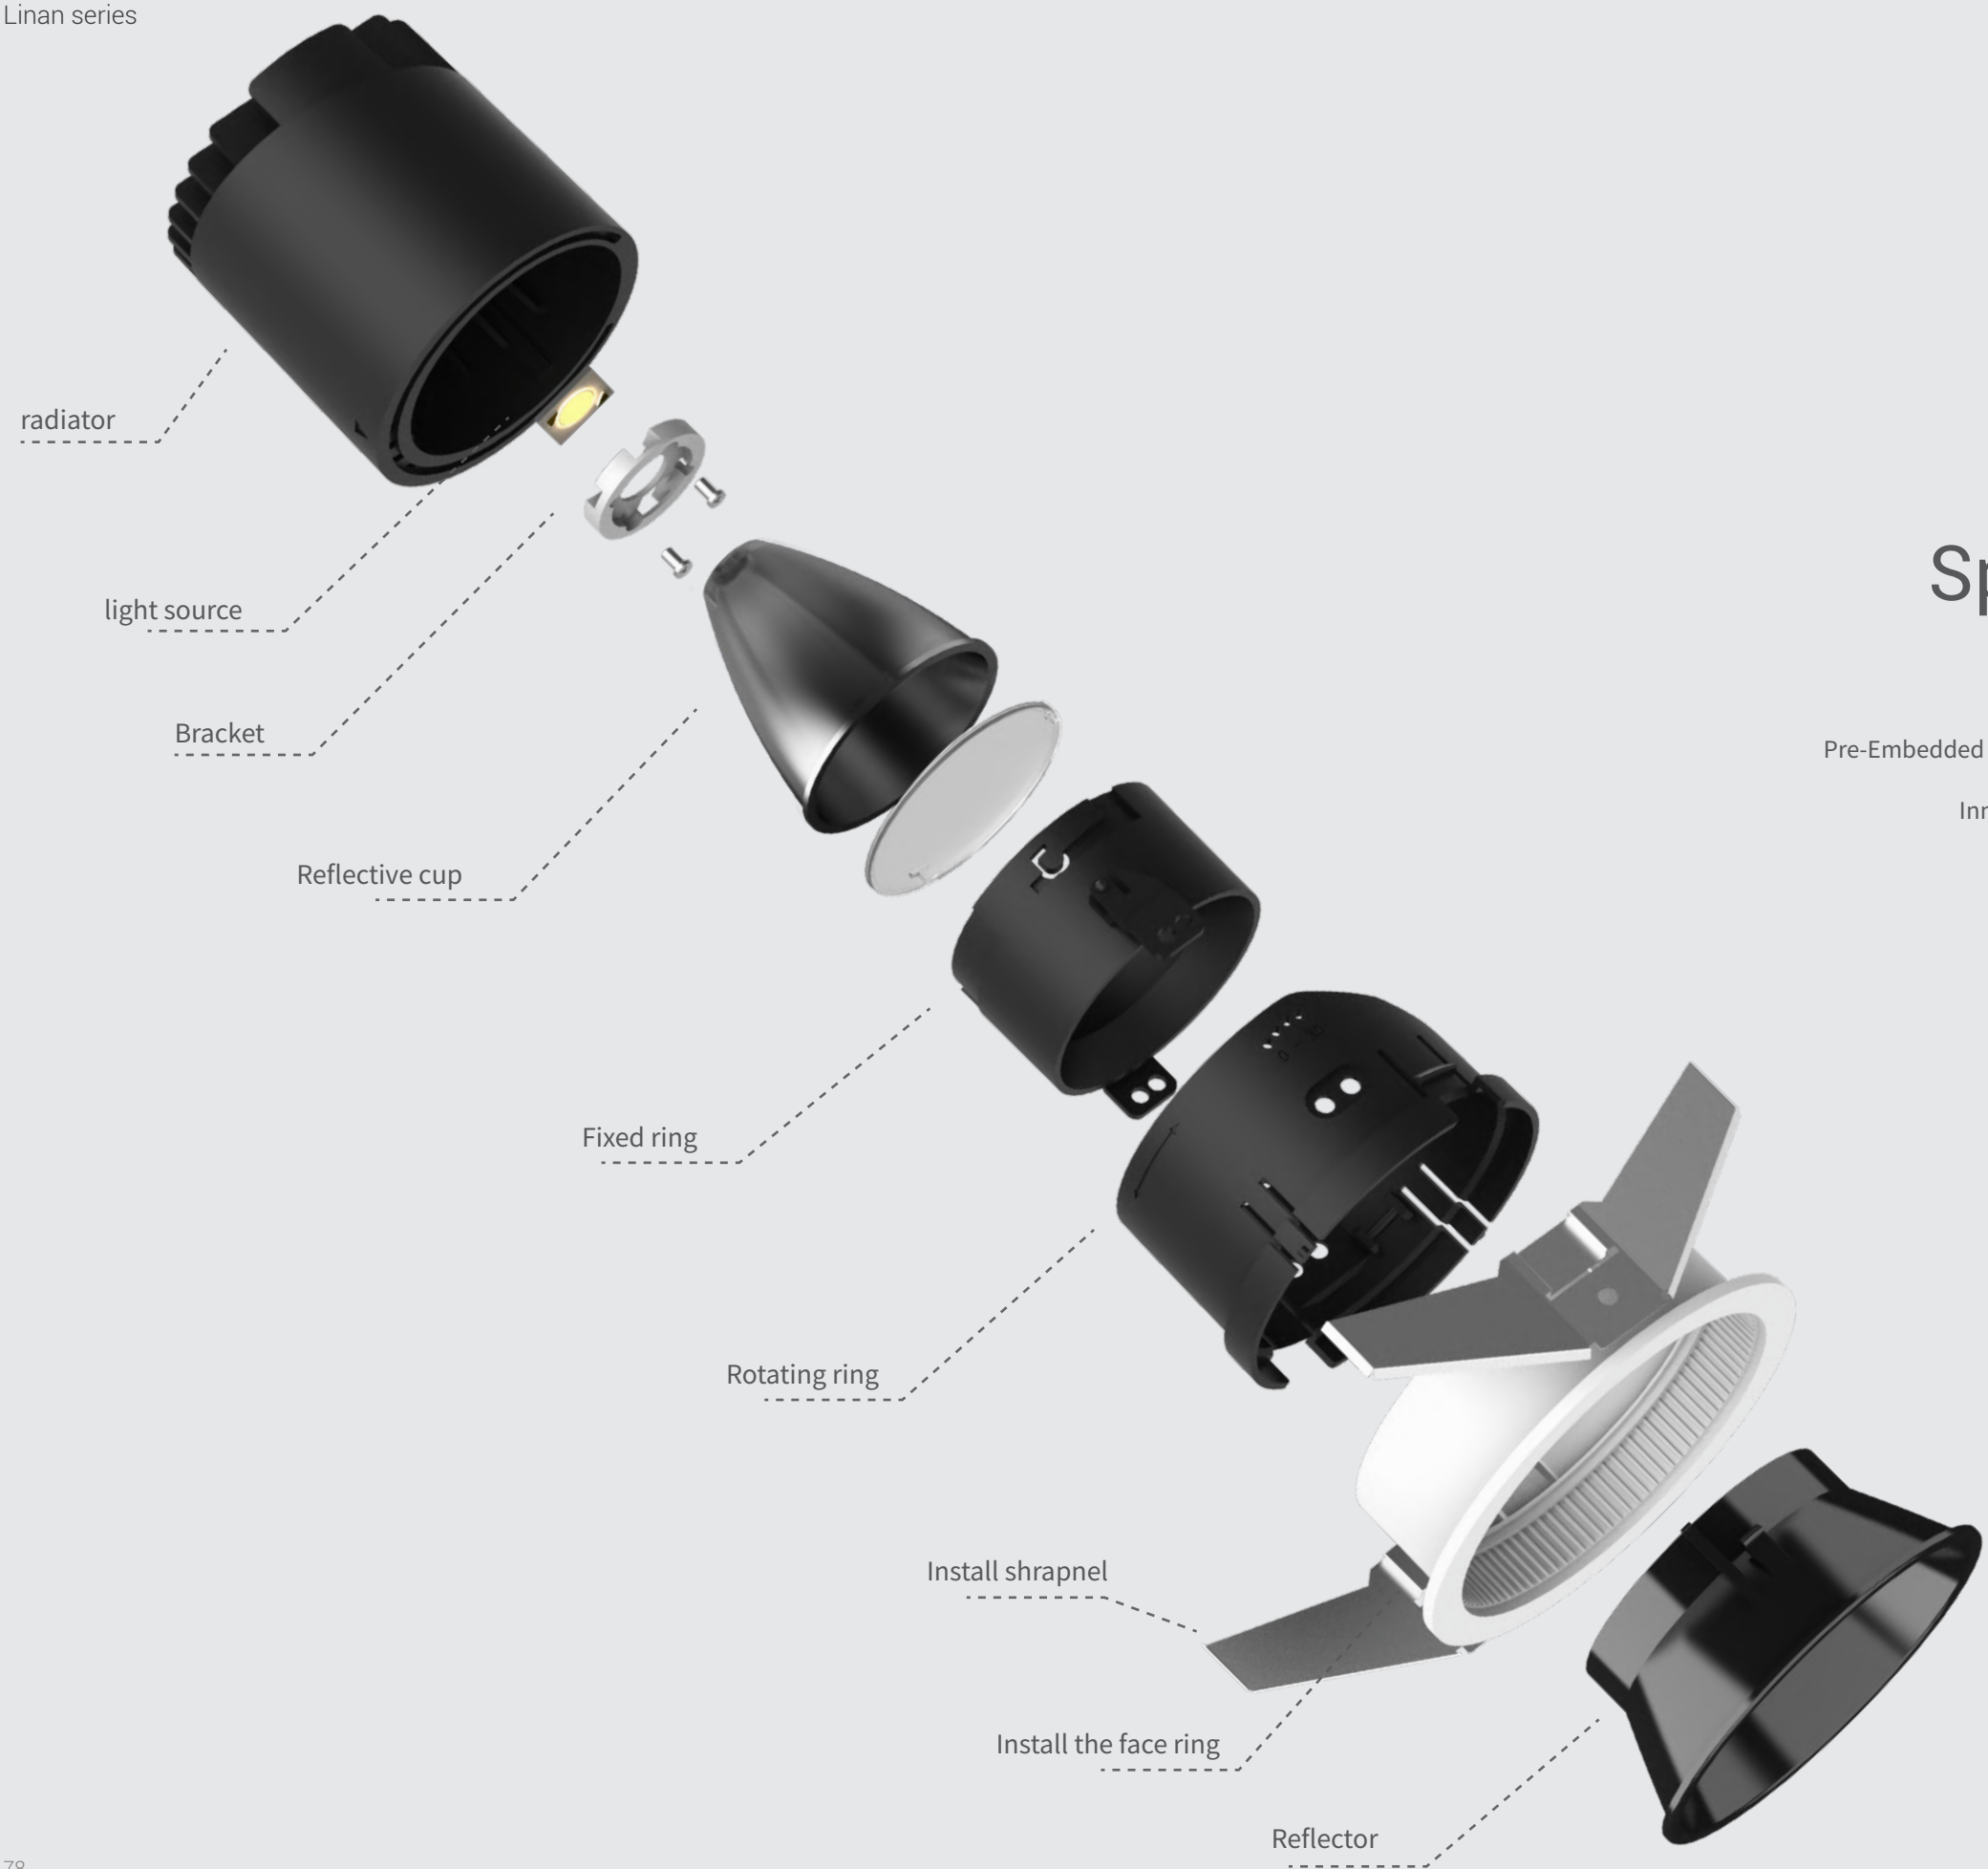

Split structure


Pre-Embedded design ,quick installation and easy maintenance
Innovative high - efficiency black mirror

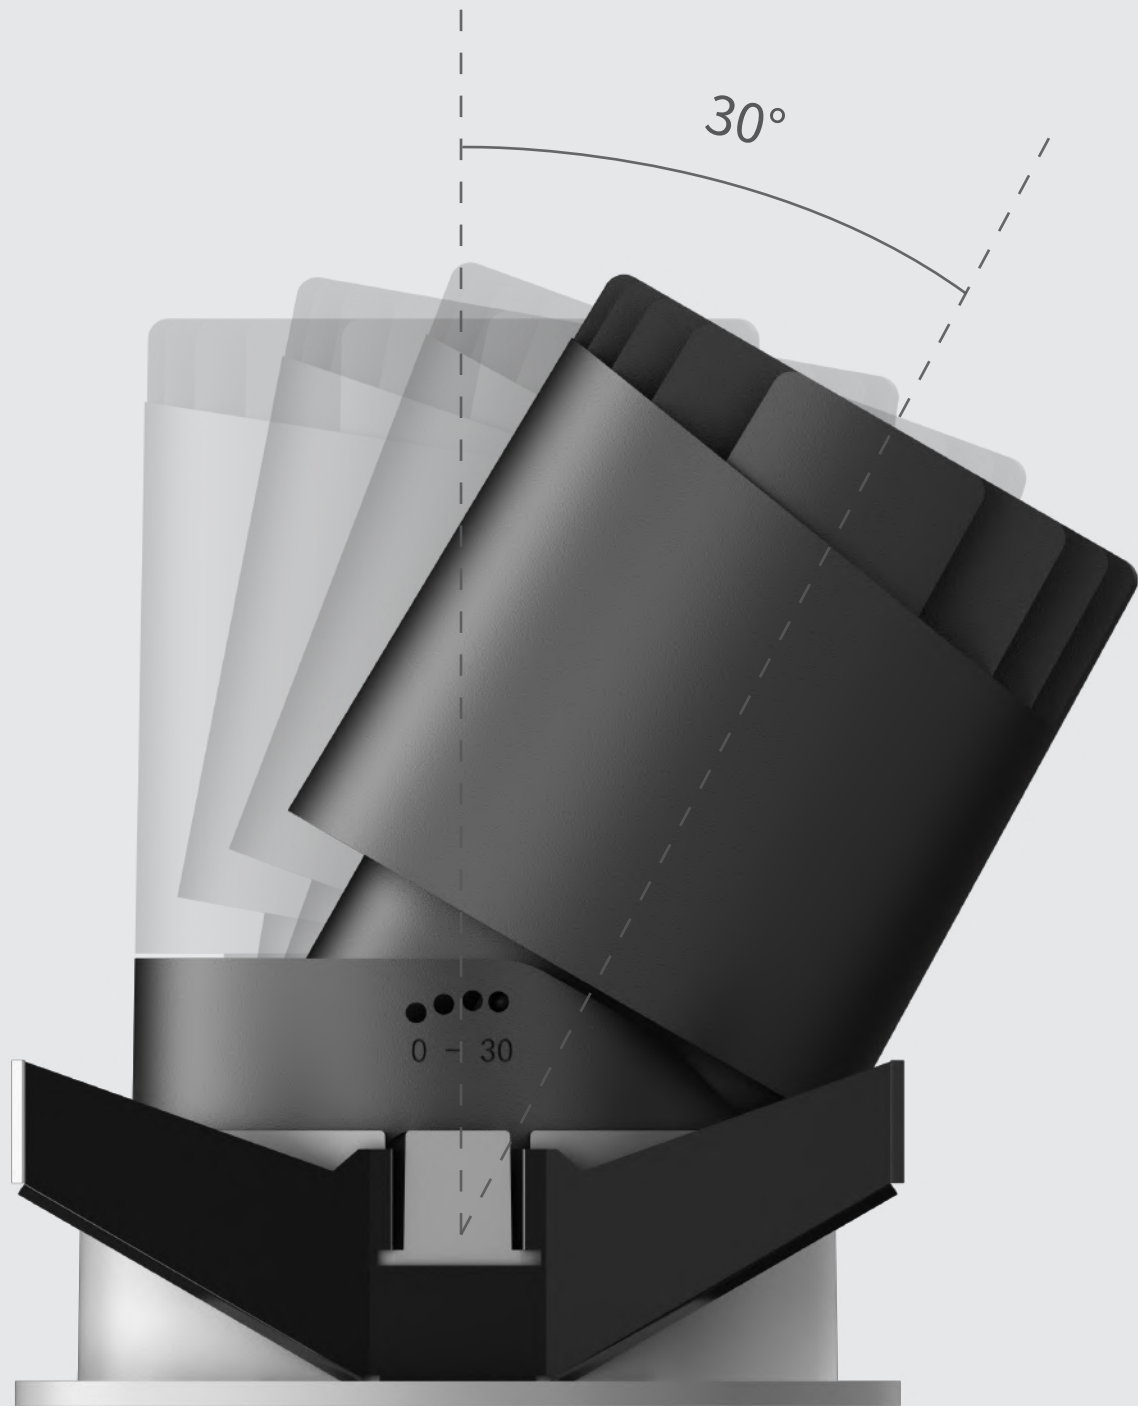

Scale mark

Increase the rotation angle scale mark to tilt the lamp body to a maximum angle of 30 °

Easy switching between direct illumination mode / wall washing mode

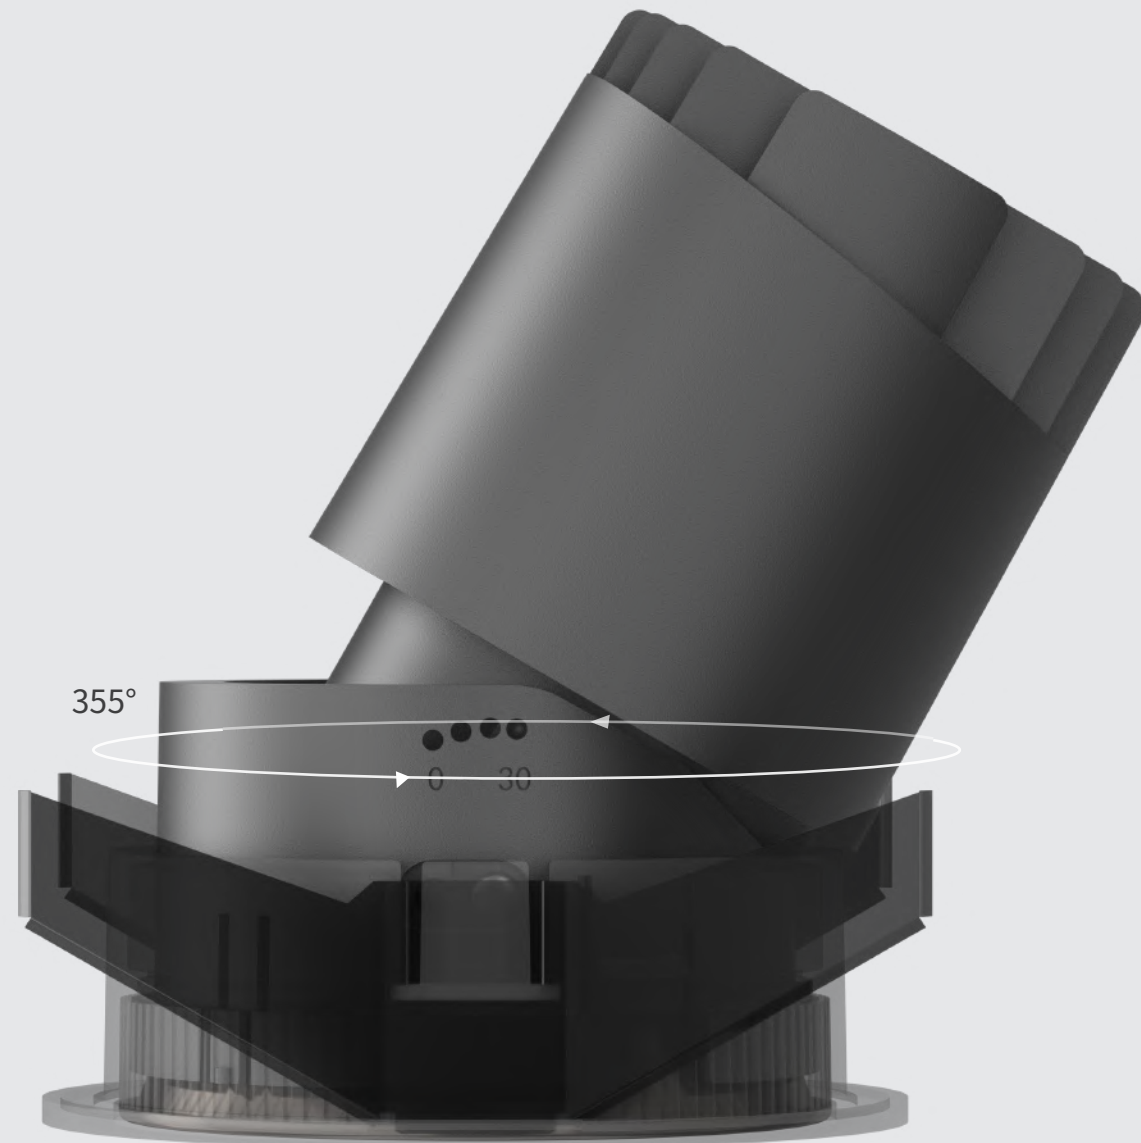


Locating groove

Rotate 355 ° horizontal , each rotation degree are just right

4-way tilt angle adjusted, positioning dots inside, and the resistance is just right


Accurate control of beam angle and spot effect,giving space more vivid emotions

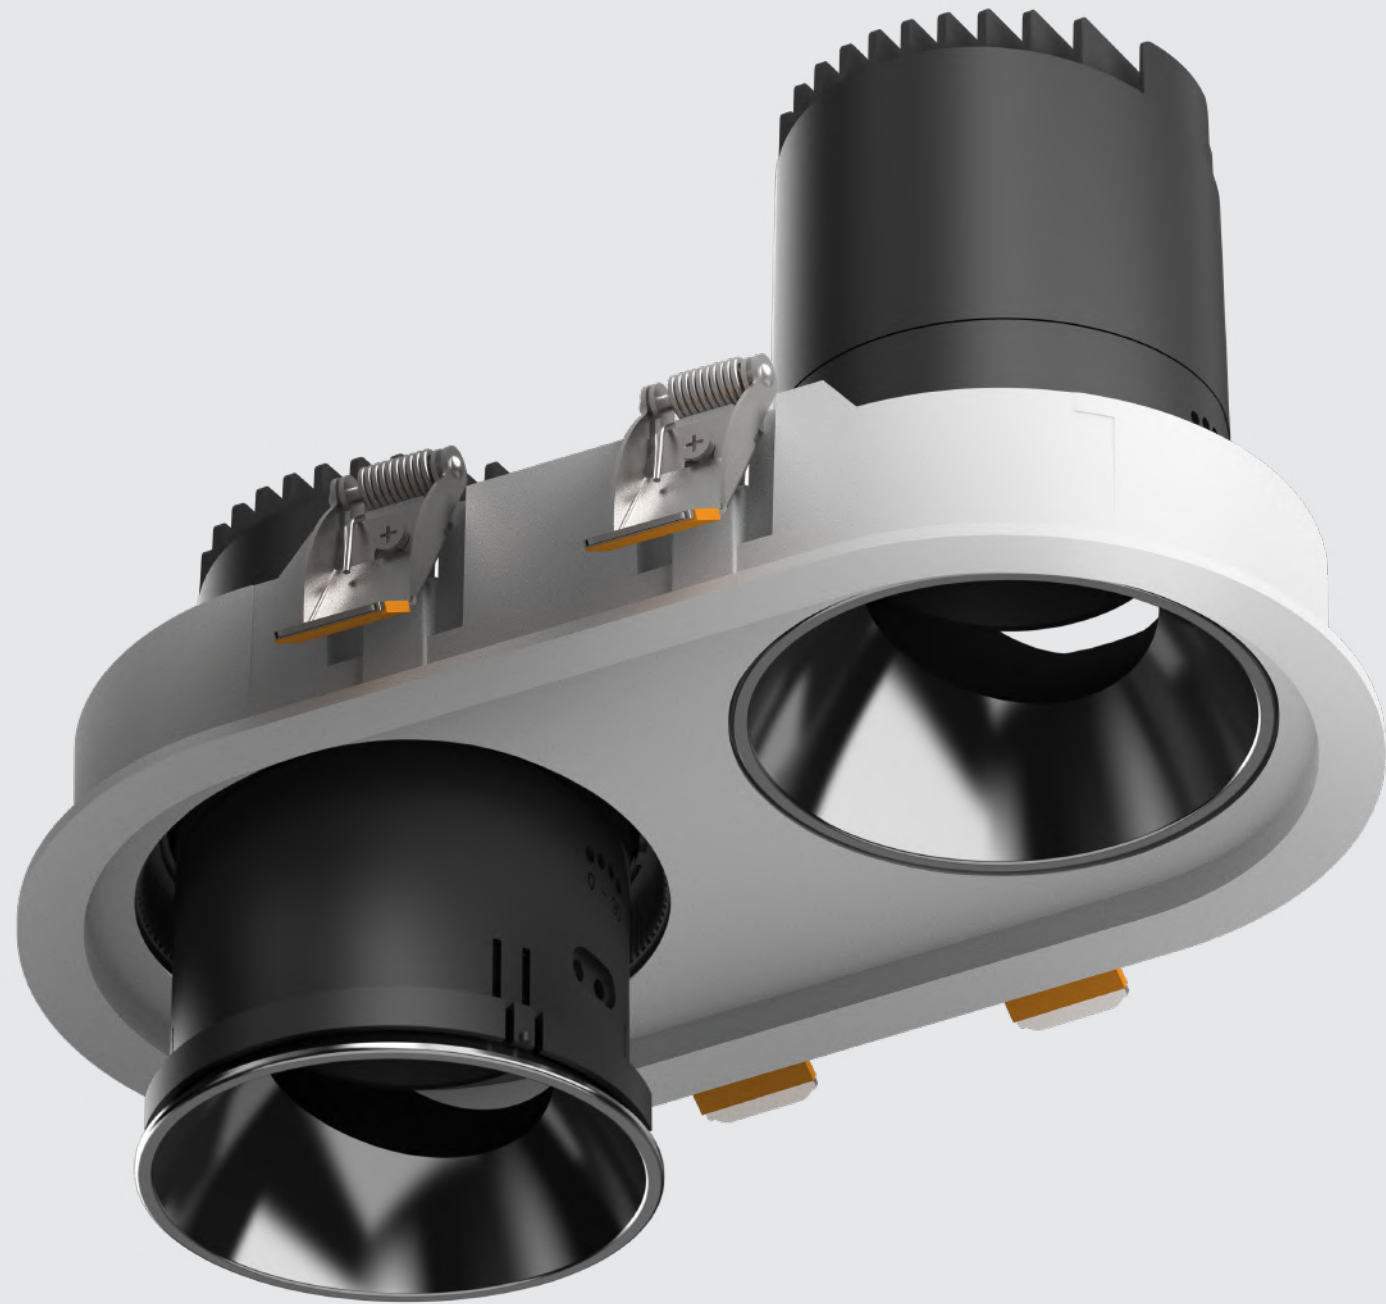


Luminous efficiency

The lamp cap can rotate freely in all directions

Let the light move at will and maximize the value of light effect

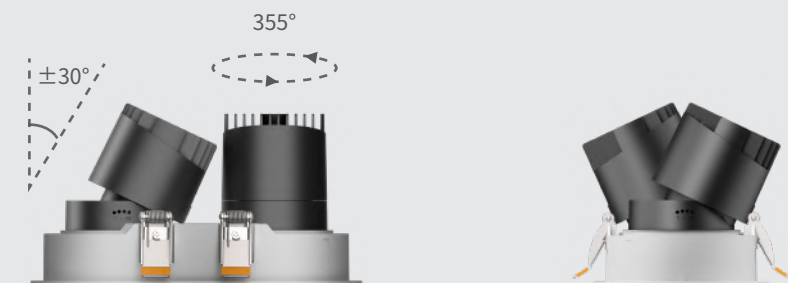

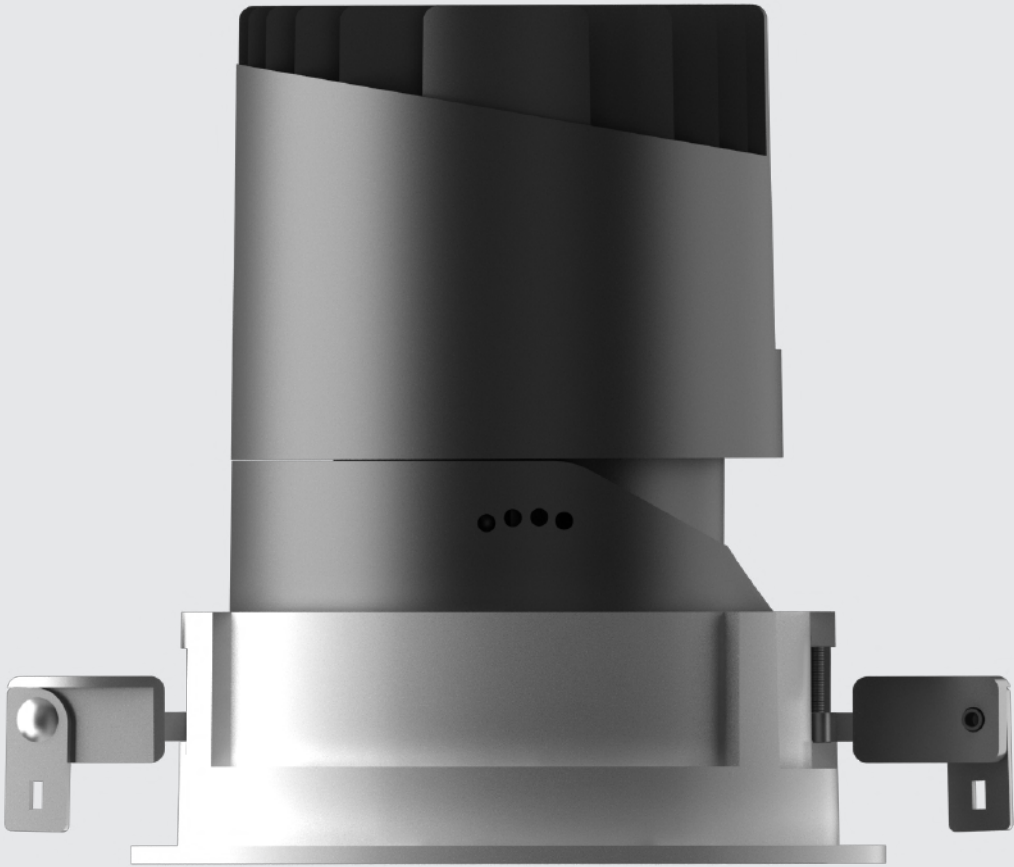

1–30mm

Suitable for a variety of plate thickness

Quick tightening of screws, easy installation

Suitable for various ceiling thicknesses up to 30mm



1、 Hexagon socket screw fixing



2、 Stainless steel shrapnel

3、 Nickel plated spring




LINAN LIGHT

Linan series
Power: 6W
The new face frame adapts to various series

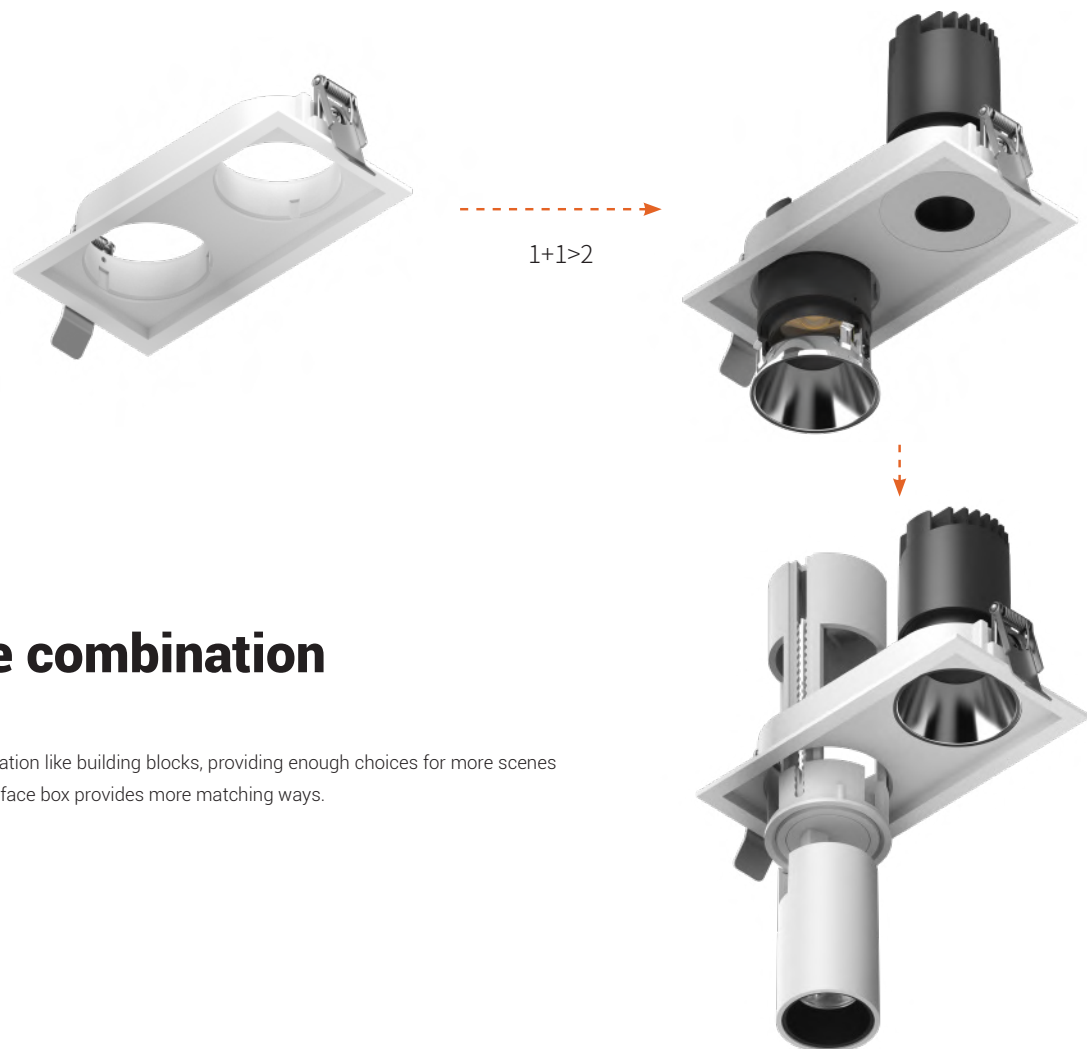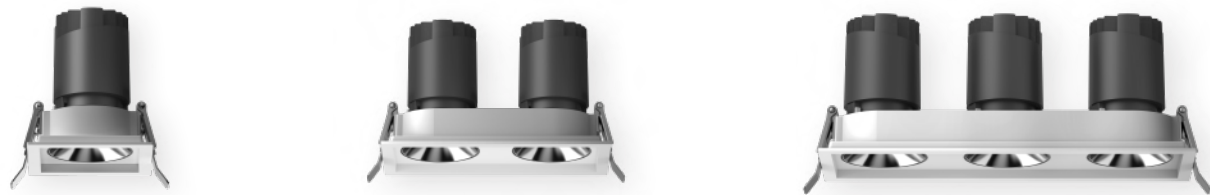


Free combination


Free collocation like building blocks, providing enough choices for more scenes
Multi head face box provides more matching ways.

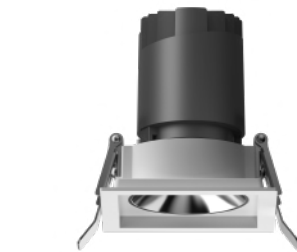


Linan square Edged single head

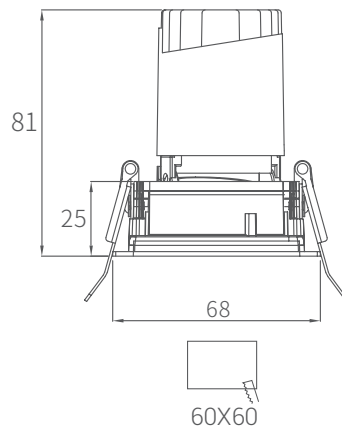

Model: XQ-100302SE60
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 60X60 mm
Size(WxH): 68X68X81mm
Standard holder: **CREE** 1304

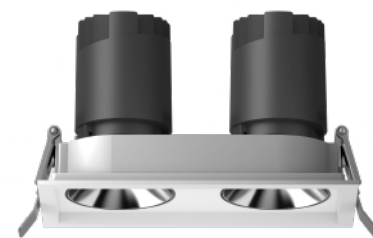

Linan square Edged double head

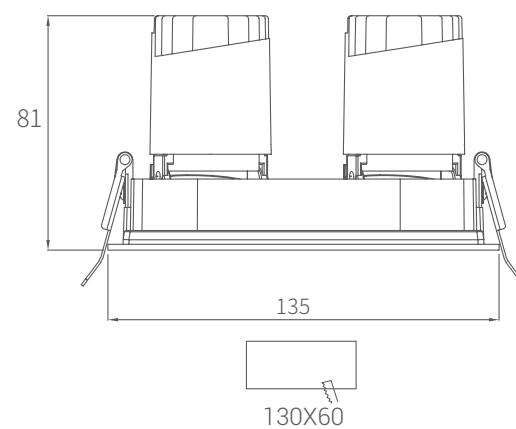

Model: XQ-100302SE60-2
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 130X60mm
Size(WxH): 135X68X81mm
Standard holder: **CREE** 1304




Linan series
Power: 6W




Linan square Edged three head




Linan Circular Edged two head

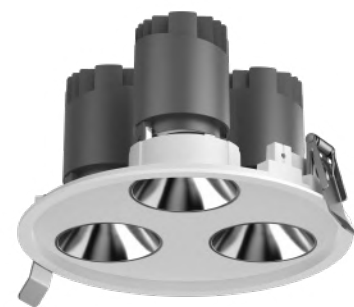


Linan Circular Edged three head

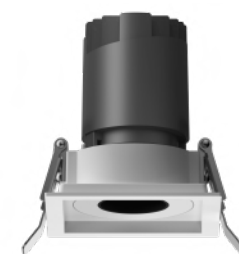


Linan Square single head-Round beam

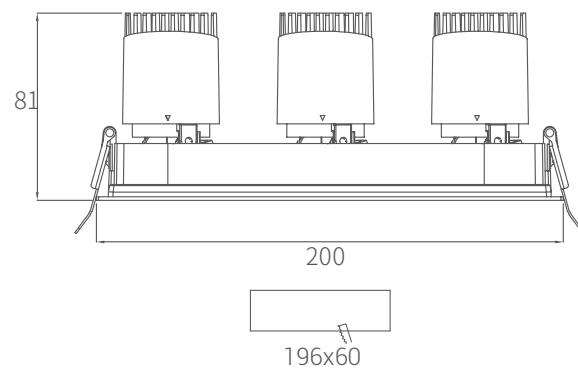


Model: XQ-100302SE60-3
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 196x60mm
Size(WxH): 200X68X81mm
Standard holder: **CREE** 1304

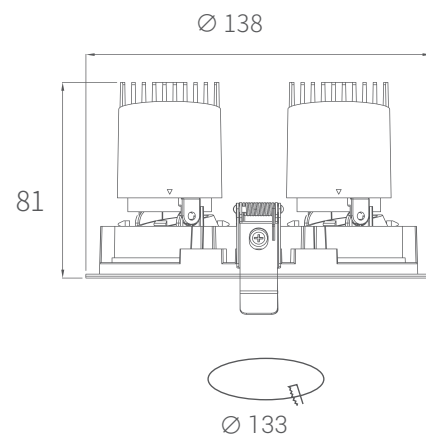

Model: XQ-100302RE60-2
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: Ø133mm
Size(WxH): Ø138X81mm
Standard holder: **CREE** 1304

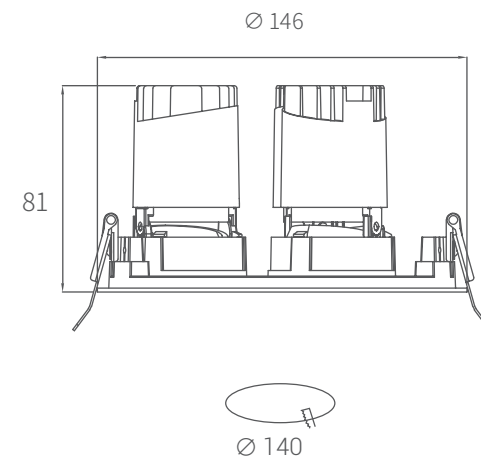

Model: XQ-100302RE60-3
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: Ø140mm
Size(WxH): Ø146X81mm
Standard holder: **CREE** 1304

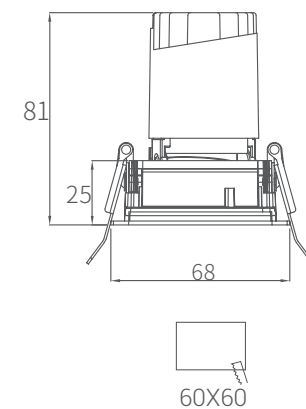

Model: XQ-100303SE60
Power: 6W
Cutout: 60X60mm
Beam angle: 10° / 15° / 24° / 36° / 55°
Size(WxH): 68X68X81mm
Standard holder: **CREE** 1304


Reflect cover color choice :




Reflect cover color choice :



Linan series
Power: 6W

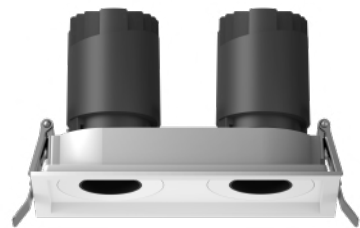

Linan square Edged double head-Round beam

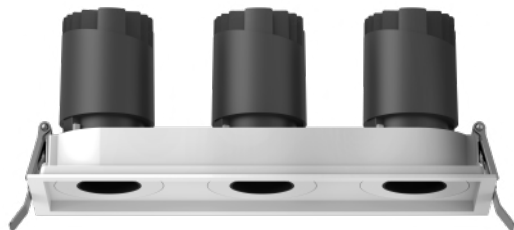


Linan square Edged three head




Linan Circular Edged two head-
Round beam




Linan Circular Edged three head-
Round beam

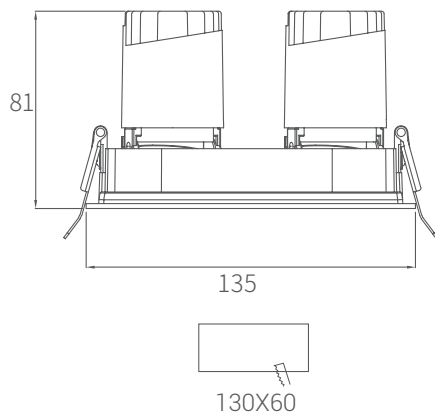


Model: XQ-100303SE60-2
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 130X60mm
Size(WxH): 135X68X81mm
Standard holder: **CREE** 1304

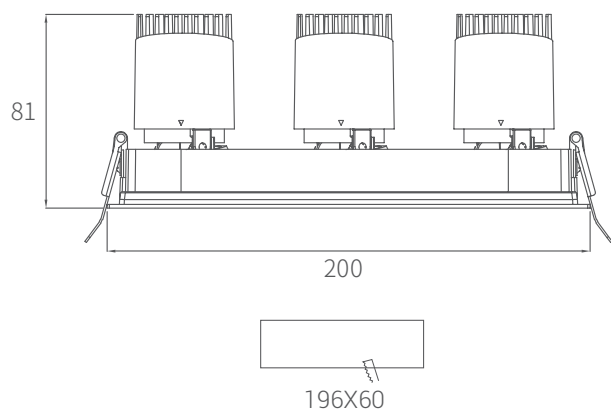

Model: XQ-100303SE60-3
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 196X60mm
Size(WxH): 200X68X81mm
Standard holder: **CREE** 1304

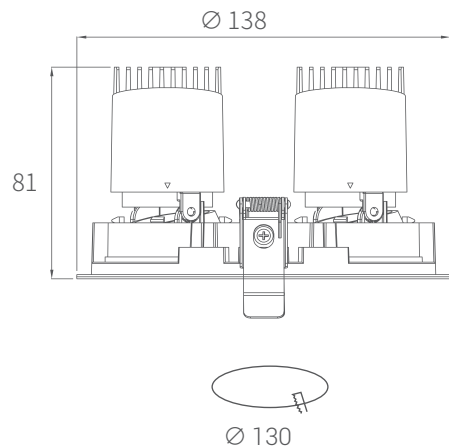


Model: XQ-100303RE60-2
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: Ø130mm
Size(WxH): Ø138X81mm
Standard holder: **CREE** 1304

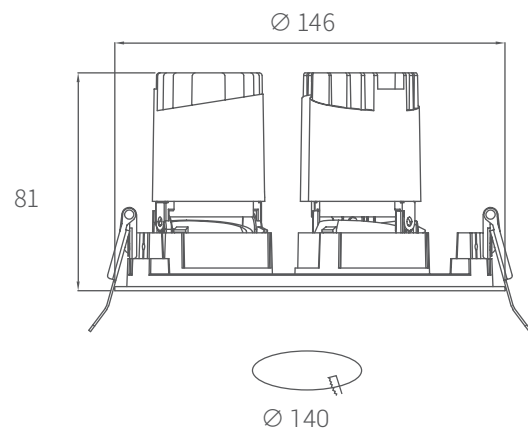


Model: XQ-100303RE60-3
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: Ø140mm
Size(WxH): Ø146X81mm
Standard holder: **CREE** 1304



Linan series
Power: 6W

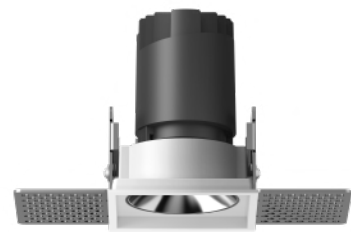

Linan Square Trimless single head

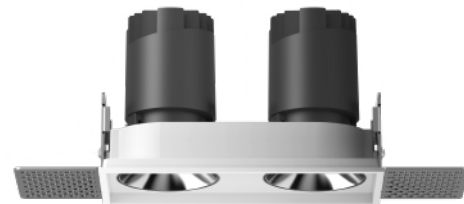


Linan Square Trimless double head




Linan Square Trimless three head




Linan Circular Trimless two head

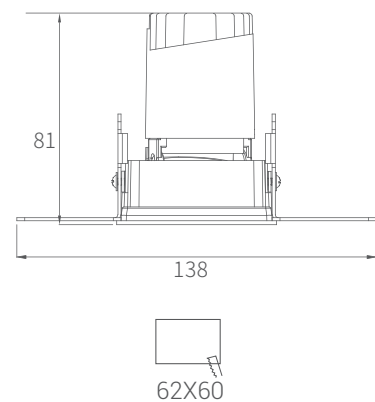


Model: XQ-100302ST60
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 62X60mm
Size(WxH): 138X68X81mm
Standard holder: **CREE** 1304

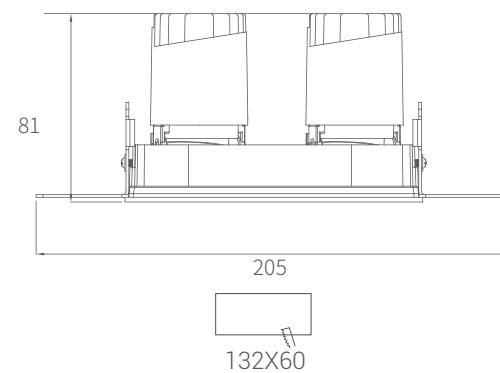

Model: XQ-100302ST60-2
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 132X60mm
Size(WxH): 205X68X81mm
Standard holder: **CREE** 1304

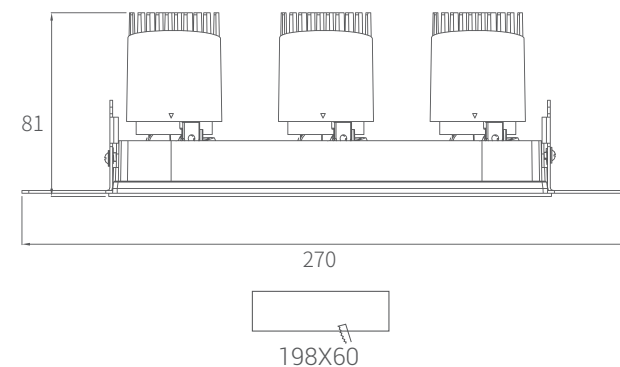

Model: XQ-100302ST60-3
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: 198X60mm
Size(WxH): 270X68X81mm
Standard holder: **CREE** 1304

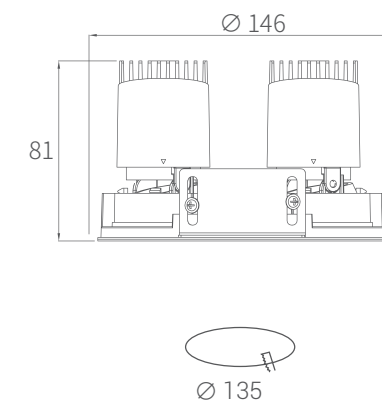

Model: XQ-100302RT60-2
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Built-in Cutout: Ø130mm
External Cutout: Ø137mm
Size(WxH): Ø146X81mm
Standard holder: **CREE** 1304

Reflect cover color choice:




Reflect cover color choice:



Linan series
Power: 6W



Linan Circular Trimless three head

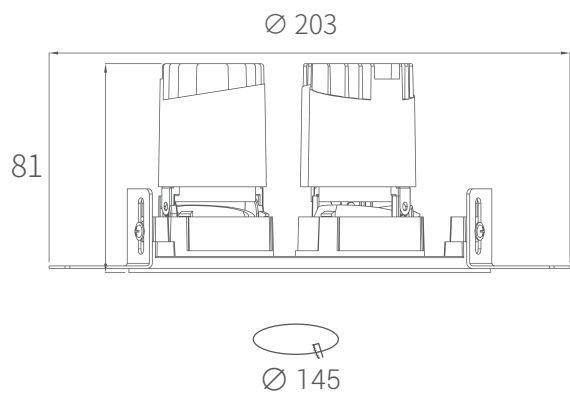

Model: XQ-100302RT60-3
Power: 6W
Beam angle: 10° / 15° / 24° / 36° / 55°
Built-in Cutout: Ø140mm
External Cutout: Ø147mm
Size(WxH): Ø203X81mm
Standard holder: **CREE** 1304





Linan series
Power: 6W



Fixed

Model: XQ-100301E50
Power: 6W
Beam angle: 10° / 15°/24° / 36°
Cutout: Ø50mm
Size(WxLxH): 58x73mm
Standard holder: **CREE** 1304



Adjustable
XQ-100302E50



round beam
XQ-100303E50





Oval beam
XQ-100304E50



Trimless Fixed

Model: XQ-100301T50
Power: 6W
Beam angle: 10° /15°/ 24° / 36°
Cutout: Ø52mm
Size(WxLxH): 97x73mm
Standard holder: **CREE** 1304



Trimless Adjustable
XQ-100302T50



Trimless Round beam
XQ-100303T50



Trimless Oval beam
XQ-100304T50

Reflect cover color choice:



Reflect cover color choice:





Linan series
Power: 6W



Fixed

Model: XQ-100301P50
Power: 6W
Beam angle: 10° /15° / 24° / 36°
Cutout: Ø50mm
Size(WxLxH): 60x60x73mm
Standard holder: **CREE** 1304



Adjustable
XQ-100302P50



round beam
XQ-100303P50





Oval beam
XQ-100304P50



Trimless Fixed

Model: XQ-100301E55
Power: 6W
Beam angle: 10° /15° / 24° / 36°
Cutout: Ø50mm
Size(WxLxH): Ø65x73mm
Standard holder: **CREE** 1304



Trimless Adjustable
XQ-100302E55



Trimless Round beam
XQ-100303E55



Trimless Oval beam
XQ-100304E55

Reflect cover color choice:




Reflect cover color choice:




Analysis of deep anti glare function


people's horizontal vision in space is 30°
so the anti glare shielding of spotlight should be more than 30 degrees to
effectively prevent glare

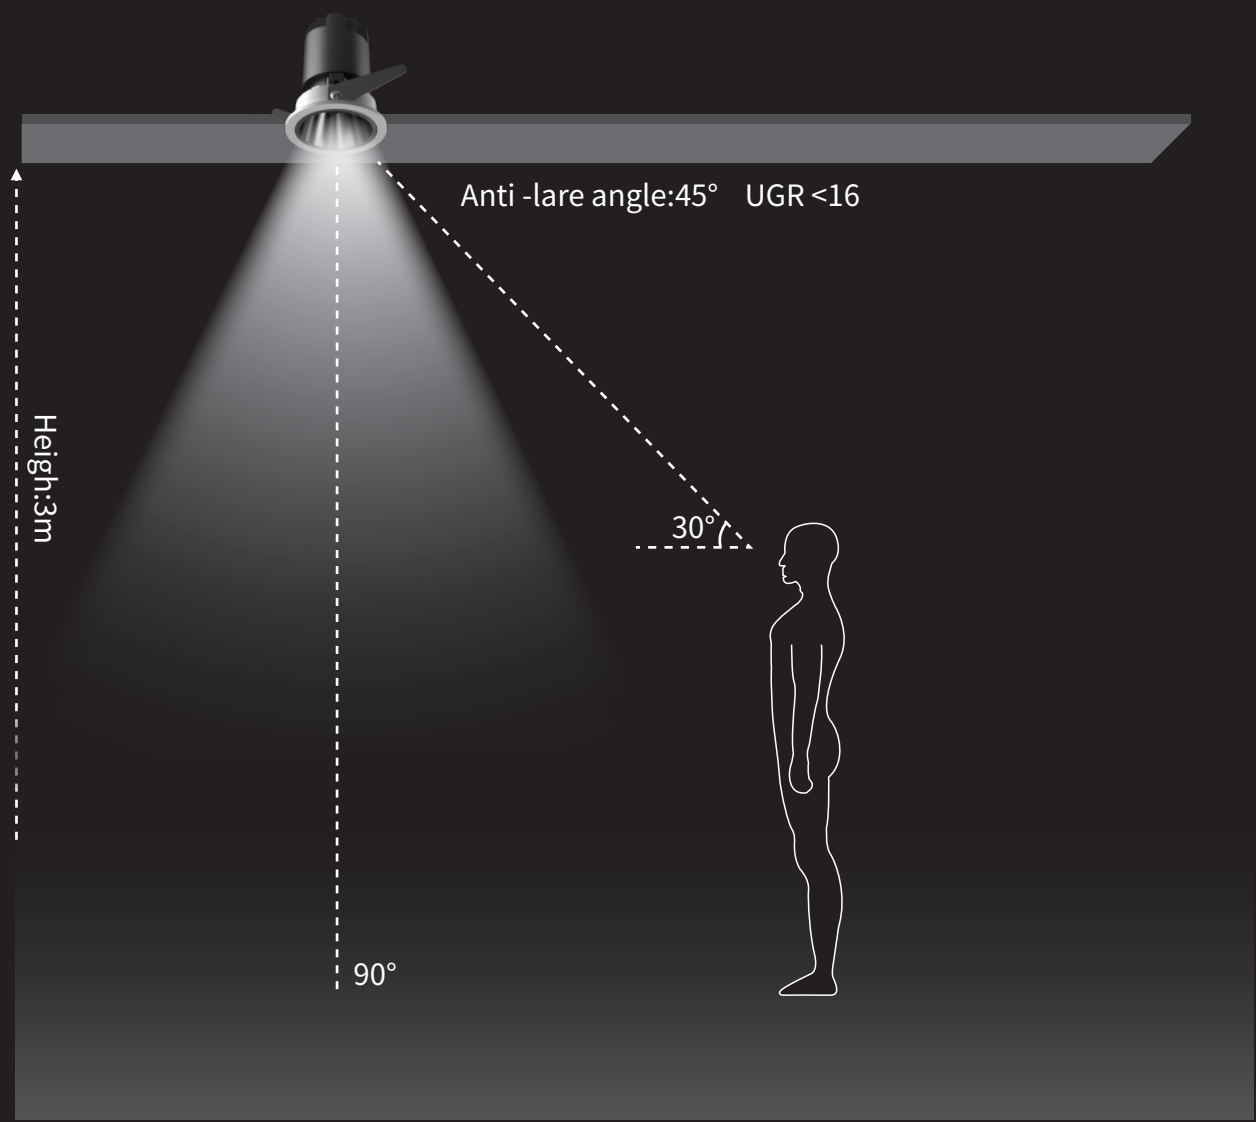

Practical application lighting effect

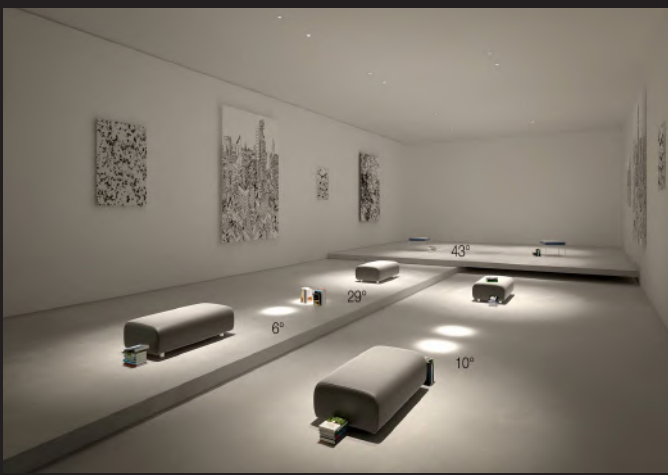

Fixed ground lighting effect

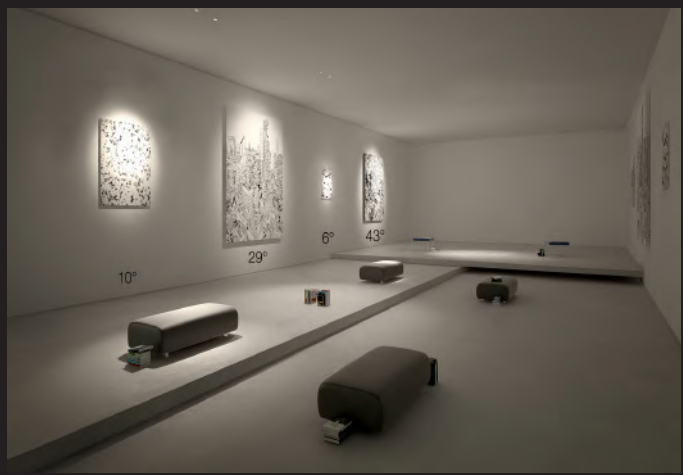


Adjustable wall lighting effect

Linan series
Power: 6W



Fixed

Model: XQ-100301E70
Power: 6W
Beam angle: 10° / 15°/24° / 36°
Cutout: Ø70mm
Size(WxH): Ø80x81mm
Standard holder: **CREE** 1304

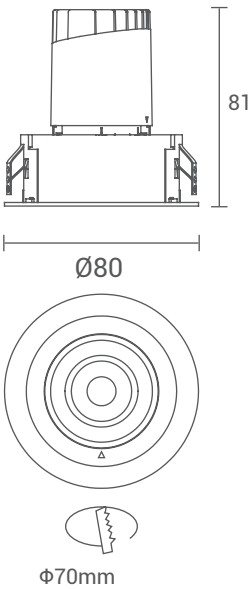

Adjustable
XQ-100302E70



round beam
XQ-100303E70





Oval beam
XQ-100304E70




Trimless Fixed

Model: XQ-100301T70
Power: 6W
Beam angle: 10° / 15°/24° / 36°
Cutout: Ø72.5mm
Size(WxH): 126x81mm
Standard holder: **CREE** 1304

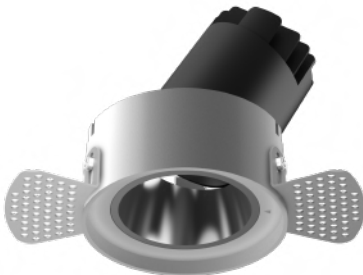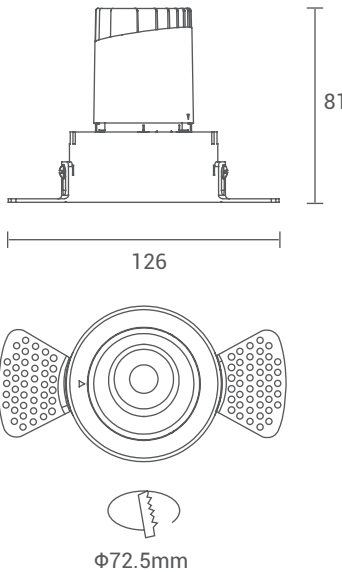

Trimless Adjustable
XQ-100302T70

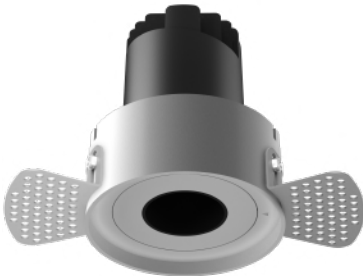

Trimless Round beam
XQ-100303T70



Trimless Oval beam
XQ-100304T70





Linan series
Power: 6W



Holistic Trimless Fixed

Model: XQ-100302T50-YT
Power: 6W
Beam angle: 10° / 15°/24° / 36°
Cutout: Ø50mm
Size(WxH): Ø85x76mm
Standard holder: **CREE** 1304



Holistic Trimless Adjustable
XQ-100302T50-YT



Holistic Trimless Round beam
XQ-100303T50-YT



Holistic Trimless Oval beam
XQ-100304T50-YT

Reflect cover color choice:



IP40




Linan series
Power: 6W



Three head Adjustable

Model: XQ-100302E70-2
Power: 6Wx2
Beam angle: 10° / 15° / 24° / 36°
Cutout: 130xØ69mm
Size(WxLxH): 140xØ80x81mm
Standard holder: **CREE** 1304

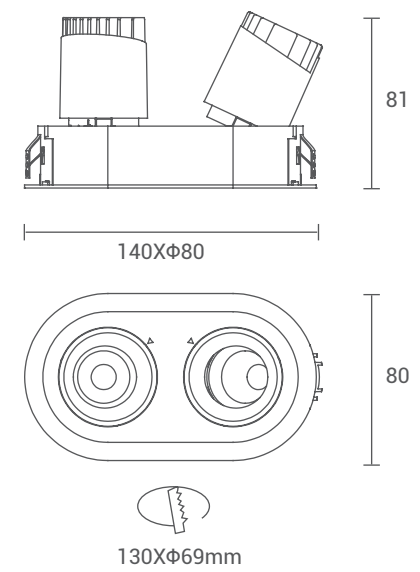

Three head Fixed
XQ-100301E70-2



Three head round beam
XQ-100303E70-2




Three head Oval beam
XQ-100304E70-2



Three head Trimless Adjustable


Model: XQ-100302T70-2
Power: 6Wx2
Beam angle: 10° / 15° / 24° / 36°
Cutout: 132.5xØ67mm
Size(WxLxH): 168x68x81mm
Standard holder: **CREE** 1304

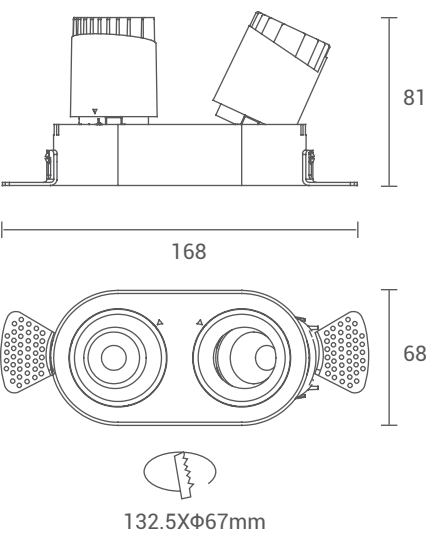

Three head Trimless Fixed
XQ-100301T70-2



Three head Trimless round beam
XQ-100303T70-2

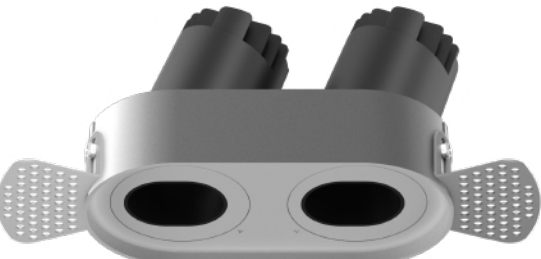


Three head Trimless Oval beam
XQ-100304T70-2





Reflect cover color choice:

Linan series
Power: 6W

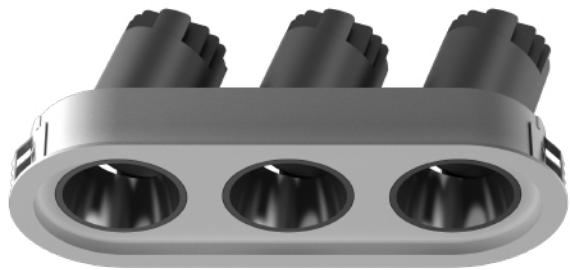


Four head Adjustable


Model: XQ-100302E70-3
Power: 6Wx3
Beam angle: 10° /15°/ 24° / 36°
Cutout: 190x Ø69mm
Size(WxLxH): 200xØ80x81mm
Standard holder: **CREE** 1304

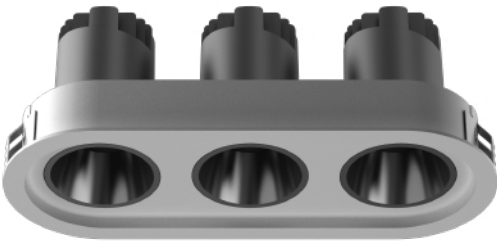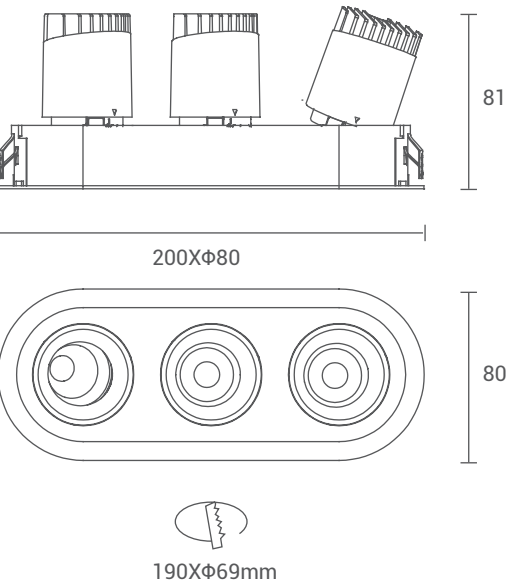


Four head Fixed
XQ-100301E70-3

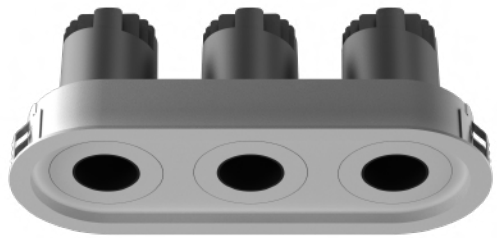

Four head round beam
XQ-100303E70-3

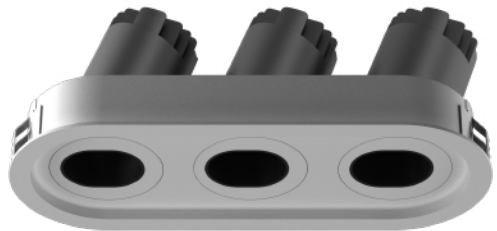


Four head Oval beam
XQ-100304E70-3

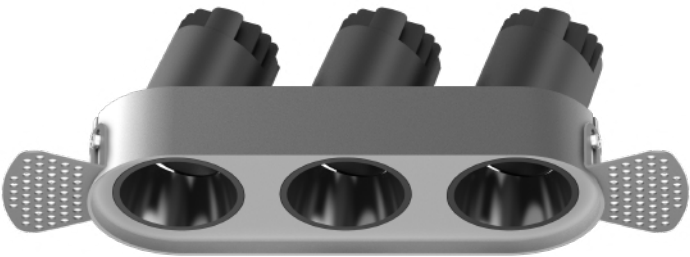

Four head Trimless Adjustable

Model: XQ-100302T70-3
Power: 6Wx3
Beam angle: 10° /15°/ 24° / 36°
Cutout: 192.5x Ø67mm
Size(WxLxH): 246x66x81mm
Standard holder: **CREE** 1304

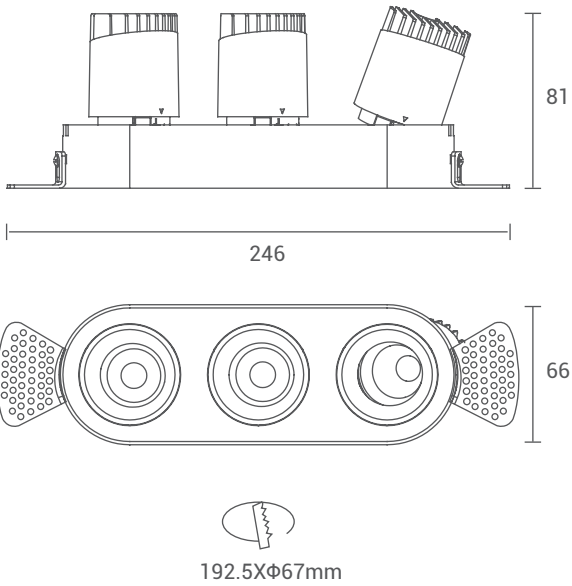


Linan series
Power: 6W



Four head Adjustable

Model: XQ-100302E70-4
Power: 6Wx4
Beam angle: 10° / 15° / 24° / 36°
Cutout: 130x130mm-R34.5
Size(WxLxH): 140x140x81mm
Standard holder: **CREE** 1304

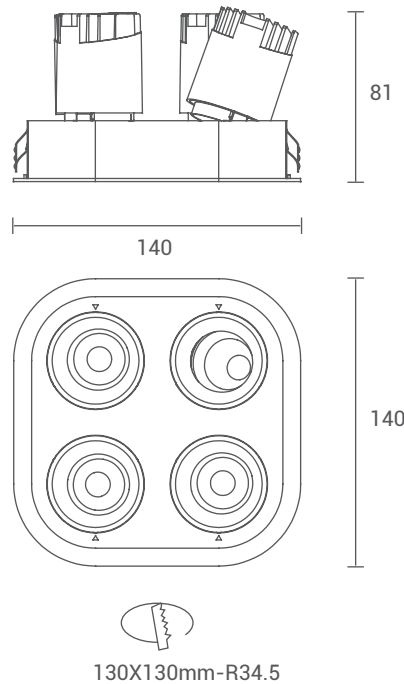

Four head Fixed
XQ-100301E70-4



Four head round beam
XQ-100303E70-4




Four head Oval beam
XQ-100304E70-4



Four head Trimless Adjustable

Model: XQ-100302T70-4
Power: 6Wx4
Beam angle: 10° / 15° / 24° / 36°
Cutout: Ø132.5x127.5mm-R35
Size(WxLxH): 186x126x81mm
Standard holder: **CREE** 1304

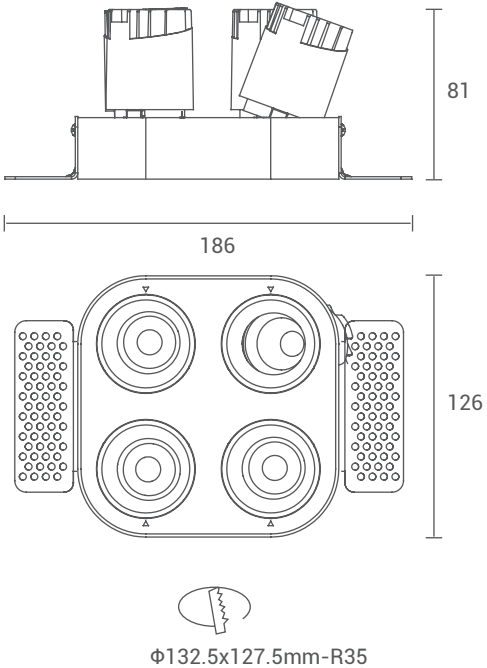


Linan series
Power: 10W



Model: XQ-100302E65-10w(LENS)
Power: 10W
Beam angle: 10° /15° / 24° / 36° / 55°(LENS)
Cutout: Ø65mm
Size(WxH): Ø72.5x81mm
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

Adjustable

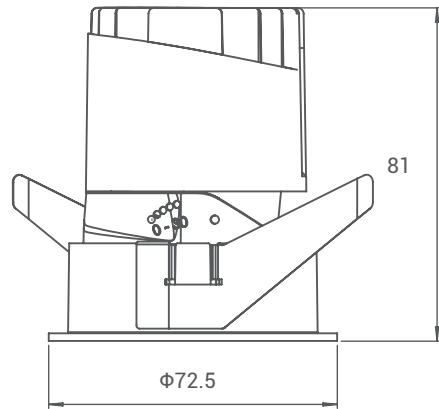


Reflect cover color choice:



Model: Xq-100302T65-YT-10W (LENS)
Power: 10W
Beam angle: 10° /15° / 24° / 36° / 55°(LENS)
Cutout: Ø65mm
Size(WxH): Ø98x81mm
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

Trimless Adjustable

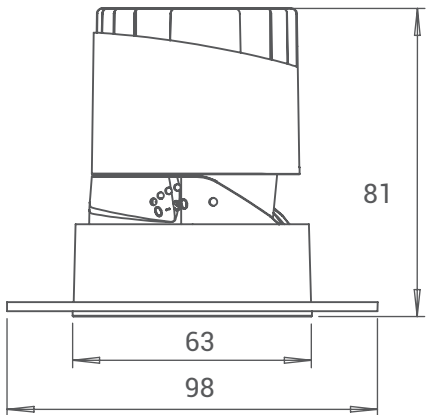

Reflect cover color choice:




Linan series
Power: 12W



Fixed

Model: XQ-100301E75
Power: 12W
Beam angle: 10° / 15° / 24° / 36°
Cutout: Ø75mm
Size(WxH): Ø86x104mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

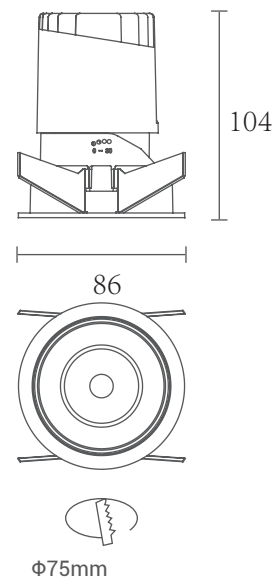

Adjustable
XQ-100302E75



round beam
XQ-100303E75



Oval beam
XQ-100304E75




Anti-glare
XQ-100305E75



Trimless Fixed

Model: XQ-100301T75
Power: 12W
Beam angle: 10° / 15° / 24° / 36°
Cutout: Ø77mm
Size(WxH): 127x104mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

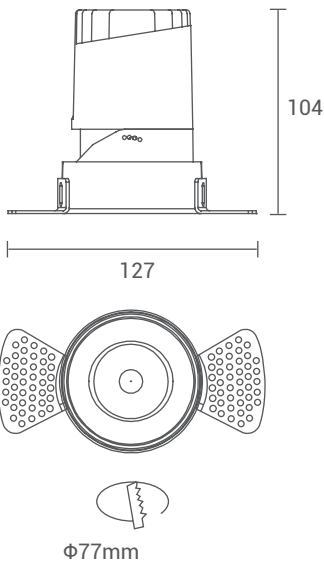

Trimless Adjustable
XQ-100302T75



Trimless round beam
XQ-100303T75



Trimless Oval beam
XQ-100304T75



Trimless Anti-glare
XQ-100305T75




Linan series
Power: 12W



Fixed

Model: XQ-100301P75
Power: 12W
Beam angle: 10°/15°/24°/36°/50°
Cutout: Ø75mm
Size(WxLxH): 86x86x104mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

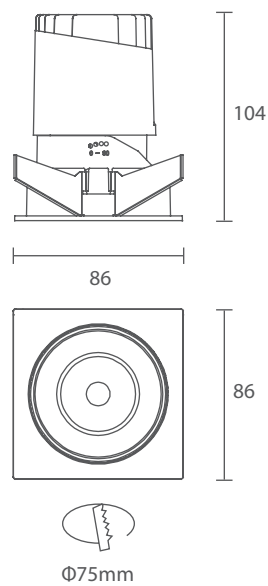

Adjustable
XQ-100302P75



round beam
XQ-100303P75



Oval beam
XQ-100304P75




Anti-glare
XQ-100305P75

Reflect cover color choice:



Trimless Fixed

Model: XQ-100301E75(LENS)
Power: 12W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: Ø77mm
Size(WxH): 127x94mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

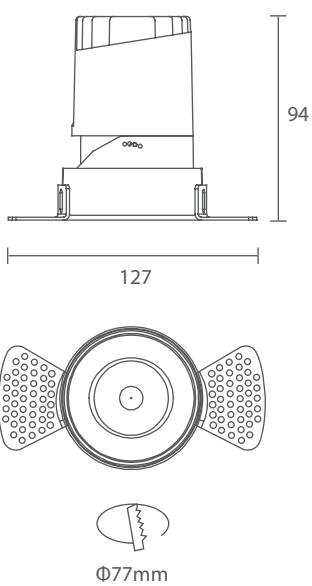

Reflect cover color choice:




Linan series
Power: 12W



Fixed

Model: XQ-100301E75-LENS
Power: 12W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: Ø75mm
Size(WxH): Ø86x94mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

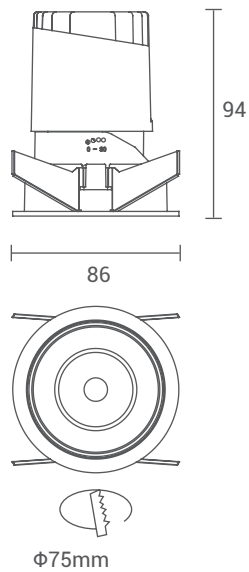

Adjustable
XQ-100302E75-LENS



round beam
XQ-100303E75-LENS



Oval beam
XQ-100304E75-LENS




Anti-glare
XQ-100305E75-LENS



Holistic Trimless Fixed

Model: XQ-100302T75-YT-LENS
Power: 12W
Beam angle: 10° / 15° / 24° / 36° / 55°
Cutout: Ø75mm
Size(WxH): Ø108x94mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

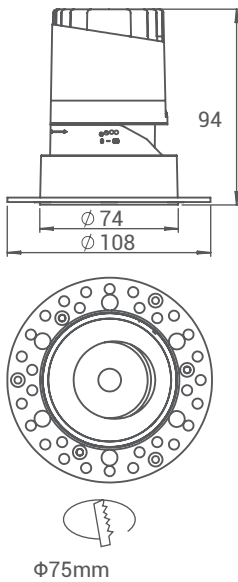

Holistic Trimless Adjustable
XQ-100302H75 - LENS



Holistic Trimless round beam
XQ-100303H75 - LENS



Holistic Trimless Oval beam
XQ-100304H75 - LENS



Holistic Trimless Anti-glare
XQ-100305H75 - LENS





Linan series
Power: 12W



Double head Adjustable

Model: XQ-100302E75-2
Power: 12Wx2
Beam angle: 10°/15°/24°/36°
Cutout: 180xØ96mm
Size(WxLxH): 194x104x109mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

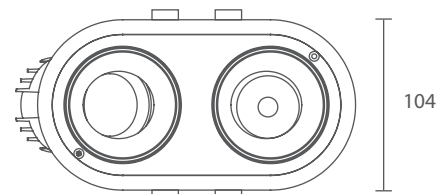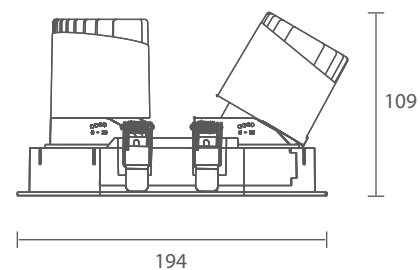

Reflect cover color choice:



Double head Fixed
XQ-100301E75-2



Double head Round beam
XQ-100303E75-2



Double head Oval beam
XQ-100304E75-2





Double head Anti-glare
XQ-100305E75-2



Double head Trimless Adjustable

Model: XQ-100302T75-2
Power: 12Wx2
Beam angle: 10°/15°/24°/36°
Cutout: 180xØ96mm
Size(WxLxH): 180x145x109mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

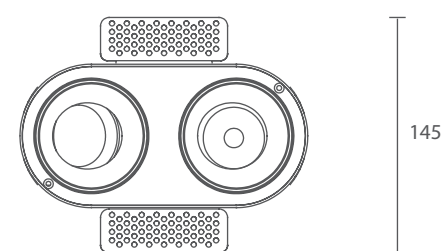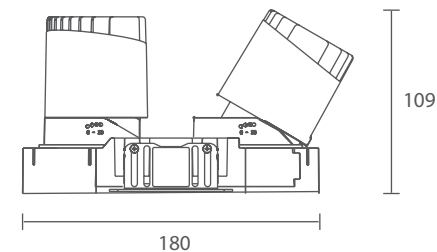


Reflect cover color choice:



Linan series
Power: 12W



Model: XQ-100302E82
Power: 12W
Beam angle: 10°/15°/24°/36°/50
Rim Cutout: 82x82mm
Trimless Cutout: 82x79mm
Size(WxLxH): 89x89x119mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

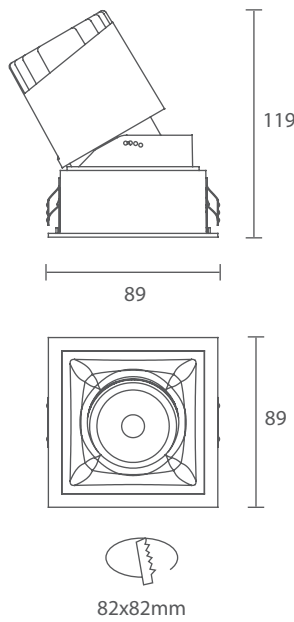


Reflect cover color choice:



Square
XQ-100302E82




Square Trimless
XQ-100302T82

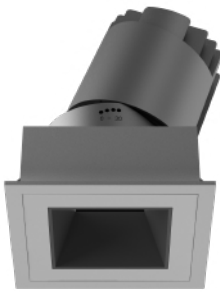


Square spot
XQ-100303E82



Square spot
XQ-100303T82

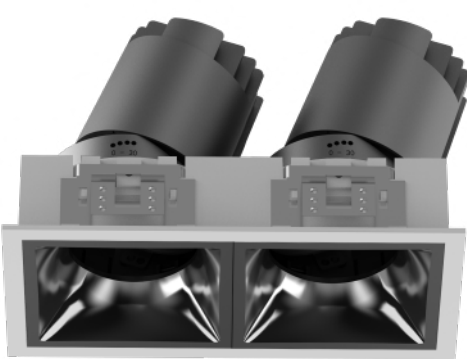

Model: XQ-100302E82-2
Power: 2X12W
Beam angle: 10°/15°/24°/36°/50
Rim Cutout: 154x82.5mm
Trimless Cutout: 154x84.5mm
Size(WxLxH): 164x89x115mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

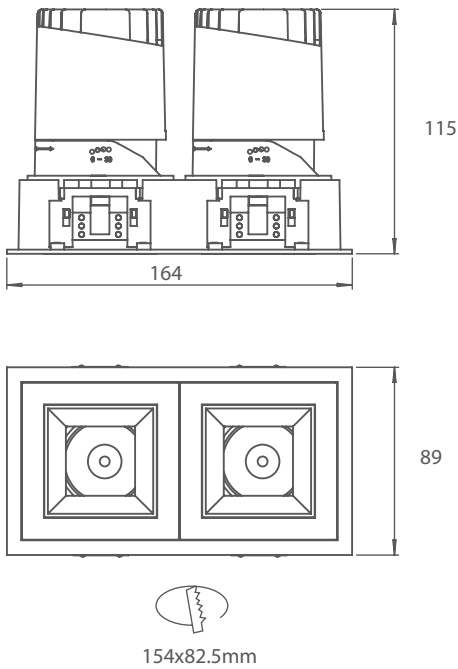



Reflect cover color choice:



Linan series
Power: 12W




Model: XQ-100302E82(LENS)
Power: 12W
Beam angle: 10°/15°/24°/36°/55°
Rim Cutout: 82x82mm
Trimless Cutout: 82x79mm
Size(WxLxH): 89x89x110mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9



Square
XQ-100302E82-LENS



Square Trimless
XQ-100302T82-LENS

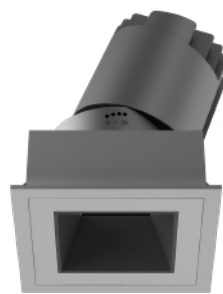


Square spot
XQ-100303E82-LENS






Square spot
XQ-100303T82-LENS

Reflect cover color choice:

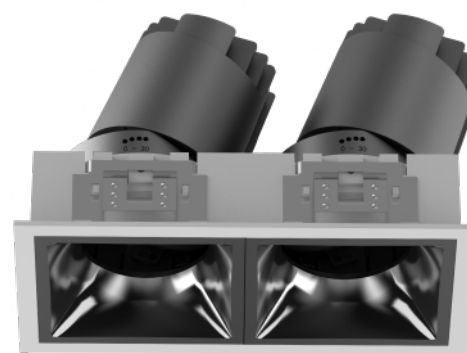

Model: XQ-100302E82-2-LENS
Power: 2X12W
Beam angle: 10°/15°/24°/36°/50°
Rim Cutout: 154x82.5mm
Trimless Cutout: 154x84.5mm
Size(WxLxH): 164x89x110mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

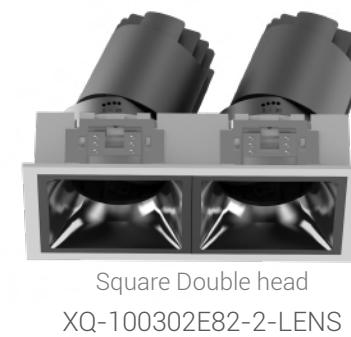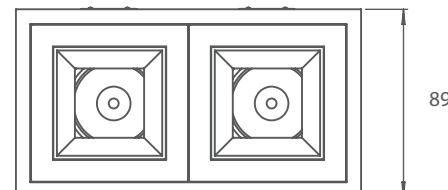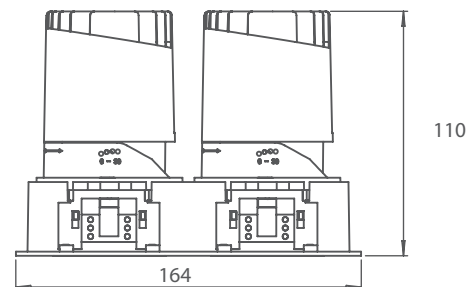

Square Double head
XQ-100302E82-2-LENS



Square Trimless Double head
XQ-100302T82-2-LENS



Double head Square spot
XQ-100303E82-2-LENS



Trimless Double Head Square spot
XQ-100303T82-2-LENS

Reflect cover color choice:



Linan series
Power: 20W



Fixed

Model: XQ-100301E95

Power: 20W

Beam angle: 12°/15°/24°/36°/60°


Cutout: Ø95mm

Size(WxH): Ø106x116mm

Standard holder: **CREE** 1507

Optional holder: **CREE** 1304

LUMINUS CXM-6/7/9

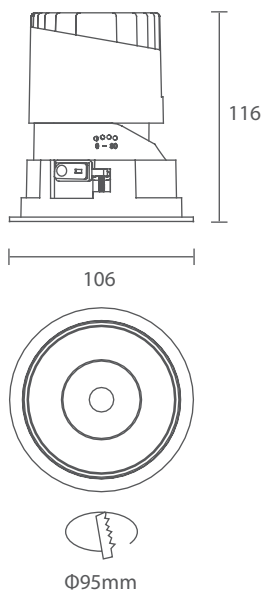

Adjustable
XQ-100302E95



round beam
XQ-100303E95



Oval beam
XQ-100304E95



Anti-glare
XQ-100305E95

Reflect cover color choice:



Trimless Fixed

Model: XQ-100301T95

Power: 20W

Beam angle: 12°/15°/24°/36°/60°


Cutout: Ø96mm

Size(WxH): 162x116mm

Standard holder: **CREE** 1507

Optional holder: **CREE** 1304

LUMINUS CXM-6/7/9

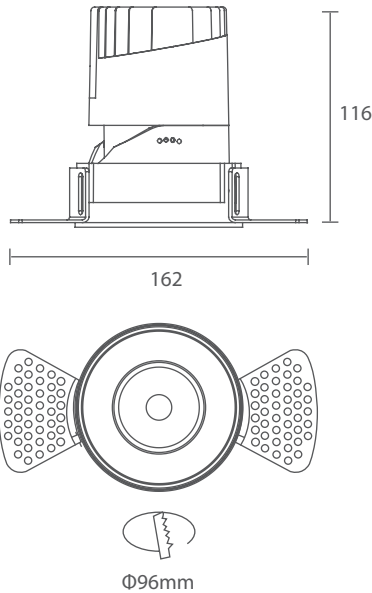

Reflect cover color choice:




Linan series
Power: 20W



Fixed

Model: XQ-100301P95
Power: 20W
Beam angle: 12°/15°/24°/36°/60°
Cutout: Ø95mm
Size(WxLxH): 106x106x119mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

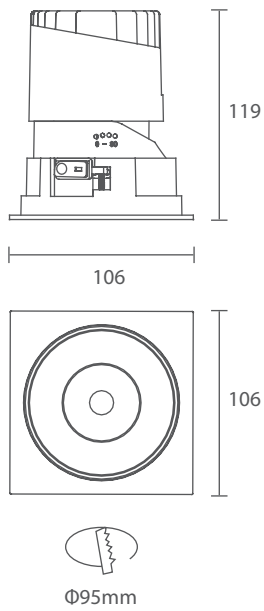

Adjustable
XQ-100302P95



round beam
XQ-100303P95



Oval beam
XQ-100304P95




Anti-glare
XQ-100305P95



Hollistic Trimless Fixed

Model: XQ-100301T95-YT
Power: 20W
Beam angle: 12°/15°/24°/36°/60°
Cutout: Ø95mm
Size(WxLxH): Ø128x116mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

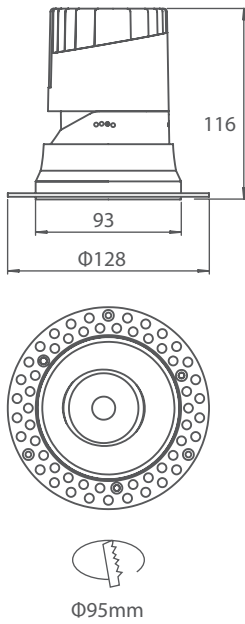

Hollistic Trimless Adjustable
XQ-100302T95-YT



Hollistic Trimless round beam
XQ-100303T95-YT



Hollistic Trimless Oval beam
XQ-100304T95-YT



Hollistic Trimless Anti-glare
XQ-100305T95-YT




Linan series
Power: 20W



Double head Adjustable

Model: XQ-100302E95-2
Power: 20Wx2
Beam angle: 12°/15°/24°/36°/60°
Cutout: 223xØ115mm
Size(WxH): 240xØ128x131mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

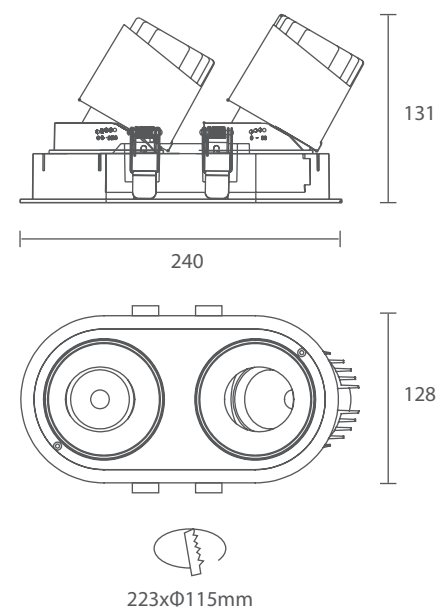

Double head Fixed
XQ-100301E95-2



Double head Round beam
XQ-100303E95-2



Double head Oval beam
XQ-100304E95-2




Double head Anti-glare
XQ-100305E95-2



Double head Trimless Adjustable

Model: XQ-100302T95-2
Power: 20Wx2
Beam angle: 12°/15°/24°/36°/60°
Cutout: 223xØ115mm
Size(WxH): 224x165x126mm
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6/7/9

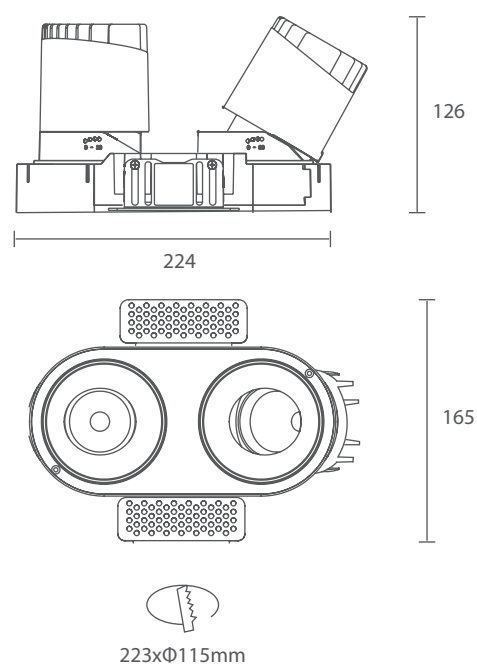

Double head Trimless Fixed
XQ-100301T95-2



Double head Trimless round beam
XQ-100303T95-2




Double head Trimless Oval beam
XQ-100304T95-2



Double head Trimless Anti-glare
XQ-100305T95-2




Linan series
Power: 30W



Fixed

Model: XQ-100301E120
Power: 30W
Beam angle: 10°/15°/24°/36°
Cutout: Ø120mm
Size(WxH): Ø132x145mm
Standard holder: **CREE** 1816
Optional holder: **CREE** 1830
LUMINUS CXM-14

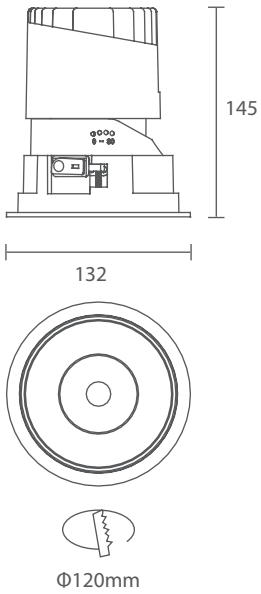

Fixed

XQ-100301E120



Adjustable

XQ-100302E120



Anti-glare


XQ-100305E120

Reflect cover color choice:



Trimless Fixed

Model: XQ-100301T120
Power: 30W
Beam angle: 10°/15°/24°/36°
Cutout: Ø120mm
Size(WxH): 185x145mm
Standard holder: **CREE** 1816
Optional holder: **CREE** 1830
LUMINUS CXM-14

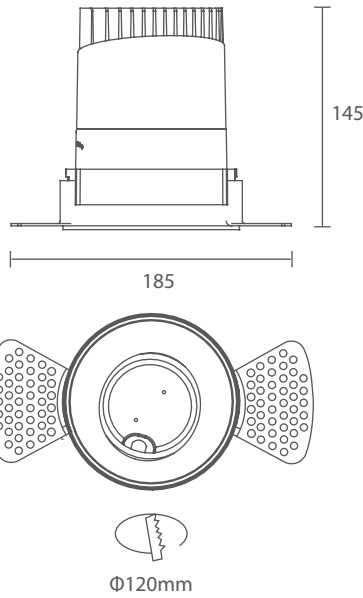

Trimless Fixed

XQ-100301T120



Trimless Adjustable

XQ-100302T120




Trimless Anti-glare

XQ-100305T120

Reflect cover color choice:




Linan series
Power: 30W



Fixed

Model: XQ-100301P120
Power: 30W
Beam angle: 10°/15°/24°/36°/55°
Cutout: Ø120mm
Size(WxLxH): 133x133x145mm
Standard holder: **CREE** 1816
Optional holder: **CREE** 1830
LUMINUS CXM-14

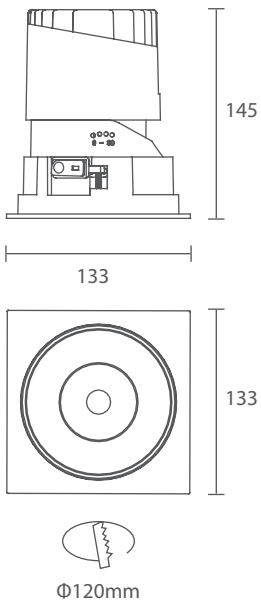

Fixed

XQ-100301P120



Adjustable

XQ-100302P120




Anti-glare

XQ-100305P120



Trimless Fixed

Model: XQ-100301E150
Power: 30W
Beam angle: 10°/15°/24°/36°/55°
Cutout: Ø150mm
Size(WxH): Ø162x158mm
Standard holder: **CREE** 1816
Optional holder: **CREE** 1830
LUMINUS CXM-14

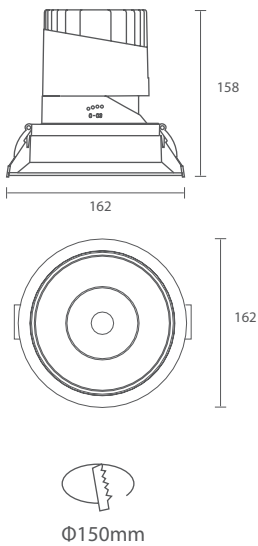

Fixed

XQ-100301E150



Adjustable

XQ-100302E150



Anti-glare

XQ-100305E150

Reflect cover color choice:





Reflect cover color choice:



Linan series
Power: 30W



Model: XQ-100302E120-2
Power: 30Wx2
Beam angle: 10°/15°/24°/36°/55°
Cutout: 279xØ141mm
Size(WxH): 296xØ167x161mm
Standard holder: **CREE** 1816
Optional holder: **CREE** 1830
LUMINUS CXM-14

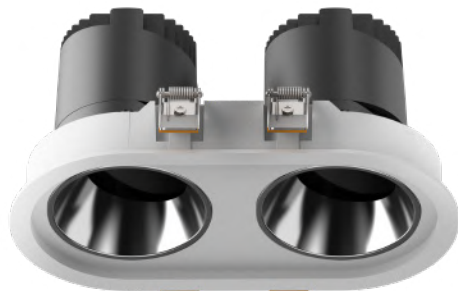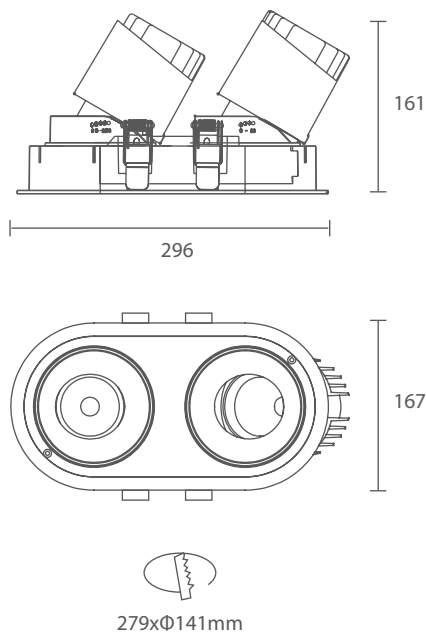

Double head Fixed
XQ-100301E120-2




Double head Ad justable
XQ-100302E120-2



Double head Anti-glare
XQ-100305E120-2




Model: XQ-100302T120
Power: 30Wx2
Beam angle: 10°/15°/24°/36°/55°
Cutout: 280xØ141mm
Size(WxH): 278x195x150mm
Standard holder: **CREE** 1816
Optional holder: **CREE** 1830
LUMINUS CXM-14

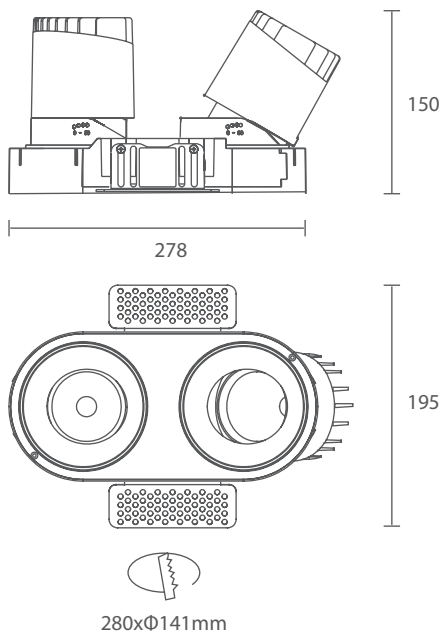



Model: XQ100302E75 MR16
Power: 5W /10W / 15W
Cutout: Ø75mm
Beam angle: 20°/40°
Size(WxLxH): Ø86x57mm

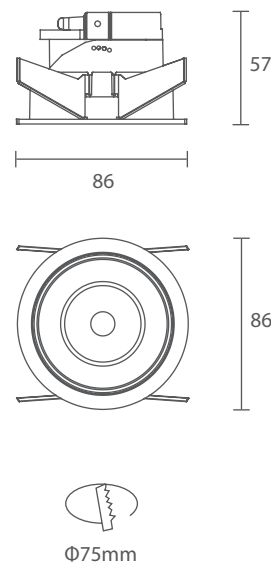

M16 Round fixed XQ-100301E75 MR16
M16 Round fixed Holistic-trimless XQ-100301T75 YT MR16
M16 Round fixed trimless XQ-100301T75 MR16



Ad justable XQ-100302E75 MR16
Holistic-trimless Ad justable XQ-100302T75 YT MR16
trimless Ad justable XQ-100302T75 MR16



Round beam XQ-100303E75 MR16
Holistic-trimless Round beam XQ-100303T75 YT MR16
Trimless Round beam XQ-100303T75 MR16




Oval beam XQ-100304E75 MR16
Holistic-trimless Oval beam XQ-100304E75 YT MR16
Trimless Oval beam XQ-100304T75 MR16




Anti-glare XQ-100305E75 MR16
Holistic-trimless Anti-glare XQ-100305E75 YT MR16
Trimless Anti-glare XQ-100305T75 MR16




Model: XQ100302E82 MR16
Power: 5W /10W / 15W
Cutout: 82x82mm
Beam angle: 20°/40°
Size(WxLxH): 89x89x79mm

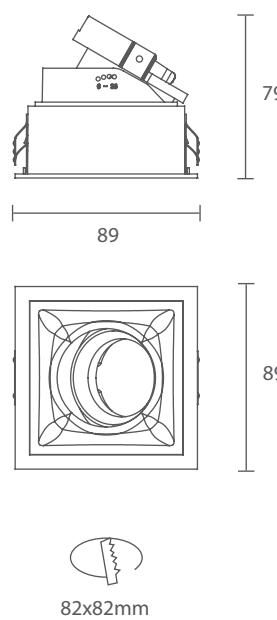


MR16 Square

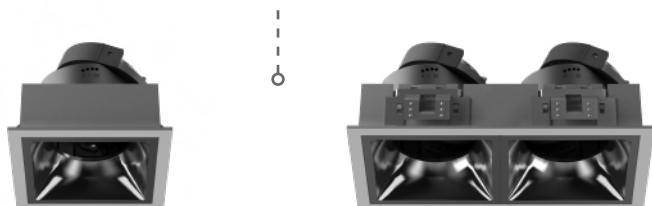


Single/Double head

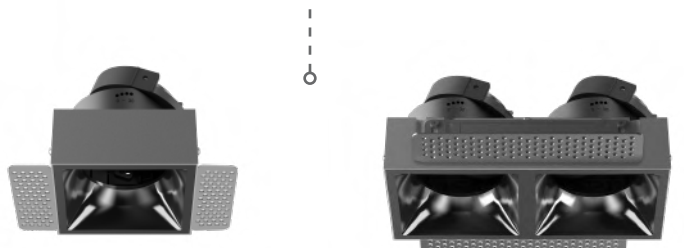

Single/Double head Trimless

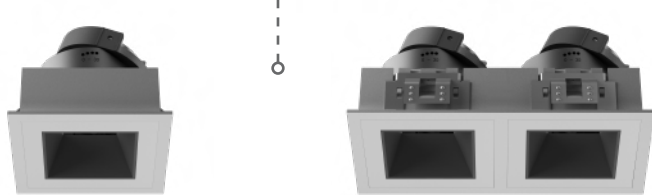

Single/Double head Trimless spot

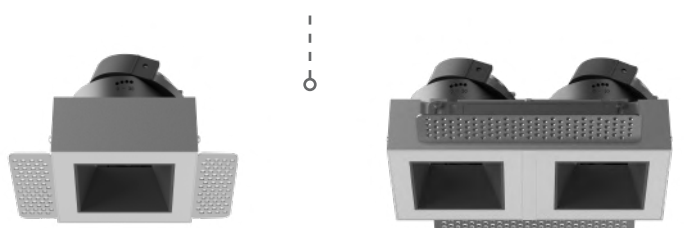


Single/Double head Trimless square spot





M16 Double head fixed

Model: XQ-1003E75 M16
Power: 5Wx2 / 10Wx2 / 15Wx2
Cutout: 180xØ96mm
Beam angle: 20°/40°
Size(WxLxH): Ø194x104x72mm

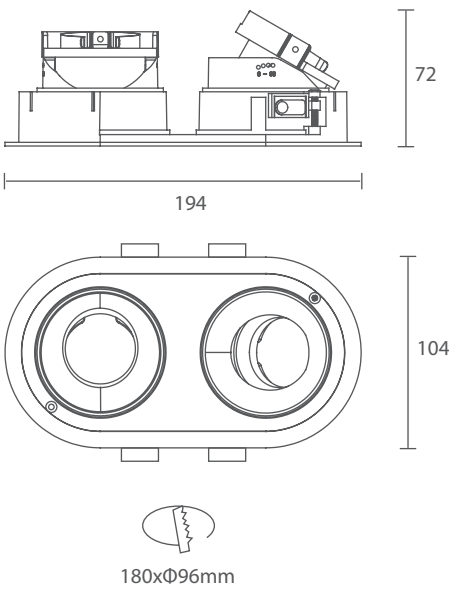

Reflect cover color choice:



M16 Double head Ad justable
XQ-100302E75 M16



M16 Double head Round beam
XQ-100303E75 M16



M16 Double head Oval beam
XQ-100304E75 M16




M16 Double head Anti-glare
XQ-100305E75 M16



M16 Double head Trimless fixed

Model: XQ100301T75 M16
Power: 5Wx2 / 10Wx2 / 15Wx2
Cutout: 180xØ96mm
Beam angle: 20°/40°
Size(WxLxH): 182x145x72mm

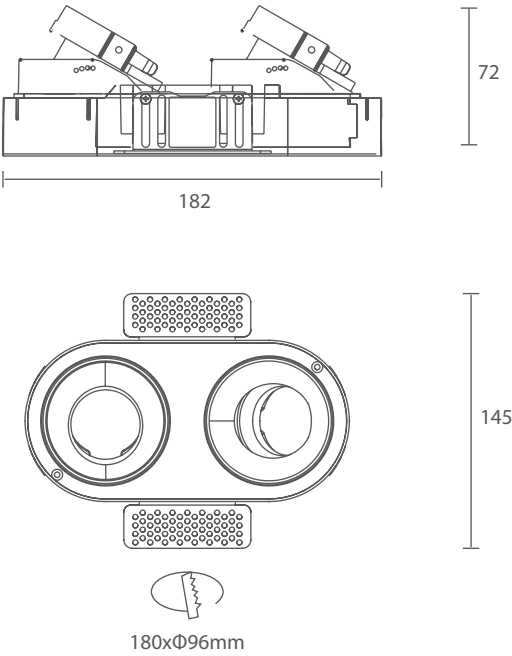


Reflect cover color choice:





Matching MR16 light source

Matching

matched with different light source modules , changeable in combination

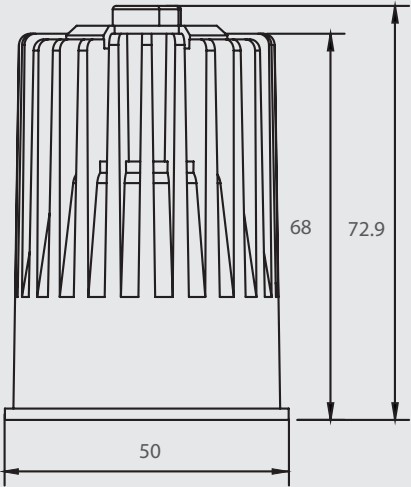





Model: MR0710
Power: 10W
Beam angle: 20°/40°
Size(WxLxH): Ø50x72.9mm

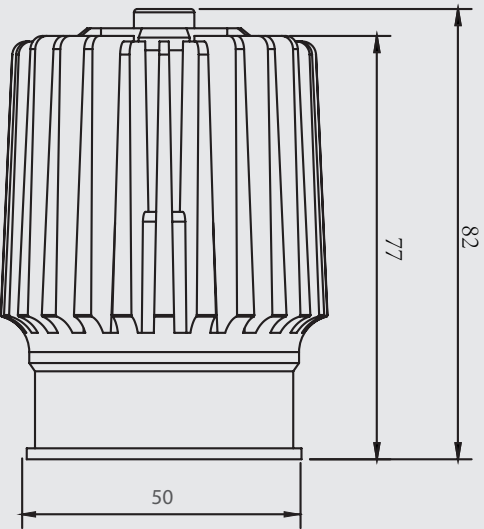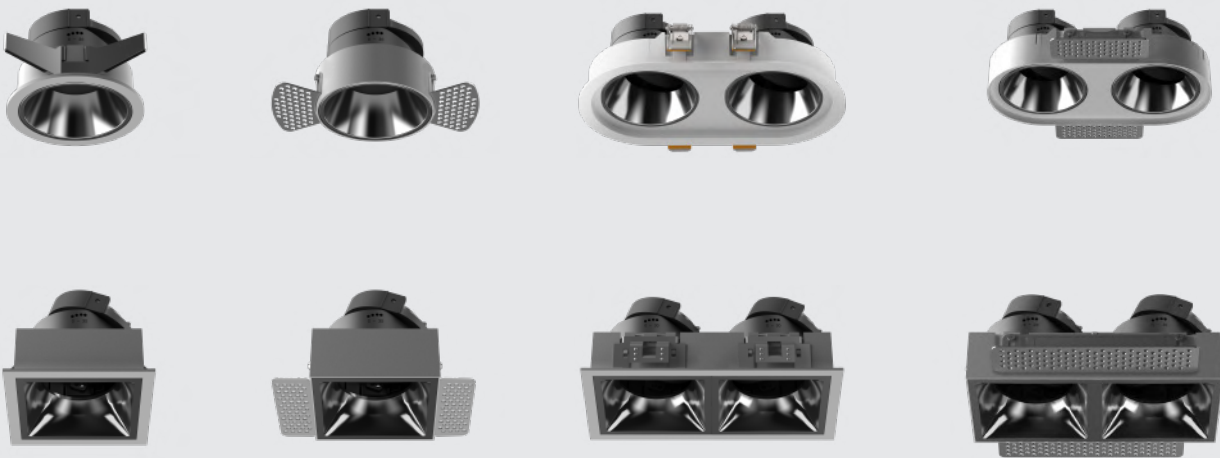


Model: MR1215
Power: 15W
Beam angle: 20°/40°
Size(WxLxH): Ø50x82mm

Stella

New Series Coming on in 2023

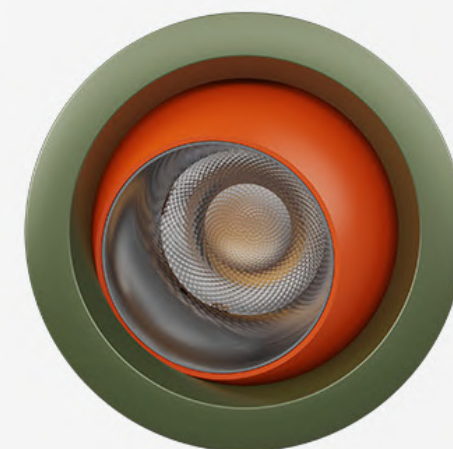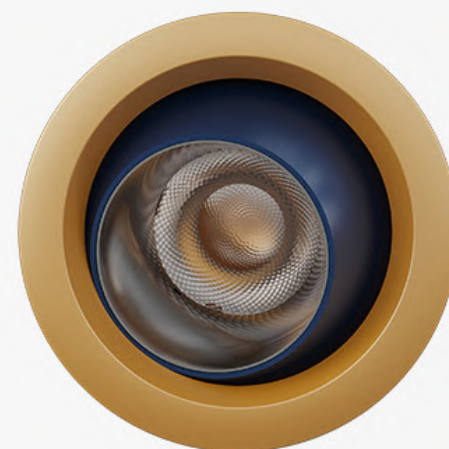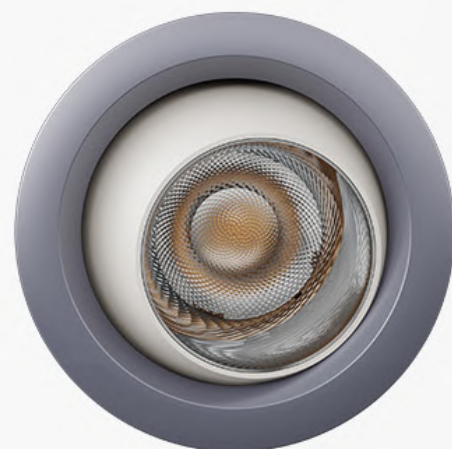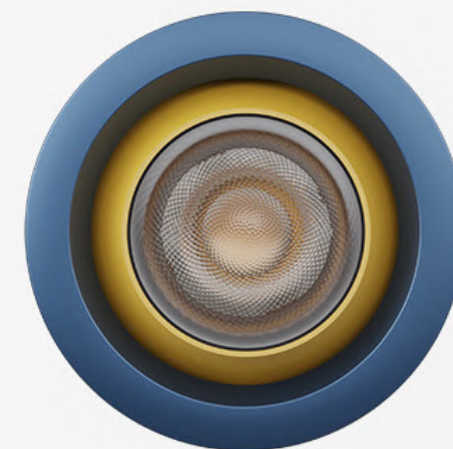

Cool and fashionable bright colors Matching
urban aesthetics
Mix and match the fashion atmosphere to attack
the front line of style.
Their color confrontation and collision can
express the meaning
that is difficult to express

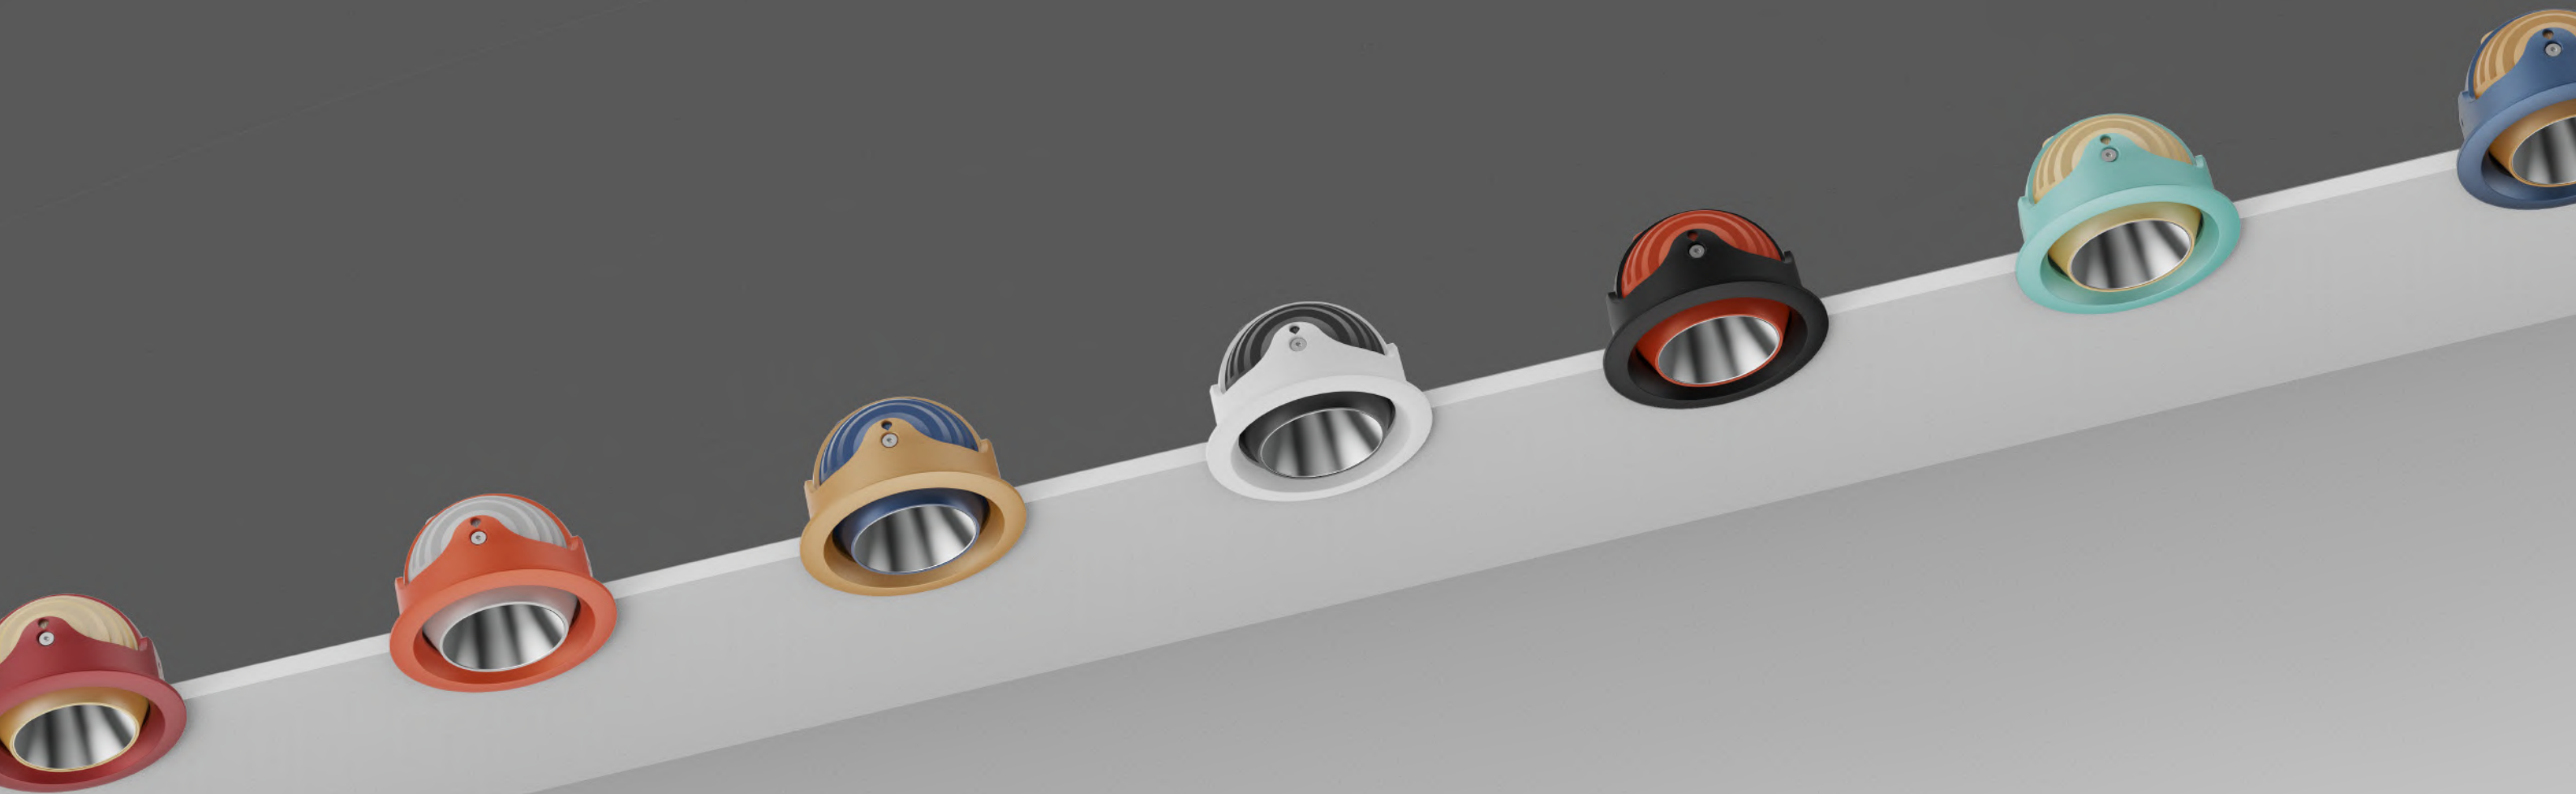

Seeing is believing


Visually diverse, new ideas thinking every second

Abandon the definition and transcend the functional boundary of accessories

Derive decoration imagination and overlay bright layers

Ceiling can also be a visual art



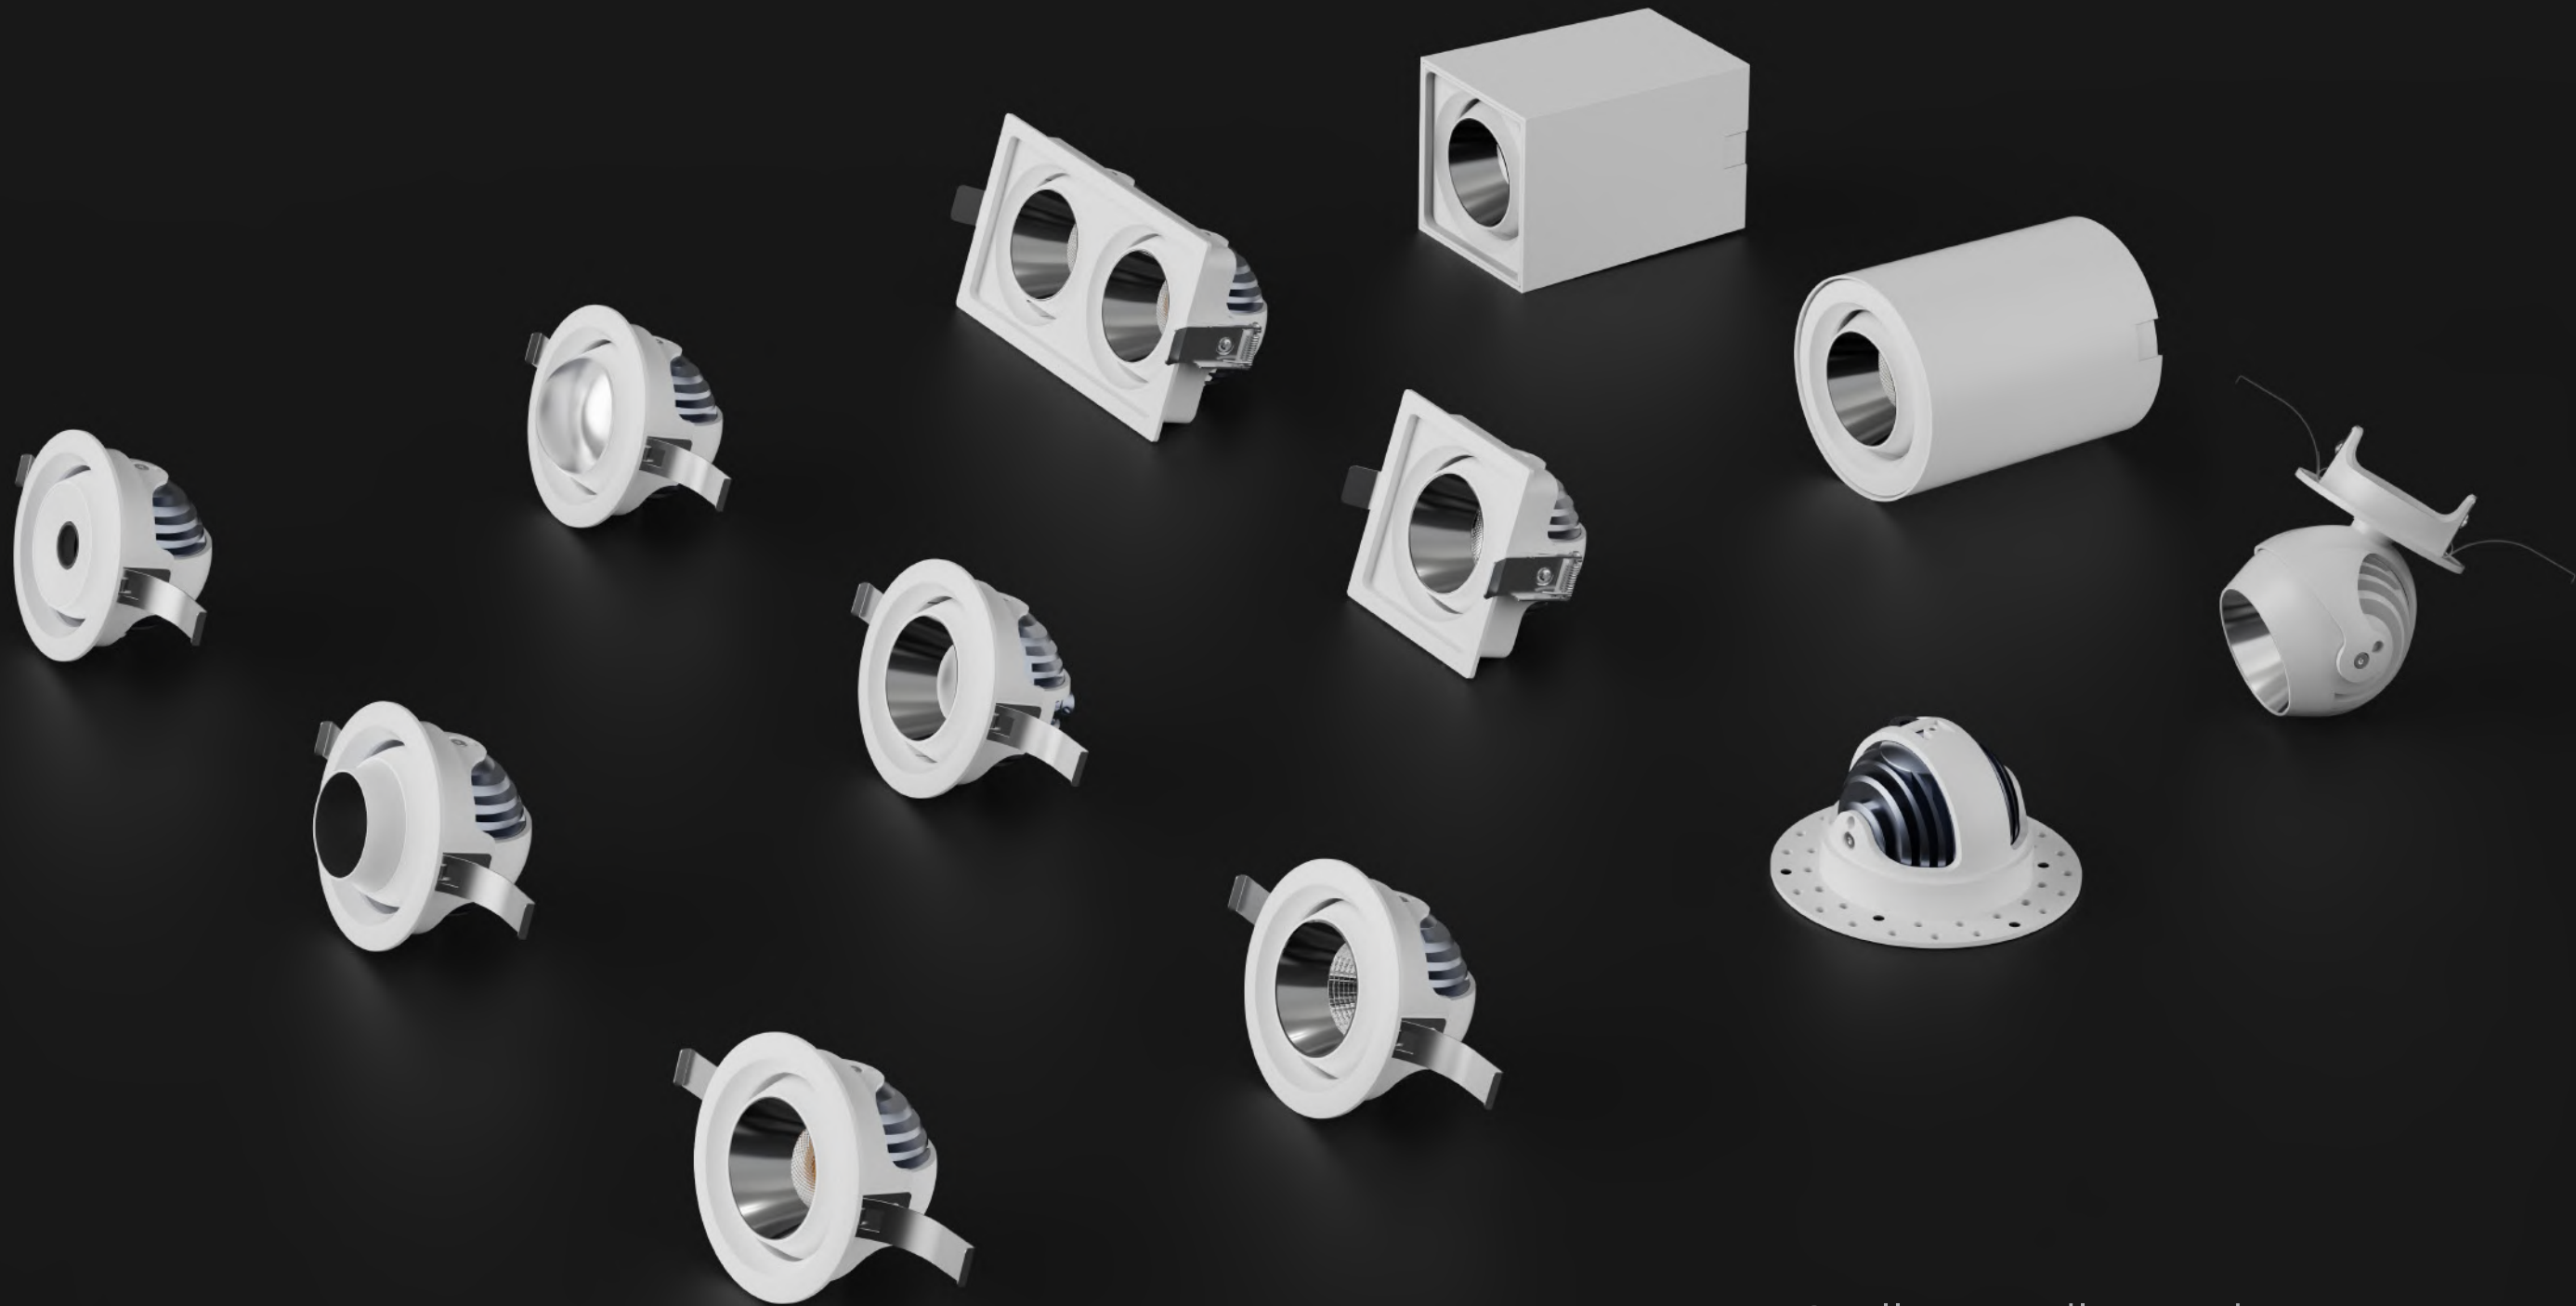

Stella Family Design

Continuously improve the integrated product system, provide more comprehensive scene lighting applications, create multiple expressions of light, and inject new possibilities into life



Optical lens/reflector cup



Black Hole Type



Snout Type



Focusing Type



Acrylic Type



Trimless Type



Single headed Square Type



Double headed Square Type



Surface Square Type





Surface Round Type

Stella series is designed with exquisite contour

- ① 355 ° rotation can be achieved
- ② 30 degree swing angle
- ③ 11 forms available
- ④ Equipped with 6 optical schemes
- ⑤ IP54 can be made
- ⑥ With flexible mobility and convenient adjustment function
- ⑦ Meet the needs of multiple scenarios





Embedded Type

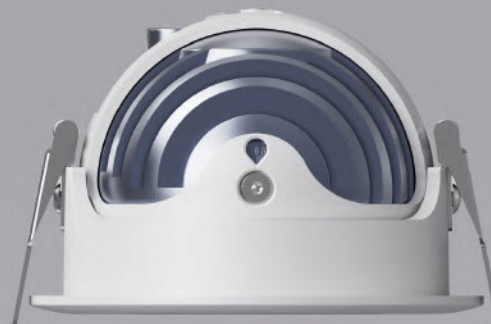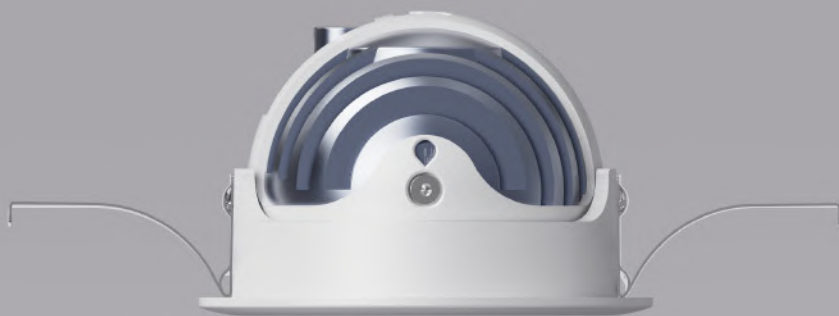


Personalized accessories

Personalized optics help unlock the wonderful performance of lighting art ,Break the limitation of lighting and make light visible everywhere

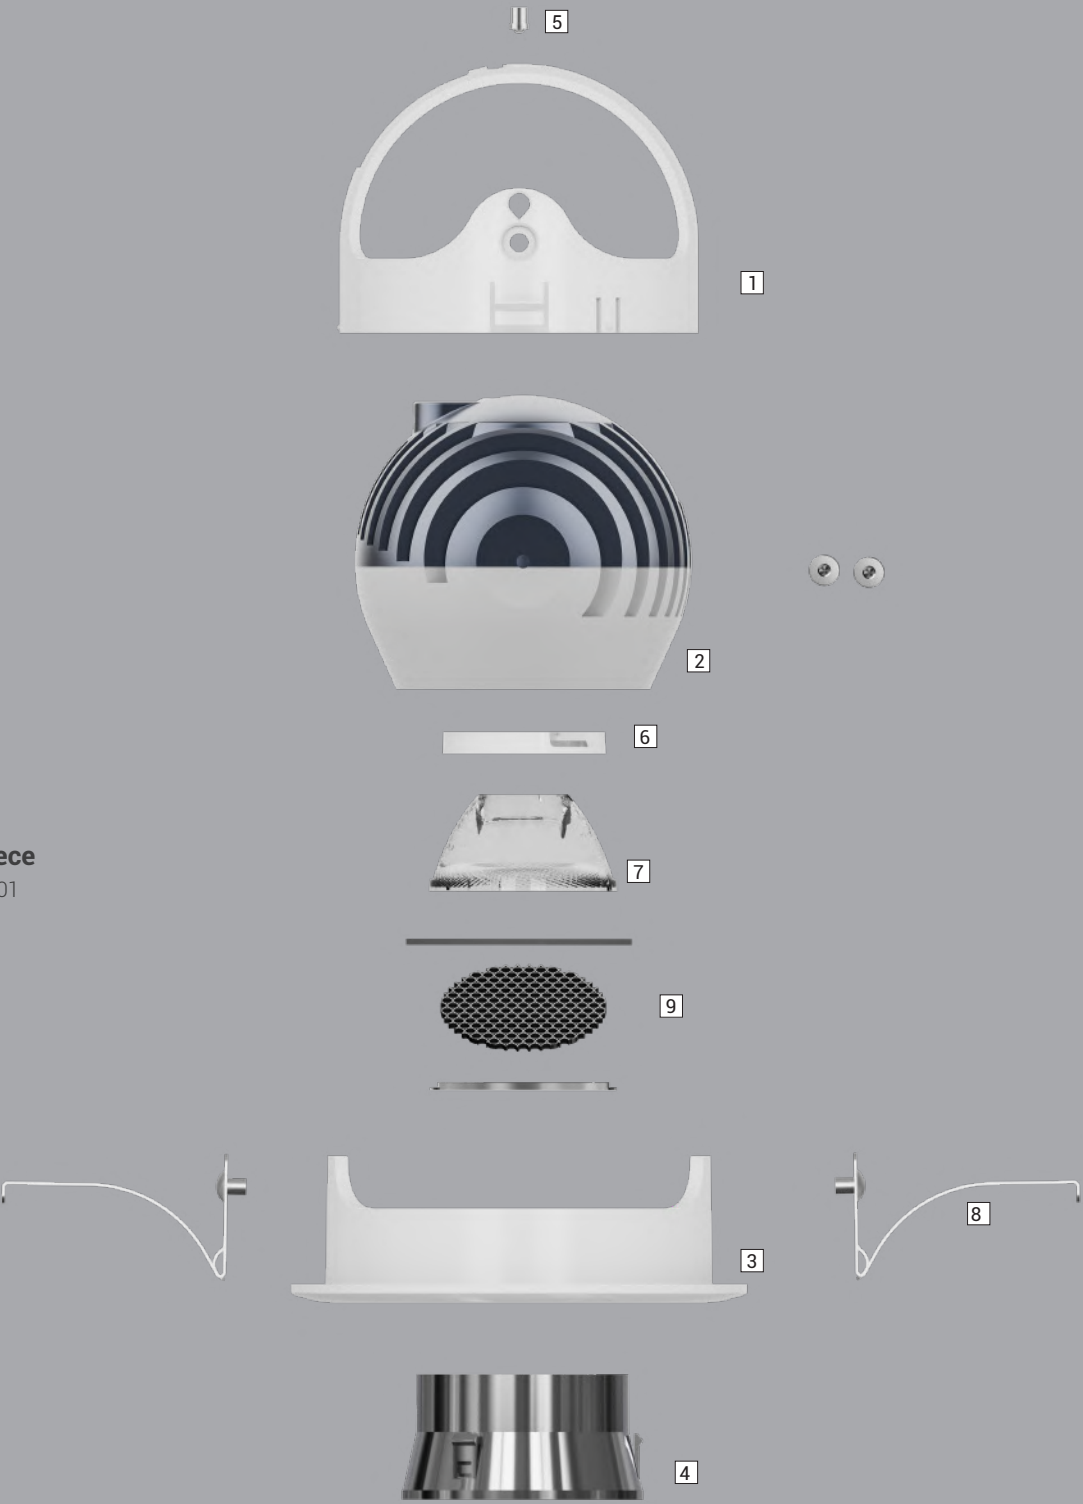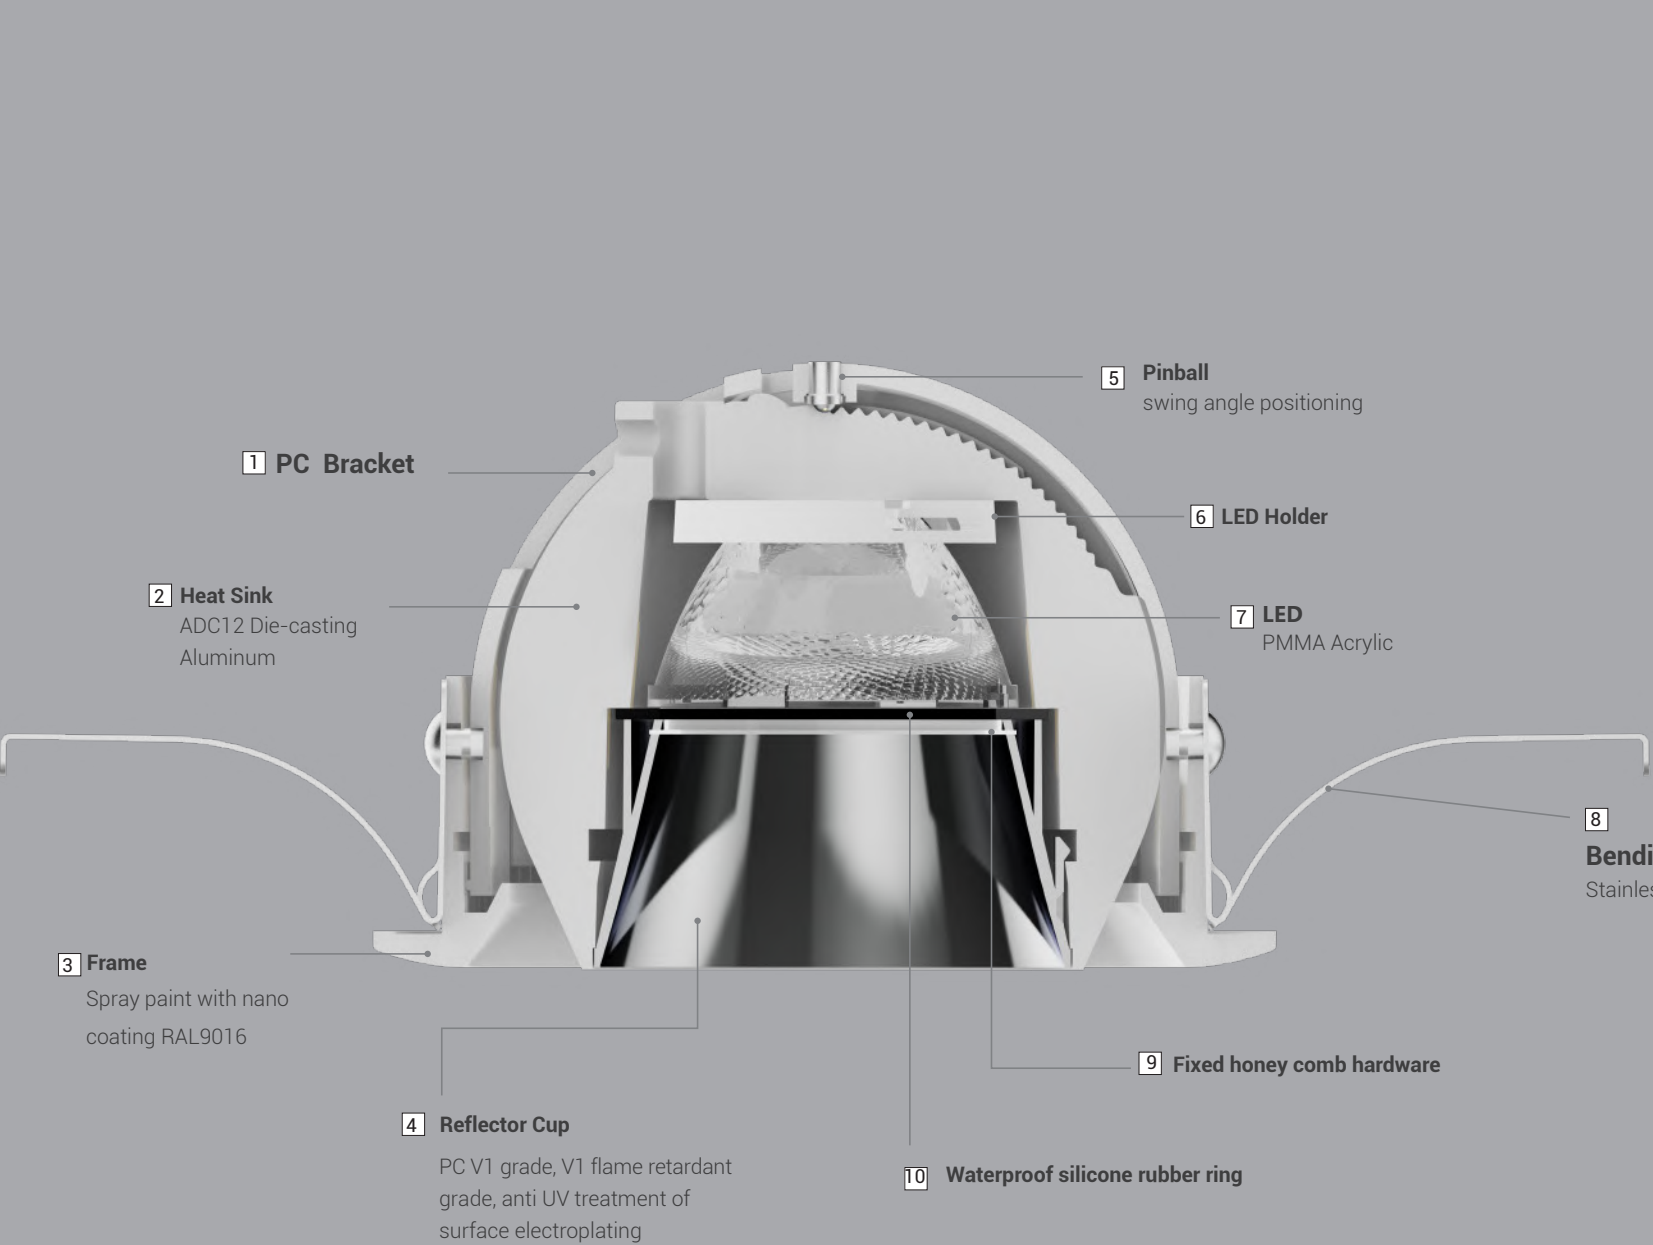


Convenient adjustment Can be rotated to all angles

Pragmatism, ingenious details

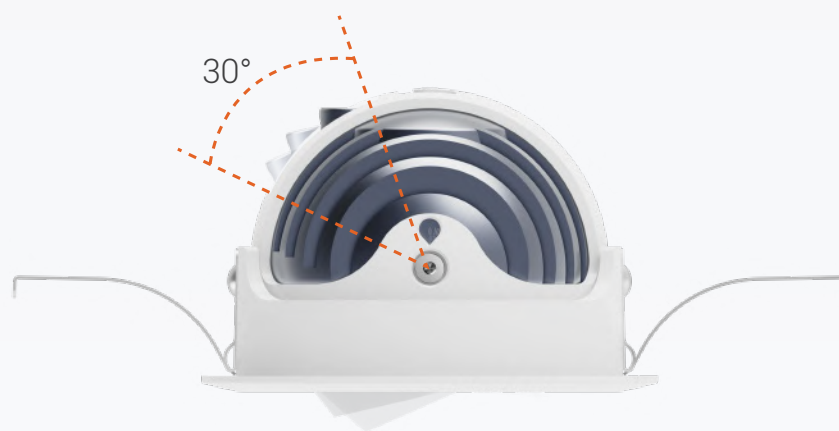

Stepless regulation 0~30° at any angle




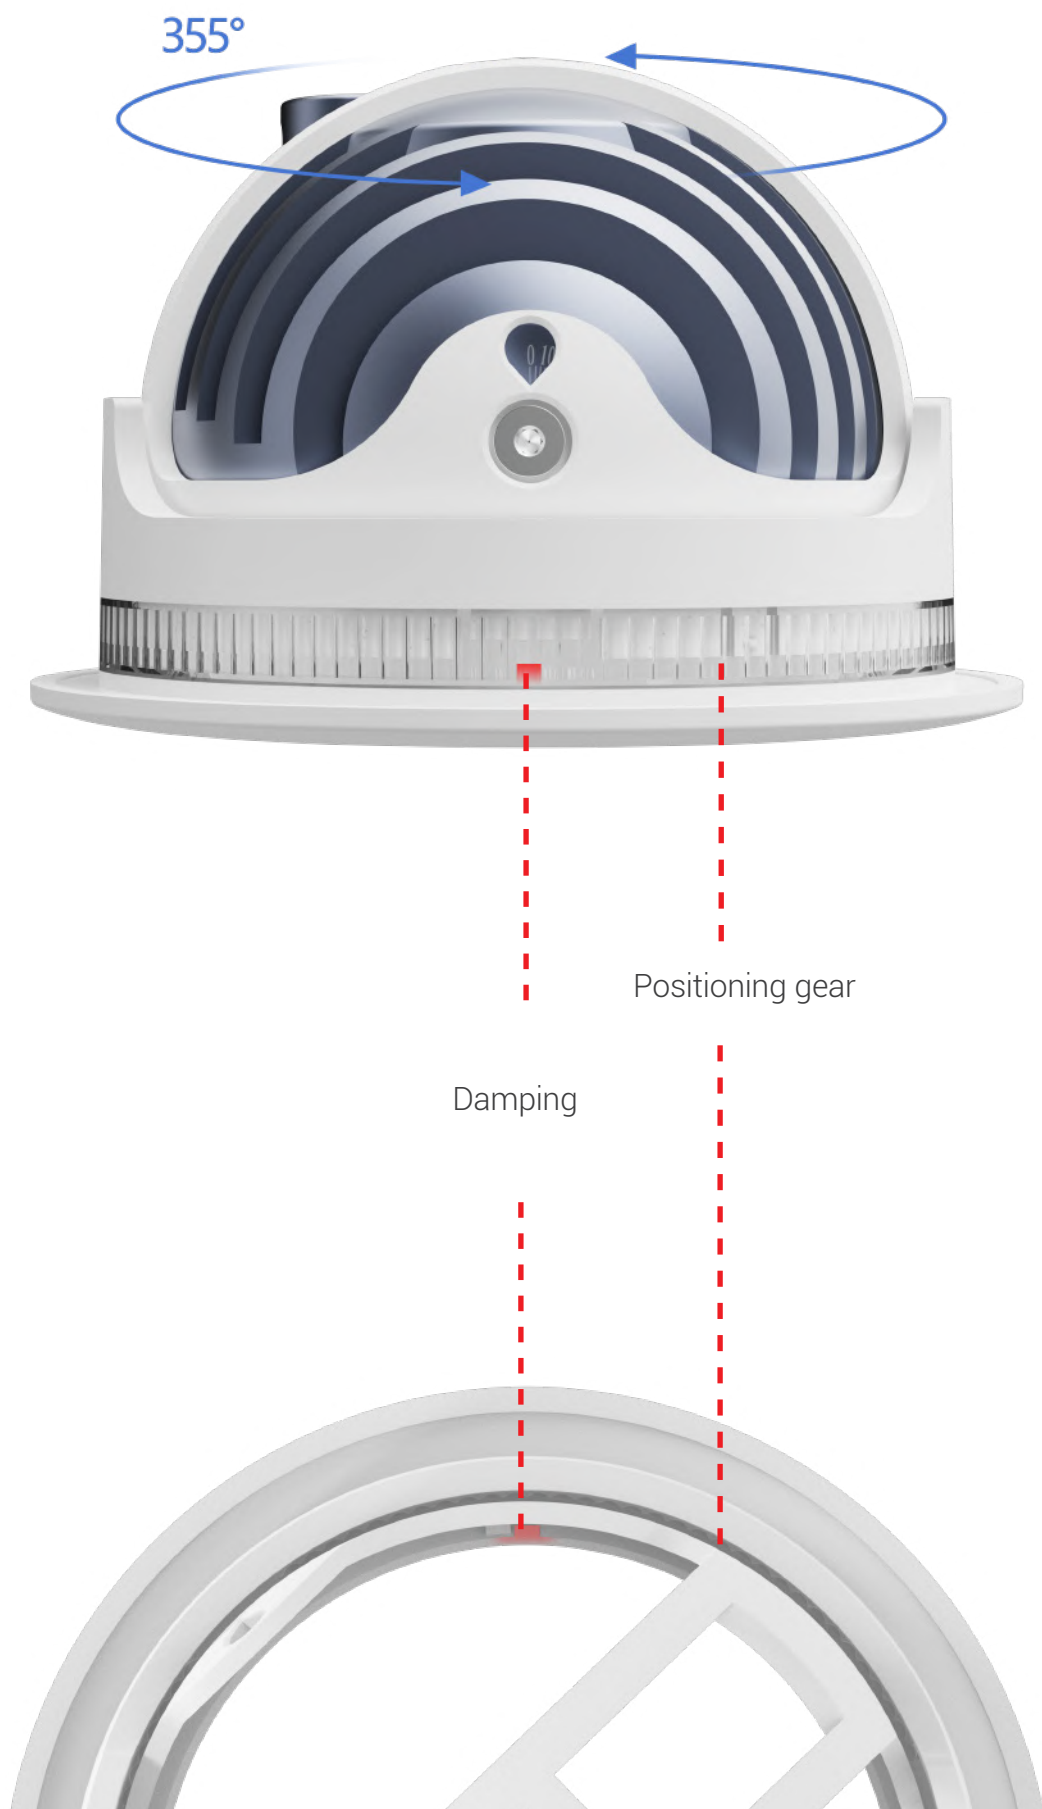

Positioning groove

355 °horizontal rotation

Horizontal rotation of 355 °,
with positioning point and damping to Fool-proof

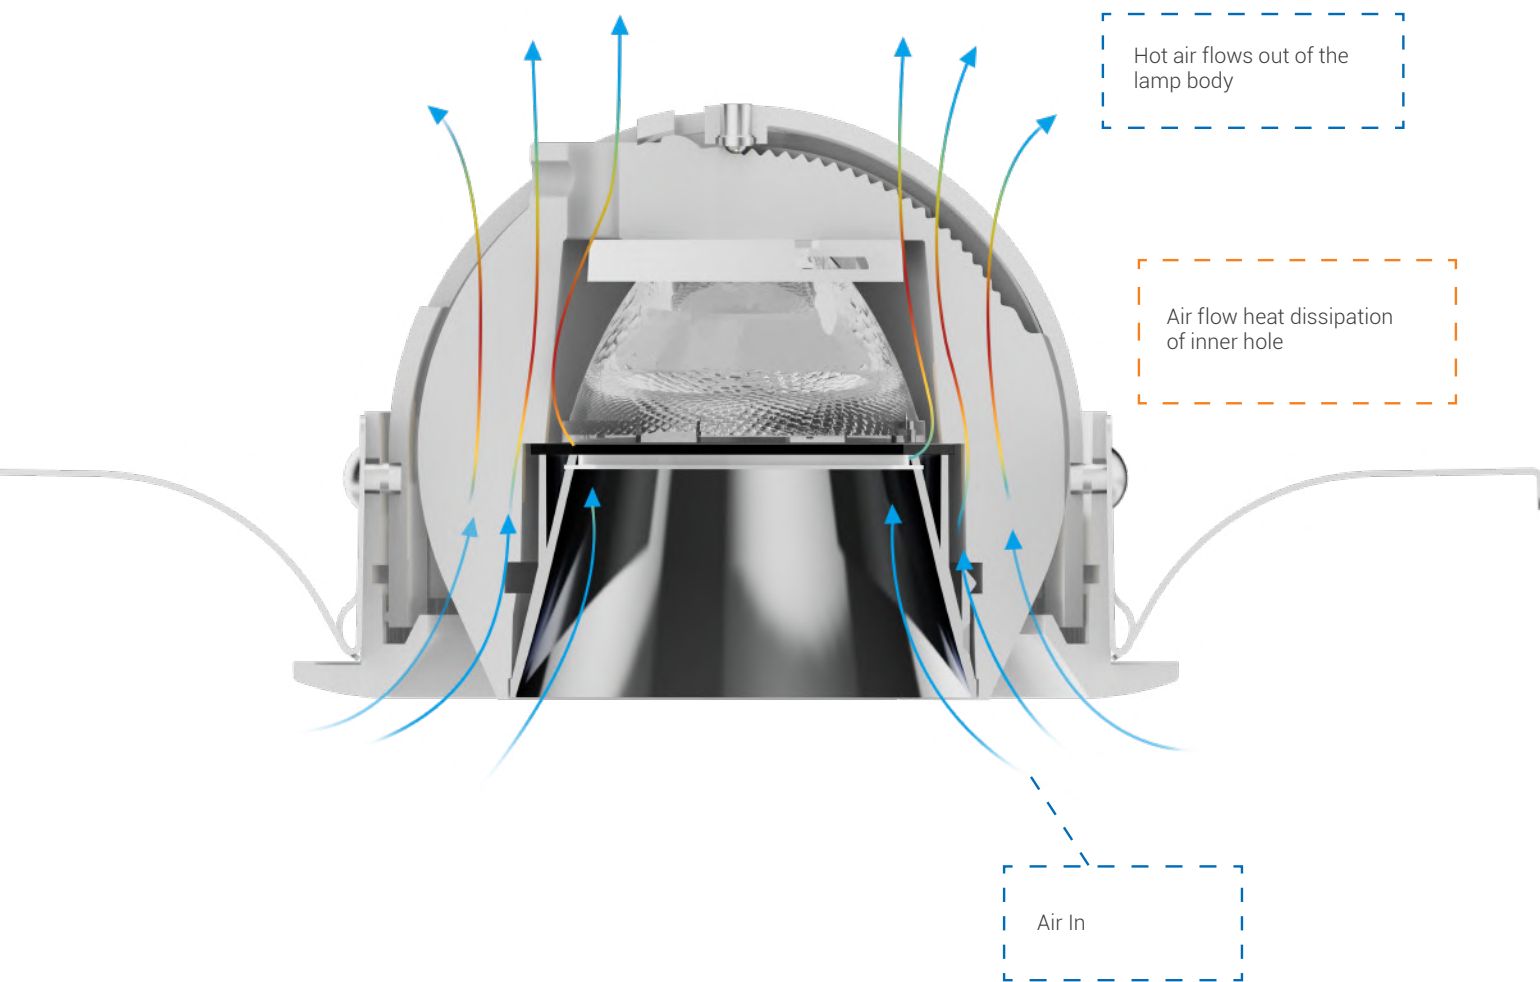

Radiator simulation

Die cast aluminum efficient heat dissipation structure, air enters the lamp body radiator, and when the air flow rises from the inner hole, the heat is exported with the air



Available in 6 colors Suitable for different decoration environments

The reflector is precisely designed with electroplating (anti UV) and nano paint technology, which is suitable for different soft decoration environments

4 kinds of frame can be selected

Four kinds of frame can be selected:
round, integral trimless, square single head, square double head





Optical lens




Frame height:1.5mm

Optical lens and reflector cup can be switched

Extremely narrow edge design



reflector cup

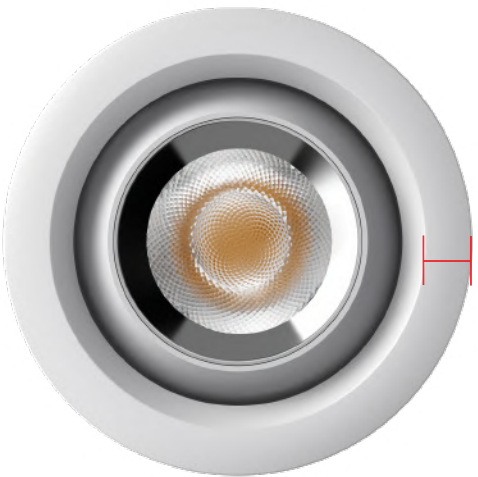


8mm Super Narrow Edge



Definition of pinball

Achievement focus

Metal pinball, when swinging angle,
the pinball moves up and down with the gear rolling
When popping up to the serrated
concave point,fasten the radiator to prevent
looseness


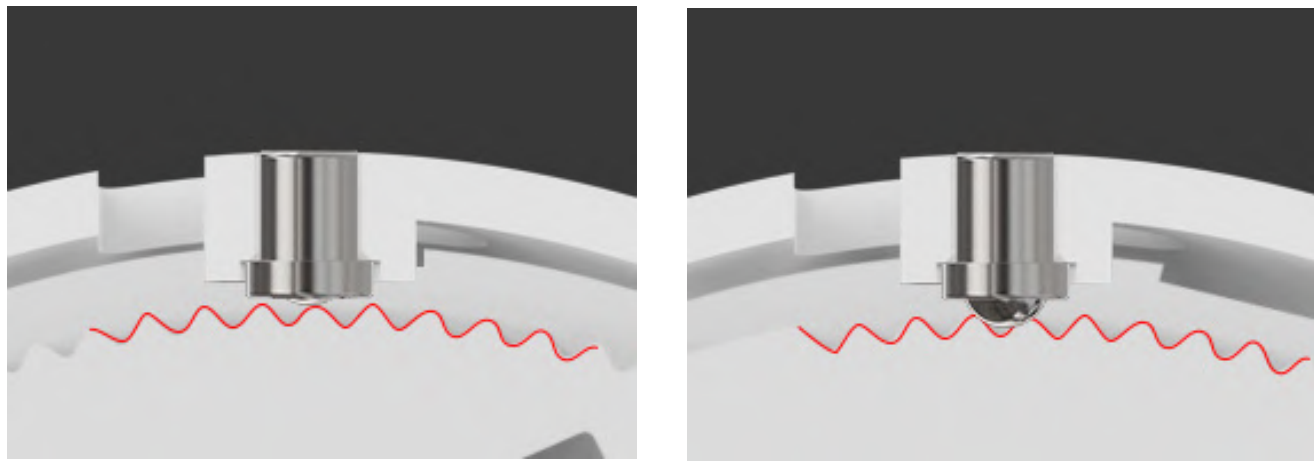



Note: Schematic diagram of pinball moving up and down

Optical Fitting

On demand transformation

Four optical Fitting are optional, which can realize the change of spot shape, full lamp UGR and other technical parameters to meet the lighting needs of different scene

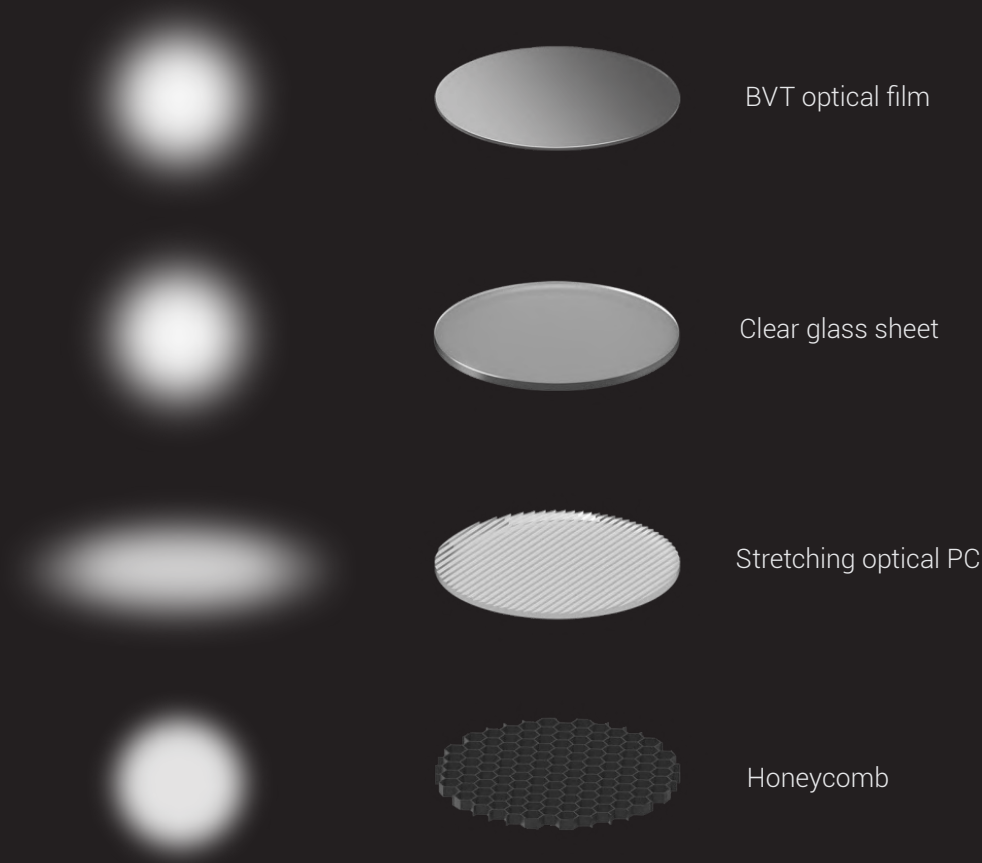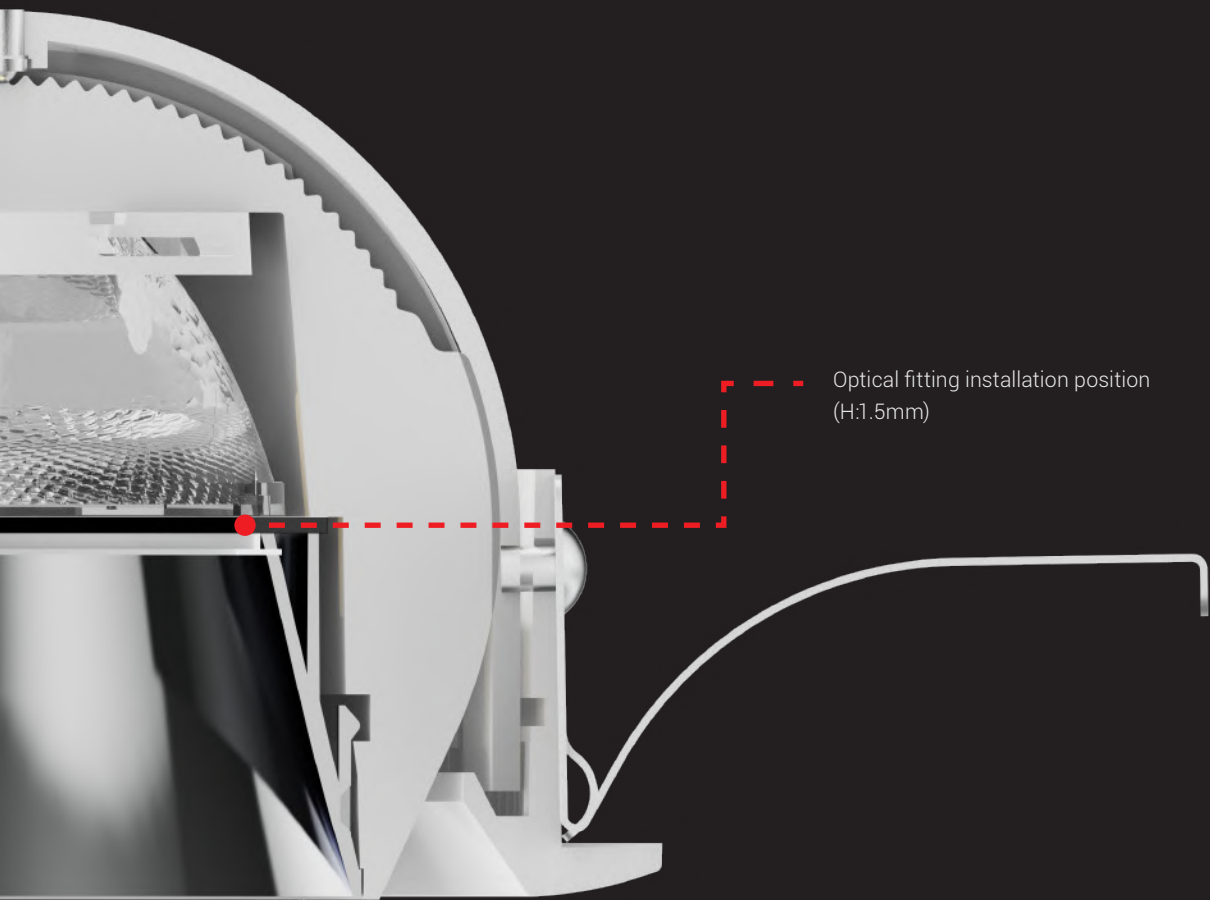

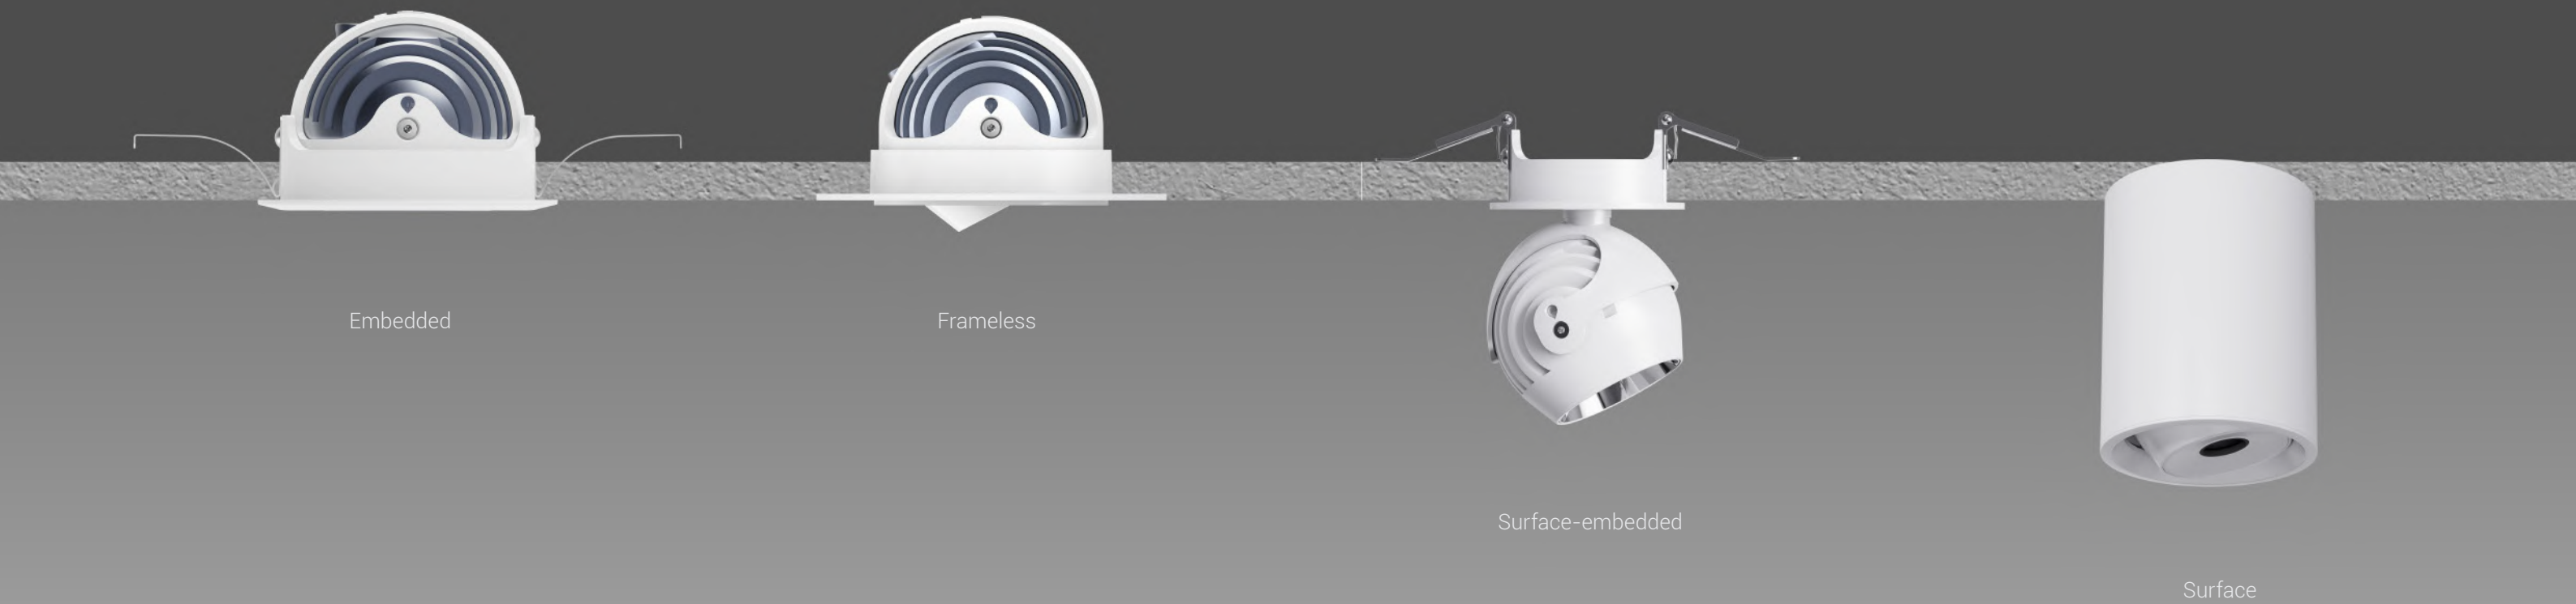


Installation Method

The installation method can be embedded, trimless, surface-embedded and surface




PMMA high luminous rate Ribbed structure lens

The ribbed structure design is adopted, with its own anti glare effect, so that the light is interwoven at the center of the upper end of the reflector, effectively reducing stray light, and the light spot transition is even, more soft and comfortable.

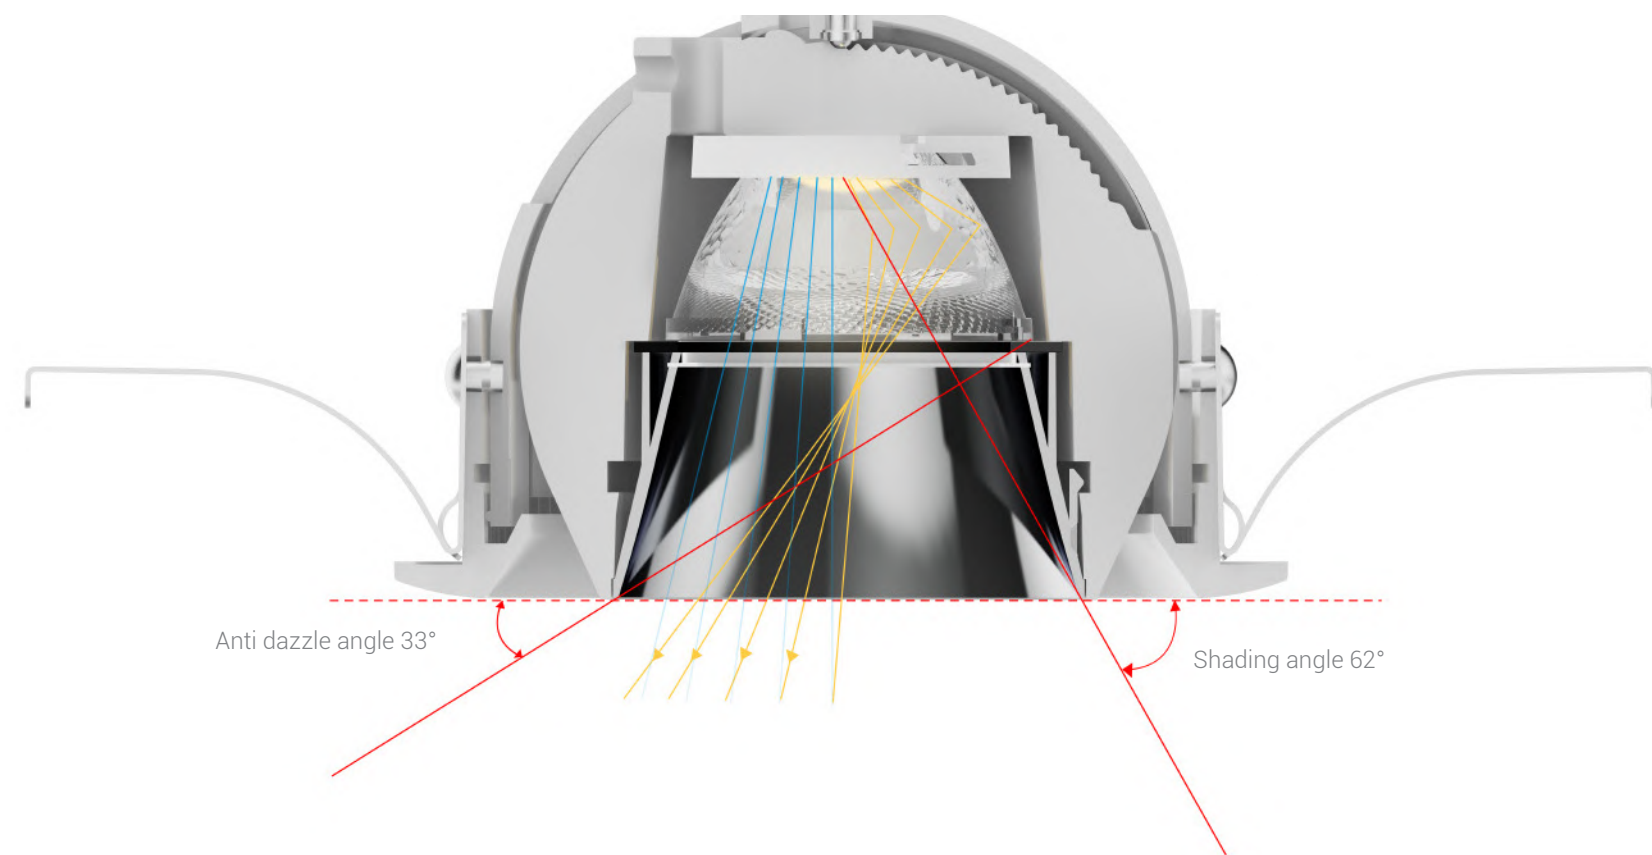






No stray light, round spot




No secondary light spot, pure and clear
Uniform light spot transition, more soft and comfortable

Light spot effect

10°	15°	24°	36°	50°
				
				

Deep Anti-Glare

In general, the horizontal view of human activities in space is 30 degrees, so the anti glare shielding of spotlights should be more than 30 degrees to effectively prevent glare

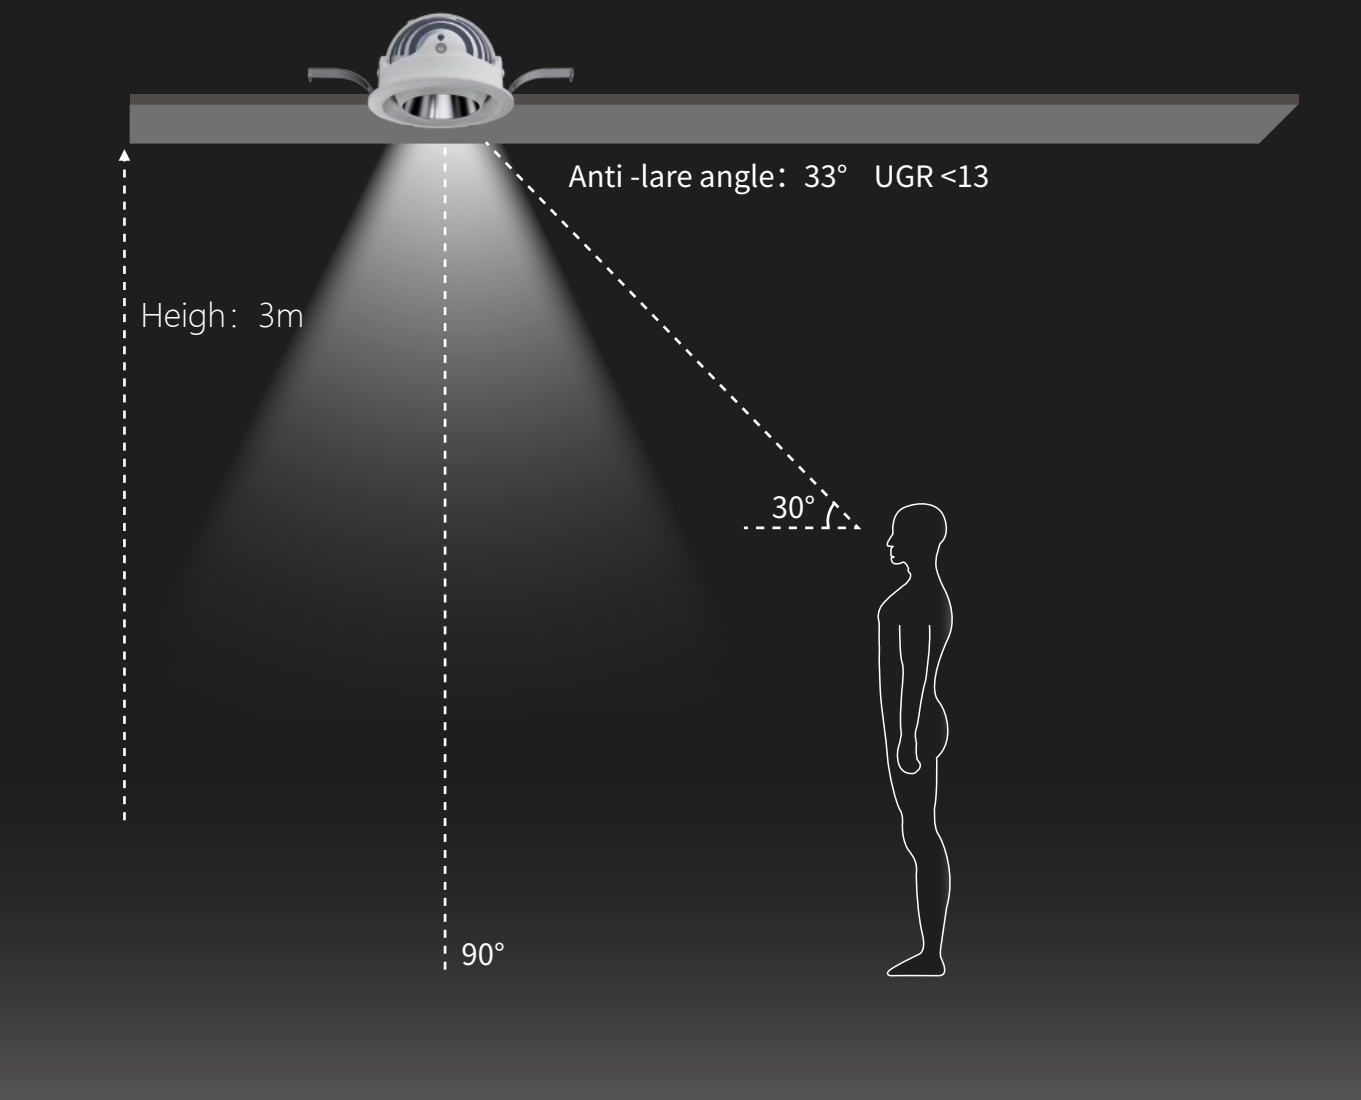

Practical application lighting effect



Fixed ground lighting effect





Adjustable wall lighting effect





Stella 75

Model: Stella75-CXM-4-12D
LED MODEL: CXM-4
Angle: 15°
Luminous flux output: 472.45lm

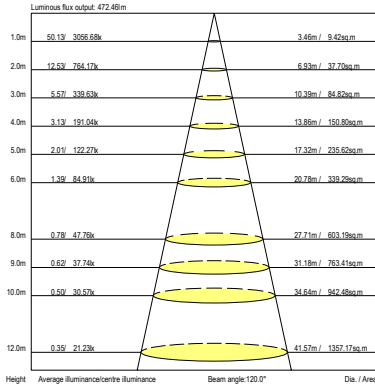
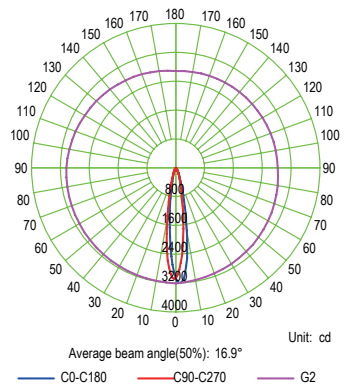


Stella 75



Model: Stella75-CXM-6-50D
LED MODEL: CXM-6
Angle: 50°
Luminous flux output: 588.57lm

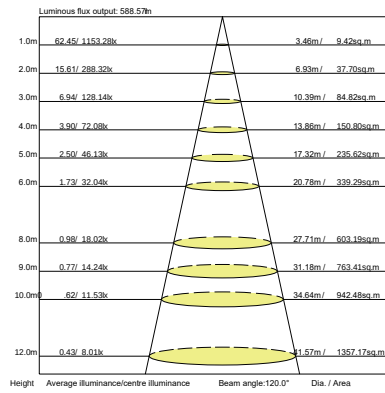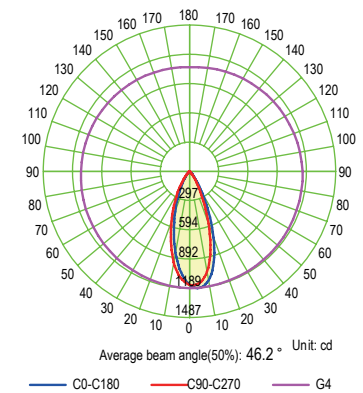



Model: Stella75-CXM-6-12D
LED MODEL: CXM-6
Angle: 24°
Luminous flux output: 539.79lm

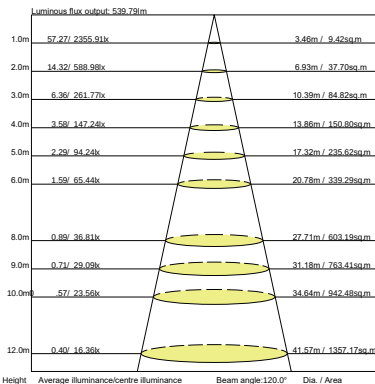
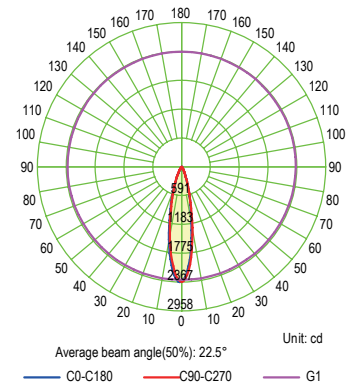


Model: Stella75-CXM-6-24D
LED MODEL: CXM-6
Angle: 24°
Luminous flux output: 624.04lm

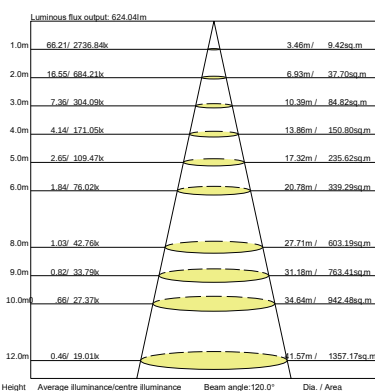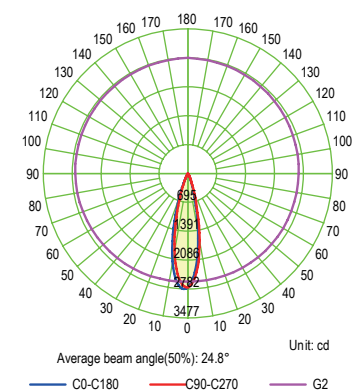


Model: Stella75-CXM-6-36D
LED MODEL: CXM-6
Angle: 36°
Luminous flux output: 601.33lm

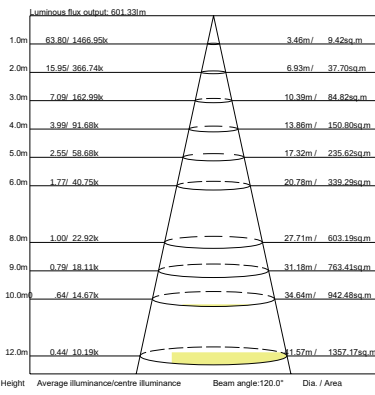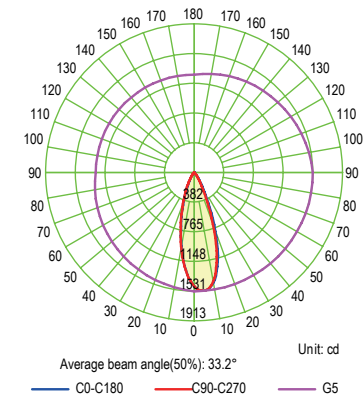

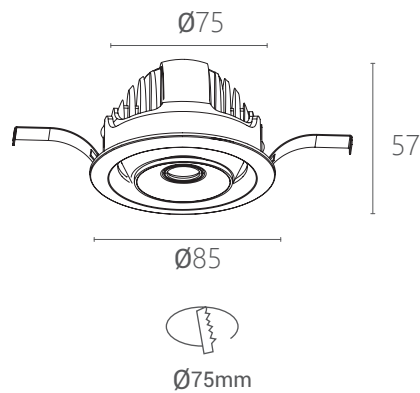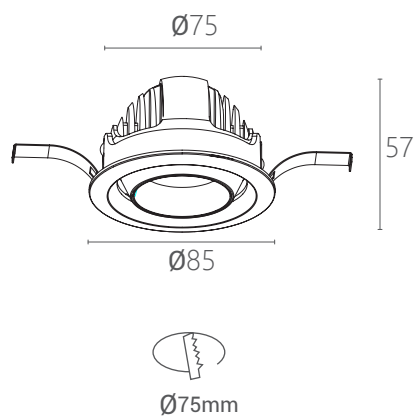


NEW Model: XQ-1001E75-PK-LENS

Power: 12W
Cutout: Ø75mm
Size(WxH): Ø85X57mm
Beam angle: 15°/24°/36°/50°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9

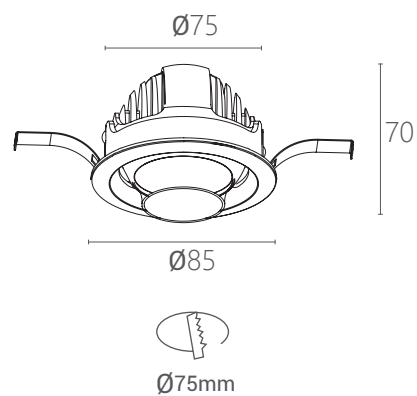


NEW Model: XQ-1001E75-ZY

Power: 12W
Cutout: Ø75mm
Size(WxH): Ø85X70mm
Beam angle: 15°/24°/36°/50°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9




Optional:

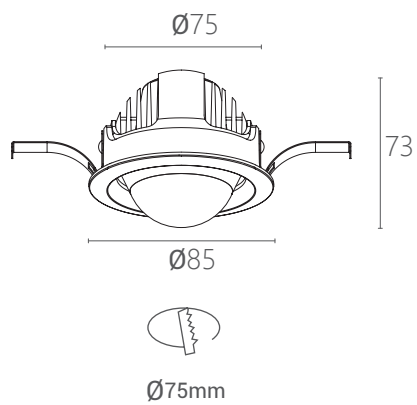


NEW Model: XQ-1001E75-FG

Power: 12W
Cutout: Ø75mm
Size(WxH): Ø85X73mm
Beam angle: 60°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9



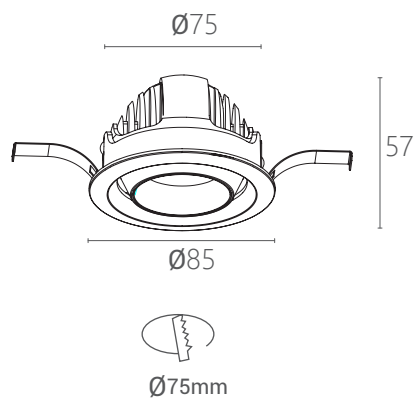

NEW Model: XQ-1001E75-PK-FGB
Power: 12W
Cutout: Ø75mm
Size(WxH): Ø85X57mm
Beam angle: 18°/24°/36°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9

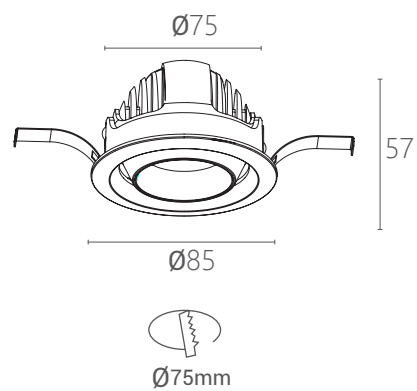


NEW Model: XQ-1001E75-BJ-LENS
Power: 12W
Cutout: Ø75mm
Size(WxH): Ø85X57mm
Beam angle: 15°~50°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9

Reflector cover:

Optional:



NEW Model: XQ-1001P75-PK-LENS
Power: 12W
Cutout: 75x75mm
Size(WxH): 85X62mm
Beam angle: 15°/24°/36°/50°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9

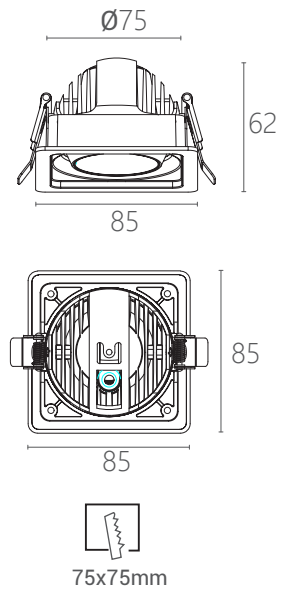


Reflector cover:

Optional:





NEW Model: XQ-1001P75-PK-2
Power: 12W
Cutout: 150x75mm
Size(WxH): 160x85XH62mm
Beam angle: 15°/24°/36°/50°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9

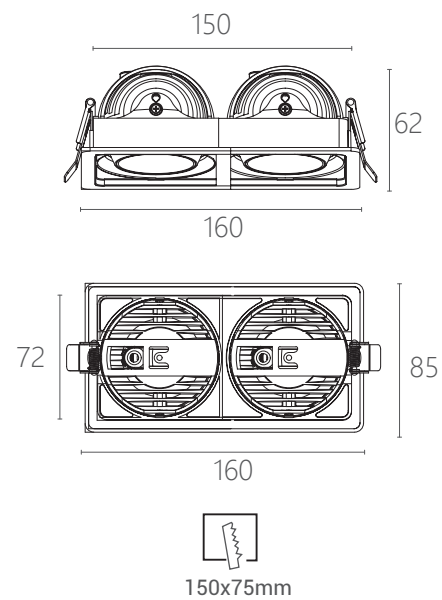

BlackHole Type



Snout Type



Acrylic Type



Reflector Cup Type




Focusing Type

Reflector cover:      
Optional:   



NEW Model: XQ-1001E75-ZY-LENS
Power: 12W
Cutout: Ø55mm
Size(WxH): Ø65X104mm
Beam angle: 15°/24°/36°/50°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9

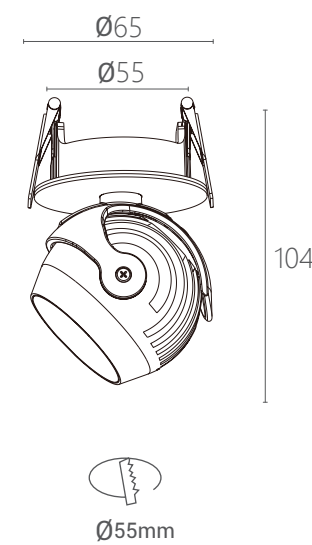

BlackHole Type



Snout Type



Acrylic Type



Reflector Cup Type



Focusing Type


Reflector cover:      
Optional:   





Frameless

NEW Model: XQ-1001T75-PK
Power: 12W
Cutout: Ø75mm
Size(WxH): Ø108X57mm
Beam angle: 15°/24°/36°/50°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9

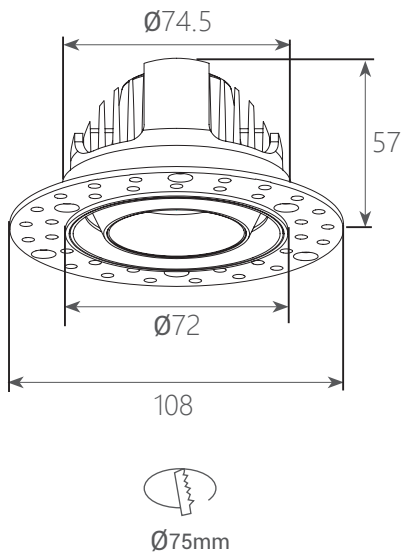

Reflector cover:      
Optional:   



BlackHole Type



Snout Type



Acrylic Type



Reflector Cup Type




Focusing Type




Surface round

NEW Model: MZ7002R-ZZ10W
Power: 12W
Size(WxH): 77X100mm
Beam angle: 15°/24°/36°/50°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9




Reflector cover:      
Optional:   



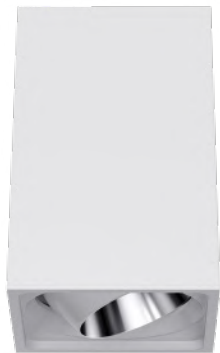

Surface square

NEW Model: MZ7002S-ZZ10W-LENS
Power: 12W
Size(WxH): 77X113mm
Beam angle: 15°/24°/36°/50°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6 CXM-9




PARKER

Commercial lighting Paik series




Simplify
and
reinvent the classic

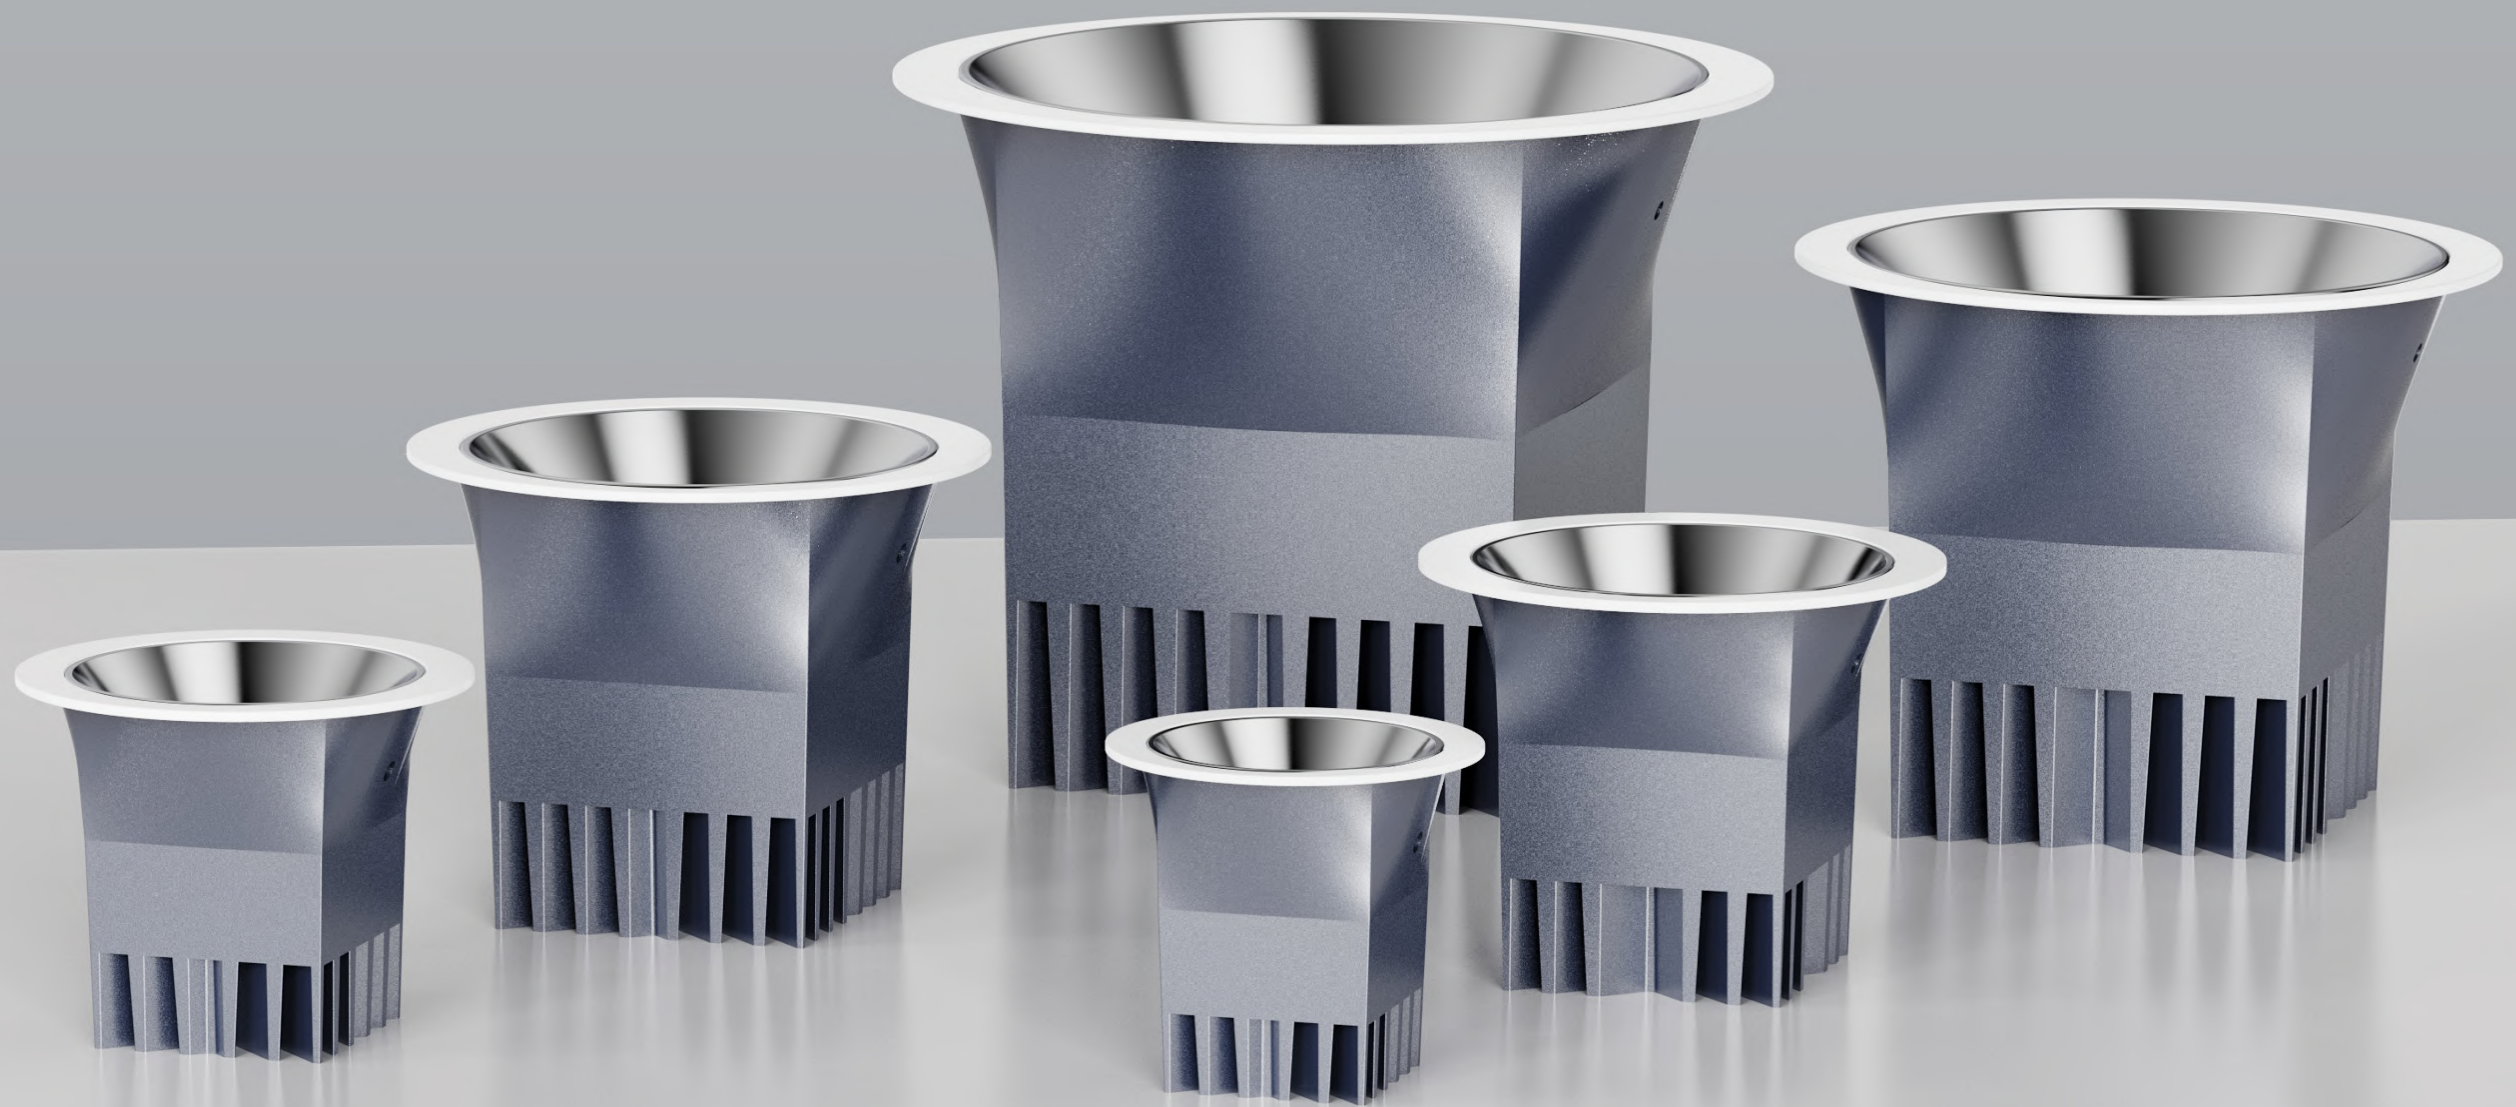


Parker series adopts integrated design, it's easy to install,
and the power is larger under the premise of the same size. IP54 waterproof and
honeycomb can be customized, mainly for direct lighting scenes.


6 size of cut hole

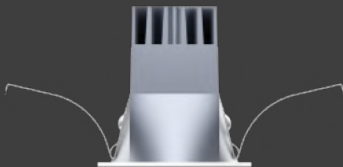


Φ45
Lens: 6W
Reflector Cup: 7W

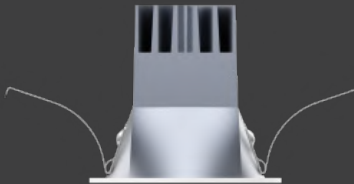


Φ55
Lens: 8W
Reflector Cup: 10W

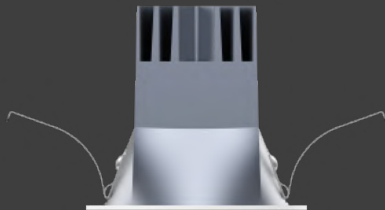


Φ65
Lens: 10W
Reflector Cup: 13W

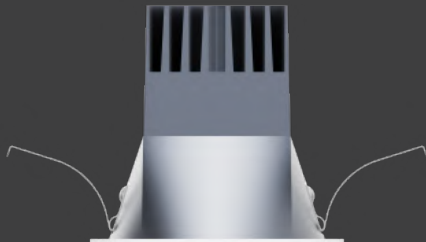




Φ75
Lens: 12W
Reflector Cup: 18W

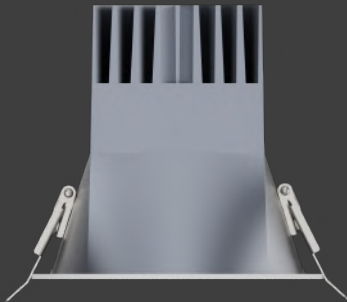

Φ95
Lens: 20W
Reflector Cup: 25W

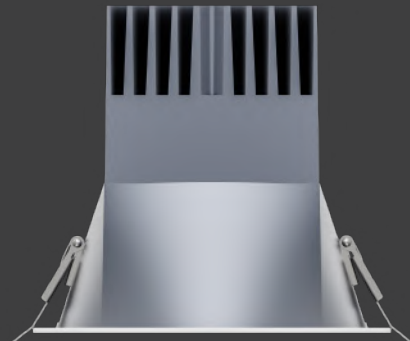


Φ120
Lens: 35W
Reflector Cup: 40W

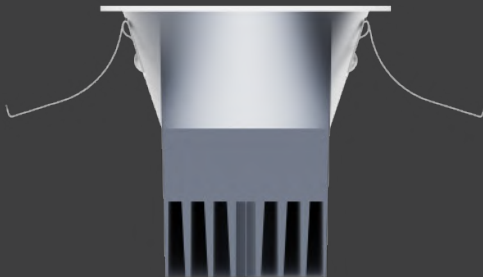




Square and Round design

Simple and neat appearance,
Create a personal profile and a pioneering
style

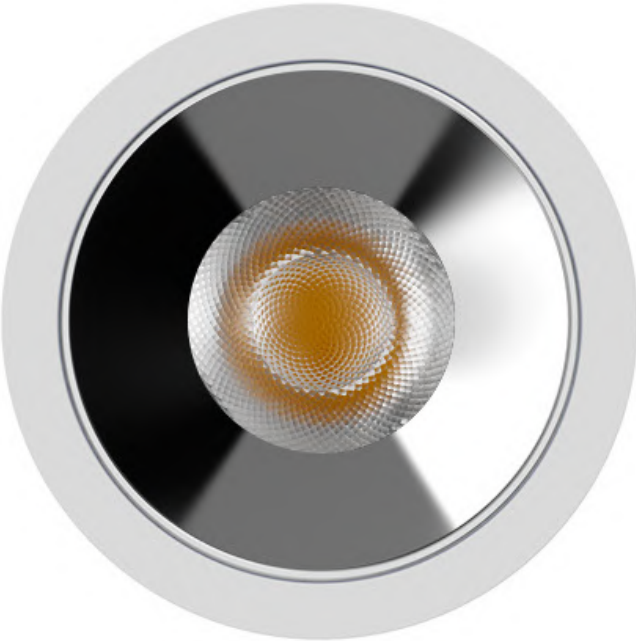

Petite and delicate




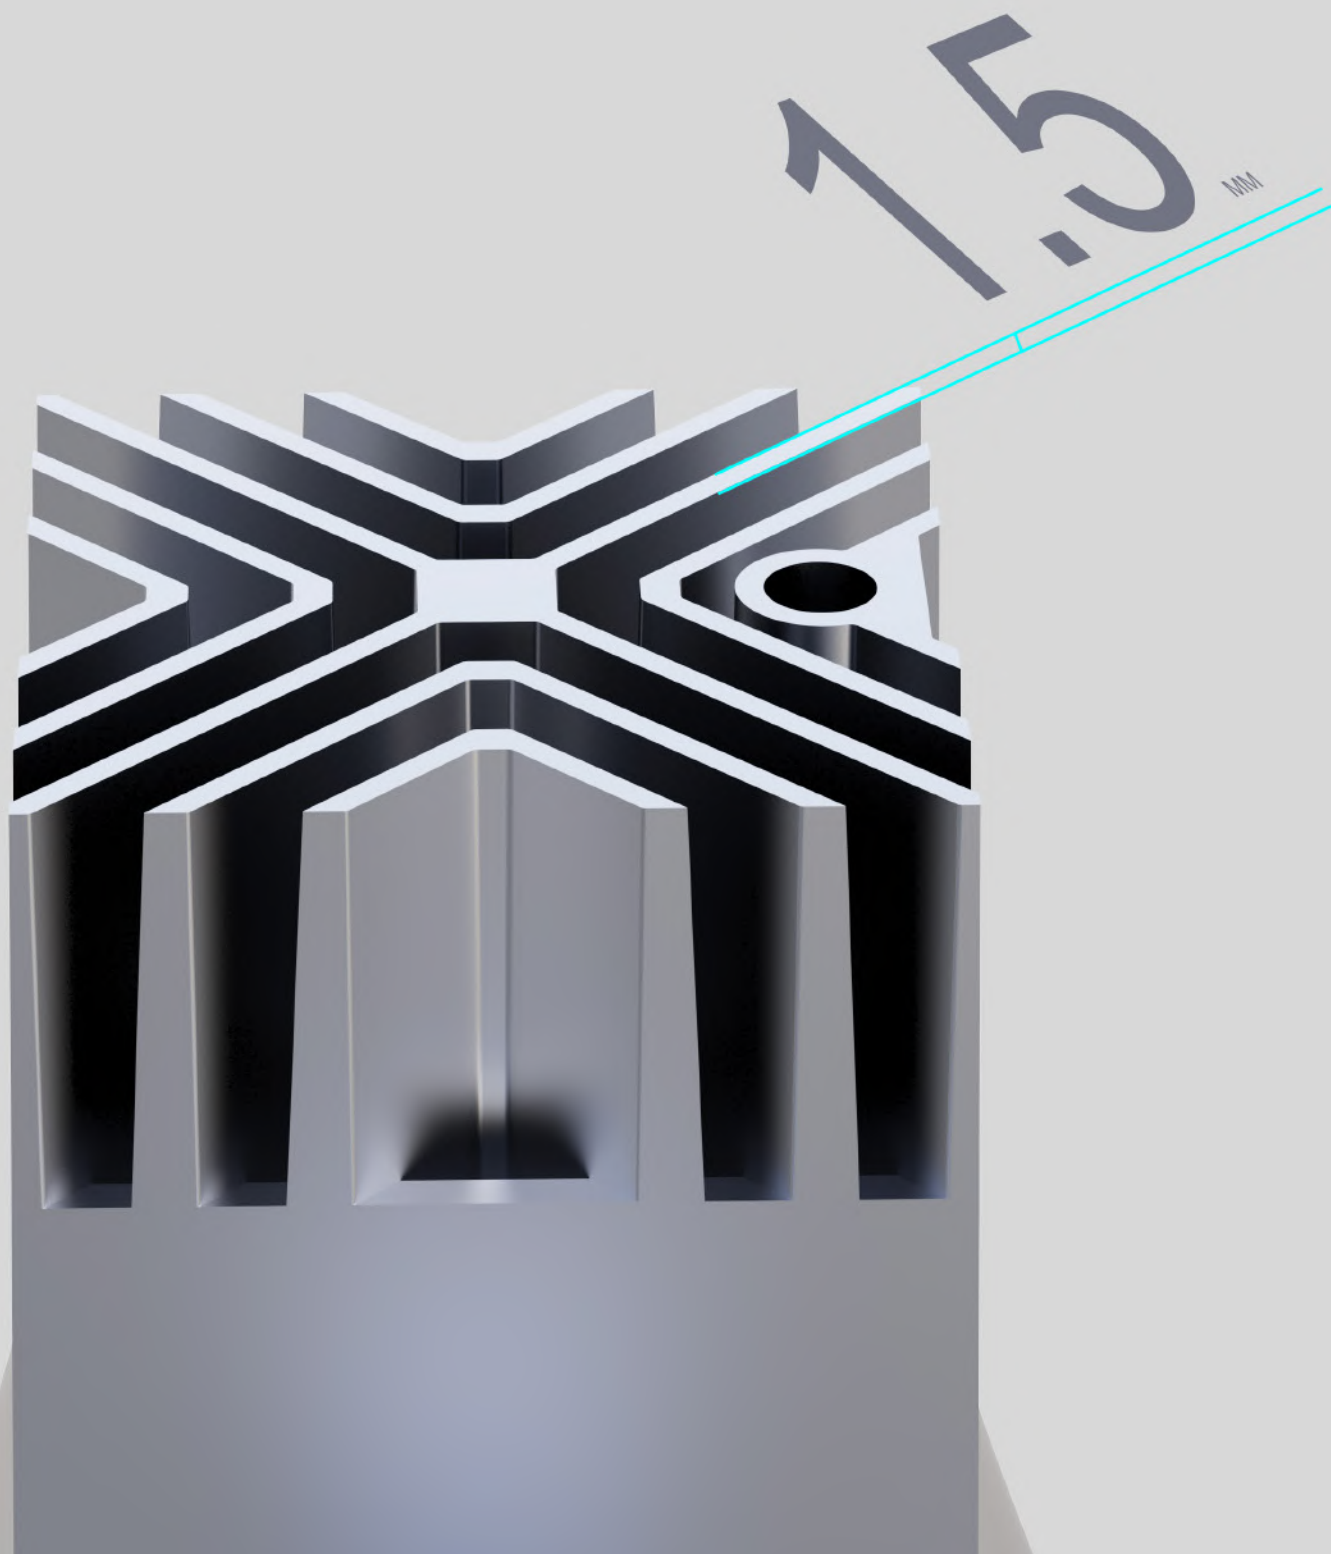


Texture stripe,embellishment details



Refined polishing, achieve highlights

Extremely narrow edge design

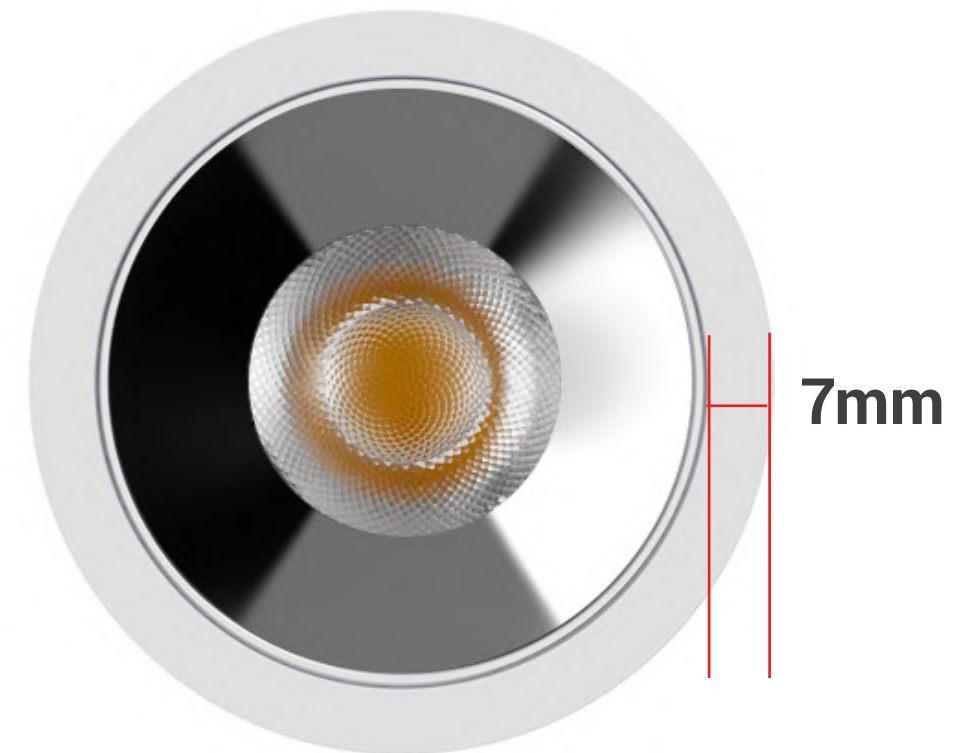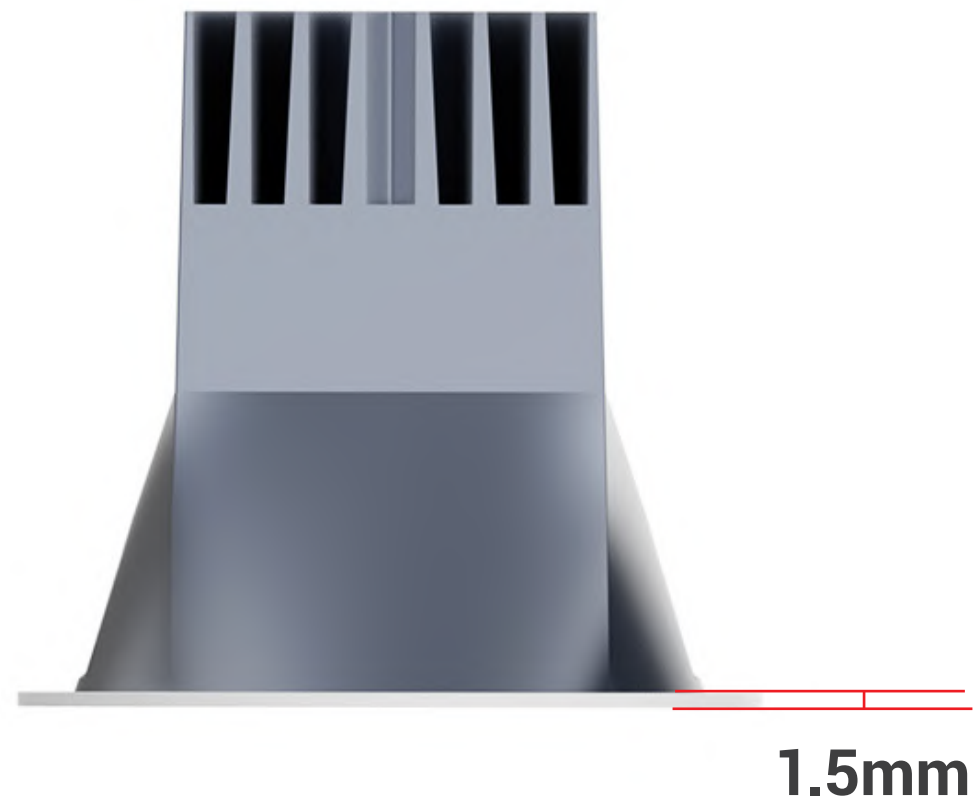




IP44 Dustproof and waterproof

IP44 Suitable for wet spaces such as bathrooms



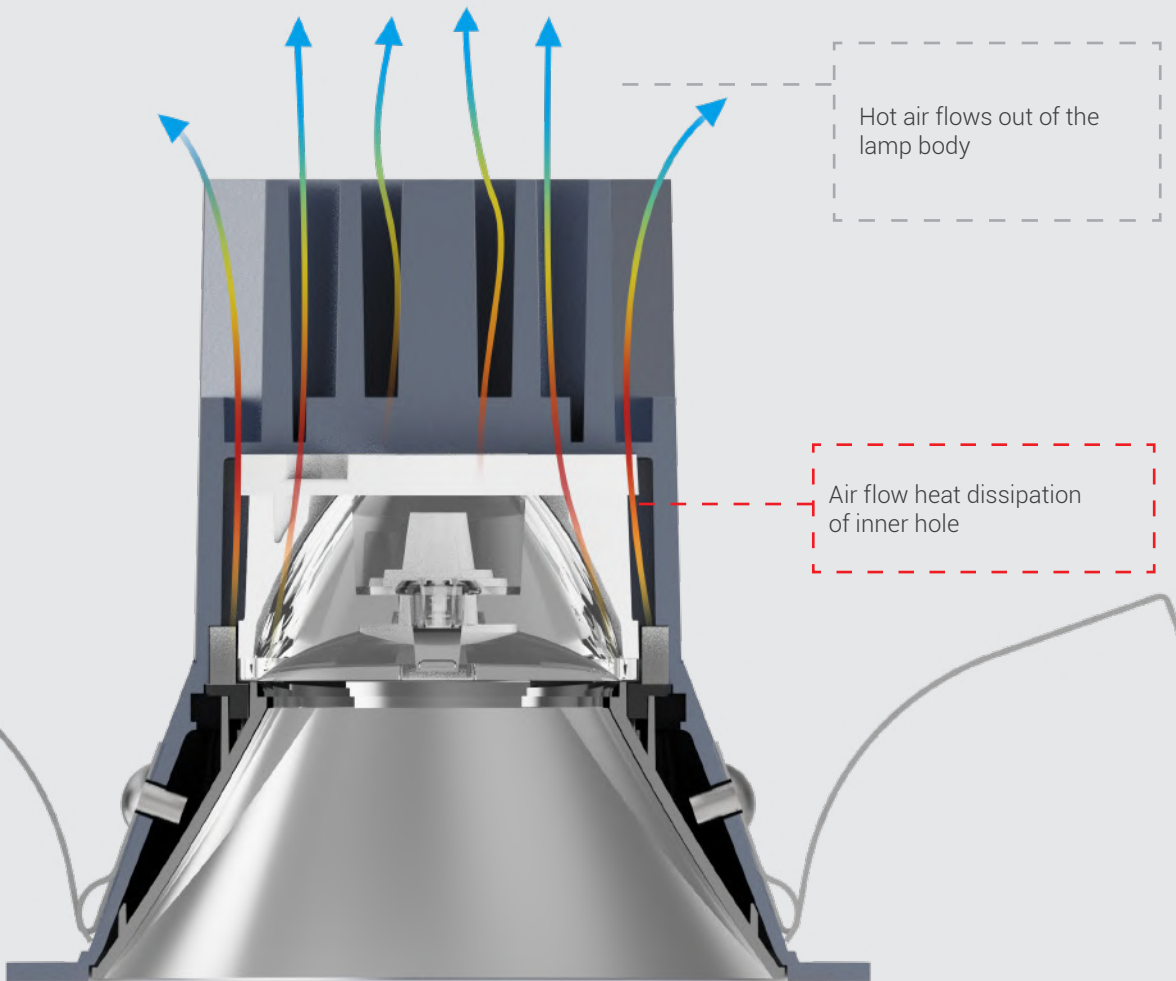


Radiator simulation

Die-casting aluminum heat dissipation structure, the heat is derived from the inner hole of the heatsink

SPRING

Die-casting aluminum heat dissipation structure, the heat is derived from the inner hole of the heatsink

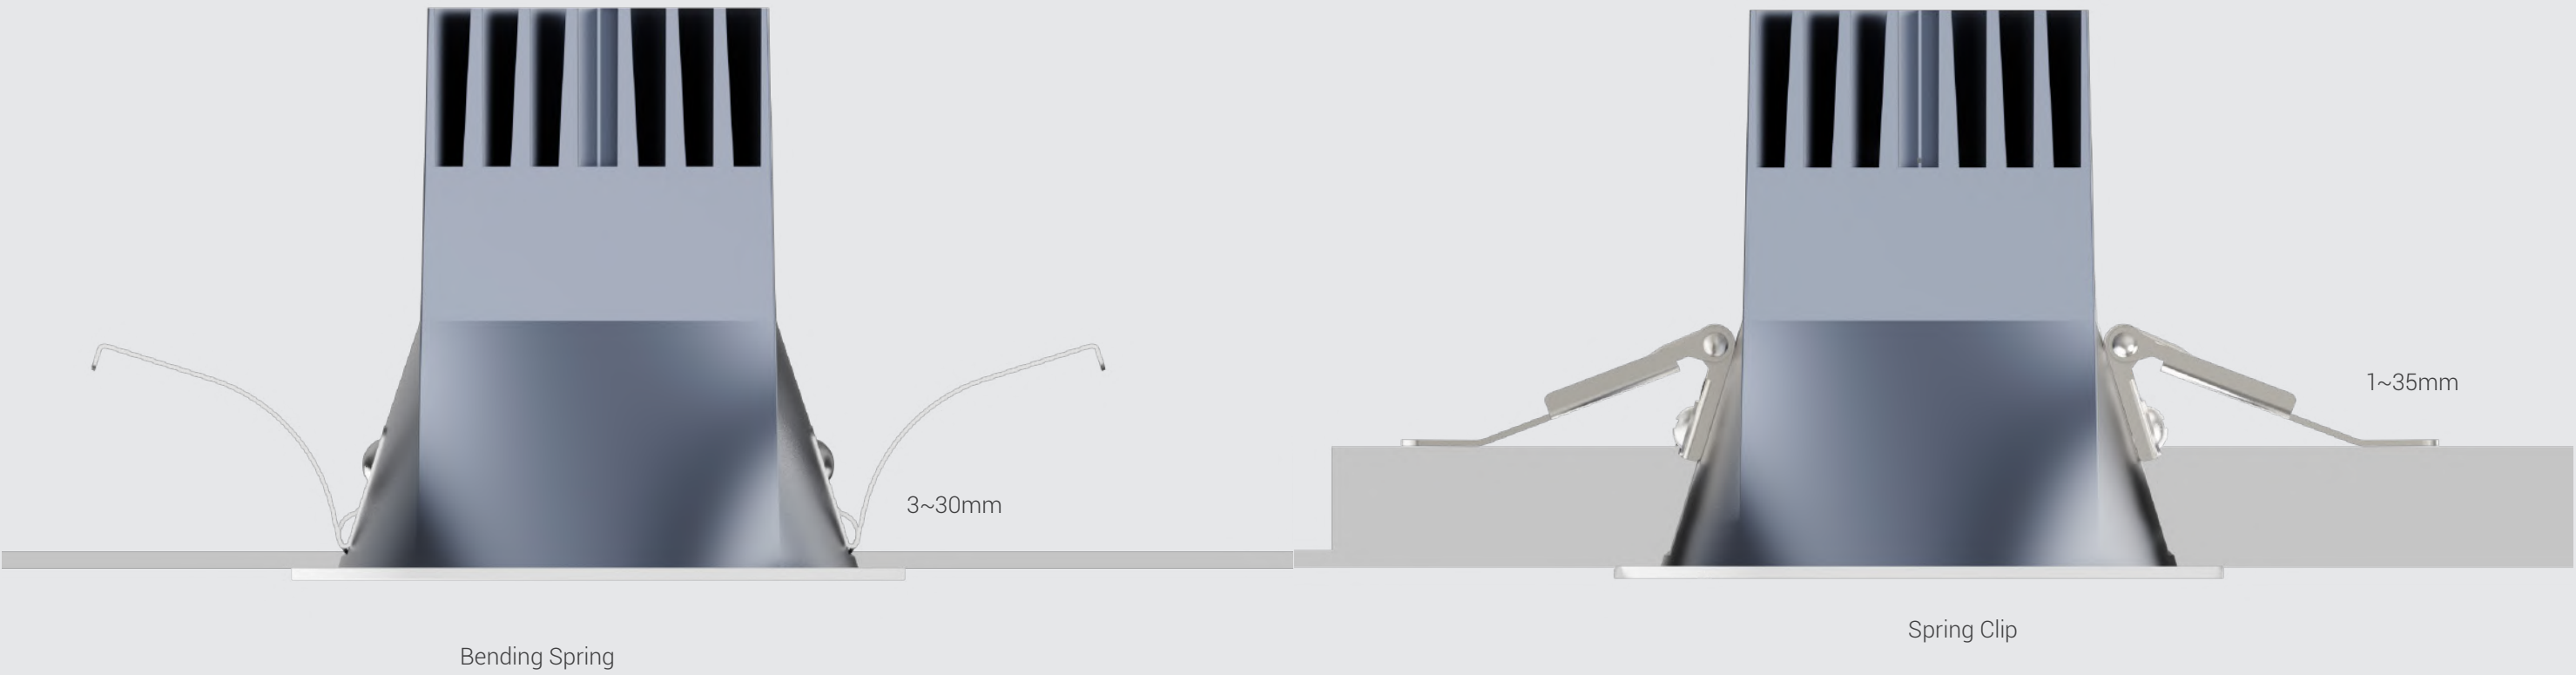



Available in 6 colors
Suitable for different
decoration environments

The reflector is precisely designed with electroplating (anti UV) and nano paint technology, which is suitable for different soft decoration environments



Optical Fitting, On demand transformation


Two optical accessories are optional, which can realize the change of spot shape, whole lamp UGR and other technical parameters to meet the lighting needs of different scenes

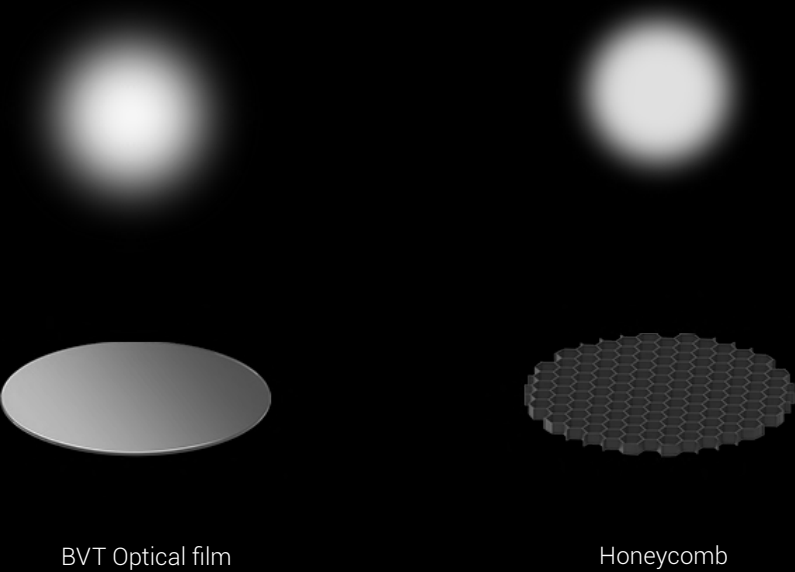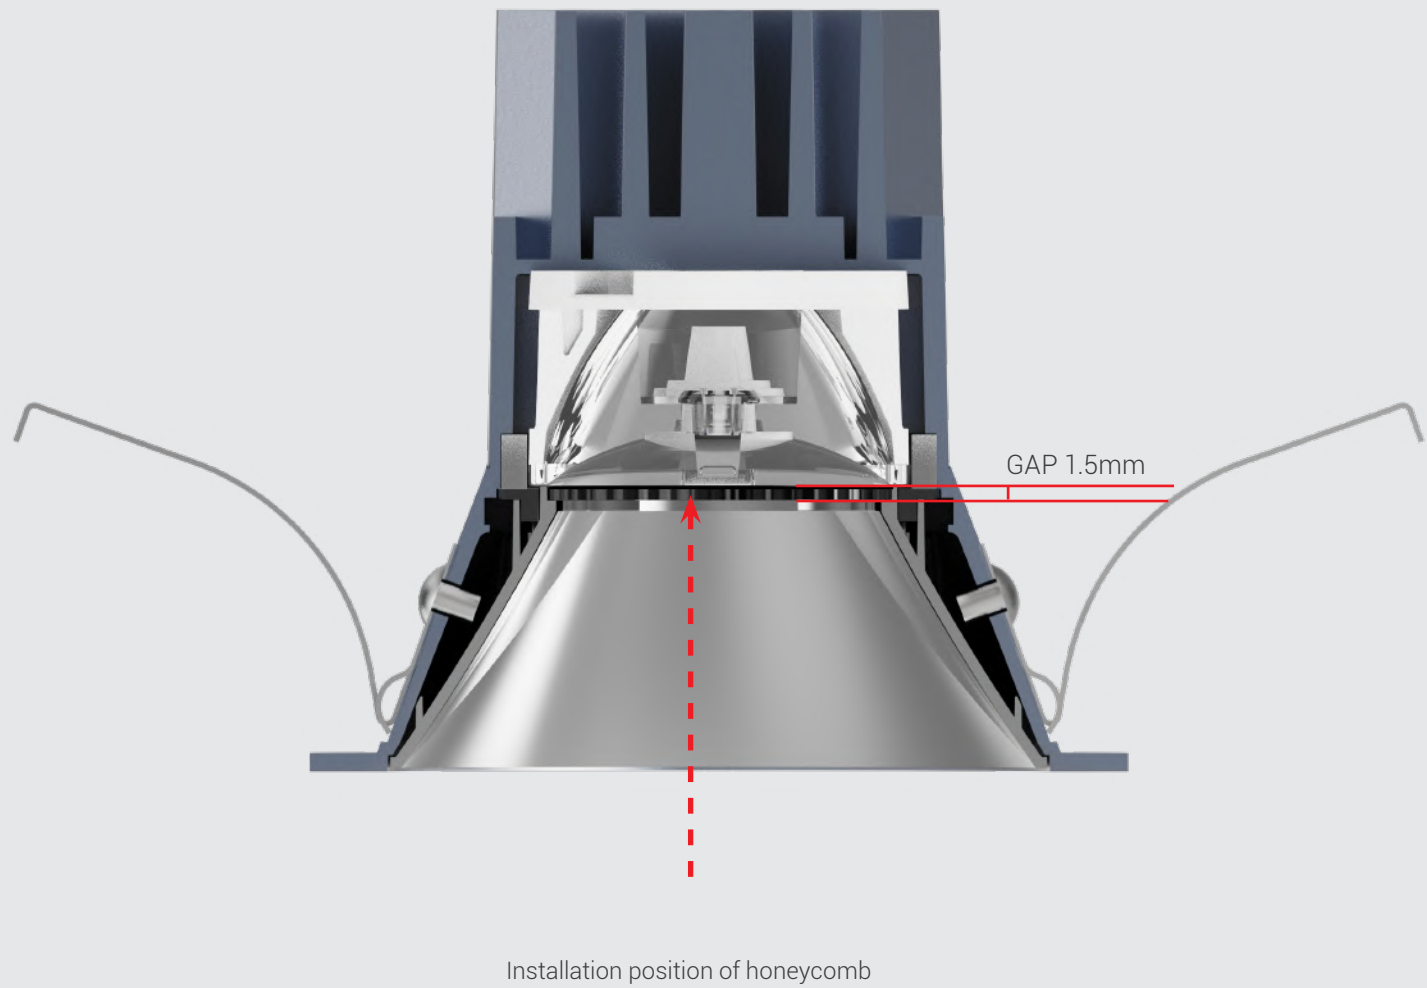

8° ~60°

Beam Angle


8 ° extremely narrow light,
12 °, 15 °, 24 °, 36 °, 50 °, 60 °Creating a
varietyof space art atmosphere

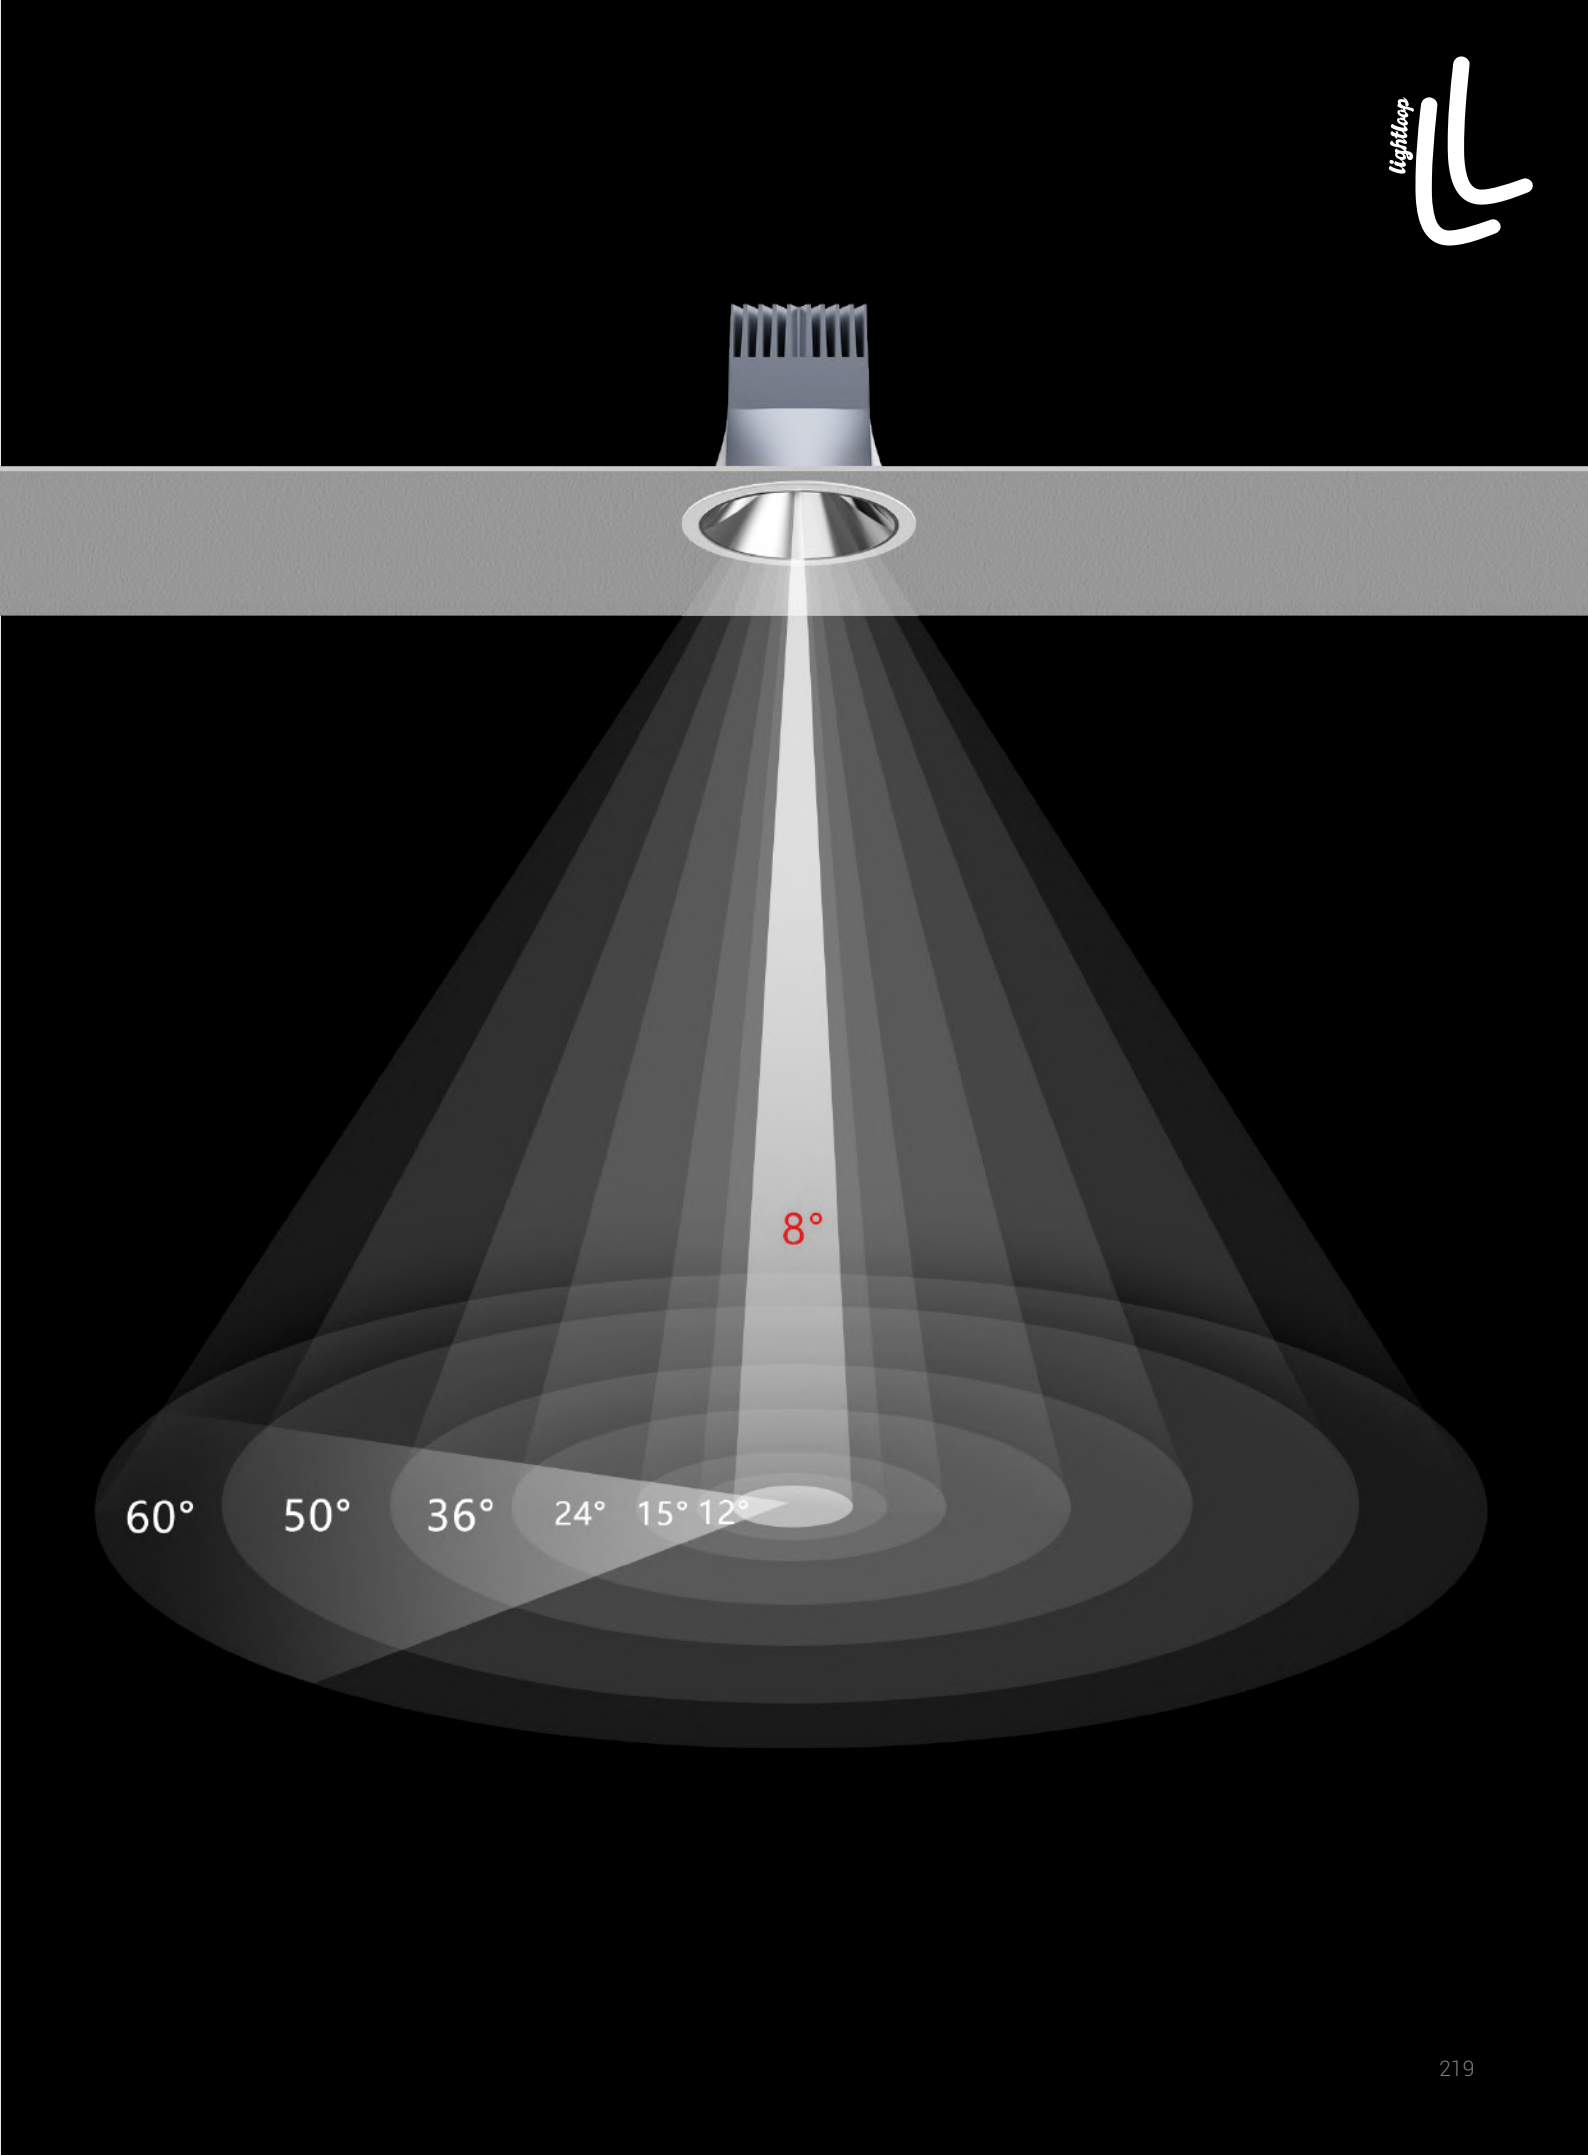



PMMA high luminous rate Ribbed structure lens

The ribbed structure design is adopted, with its own anti glare effect, so that the light is interwoven at the center of the upper end of the reflector, effectively reducing stray light, and the light spot transition is even, more soft and comfortable

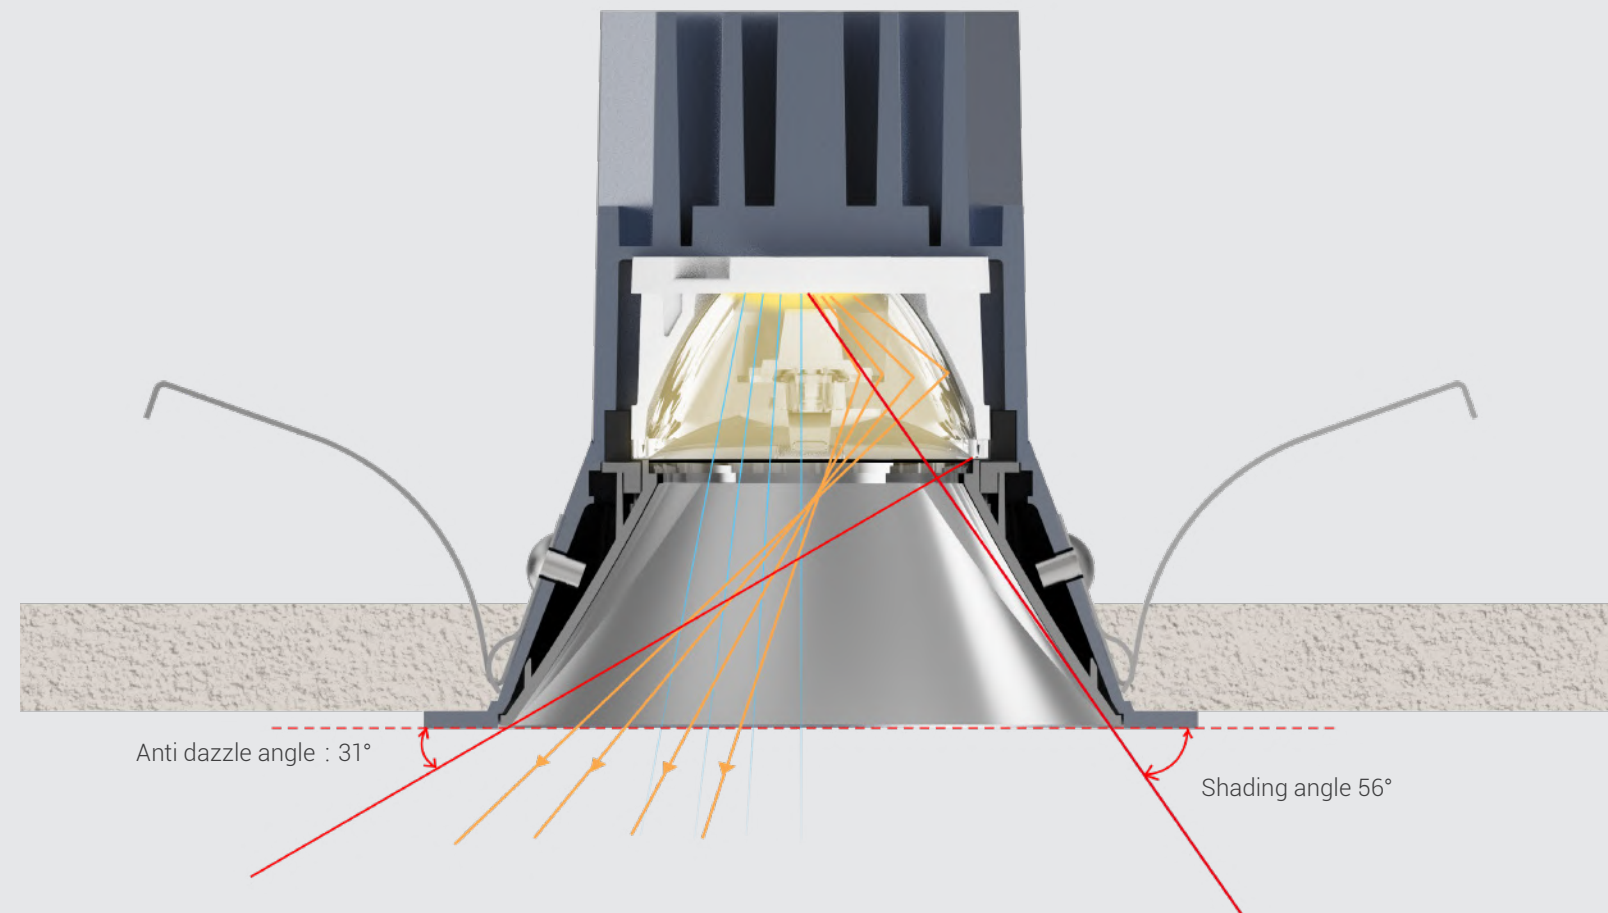



No stray light, round spot


No secondary light spot, pure and clear
Uniform light spot transition, more soft and comfortable

Light spot effect

8°	10°	15°	24°	36°	50°

Deep Anti-Glare

In general, the horizontal view of human activities in space is 30 degrees, so the anti glare shielding of spotlights should be more than 30 degrees to effectively prevent glare

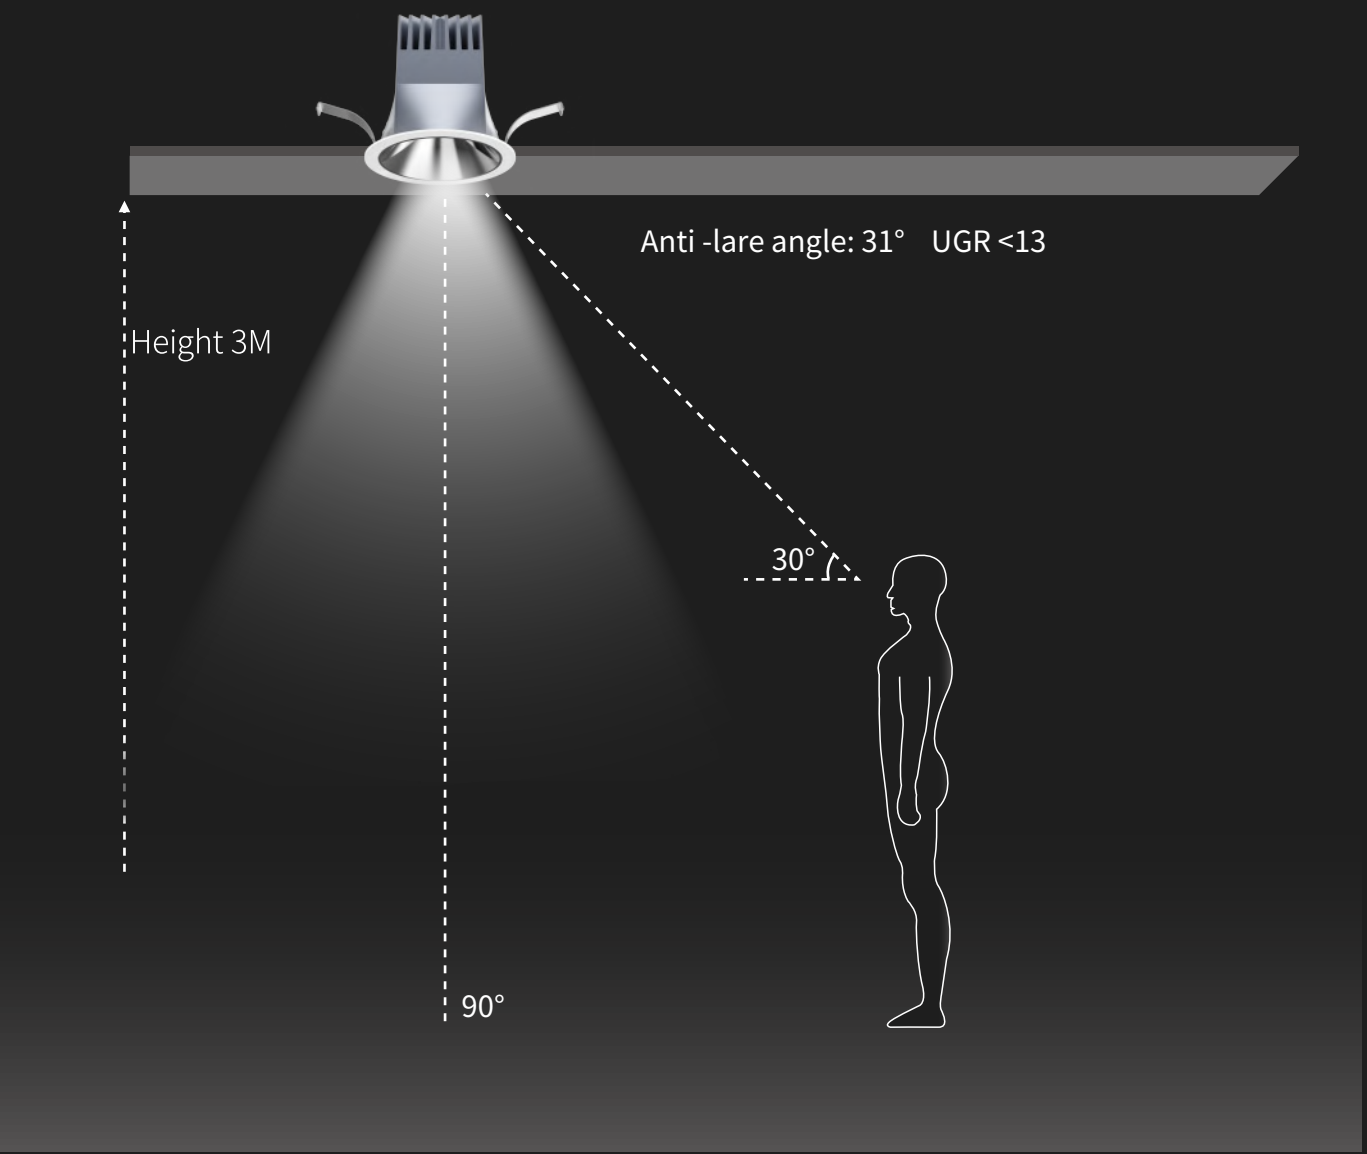

Practical application lighting effect



Fixed ground lighting effect



Adjustable wall lighting effect


light distribution curve

Model: PARKER-75



LED MODEL: CXM-6

Beam angle: 24°



Luminous flux output: 863.59lm

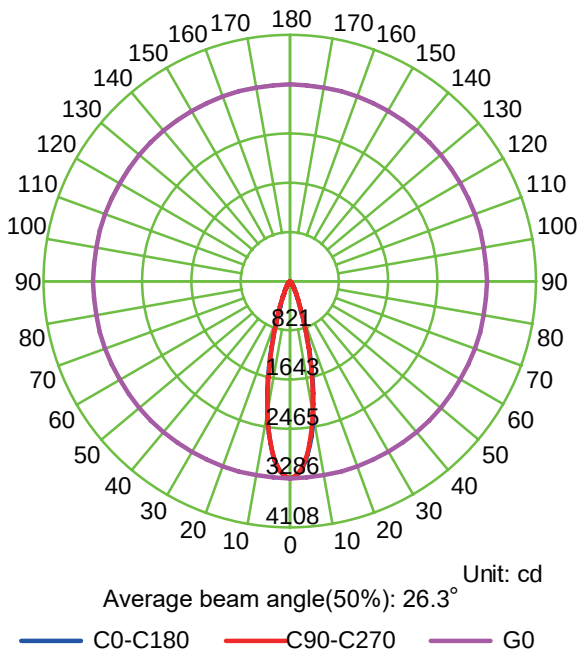

Luminous flux output: 863.59lm			
Height	Average illuminance/centre illuminance	Beam angle:120.0°	Dia. / Area
1.0m	91.63/ 3286.74lx		3.46m/ 9.42sq.m
2.0m	22.91/ 821.69lx		6.93m/ 37.70sq.m
3.0m	10.18/ 365.19lx		10.39m/ 84.82sq.m
4.0m	5.73/ 205.42lx		13.86m/ 150.80sq.m
5.0m	3.67/ 131.47lx		17.32m/ 235.62sq.m
6.0m	2.55/ 91.30lx		20.78m/ 339.29sq.m
8.0m	1.43/ 51.36lx		27.71m/ 603.19sq.m
9.0m	1.13/ 40.58lx		31.18m/ 763.41sq.m
10.0m	.92/ 32.87lx		34.64m/ 942.48sq.m
12.0m	0.64/ 22.82lx		41.57m/ 1357.17sq.m



NEW Model: XQ-1002E45-LENS
Power: 6W(Lens)
Power: 7W(Reflector Cup)
Cutout: Ø45mm
Size(WxH): Ø52.5X55mm
Beam angle: 8°/12°/15°/24°/36°/50°/60°
Standard holder: **CREE** 1304
Optional holder:
LUMINUS CXM-4 CXM-6







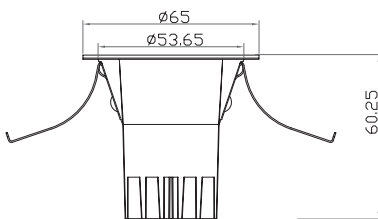
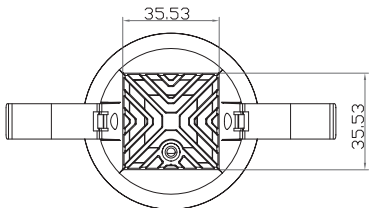


NEW Model: XQ-1002E55-LENS
Power: 8W(Lens)
Power: 10W(Reflector Cup)
Cutout: Ø55mm
Size(WxH): Ø65X60.25mm
Beam angle: 8°/12°/15°/24°/36°/50°/60°
Standard holder: **CREE** 1304
Optional holder:
LUMINUS CXM-4 CXM-6

Reflector cover:

Optional :





NEW Model: XQ-1002E65-LENS
Power: 10W(Lens)
Power: 13W(Reflector Cup)
Cutout: Ø65mm
Size(WxH): Ø75X69.9mm
Beam angle: 8° /12° /15° /24° /36° /50° /60°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6~10

NEW Model: XQ-1002E75-LENS
Power: 12W(Lens)
Power: 18W(Reflector Cup)
Cutout: Ø75mm
Size(WxH): Ø85X79.8mm
Beam angle: 8° /12° /15° /24° /36° /50° /60°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304
LUMINUS CXM-6~10

NEW Model: XQ-1002E95-LENS
Power: 20W(Lens)
Power: 25W(Reflector Cup)
Cutout: Ø95mm
Size(WxH): Ø106X100mm
Beam angle: 8° /12° /15° /24° /36° /50° /60°
Standard holder: **CREE** 1507
Optional holder:
LUMINUS CXM-10~17

NEW Model: XQ-1002E120-LENS
Power: 35W(Lens)
Power: 40W(Reflector Cup)
Cutout: Ø120mm
Size(WxH): Ø135X124mm
Beam angle: 8° /12° /15° /24° /36° /50° /60°
Standard holder: **CREE** 1917
Optional holder: **CREE** 1830
LUMINUS CXM-14~23

Reflector cover:      

Optional : 




Reflector cover:      

Optional : 



CONNER


Commercial lighting conner series

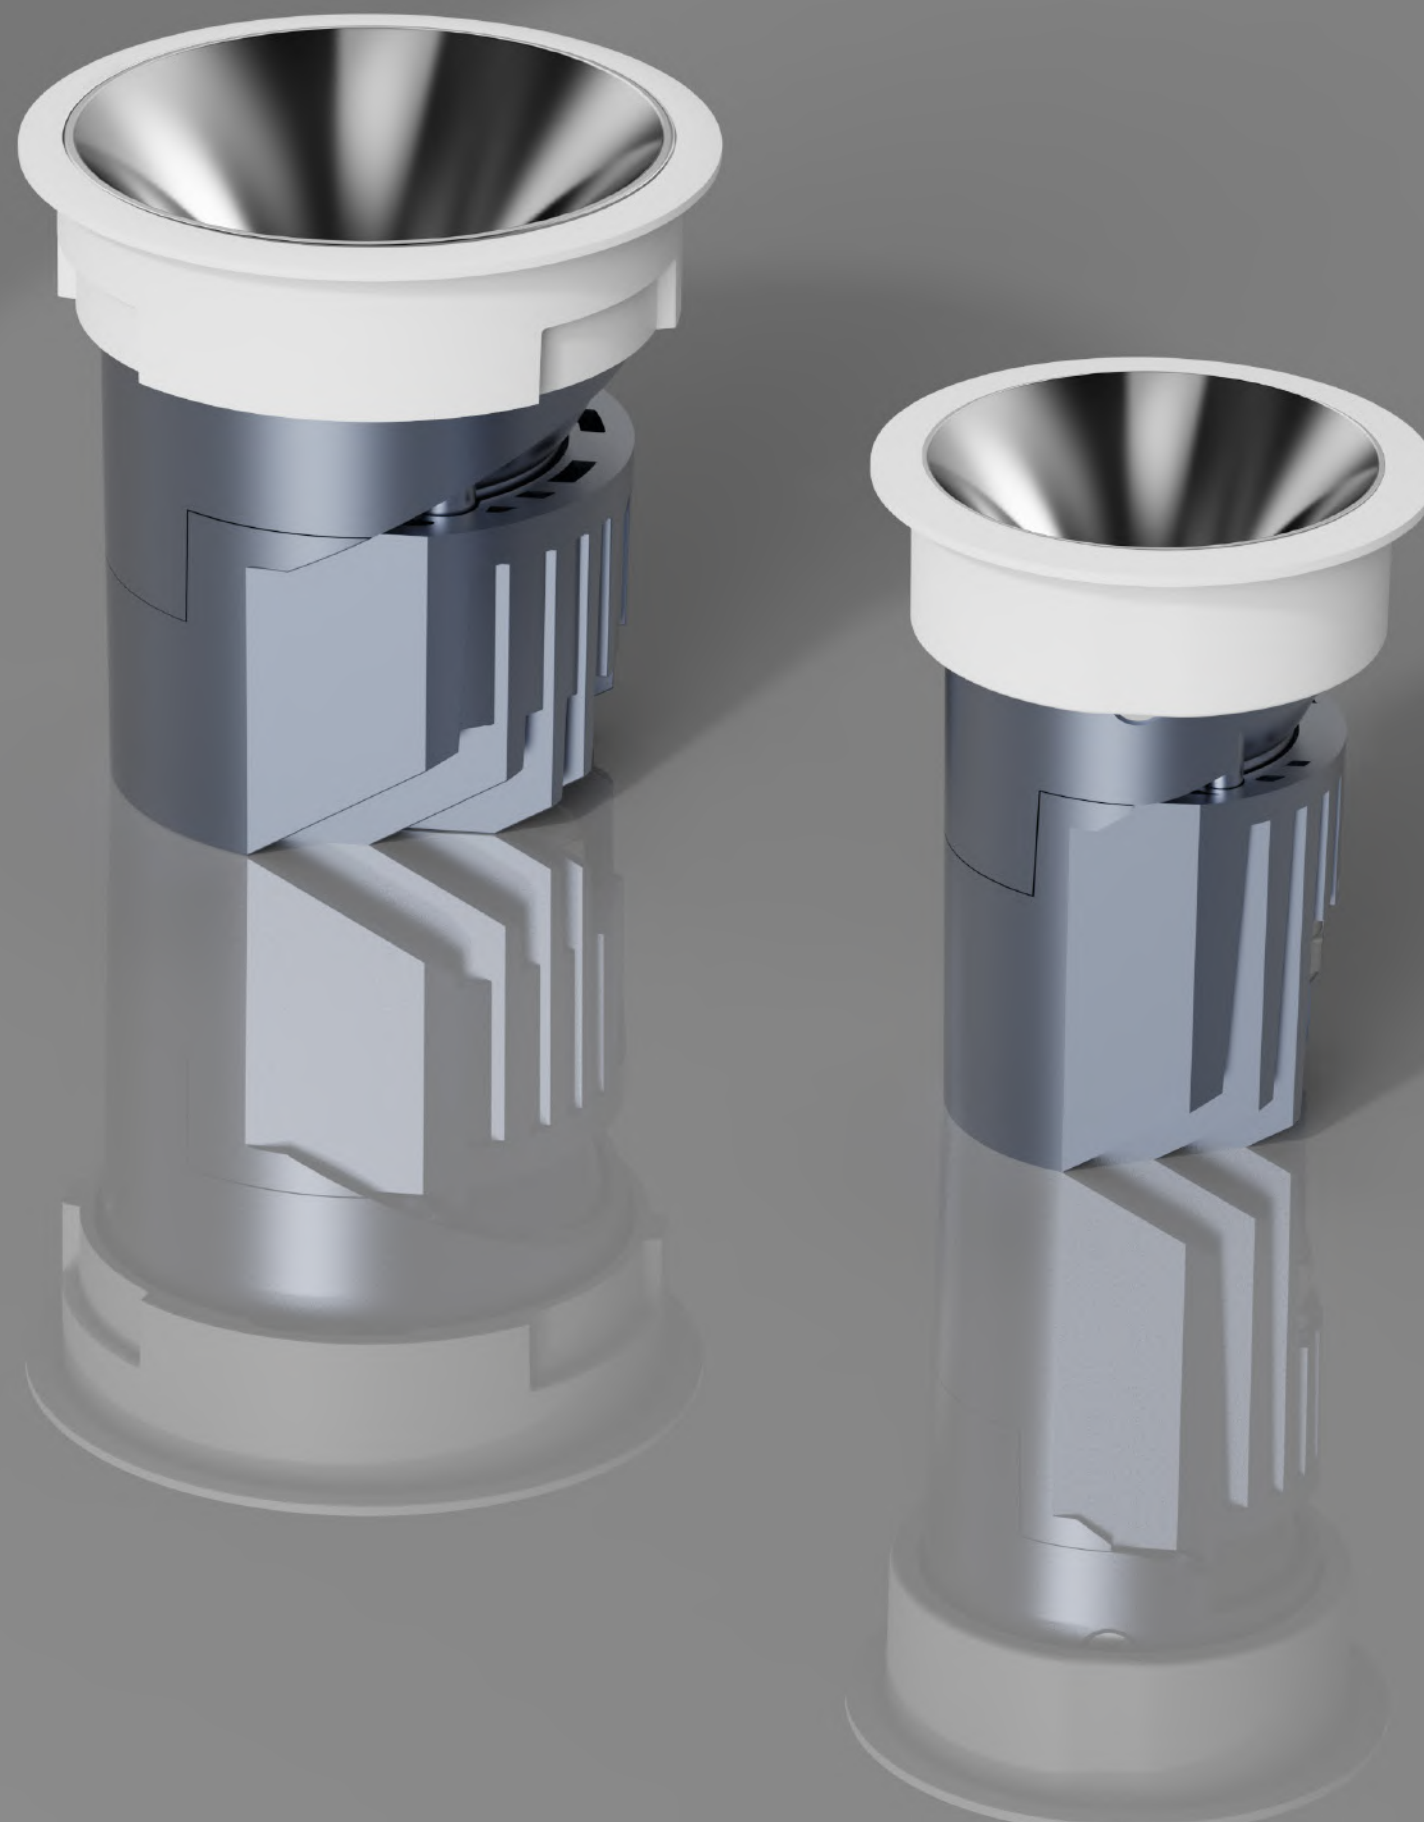



2.0 CONNER

All metal lamp body, High quality light

IP65

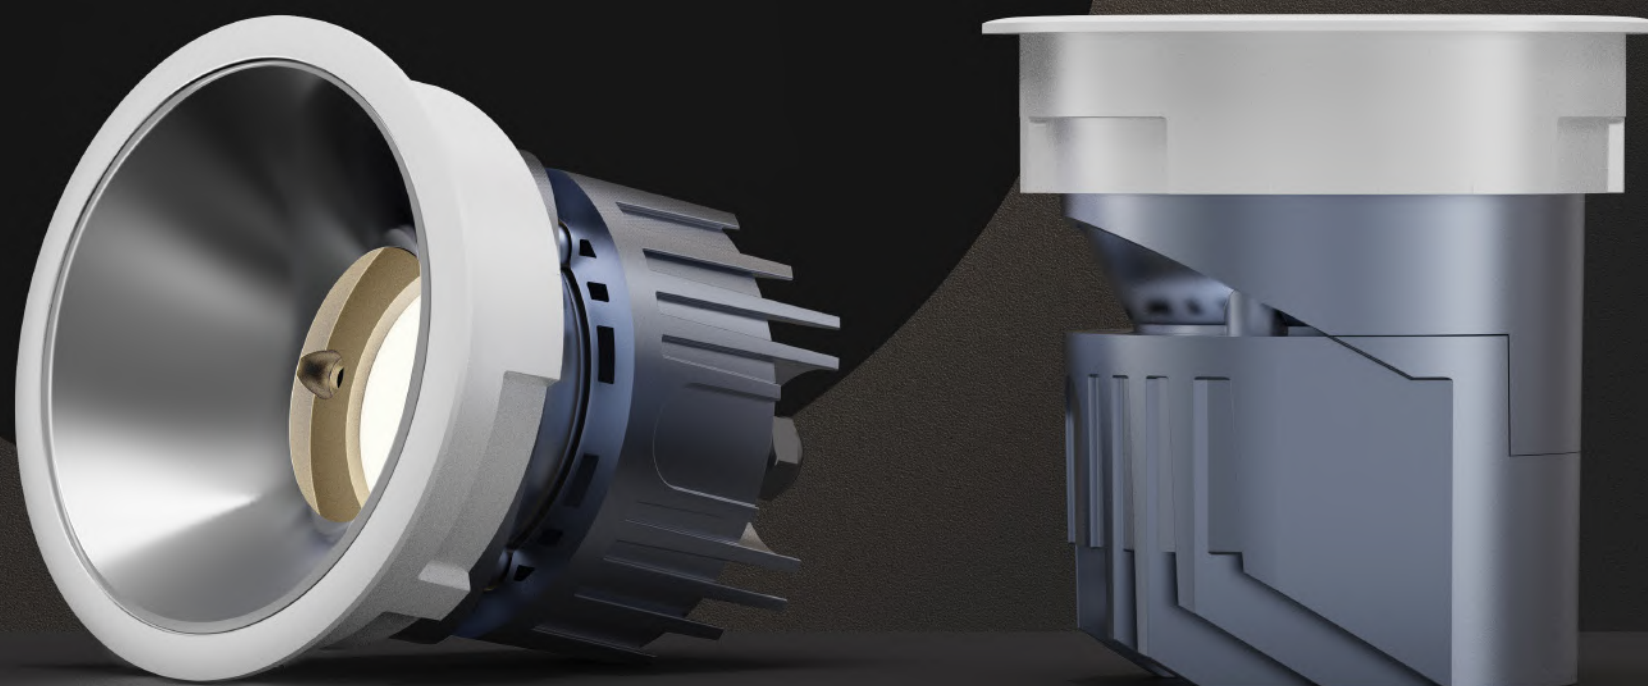


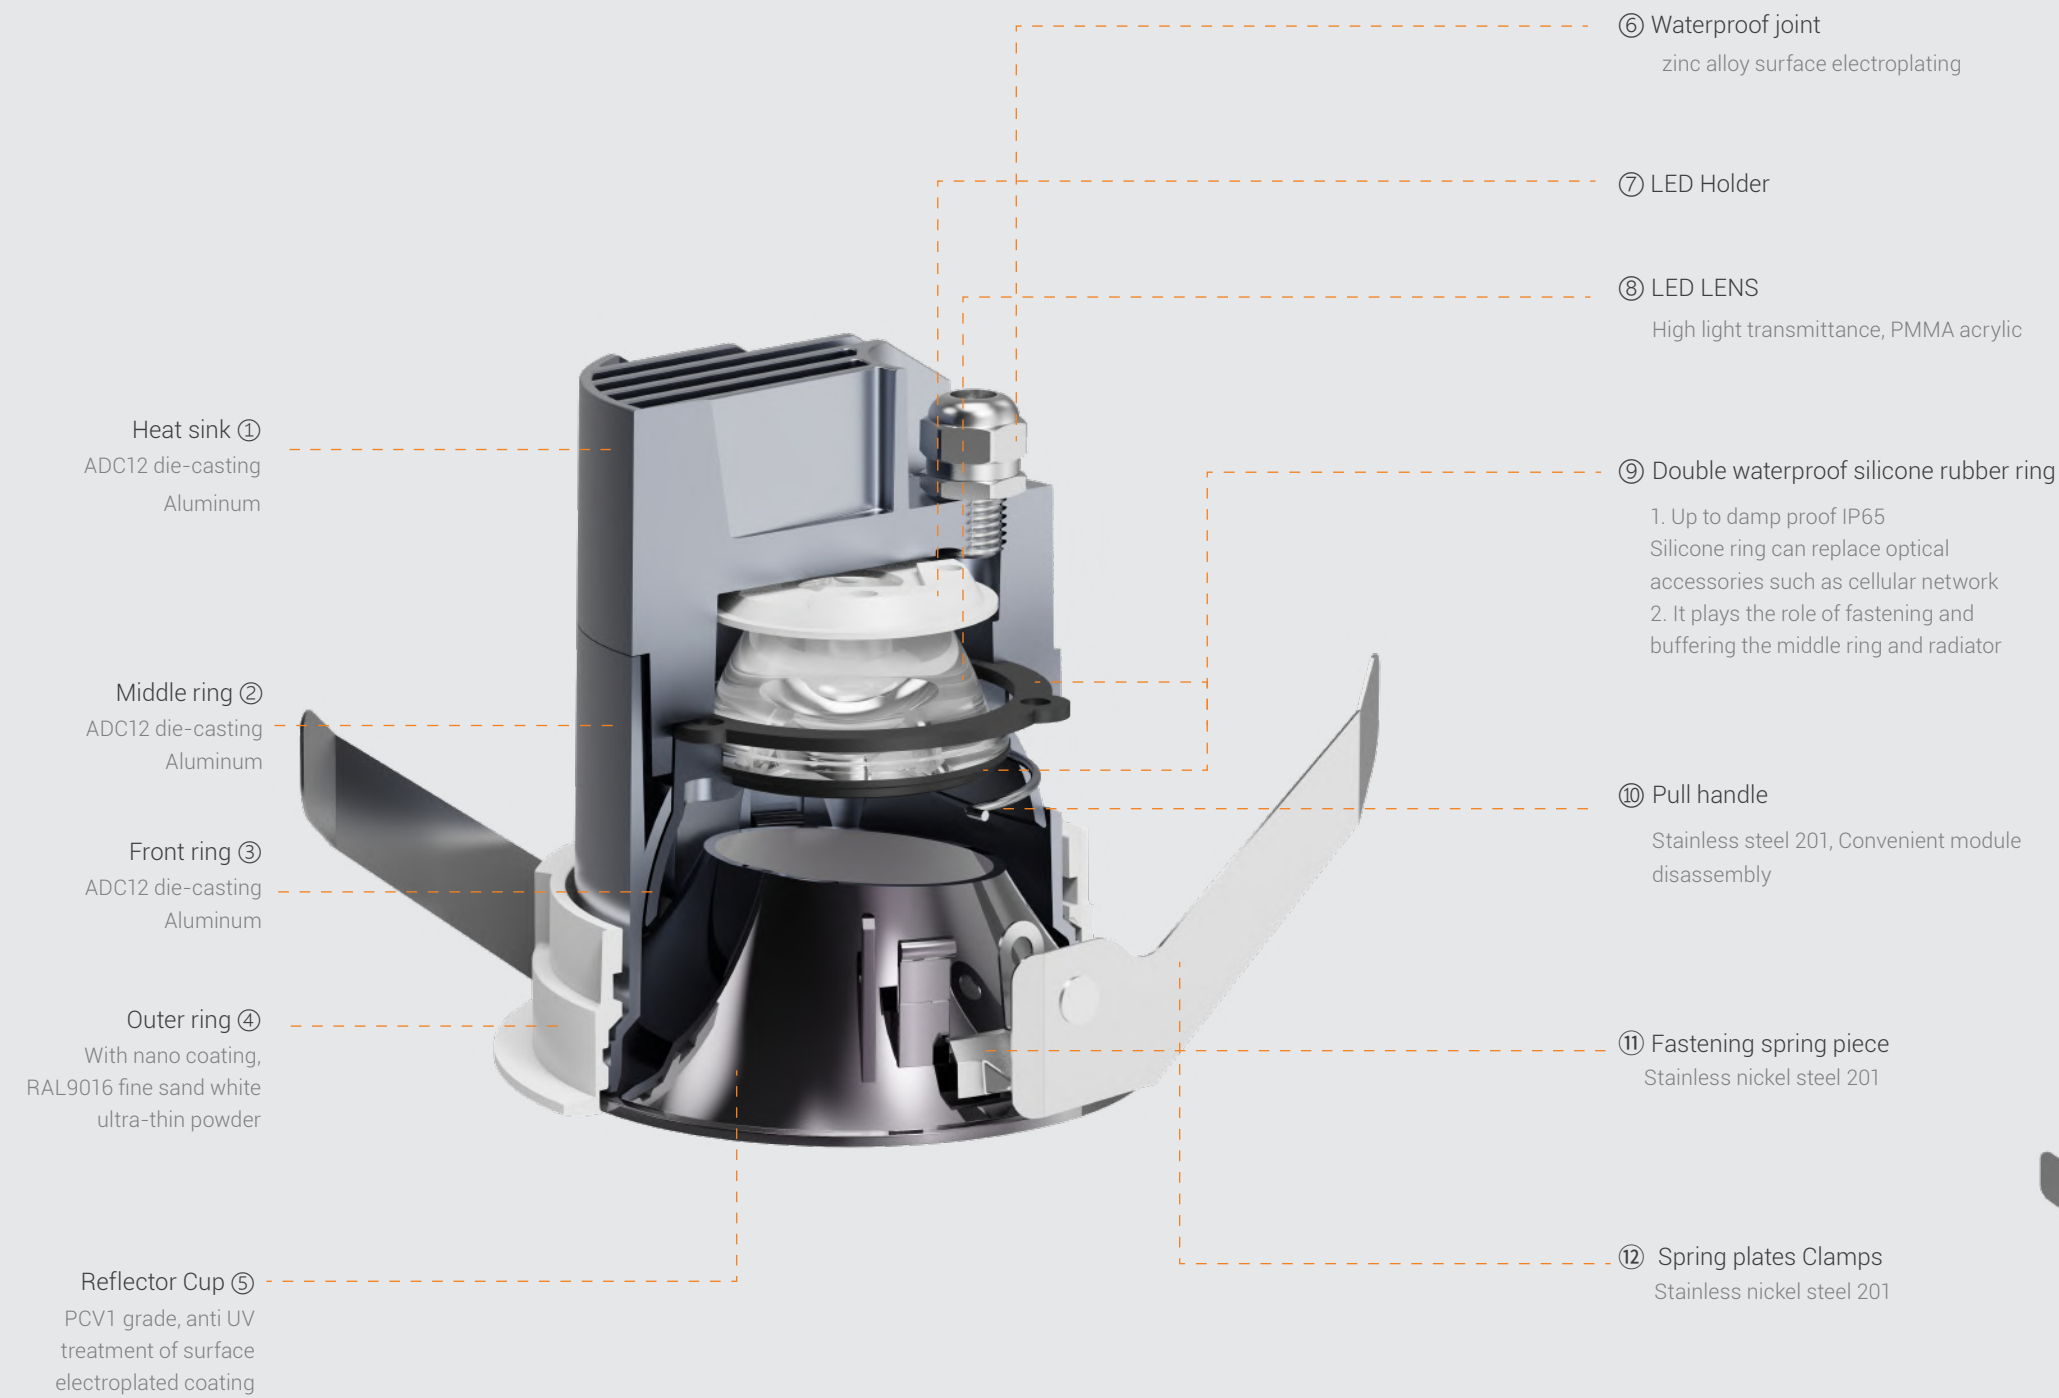

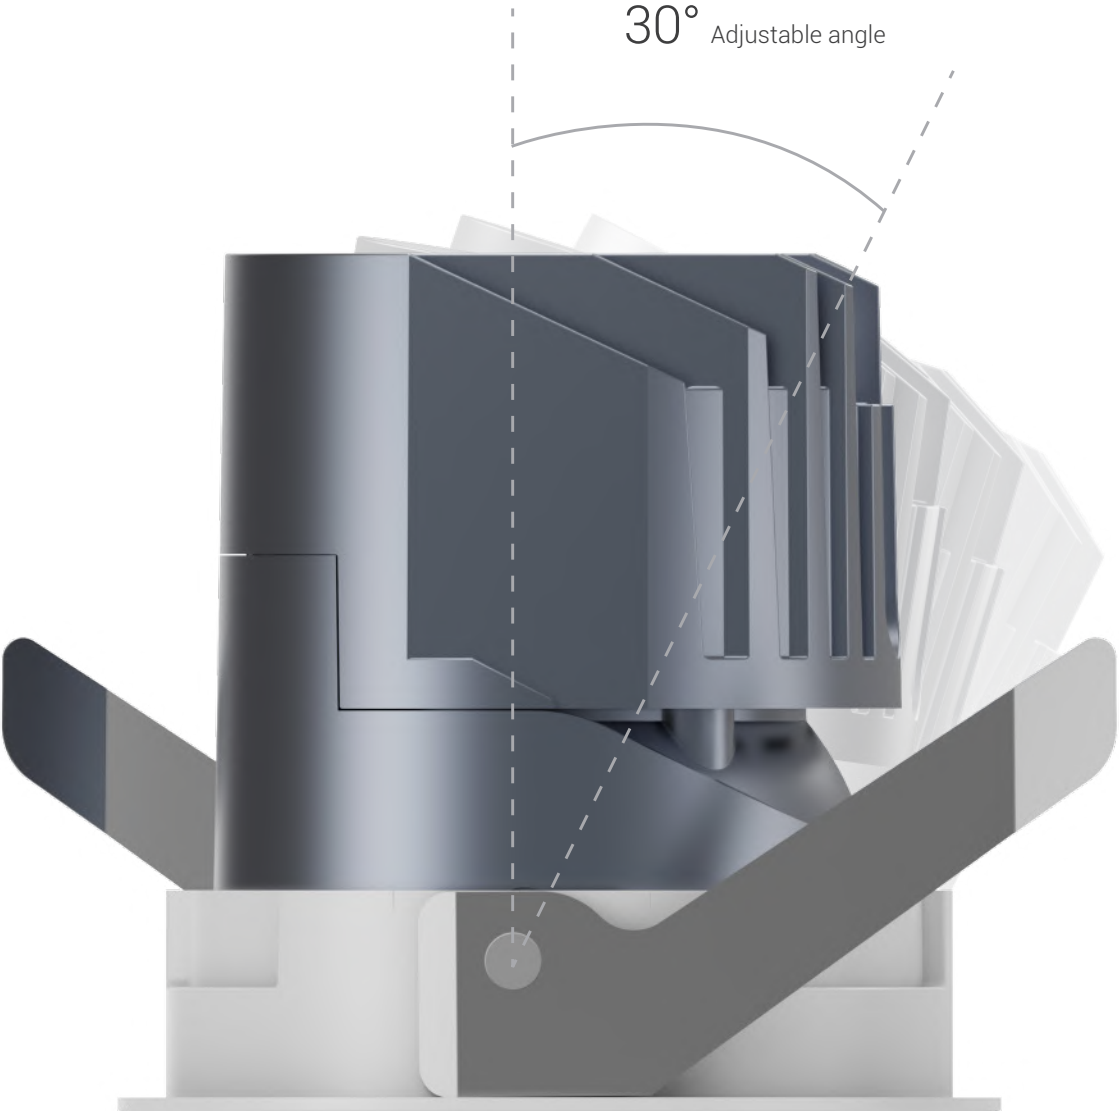

30°
Adjustable angle

The maximum swing angle is 30 °
Let the light move at will and maximize the value of light effect

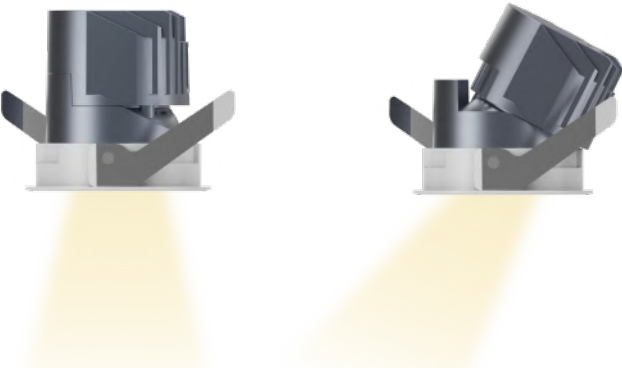



355°

Positioning groove,355 °
horizontal rotation

The 355 ° horizontal rotation is just right for
each degree of rotation
Realize the accurate control of beam angle and spot
effect, and endow the space with more vivid emotion

IP65



waterproof, dustproof and fogproof

IP65 waterproof


Fully sealed IP65 waterproof design

The interior of the light body is fully sealed(Double waterproof silicone rubber ring) and has undergone several + surface treatment and waterproofing processes to withstand environments such as bathrooms, kitchens and toilets that are susceptible to water, fog and fumes.





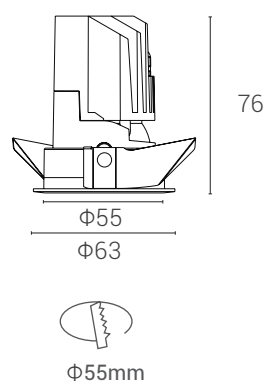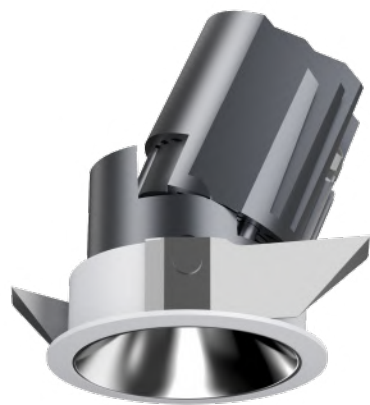


NEW Model: XQ-1008E55S-S
Power: 10W
Cutout: Ø55mm
Size(WxH): Ø63X76mm
Beam angle: 15°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **CREE** 1306
LUMINUS CXM-4 CXM-6

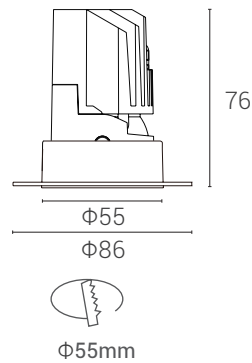

NEW Model: XQ-1008T55S-JS
Power: 10W
Cutout: Ø55mm
Size(WxH): Ø86X76mm
Beam angle: 15°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **CREE** 1306
LUMINUS CXM-4 CXM-6

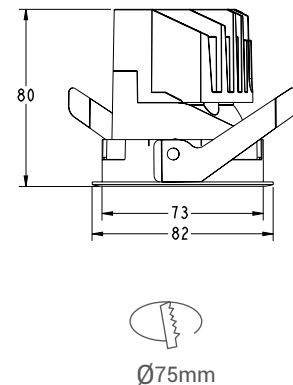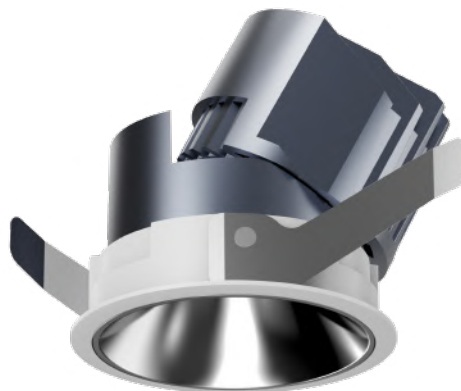

NEW Model: XQ-1008E75S-S
Power: 12W
Cutout: Ø75mm
Size(WxH): Ø82X80mm
Beam angle: 10°/15°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **CREE** 1306
LUMINUS CXM-4 CXM-6

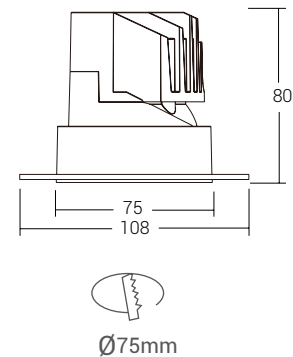

NEW Model: XQ-1008T75S-JS
Power: 12W
Cutout: Ø75mm
Size(WxH): Ø108X80mm
Beam angle: 10°/15°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **CREE** 1306
LUMINUS CXM-4 CXM-6

Reflector cover:      
Optional: 




Reflector cover:      
Optional: 




CONNOR


2021

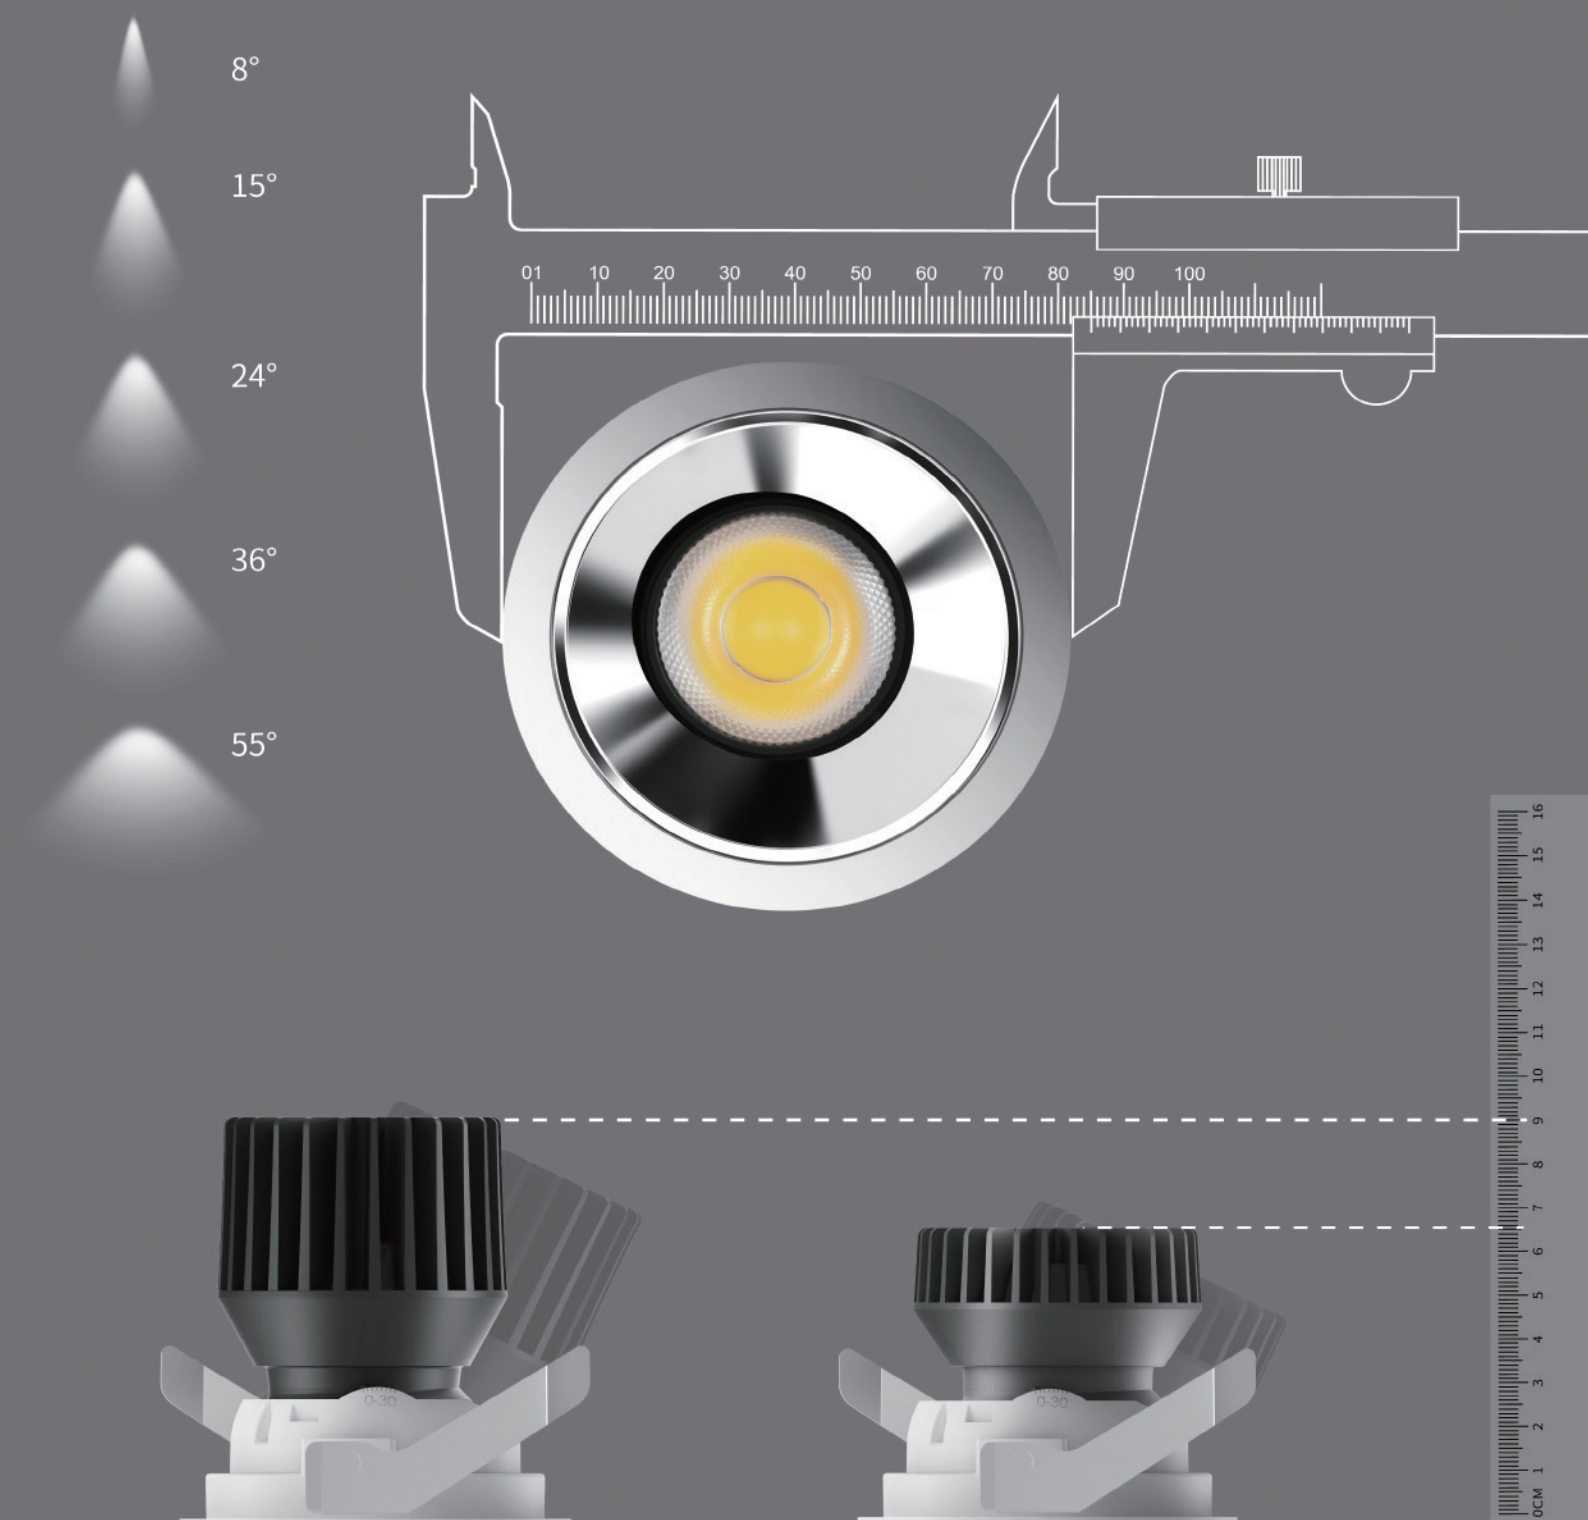


Luminous efficiency

Radiator can rotate freely - 355 °
 The maximum swing angle is 30 °
 Let the light move at will and maximize the value
 of light effect

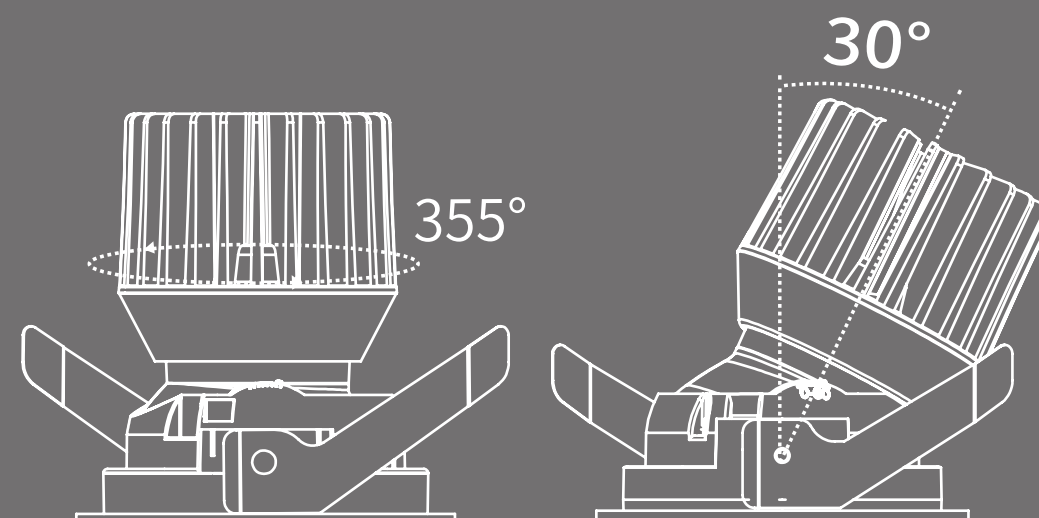


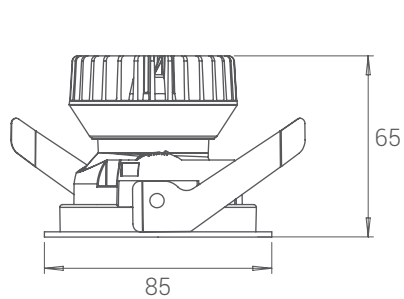


Model: XQ1008E75S
Power: 8W
Cutout: Ø75mm
Size(WxH): Ø85X65mm
Beam angle: 8° /15° /24° /36° /55°
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

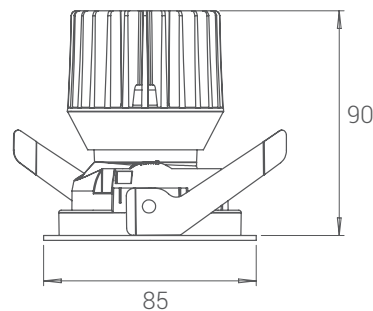

Model: XQ1008E75H
Power: 12W
Cutout: Ø75mm
Size(WxH): Ø85X90mm
Beam angle: 8° /15° /24° /36° /55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304

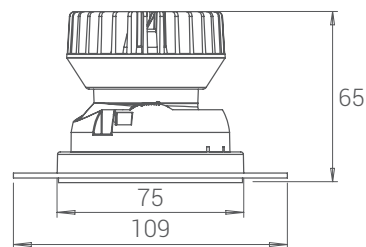

Model: XQ1008T75S
Power: 8W
Cutout: Ø75mm
Size(WxH): Ø109X65mm
Beam angle: 8° /15° /24° /36° /55°
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507


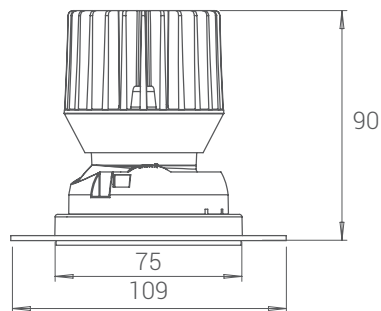


Model: XQ1008T75H
Power: 12W
Cutout: Ø75mm
Size(WxH): Ø109X90mm
Beam angle: 8° /15° /24° /36° /55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304






Model: XQ1008T75S-SG
Power: 10W
Cutout: Ø122mm
Size(WxH): Ø110X84mm
Beam angle: 8° /15° /24° /36° /55°
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

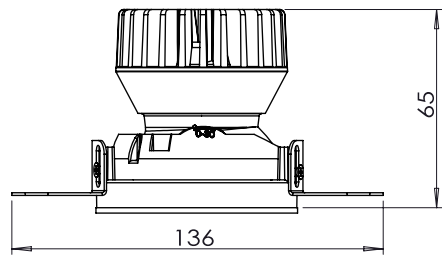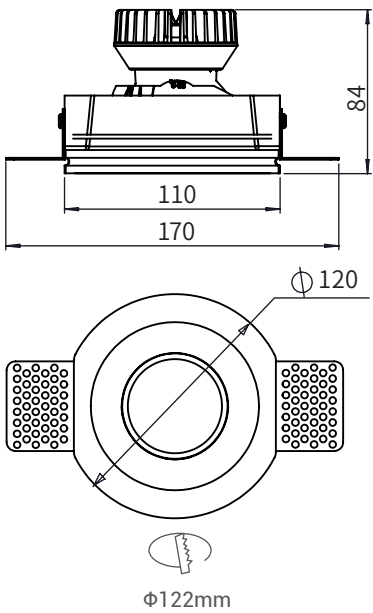


Model: XQ1008T75S
Power: 8W
Cutout: Ø75mm
Size(WxH): Ø136X65mm
Beam angle: 8° /15° /24° /36° /55°
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507

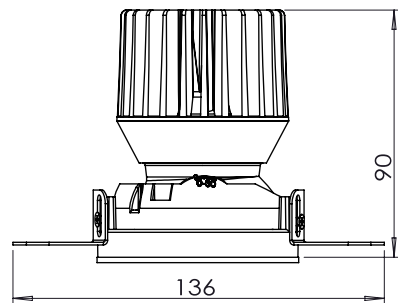

Model: XQ1008T75H
Power: 12W
Cutout: Ø75mm
Size(WxH): Ø136X90mm
Beam angle: 8° /15° /24° /36° /55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304



Model: XQ1008T75H-SG
Power: 15W
Cutout: Ø122mm
Size(WxH): Ø170X109mm
Beam angle: 8° /15° /24° /36° /55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304

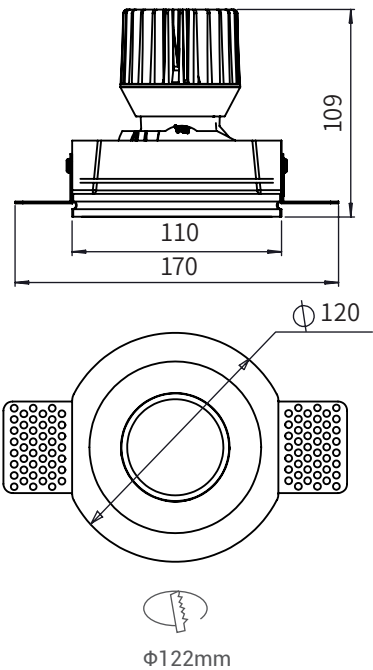





SAIRA SERIES

IP65

Waterproof

Anti-glare Multi-colours available colour customisation supported



Heat sink

ADC12 die-casting Aluminum

Middle ring

ADC12 die-casting Aluminum

Integral outerring

ADC12 die-casting Aluminum,With nano coating, RAL9016 fine sand white ultra-thin powder

Waterproof joint

zinc alloy surface electroplating

LED Holder

LED LENS

High light transmittance, PMMA acrylic

Double waterproof silicone rubber ring

1. Up to damp proof IP65 Silicone ring can replace optical accessories such as cellular network
2. It plays the role of fastening and buffering the middle ring and radiator.

Spring clips

Stainless nickel steel 201

Fixing screws


Stainless nickel steel 201

Plastic heat shrink tubing





Ultra-thin design

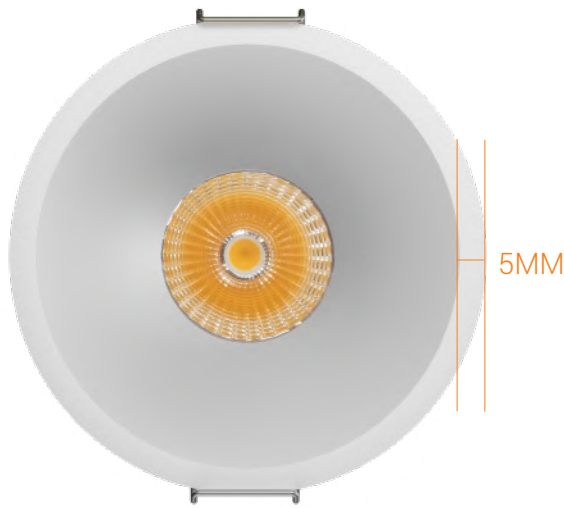


Four product sizes



Optical lens
and
reflector cup
can be switched



Integrated Frame

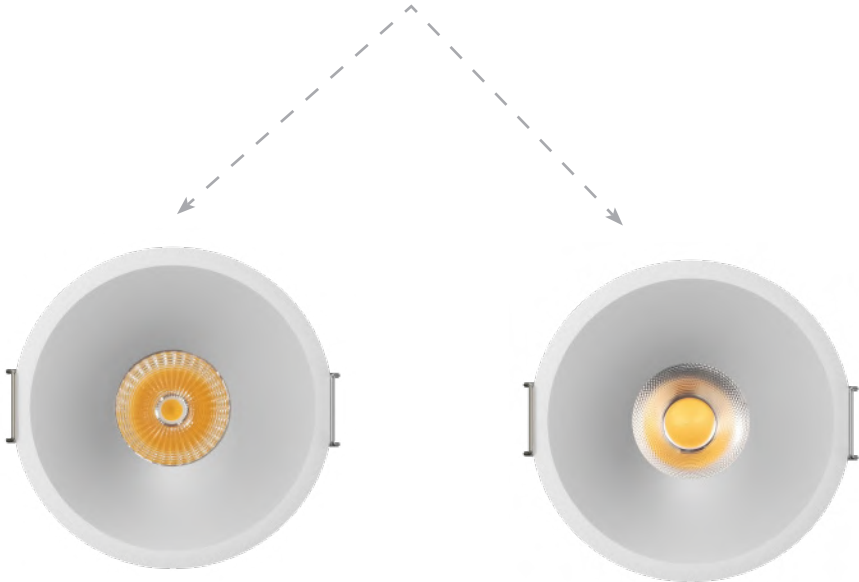


Reflector Cup

Lens



Reflector cover Frame

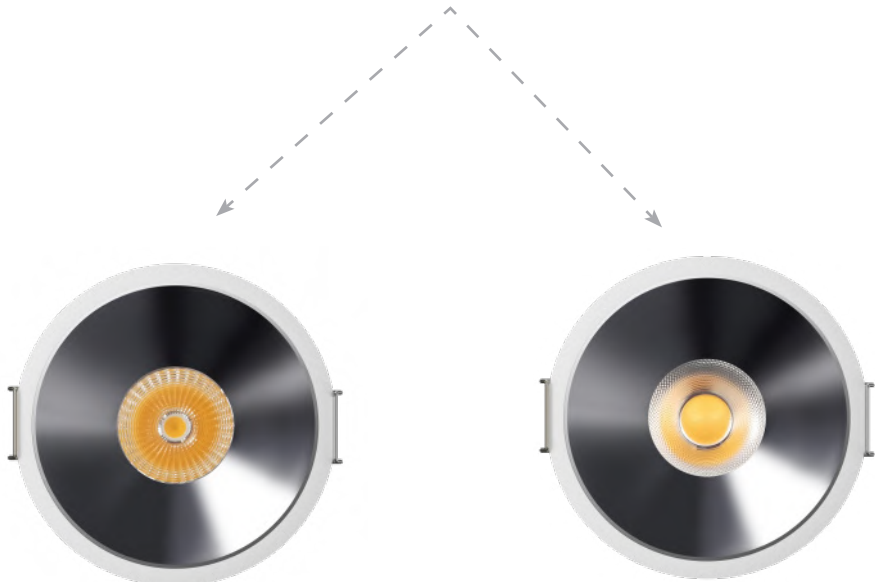


Reflector Cup

Lens

Beauty, more than one

Multi-coloured face rings ,The reflector is multi-color and can meet the needs of different occasionsThe reflector is precisely designed,plated and nano spray painted Comfortablelight type with high reflection efficiency and high efficiency

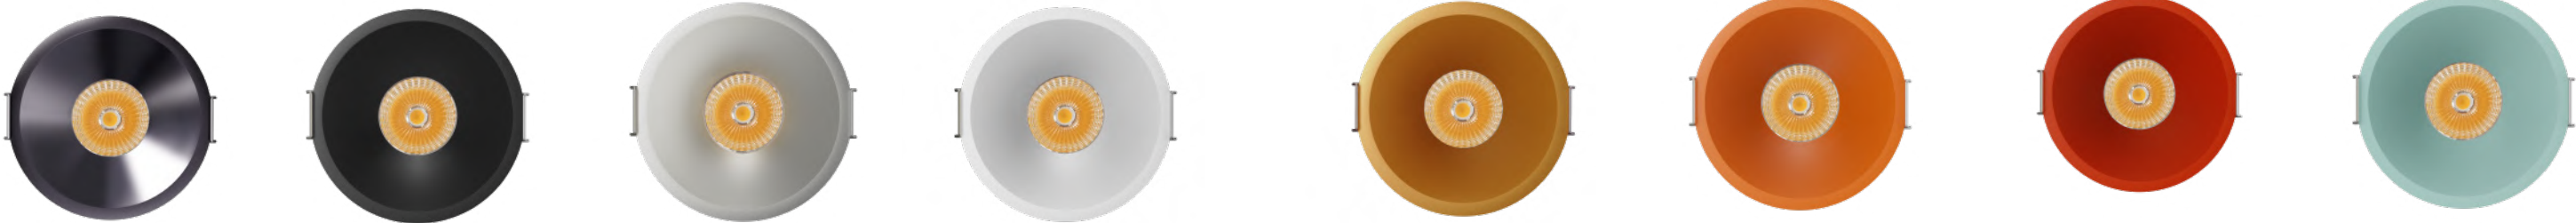

Pearl Black

Black

Silver


White

P 7563honey Gold

Pearl Black


P 3556

P 331

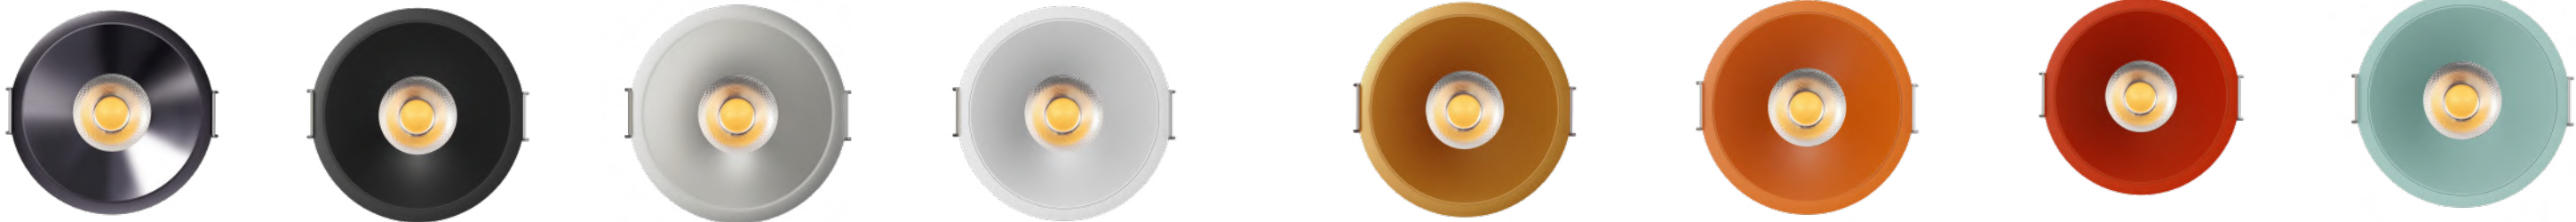

0~30°

Stepless regulation 0~30° at any angle

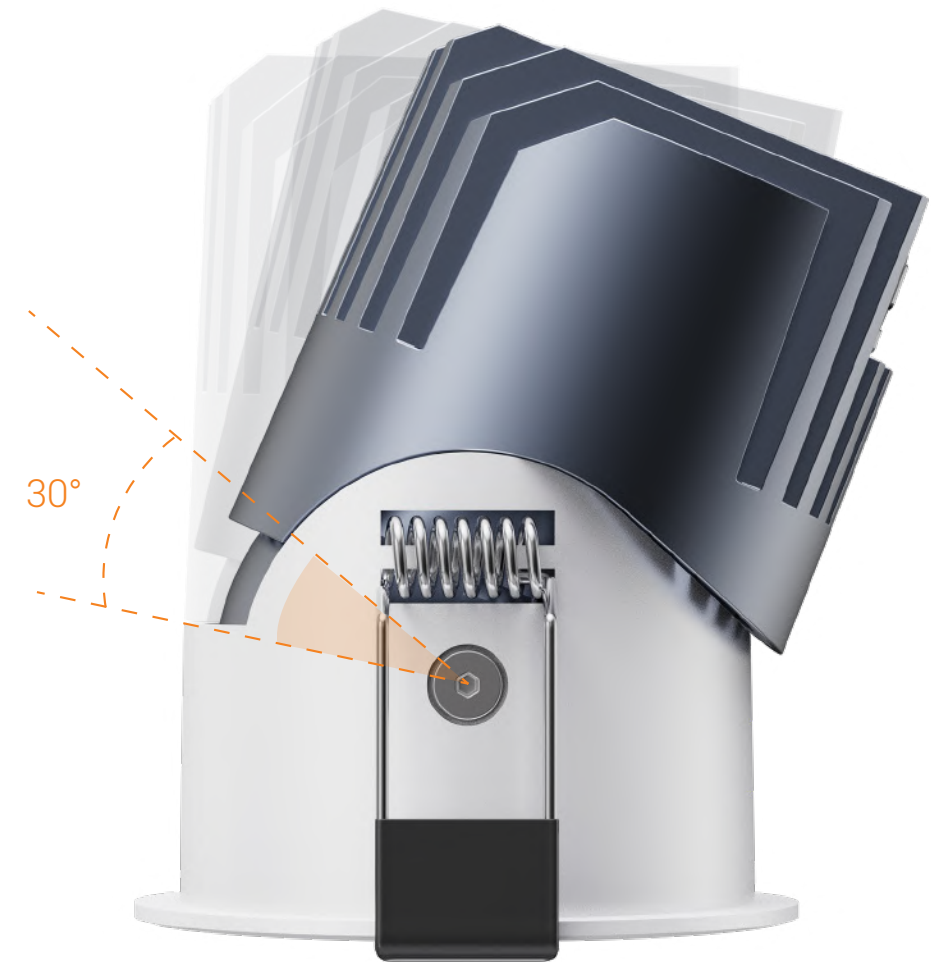


IP65

Waterproof


Not afraid of water/fog/oil/smoke can be used in the hotel, ballroom




NEW Model: XQ-1005E45
Power: 6W
Cutout: Ø45mm
Size(WxH): Ø52X72mm
Beam angle: 15°/24°/36°/55° (LENS)
Beam angle: 18°/24°/38°(Reflector Cup)
Waterproof: IP65 (LENS)
Waterproof: IP40 (Reflector Cup)
Standard holder: **CREE** 1304
Optional holder: **CREE** 1306
LUMINUS CXM-6




NEW Model: XQ-1005E65
Power: 10W
Cutout: Ø65mm
Size(WxH): Ø73X80mm
Beam angle: 10°/15°/24°/36°/55° (LENS)
Beam angle: 18°/24°/38°(Reflector Cup)
Waterproof: IP65 (LENS)
Waterproof: IP40 (Reflector Cup)
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507
LUMINUS CXM-6



NEW Model: XQ-1005E55
Power: 8W
Cutout: Ø55mm
Size(WxH): Ø62X77mm
Beam angle: 10°/15°/24°/36°/55° (LENS)
Beam angle: 18°/24°/38°(Reflector Cup)
Waterproof: IP65 (LENS)
Waterproof: IP40 (Reflector Cup)
Standard holder: **CREE** 1304
Optional holder: **CREE** 1306
LUMINUS CXM-6



NEW Model: XQ-1005E75
Power: 12W
Cutout: Ø75mm
Size(WxH): Ø84X85mm
Beam angle: 10°/15°/24°/36°/55° (LENS)
Beam angle: 18°/24°/38°(Reflector Cup)
Waterproof: IP65 (LENS)
Waterproof: IP40 (Reflector Cup)
Standard holder: **CREE** 1304
Optional holder: **CREE** 1507
LUMINUS CXM-6

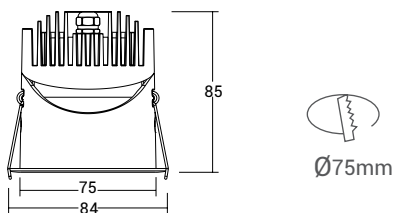

Reflector cover:

Optional:



Reflector cover:

Optional:



Una Series




- Die-cast aluminium lamp body can effectively prevent corrosion and rust, make the lamp body fully heat dissipation, improve heat dissipation efficiency.
- It can be used as IP40 anti-fog and prevent fog and spray from contacting light source. It is suitable for kitchen and toilet.
- Equipped with an extremely narrow beam Angle, can be from different angles to accurately illuminate the subject.




Split structure

embedded design, fast installation and
convenient maintenance
Innovative
high-efficiency black light mirror



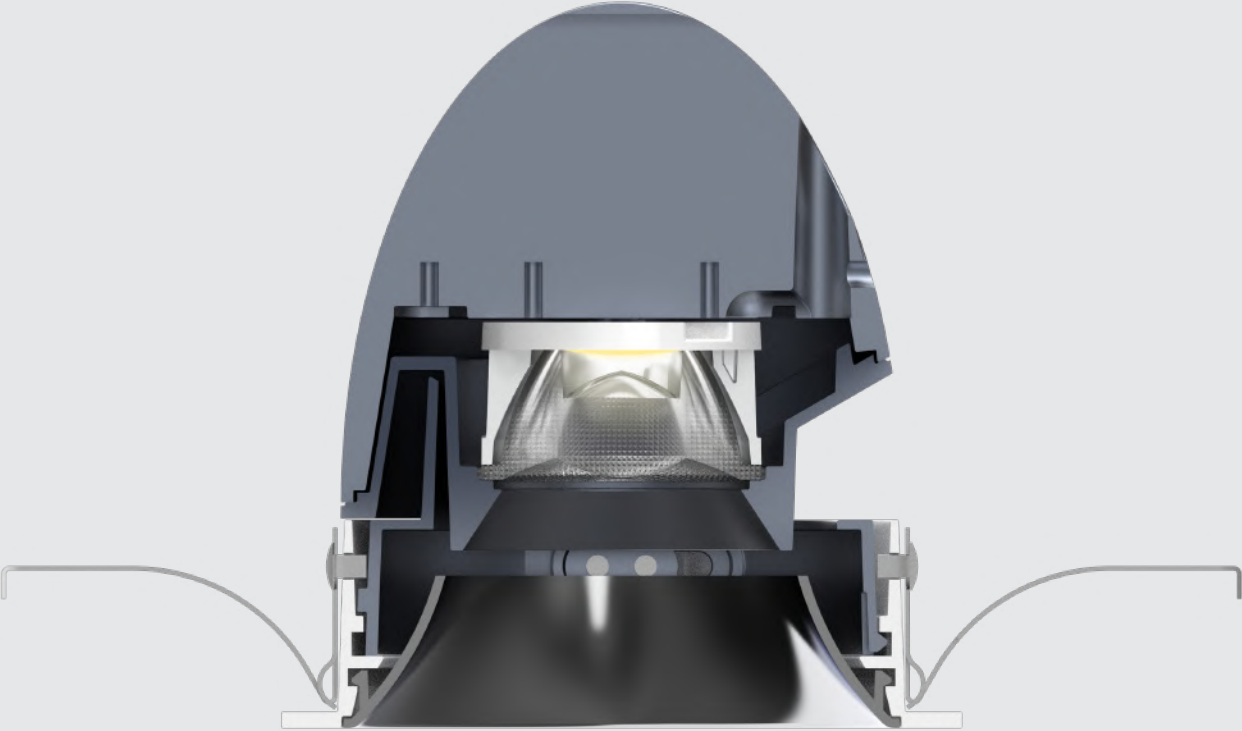

Direct light status

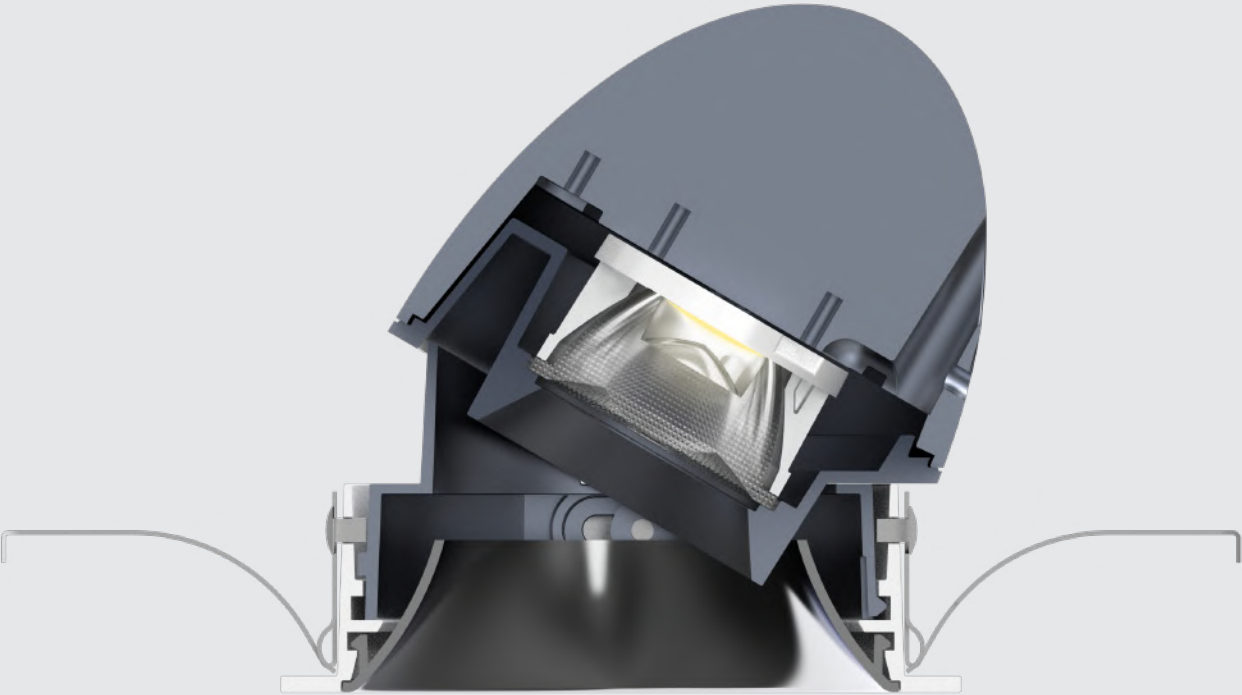

Pendulum angle status



Adjustable angle 30°

Horizontal rotation 355°




Luminous efficiency

It can achieve 0-30 ° adjustable angle,
built-in hidden horizontal push, which can push 6 mm, and the
lighting effect is better





NEW Model: XQ-1006E75
Power: 12W
Cutout: Ø75mm
Size(WxH): Ø85X90mm
Beam angle: 15° /24° /36° /55°
Waterproof: IP40 (lens)
Standard holder: 1304
Optional holder: 1306 /1507

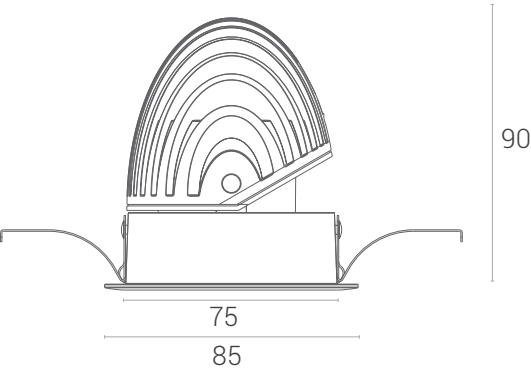

Reflector cover:      
Optional : 



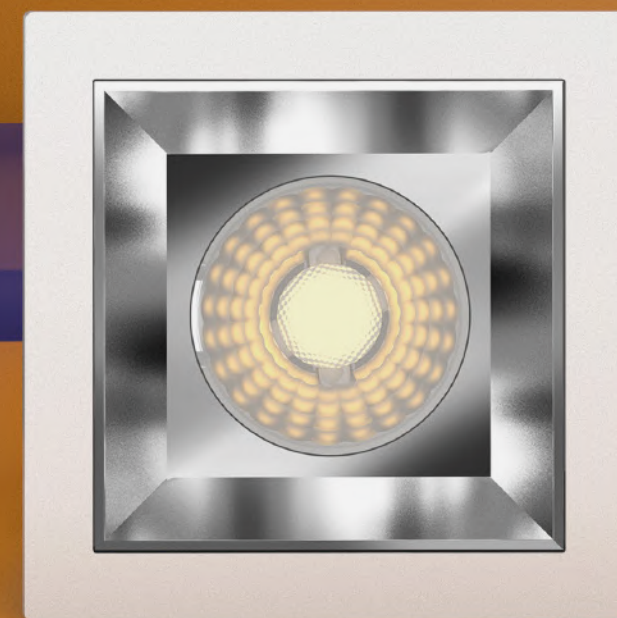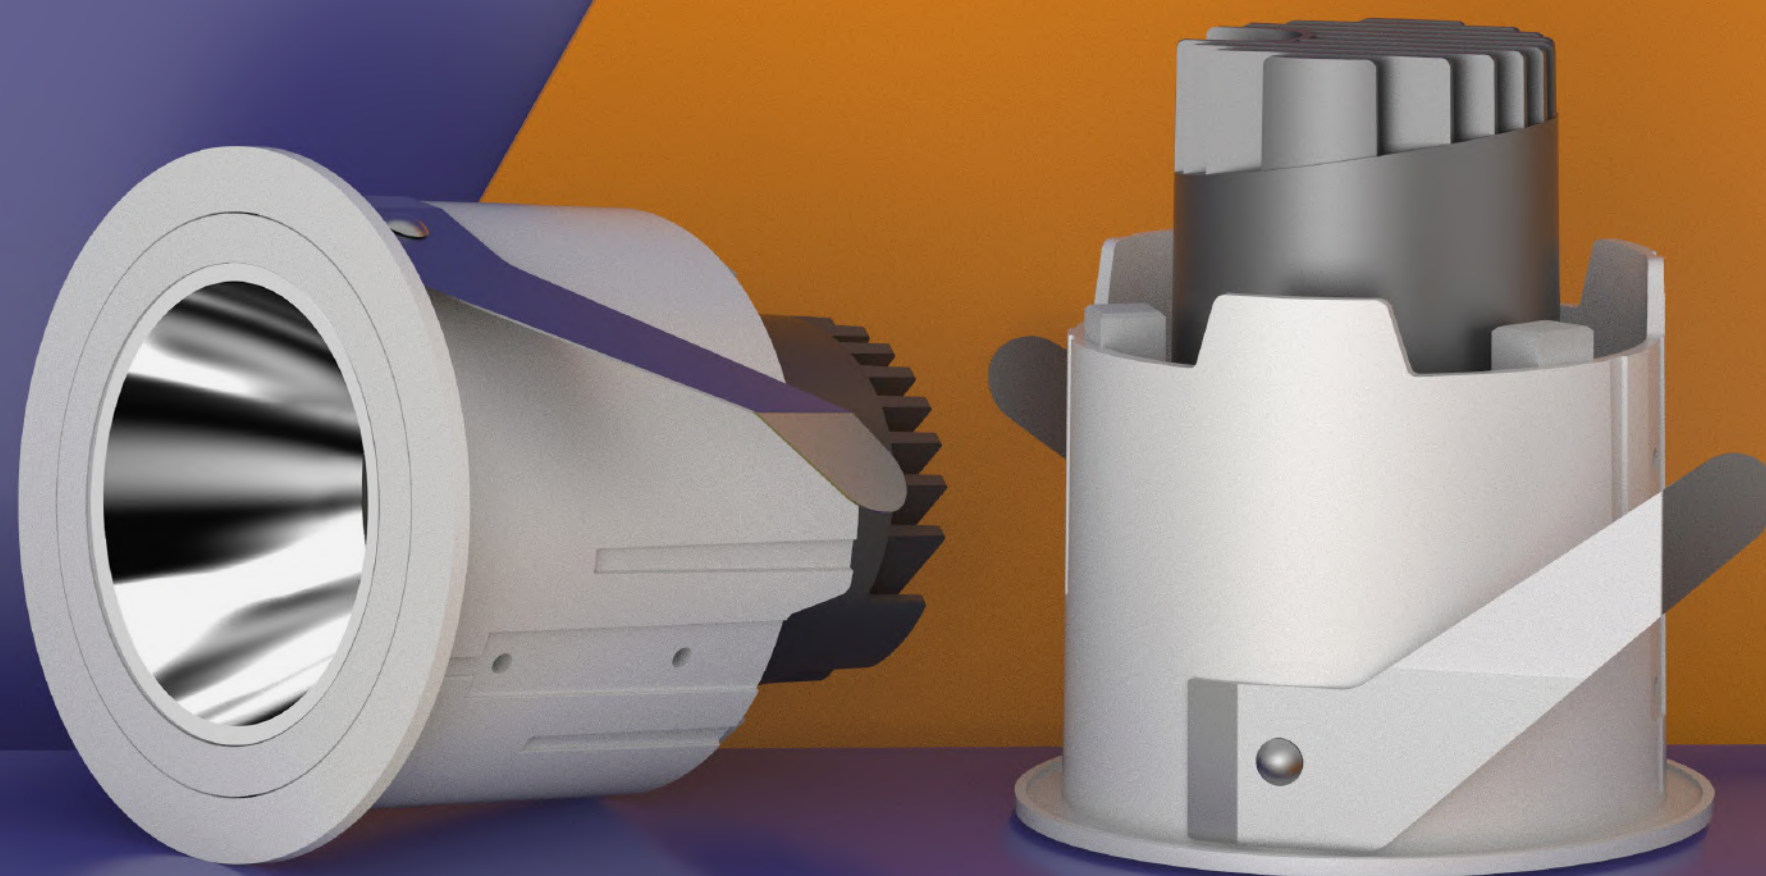

TIAN YUE

Tianyue series is a variety of optical applications based on Linan series radiators, It integrates key lighting, facade lighting, indirect lighting, basic lighting, etc. Covering points, lines, surfaces and lighting optical applications can be based on different architectural styles, Freely switch different models to achieve ideal optical functions, The installation method can be embedded, frameless, surface mounted, hoisting, etc.





Excellent design

From its design proposal, to optical structure and heat dissipation structure, to product surface treatment
It embodies its uniqueness everywhere.



SQUARE CIRCULAR

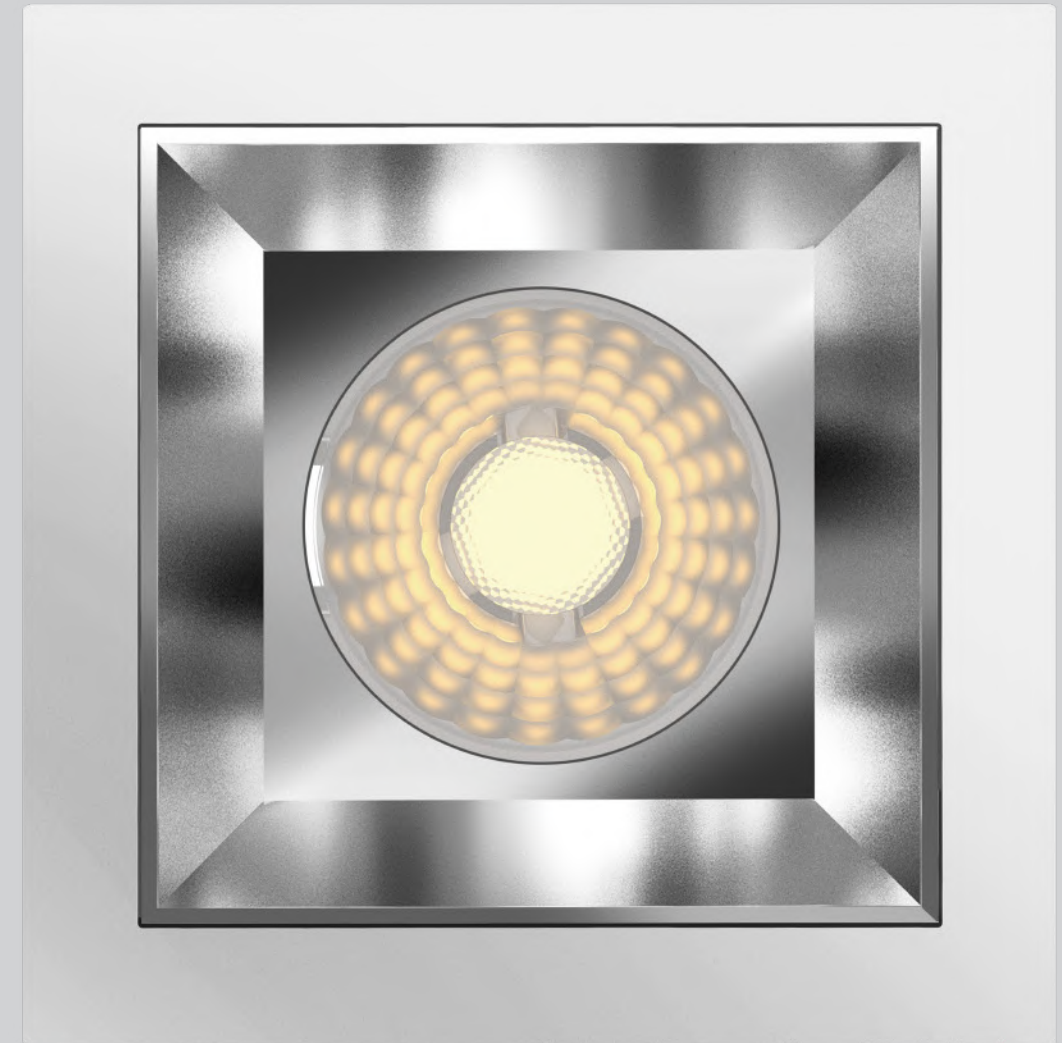

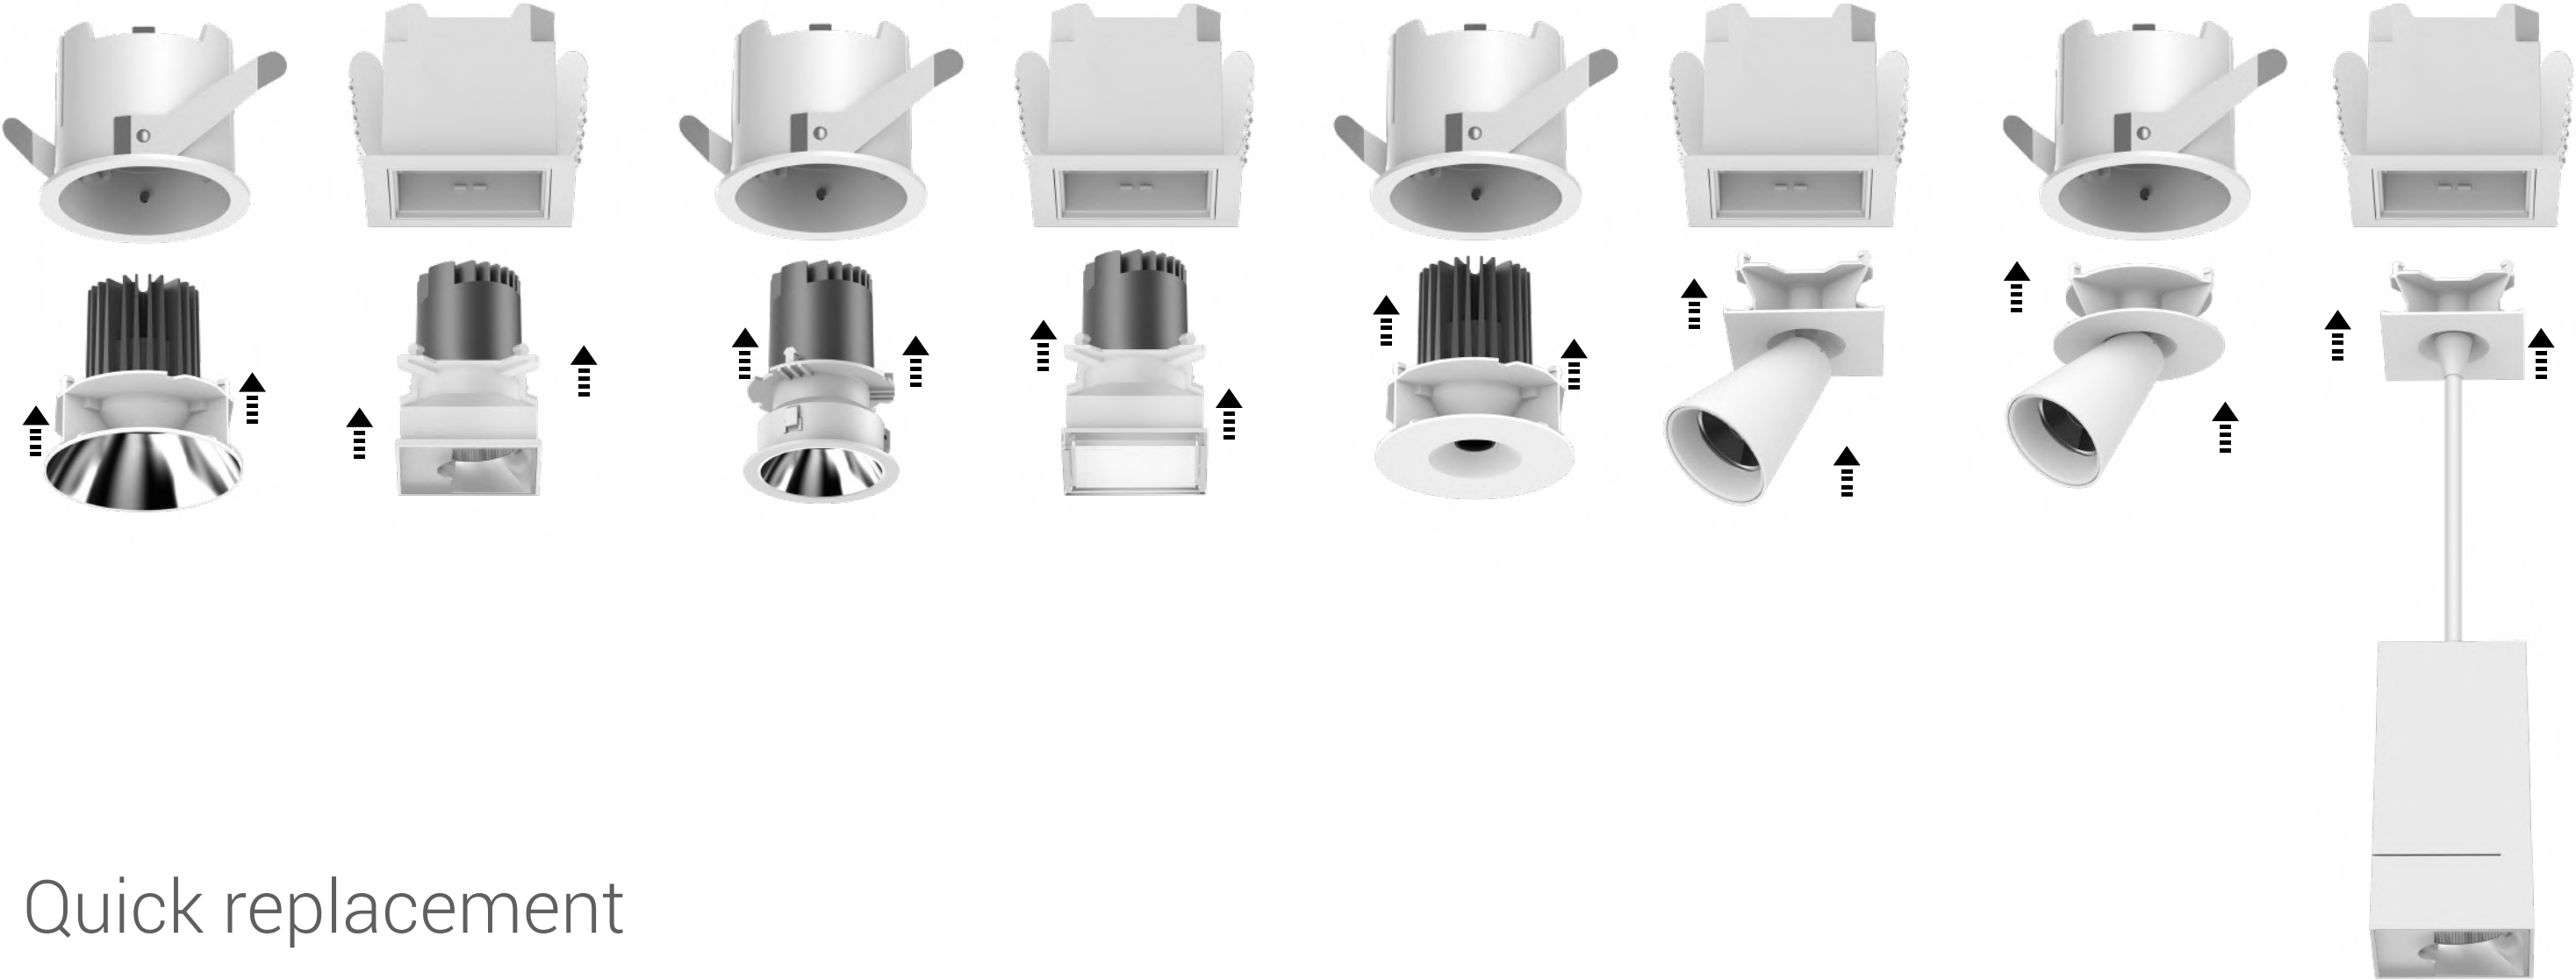


Quick replacement

In order to facilitate replacement and adapt to more scenes and lighting requirements
A quick replacement module is designed and developed. If you need to replace it, you can directly press to remove it and
replace it with a new module

TIANYUE


Functional configuration applicable to multiple scenarios of full-featured product series

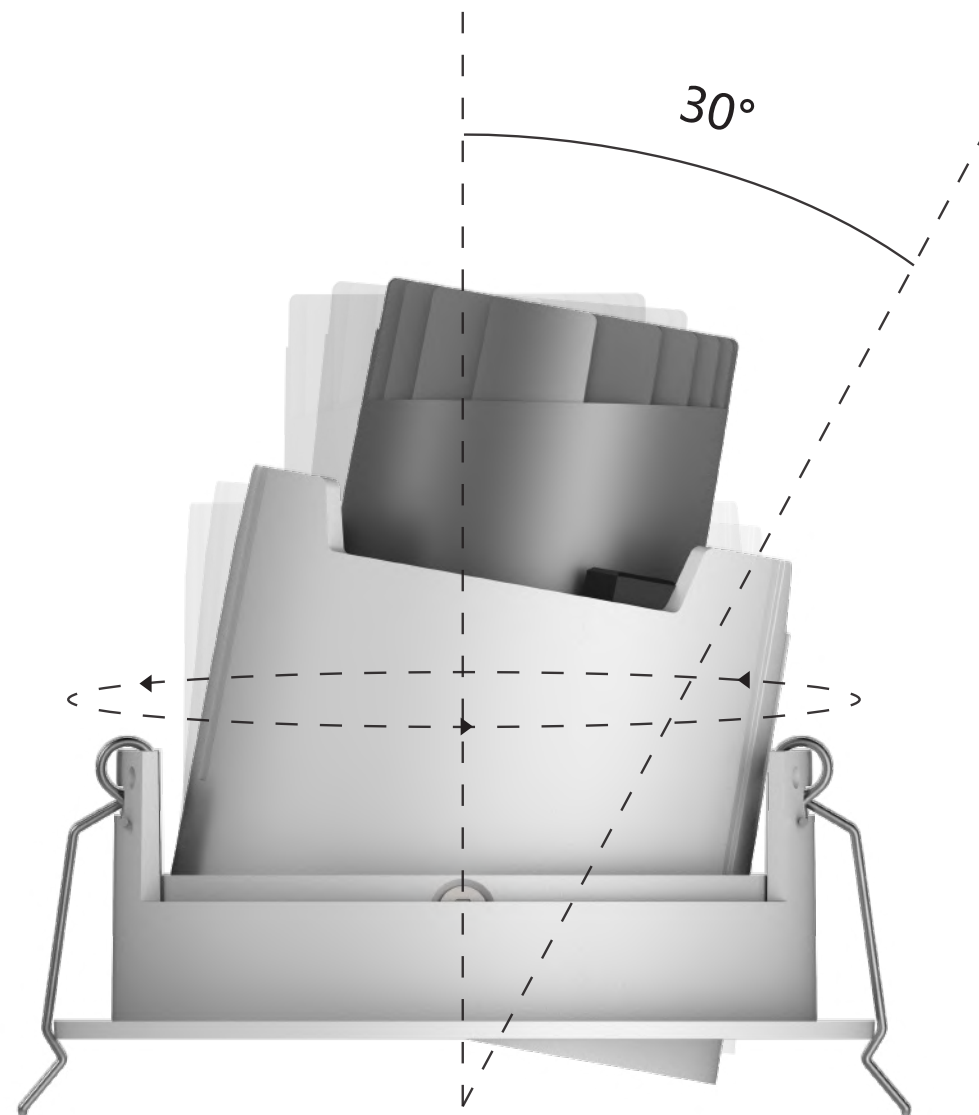

Large angle swing angle


Multi direction, multi angle swing angle, free choice of angle

The maximum angle is 30 °

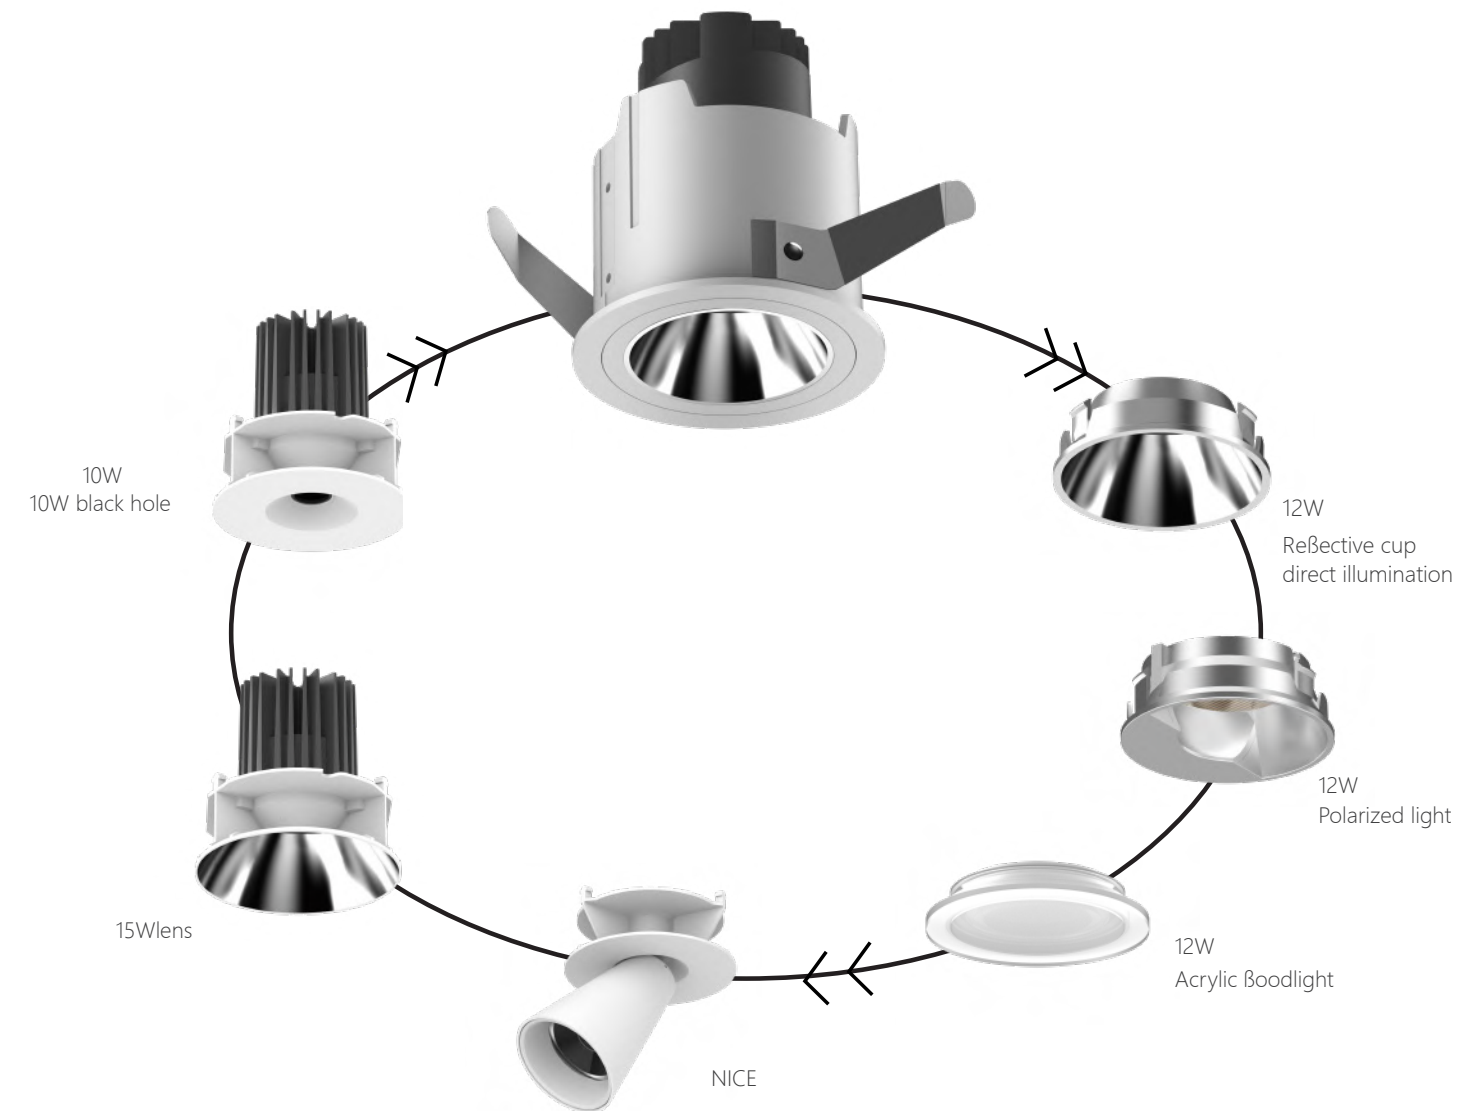


Multiple light distribution


By replacing the optical parts, the purpose of multi-scene application can be achieved

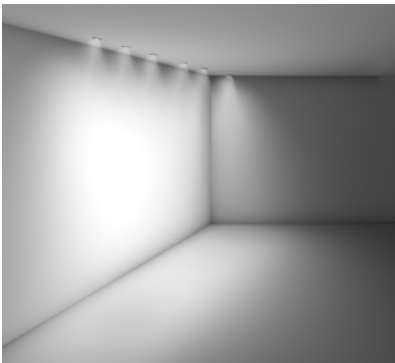


1 can illuminate the wall without dazzling.

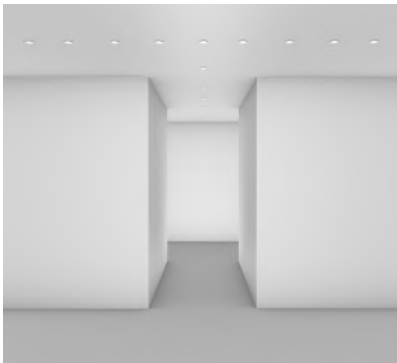

2 The irradiation range is wide and the angle can be adjusted.

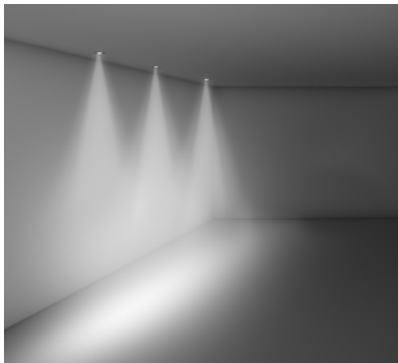


3 Improve lighting efficiency.

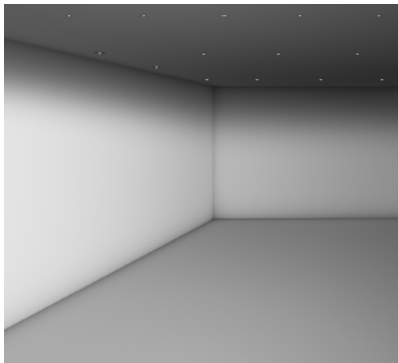

4 can illuminate the wall without dazzling.




5 Spotlight: focus light

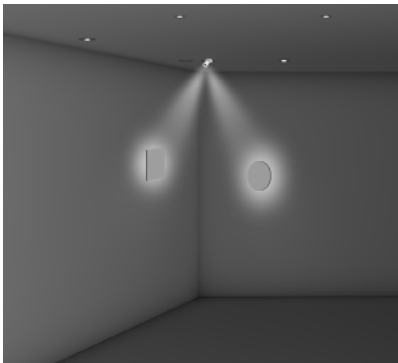

6 Horn: adjustable angle up to 180 °


More than ten kinds of
light distribution

Linking lighting to functional areas
Individual matching

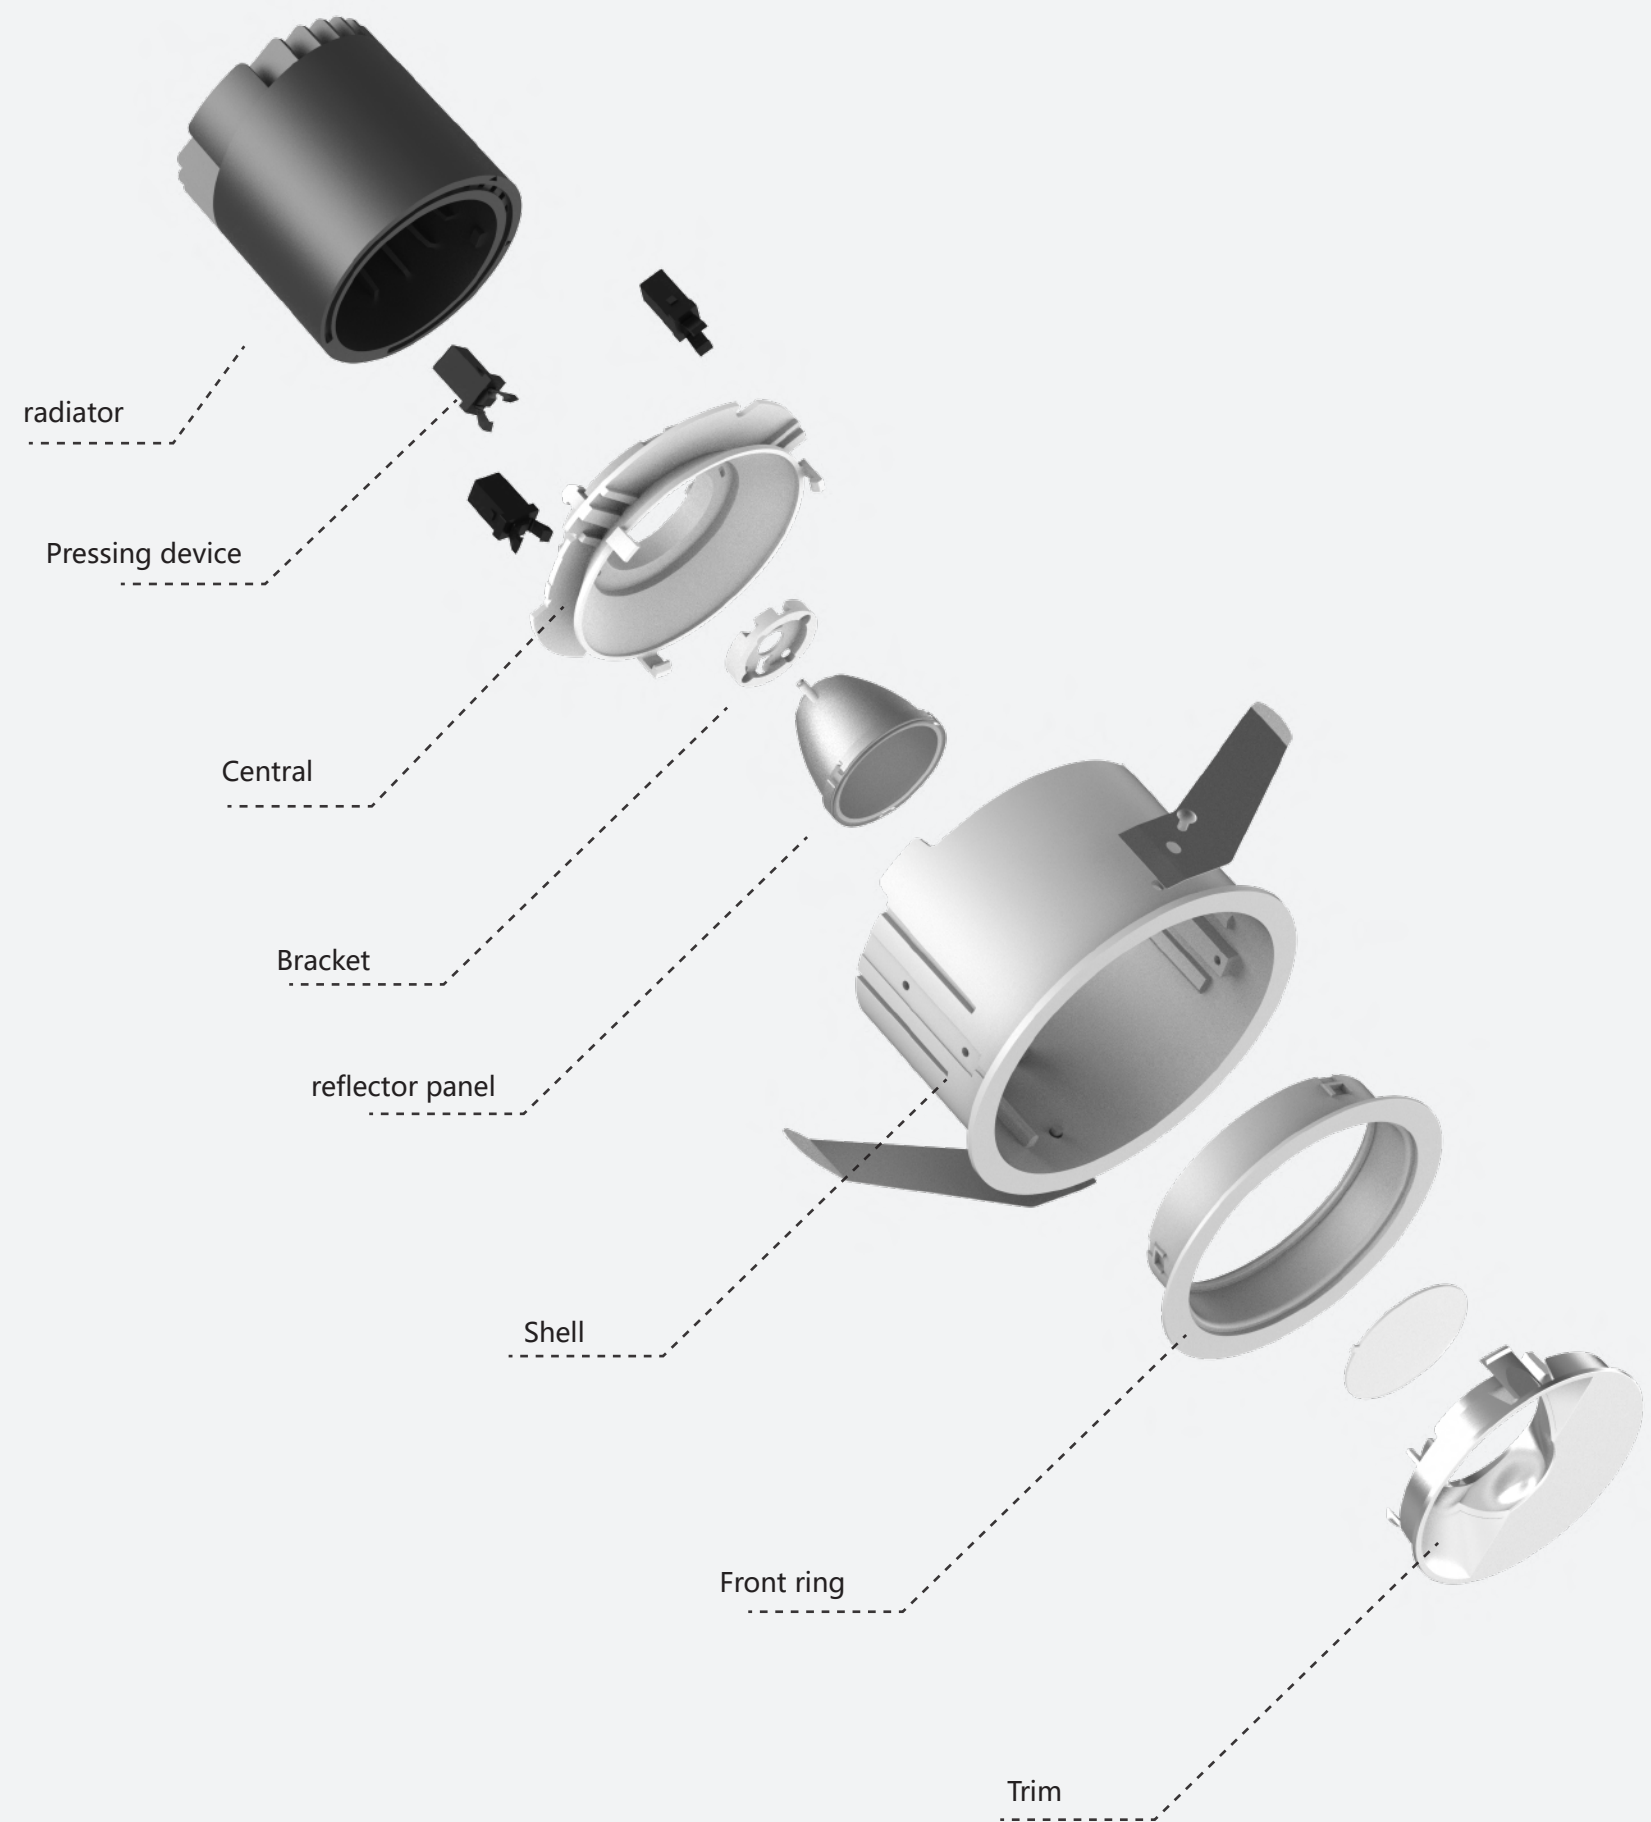


Split structure

Embedded design of lamps, fast installation and convenient maintenance
Innovative high efficiency black mirror

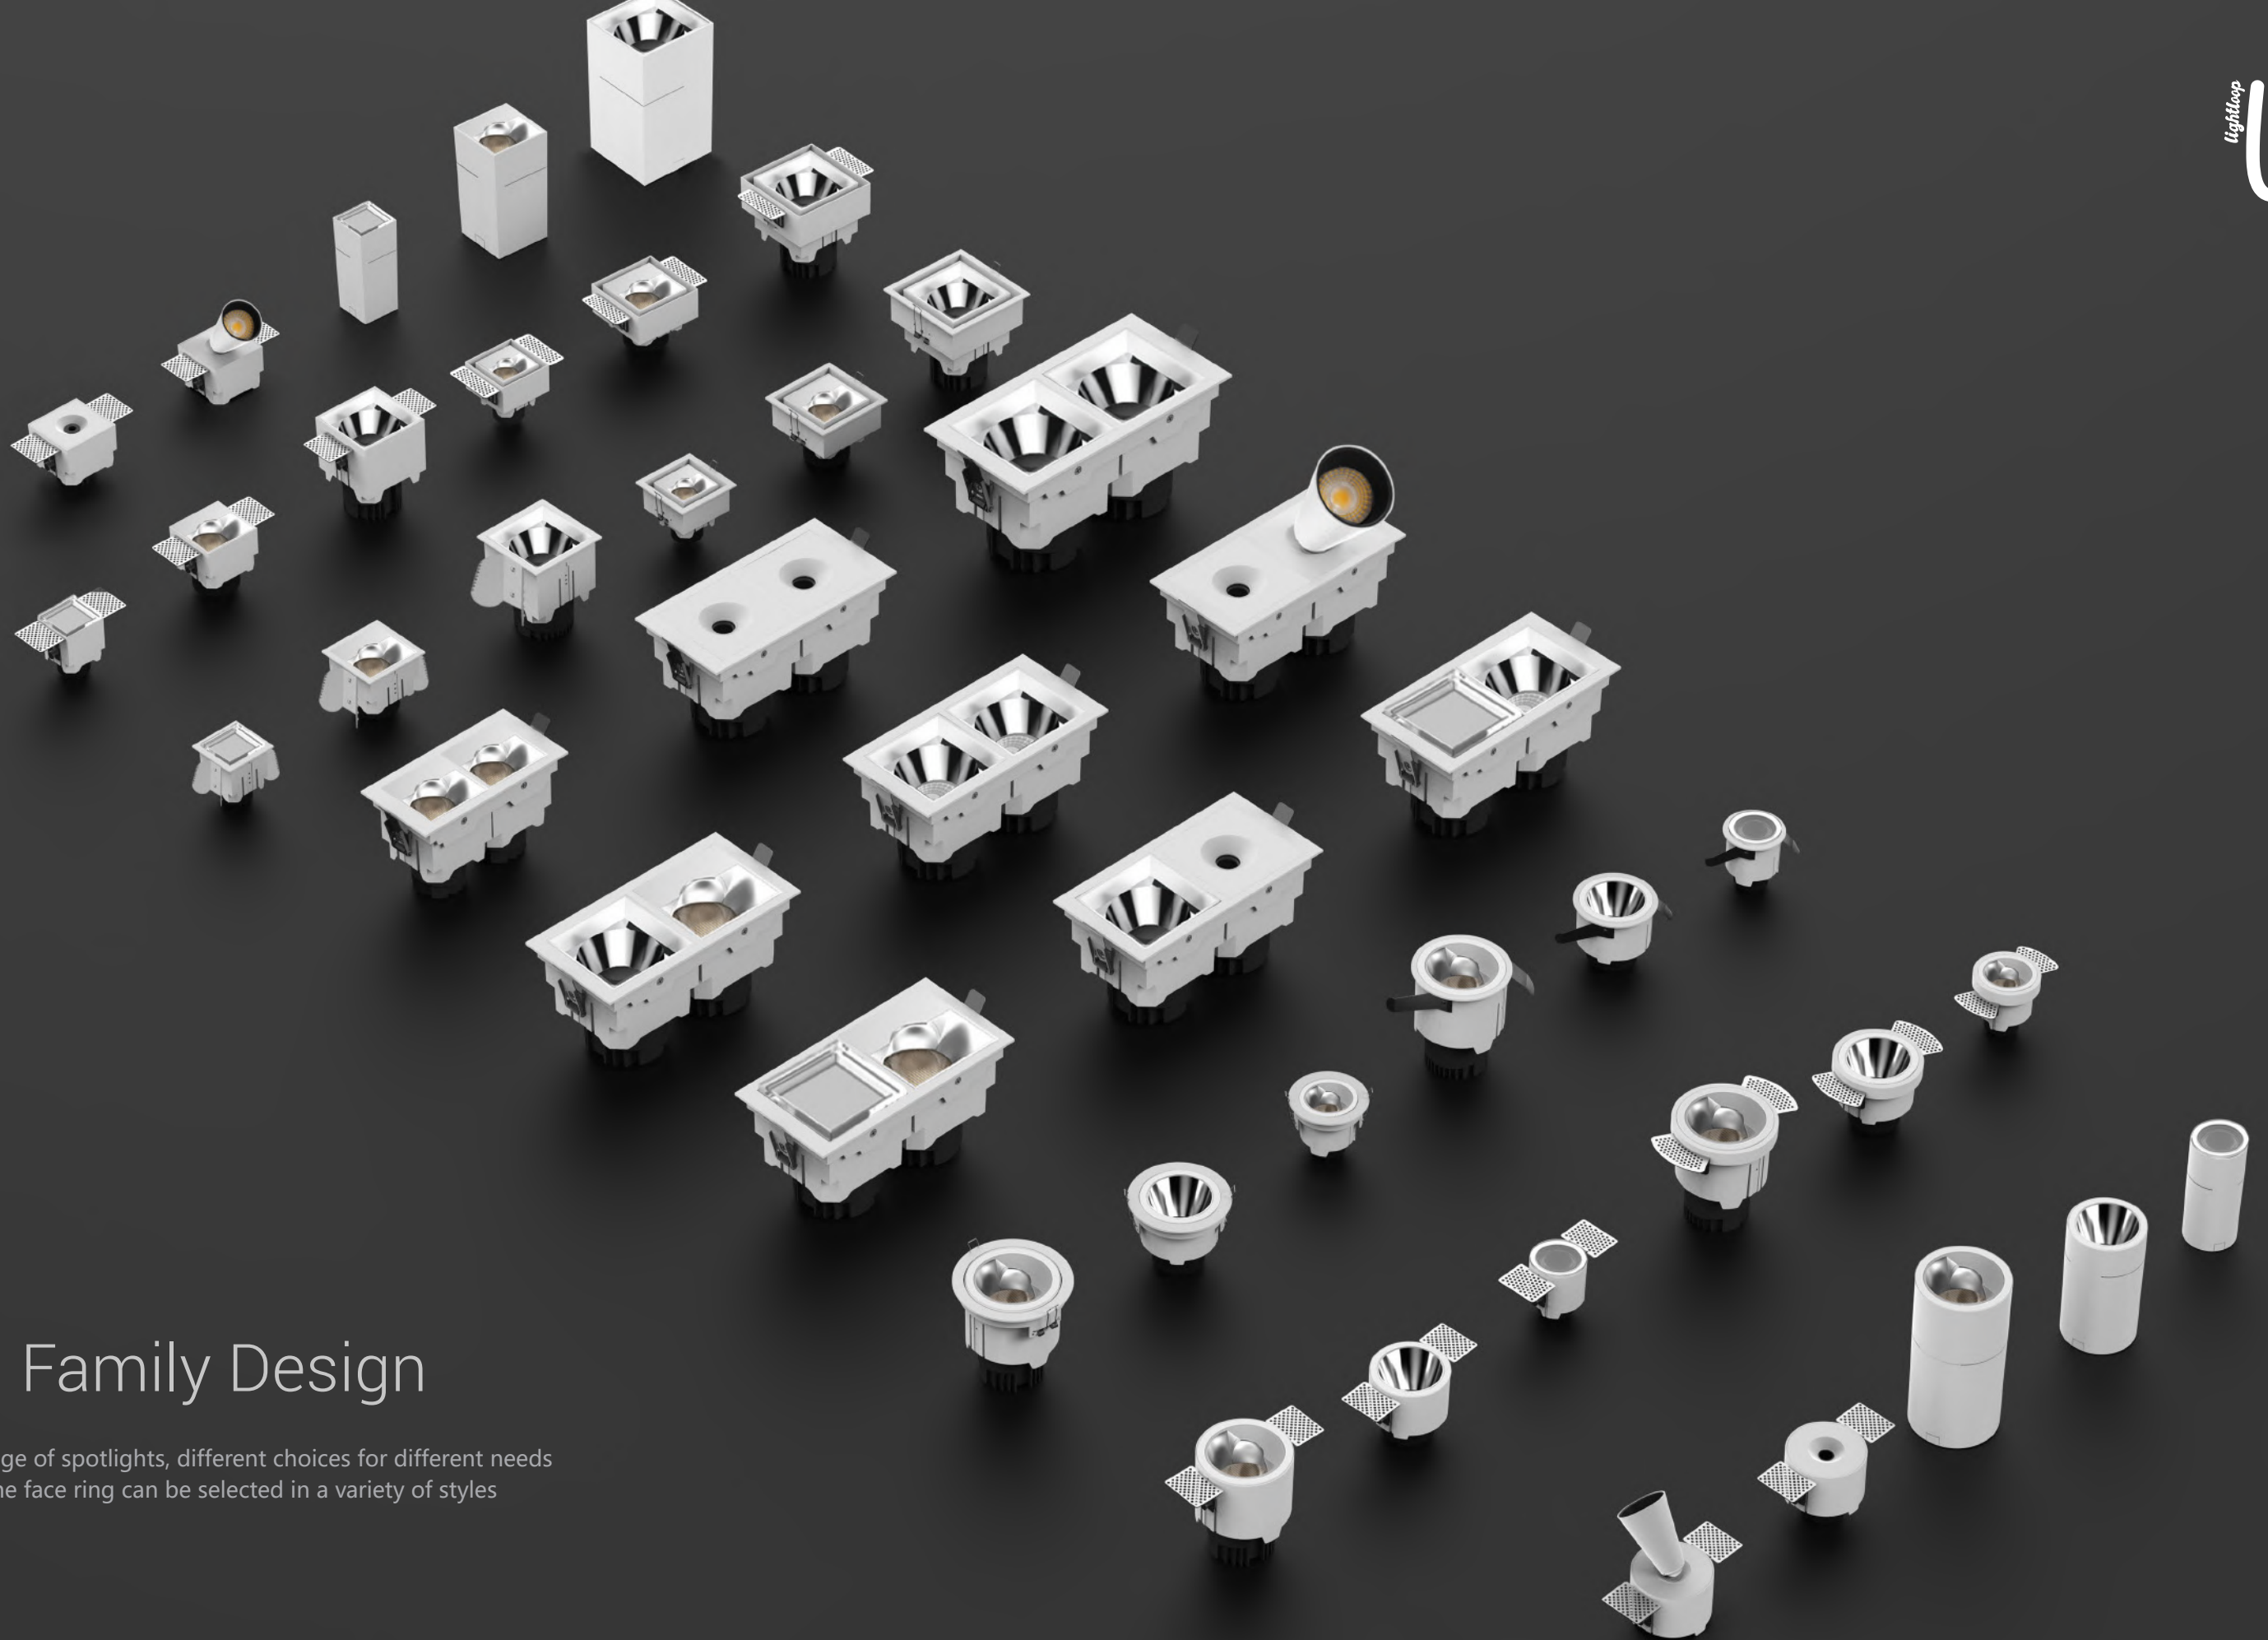


Family Design

Full range of spotlights, different choices for different needs
The face ring can be selected in a variety of styles

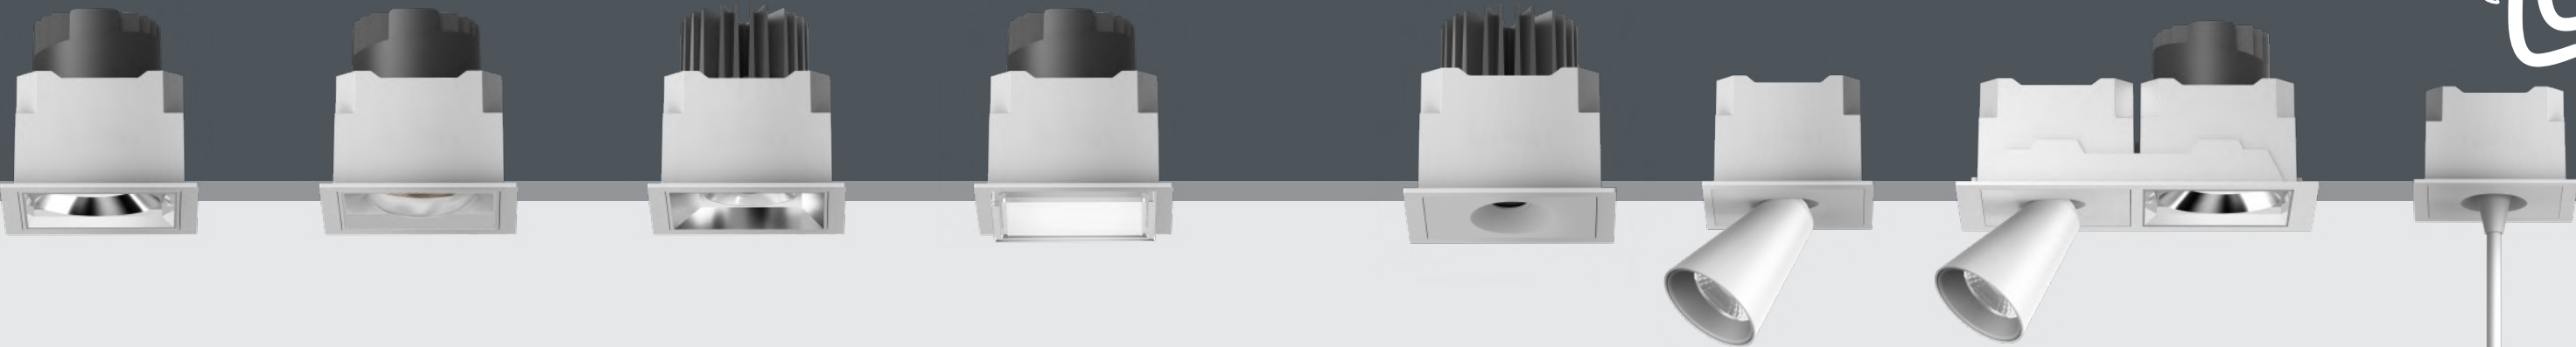

TIANYUE SERIES

The Tianyue series is based on the Linan series radiator.
The optical application is connected to the lighting.
The basic lighting and other lines, surfaces and lighting can
be installed in different ways according to different architectural styles.
The embedded open installation type and hoisting type can be selected

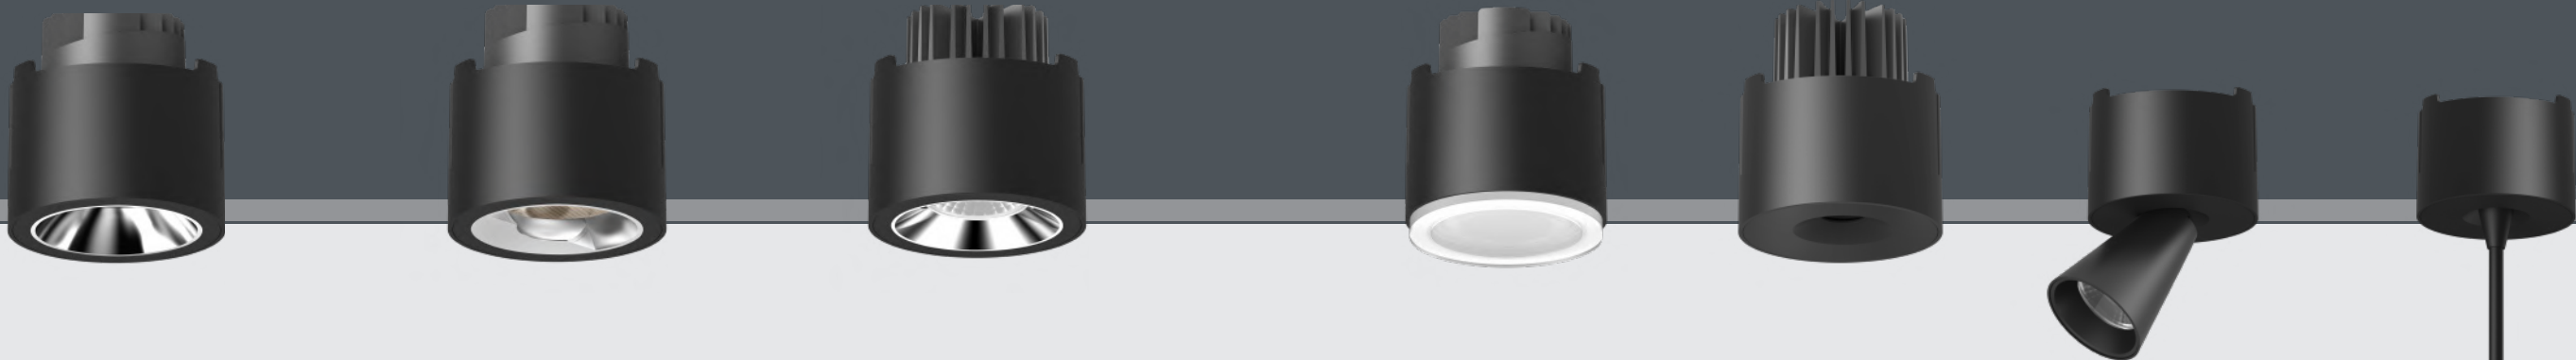

TIANYUE SERIES


The Tianyue series is based on the Linan series radiator.
The optical application is connected to the lighting.
The basic lighting and other lines, surfaces and lighting can
be installed in different ways according to different architectural styles.
The embedded open installation type and hoisting type can be selected




Power:6W



Model: DRE0406W
Power: 6W
Cutout : Ø70mm
Size(WxLxH): Ø75X83mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1304
Standard holder: **ITILED** 020

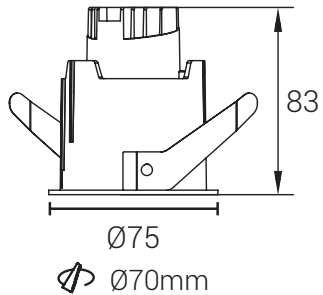

Model: DRE0406W
Power: 6W
Cutout : Ø85mm
Size(WxLxH): Ø93X83mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1304
Standard holder: **ITILED** 020



Direct
DRE0206W



Polarizer
PRE0206W



Acrylic
FRE0206W





Adjustable Direct
DRE0406W




Adjustable polarizer
PRE0406W



Model: DSE0206W
Power: 6W
Cutout : 60X60mm
Size(WxLxH): 70X70X83mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1304
Standard holder: **ITILED** 020



Model: DSE0406W
Power: 6W
Cutout : 82X82mm
Size(WxLxH): 90X90X84mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1304
Standard holder: **ITILED** 020




Direct
DSE0206W




Polarizer
PSE0206W



Acrylic
FSE0206W



Adjustable Direct
DSE0406W




Adjustable polarizer
PSE0406W

Power:6W



Model: DRT0206W
Power: 6W
Cutout : Ø70mm
Size(WxLxH): Ø65X83mm
Beam Angle:15°/24°/38°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020

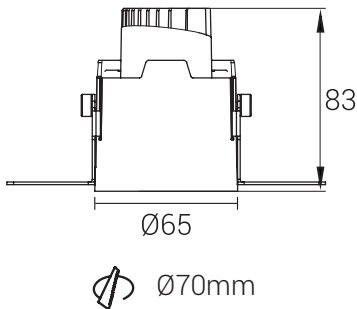

Direct
DRT0206W




Polarizer
PRT0206W



Acrylic
FRT0206W




Model: DRT0406W
Power: 6W
Cutout : Ø85mm
Size(WxLxH): Ø80X83mm
Beam Angle:15°/24°/38°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020





Adjustable Direct
DRT0406W




Adjustable polarizer
PRT0406W

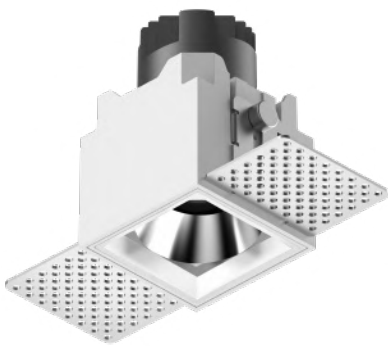


Model: DST0206W
Power: 6W
Cutout : 60*60mm
Size(WxLxH):58X58X83mm
Beam Angle:15°/24°/38°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020




Direct
DST0206W




Polarizer
PST0206W



Acrylic
FST0206W

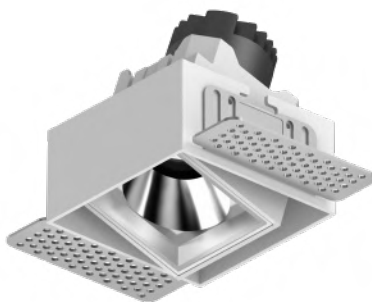

Model: DST0406W
Power: 6W
Cutout : 82X82mm
Size(WxLxH):78X78X84mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020




Adjustable Direct
DST0406W




Adjustable polarizer
PST0406W

Power:10W




70mm

Model: DRE0210W-TJ
Power: 10W
Cutout : Ø70mm
Size(WxLxH):Ø75X88mm
Beam Angle:12°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020





80mm

Model: DRE0410W-TJ
Power: 10W
Cutout : Ø80mm
Size(WxLxH):Ø93X83mm
Beam Angle:12°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020



60X60mm


Model: DSE0210W-TJ
Power: 10W
Cutout : 60X60mm
Size(WxLxH): 72.2X72.2X88.2mm
Beam Angle: 12°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020

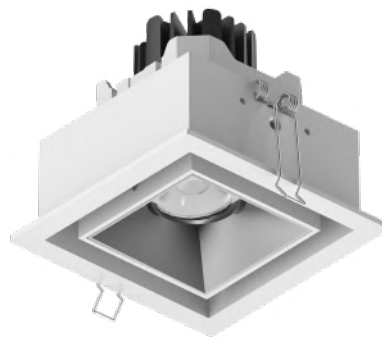


80x80mm

Model: DSE0410W-TJ
Power: 10W
Cutout : 80X80mm
Size(WxLxH): 91X91X83mm
Beam Angle:12°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020



Power:10W




Model: DRT0210W-TJ
Power: 10W
Cutout : Ø75mm
Size(WxLxH):Ø65X88mm
Beam Angle:12°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020

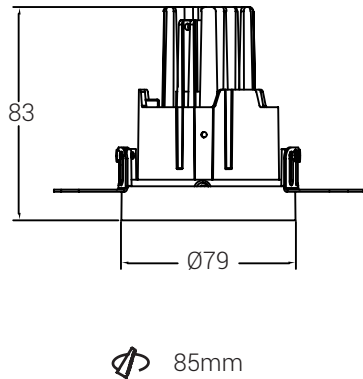

Model: DRT0410W-TJ
Power: 10W
Cutout : Ø85mm
Size(WxLxH):Ø79X83mm
Beam Angle:12°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020

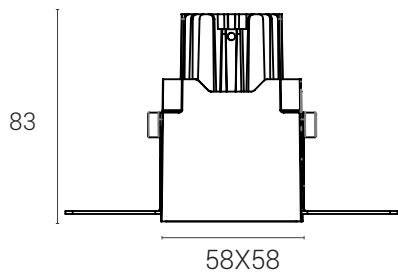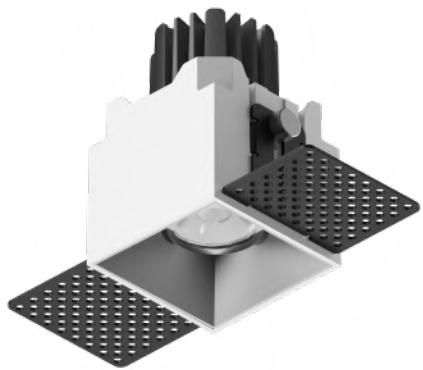


Model: DST0210W-TJ
Power: 10W
Cutout : 60X60mm
Size(WxLxH):58X58X83mm
Beam Angle: 12°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020

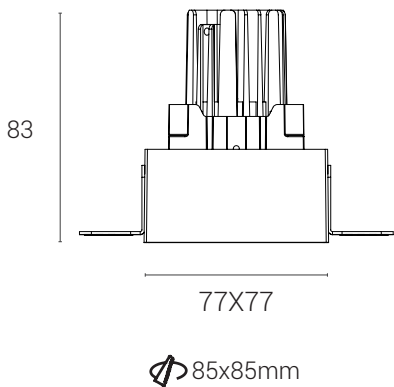


Model: DST0410W-TJ
Power: 10W
Cutout : 85X85mm
Size(WxLxH):77X77X83mm
Beam Angle: 12°/24°/36°/55°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020

Power:10W




70mm

Model: DRE0210W-HD
Power: 10W
Cutout : Ø70mm
Size(WxLxH):Ø75X88mm
Beam Angle:24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD





80mm

Model: DRE0410W-HD
Power: 10W
Cutout : Ø80mm
Size(WxLxH):Ø93X88mm
Beam Angle:24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD



60X60mm

Model: DSE0210W-HD
Power: 10W
Cutout : 60X60mm
Size(WxLxH): 72.2X72.2X88.2mm
Beam Angle: 24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD


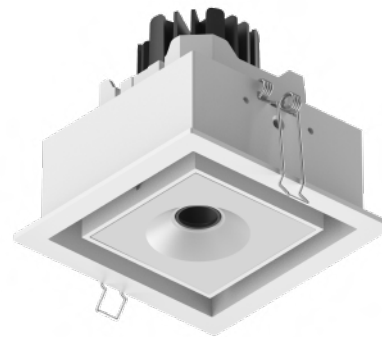


80x80mm


Model: DSE0410W-HD
Power: 10W
Cutout : 80X80mm
Size(WxLxH): 91X91X88mm
Beam Angle: 24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD





Power:10W

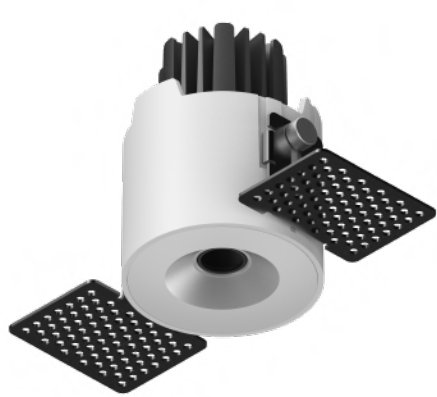



Model: DRT0210W-HD
Power: 10W
Cutout : Ø75mm
Size(WxLxH):Ø65X88mm
Beam Angle:24°/36°
Standard holder: **Shinland** ^{Optica} V4HD
Optional holder: **Shinland** ^{Optica} CXA13-HD

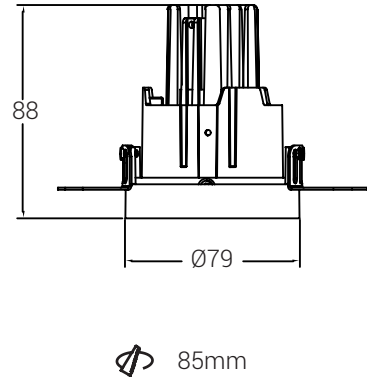

Model: DRT0410W-TJ
Power: 10W
Cutout : Ø85mm
Size(WxLxH):Ø79X88mm
Beam Angle:24°/36°
Standard holder: **Shinland** ^{Optica} V4HD
Optional holder: **Shinland** ^{Optica} CXA13-HD

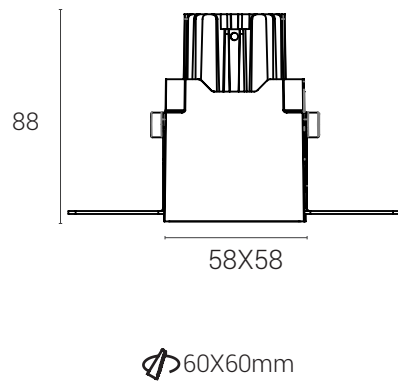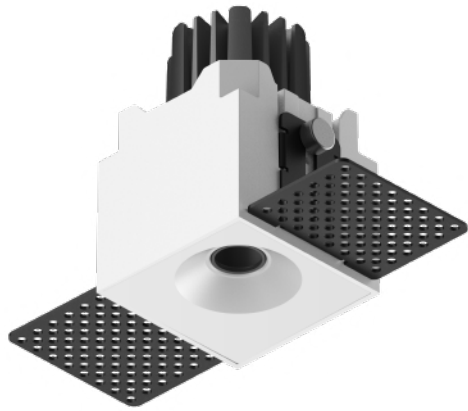


Model: DST0210W-HD
Power: 10W
Cutout : 60X60mm
Size(WxLxH): 58X58X88mm
Beam Angle: 24°/36°
Standard holder: **Shinland** ^{Optica} V4HD
Optional holder: **Shinland** ^{Optica} CXA13-HD

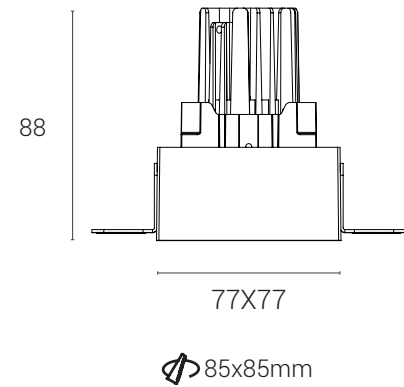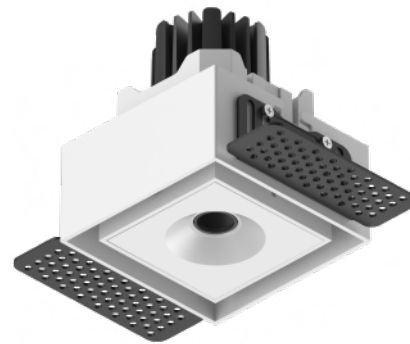



Model: DST0410W-HD
Power: 10W
Cutout : 85X85mm
Size(WxLxH):77X77X88mm
Beam Angle: 24°/36°
Standard holder: **Shinland** ^{Optica} V4HD
Optional holder: **Shinland** ^{Optica} CXA13-HD

Power:10W

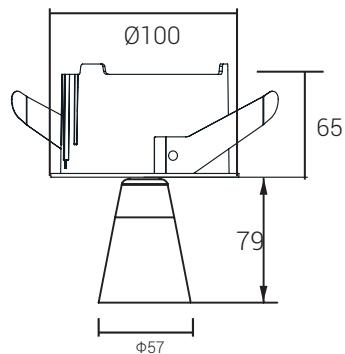


Ø94mm

Model: SRE-0210W-DLB
Power: 10W
Cutout : Ø94mm
Size(WxLxH): Ø100X65X79mm
Beam Angle: 15° /24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

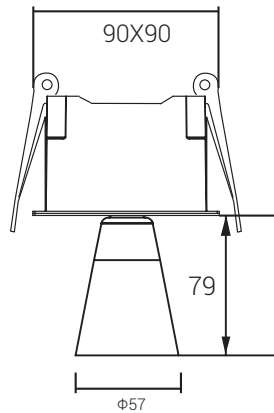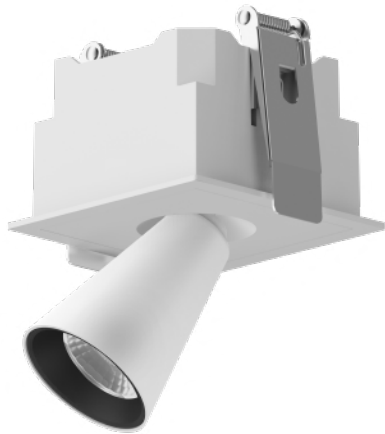



80X80mm

Model: SSE-0210W-DLB
Power: 10W
Cutout : 80x80mm
Size(WxLxH):90X90x65mm
Beam Angle: 15° /24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

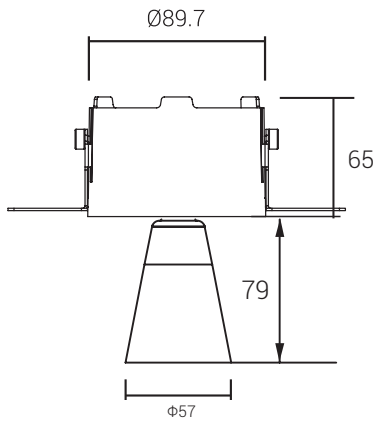

Ø95mm

Model: SRT-0210W-DLB
Power:10W
Cutout : Ø95mm
Size(WxLxH):Ø89.7x65x79mm
Beam Angle: 15° /24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

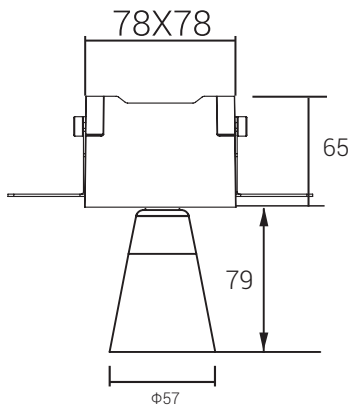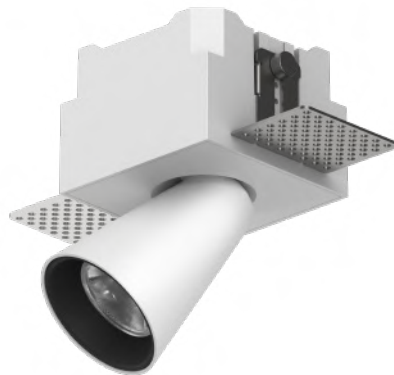


80X80mm

Model: SST-0210W-DLB
Power:10W
Cutout : 80x80mm
Size(WxLxH):78x78x65mm
Beam Angle: 15° /24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

Power:12W



Model:DRE0212W
Power: 12W
Cutout : Ø94mm
Size(WxLxH):Ø100X89.5mm
Beam Angle: 15° /24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020



Direct
DRE0212W




Polarizer
PRE0212W



Acrylic
FRE0212W




Model: DRE0412W
Power: 12W
Cutout : Ø110mm
Size(WxLxH):Ø118X90mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020




Adjusteble Direct
DRE0412W



Adjustable polarizer
PRE0412W



Model: DSE0212W
Power:12W
Cutout :80X80mm
Size(WxLxH):90X90X90mm
Beam Angle: 15° /24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020




Direct
DSE0212W





Polarizer
PSE0212W




Acrylic
FSE0212W

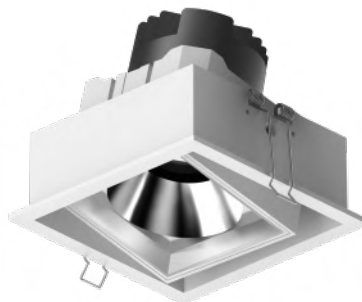

Model: DSE0412W
Power:12W
Cutout : 103X103mm
Size(WxLxH):111X111X90mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020



Adjusteble Direct
DSE0412W




Adjustable polarizer
PSE0412W


Power:12W



Model: DRT0212W
Power: 12W
Cutout :Ø95mm
Size(WxLxH):Ø90X90mm
Beam Angle: 15° /24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020



Direct
DRT0212W




Polarizer
PRT0212W



Acrylic
FRT0212W




Model: DRT0412W
Power: 12W
Cutout : Ø110mm
Size(WxLxH):Ø105X90mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020





Adjusteble Direct
DRT0412W




Adjustable polarizer
PRT0412W

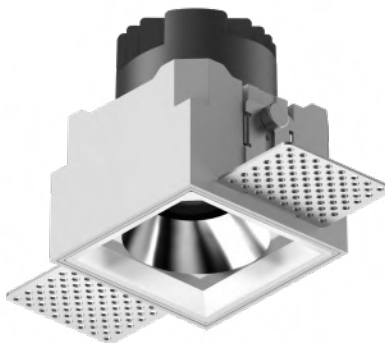


Model: DST0212W
Power:12W
Cutout : 80X80mm
Size(WxLxH):78X78X90mm
Beam Angle: 15° /24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020




Direct
DST0212W





Polarizer
PST0212W



Acrylic
FST0212W

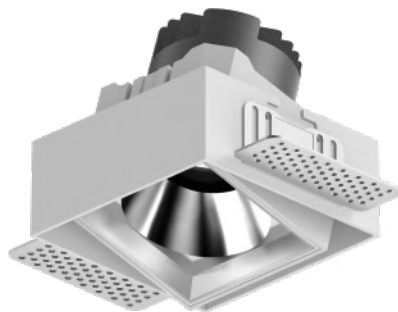

Model: DST0412W
Power:12W
Cutout : 103X103mm
Size(WxLxH):99X99X90mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020




Adjusteble Direct
DST0412W




Adjustable polarizer
PST0412W



Power:12W

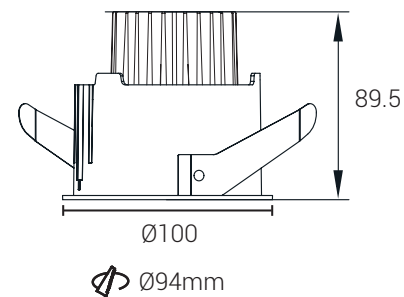



Model: DRE0212W-HD
Power: 12W
Cutout : Ø94mm
Size(WxLxH):Ø100X89.5mm
Beam Angle: 24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD



Model: DRE0412W-HD
Power: 12W
Cutout : Ø108mm
Size(WxLxH):Ø118X90mm
Beam Angle: 24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD


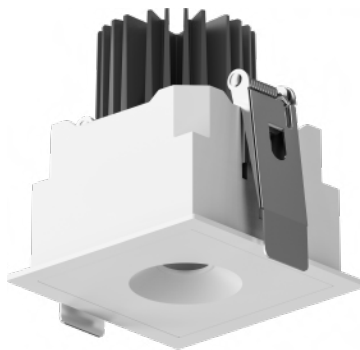


Model: DSE0212W-HD
Power: 12W
Cutout : 80X80mm
Size(WxLxH):90X90X90mm
Beam Angle: 24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD


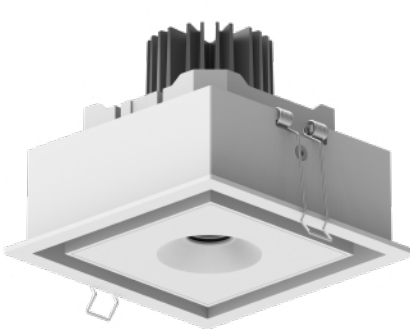


Model: DST0412W-HD
Power: 12W
Cutout : 103X103mm
Size(WxLxH):111X111X90mm
Beam Angle: 24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD



Power:12W

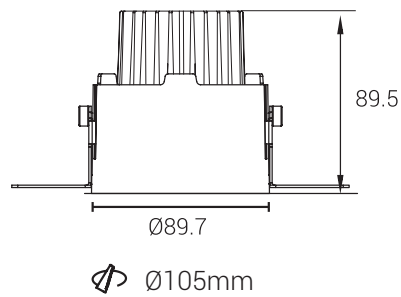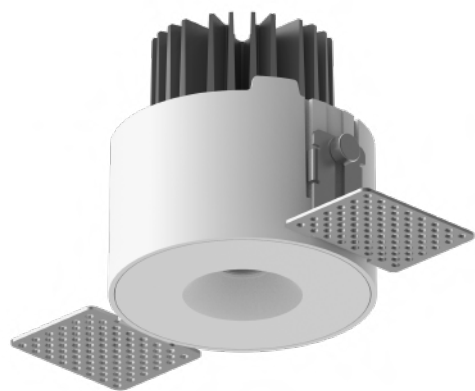



Model: DRT0212W-HD
Power: 12W
Cutout : Ø95mm
Size(WxLxH): Ø89.7x89.5mm
Beam Angle: 24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD

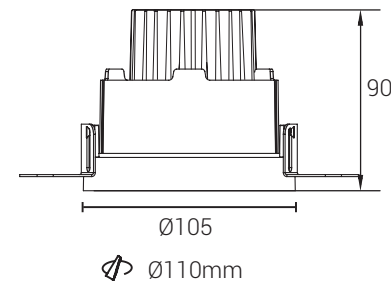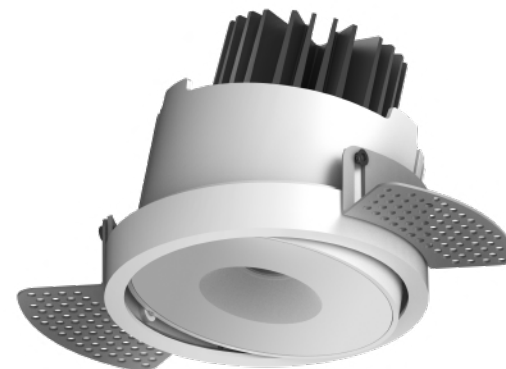

Model: DRT0412W-HD
Power: 12W
Cutout : Ø110mm
Size(WxLxH): Ø105x90mm
Beam Angle: 24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD

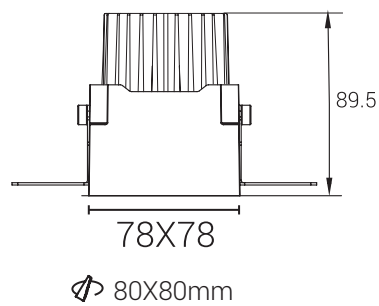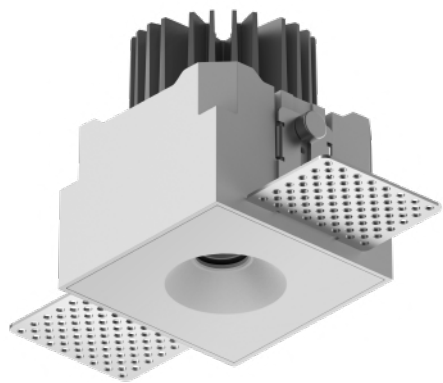


Model: DST0212W-HD
Power:12W
Cutout : Ø80X80mm
Size(WxLxH):78x78x90mm
Beam Angle: 24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD

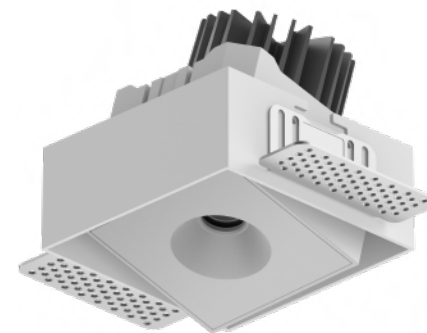


Model:DST0412W-HD
Power:12W
Cutout :103x103mm
Size(WxLxH):99X99X90mm
Beam Angle: 24°/36°
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD



Power:16W

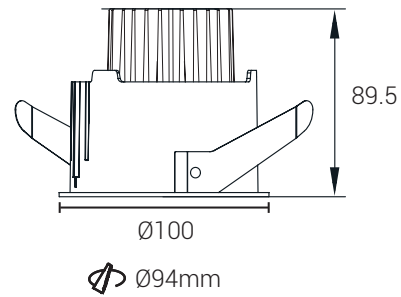



Model: DRE0216W-TJ
Power: 16W
Cutout : Ø94mm
Size(WxLxH):Ø100X89.5mm
Beam Angle: 12° / 24° / 36° / 55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304



Model: DRE0416W-TJ
Power: 16W
Cutout : Ø108mm
Size(WxLxH):Ø118X90mm
Beam Angle: 12° / 24° / 36° / 55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304


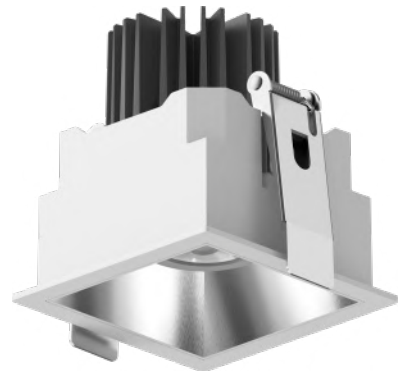


Model:DSE0216W-TJ
Power:16W
Cutout : 80x80mm
Size(WxLxH):90X90X89.6mm
Beam Angle: 12° / 24° / 36° / 55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304

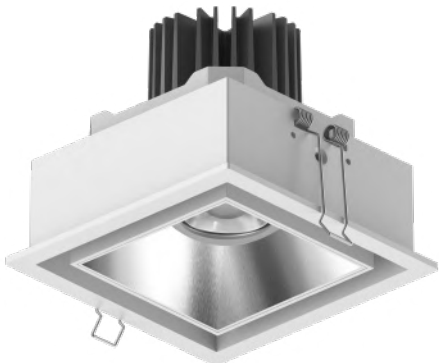


Model: DSE0416W-TJ
Power: 16W
Cutout : 80X80mm
Size(WxLxH):111X111X90mm
Beam Angle: 12° / 24° / 36° / 55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304

Power:16W

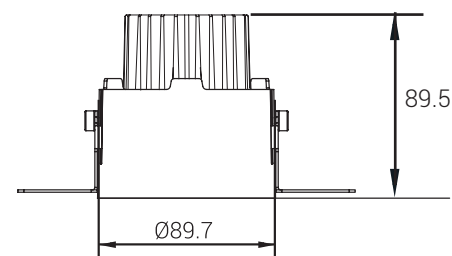
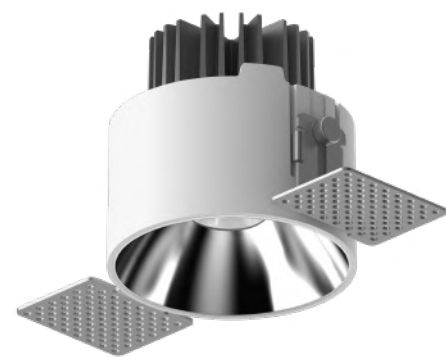


Ø105mm

Model: DRE0216W-TJ
Power: 16W
Cutout : Ø105mm
Size(WxLxH):Ø89.5x89.7mm
Beam Angle: 12° / 24° / 36° / 55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304


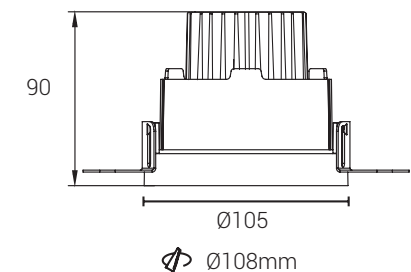


Model: DRE0416W-TJ
Power: 16W
Cutout : Ø108mm
Size(WxLxH):Ø105X90mm
Beam Angle: 12° / 24° / 36° / 55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304

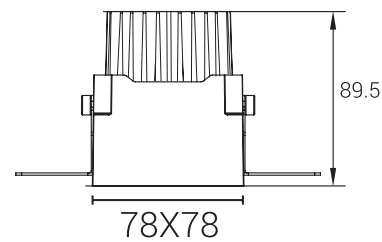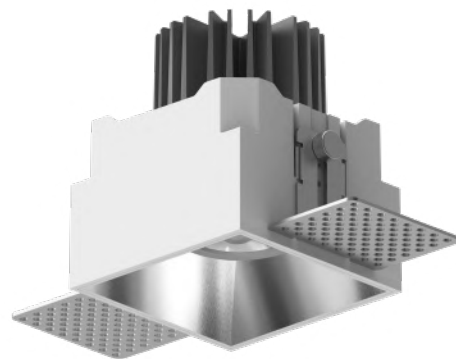

Ø80X80mm

Model: DST0216W-TJ
Power:16W
Cutout : 80x80mm
Size(WxLxH):78x78x89.5mm
Beam Angle: 12° / 24° / 36° / 55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304

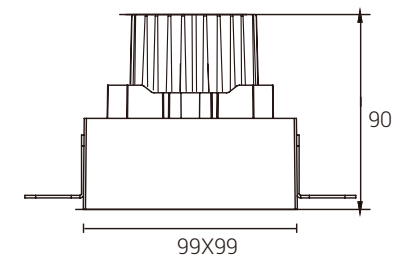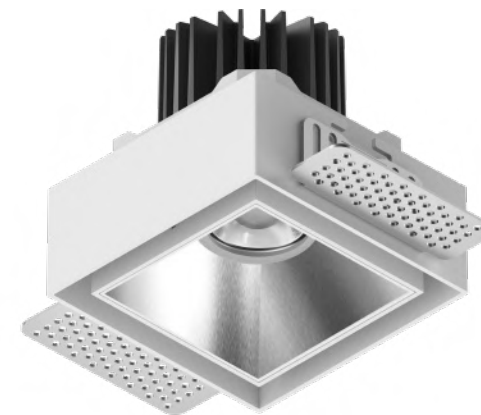


Ø103X103mm

Model: DST0416W-TJ
Power: 16W
Cutout : 103X103mm
Size(WxLxH):99X99X90mm
Beam Angle: 12° / 24° / 36° / 55°
Standard holder: **CREE** 1507
Optional holder: **CREE** 1304


Power:20W



Model: DRE0220W
Power: 20W
Cutout : Ø110mm
Size(WxLxH): Ø117x132mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020



Model: DRE0420W
Power: 20W
Cutout : Ø125mm
Size(WxLxH): Ø135x132mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020



Direct
DRE0220W



Polarizer
PRE0220W



Acrylic
FRE0220W





Adjustable Direct
DRE0420W




Adjustable polarizer
PRE0420W




Model: DSE0220W
Power: 20W
Cutout : 100X100mm
Size(WxLxH):110X110X132mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020



Model: DSE0420W
Power: 20W
Cutout : 125X125mm
Size(WxLxH):135X135X132mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020




Direct
DSE0220W




Polarizer
PSE0220W



Acrylic
FSE0220W



Adjustable Direct
DSE0420W




Adjustable polarizer
PSE0420W


Power:20W




Model: DRE0220W/PRE0220W
Power: 20W
Cutout : Ø125mm
Size(WxLxH): Ø107x132mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020



Direct
DRT0220W




Polarizer
PRT0220W



Acrylic
FRT0220W




Model: DRT0420W/PRT0420W
Power: 20W
Cutout : Ø125mm
Size(WxLxH): Ø122x132mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020





Adjustable Direct
DRT0420W




Adjustable polarizer
PRT0420W

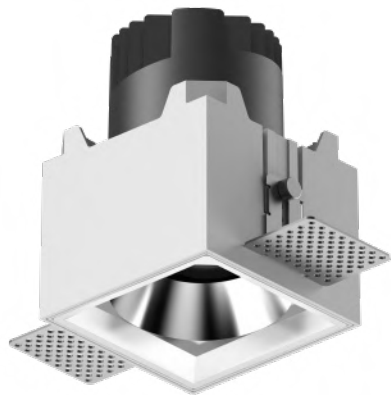


Model: DSE0220W/PSE0220W
Power:20W
Cutout :100X100mm
Size(WxLxH):98X98X132mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020




Direct
DST0220W





Polarizer
PST0220W



Acrylic
FST0220W

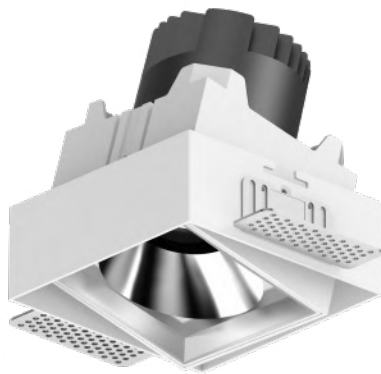

Model: DST0420W/PST0420W
Power:20W
Cutout : 125X125mm
Size(WxLxH):122X122X132mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020



Adjustable Direct
DST0420W




Adjustable polarizer
PST0420W


Power:12W



Model: DST0206W-2
Power: 6WX2
Cutout :130X65mm
Size(WxLxH):139X71X83mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020




Direct
DSE0206W-2





Polarizer
PSE0206W-2


Power:24W

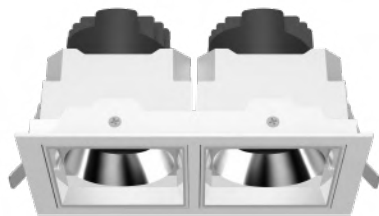


Model: DST0212W-2
Power:12WX2
Cutout : 175X85mm
Size(WxLxH):180X90X88mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020





Direct
DSE0212W-2




Polarizer
PRE0212W-2

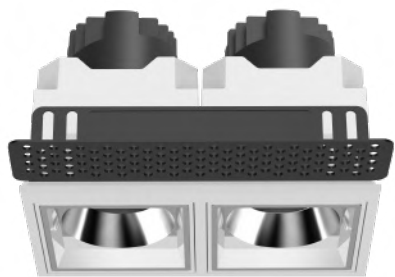


Model: DST0206W-2
Power: 6WX2
Cutout :130X70mm
Size(WxLxH): 125X65X83mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020





Direct
DST0206W-2




Polarizer
PST0206W-2

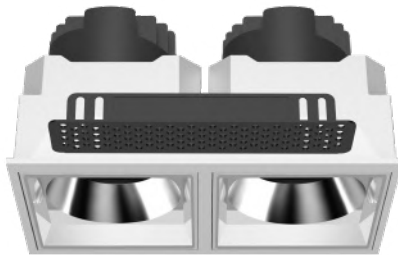


Model: DST0212W-2
Power: 12WX2
Cutout : 170X90mm
Size(WxLxH): 167X83X90mm
Beam Angle: 15°/24°/38°
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020



Direct
DST0212W-2





Polarizer
PST0212W-2

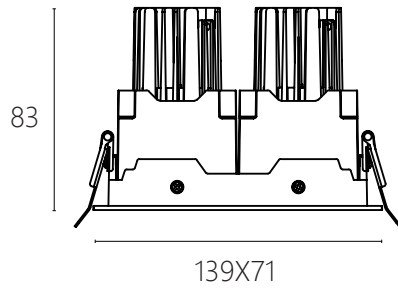



130x65mm

Model: DSE0210W-2-TJ
Power: 10WX2
Cutout : 130x65mm
Size(WxLxH):139x71x83mm
Standard holder: 1304
Optional holder: 020

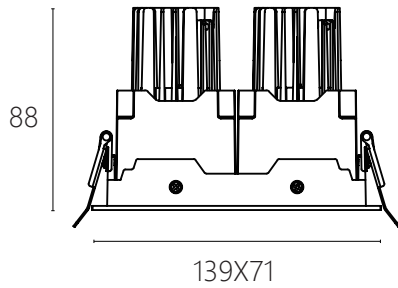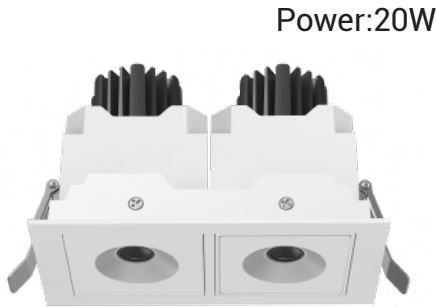



130x65mm

Model: DSE0210W-2-HD
Power: 10WX2
Cutout : 130x65mm
Size(WxLxH):139x71x88mm
Standard holder: V4HD
Optional holder: CXA13-HD

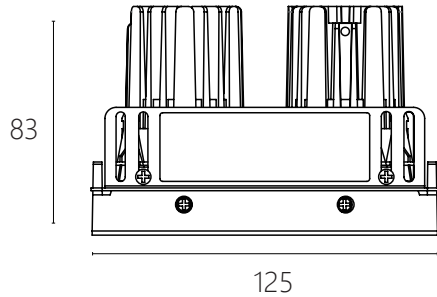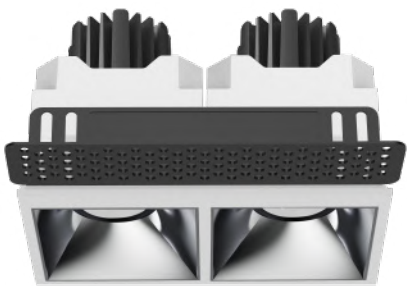

130x70mm



Model: DST0210W-2-TJ
Power: 10WX2
Cutout : 130x70mm
Size(WxLxH): 125X65X83mm
Standard holder: 1304
Optional holder: 020

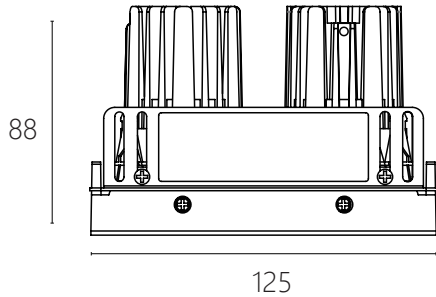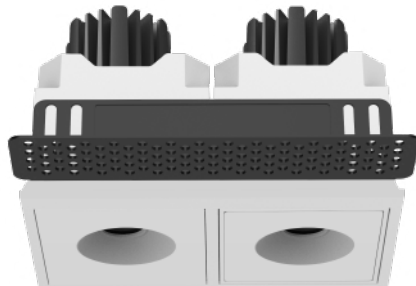

130x70mm


Model: DST0210W-2-HD
Power: 10WX2
Cutout : 130x70mm
Size(WxLxH): 125X65X88mm
Standard holder: V4HD
Optional holder: CXA13-HD

Power:10W/12W

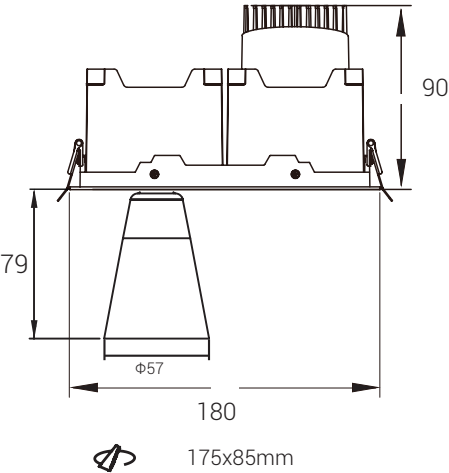
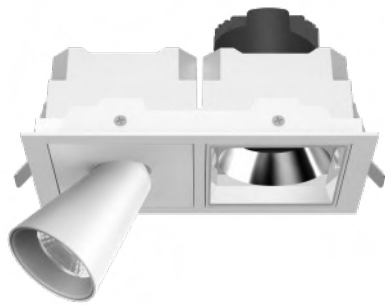


Model: SSE-0212W-LB/PST0212W
Power:10W/12W
Cutout : 175x85mm
Size(WxLxH):180x90x167mm
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020


Power:40W

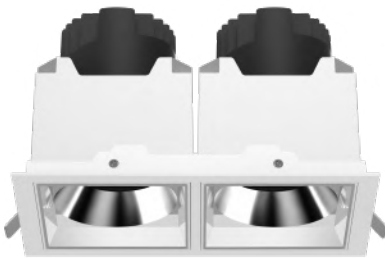


Model: DST0220W-2
Power:20WX2
Cutout : 214X105mm
Size(WxLxH):220X110X131mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020




Direct
DSE0220W-2





Polarizer
PRE0220W-2

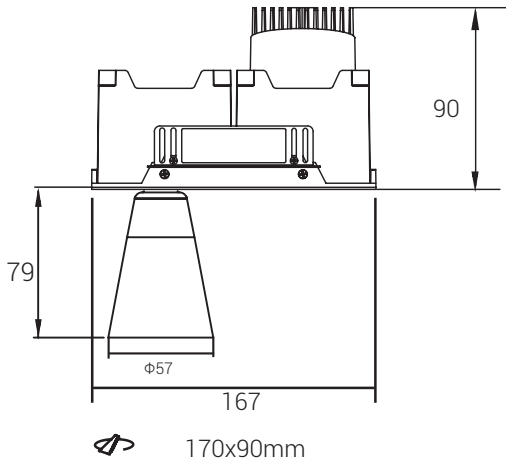


Model: SSE-0212W-LB/PST012W
Power: 10W/12W
Cutout : 170x90mm
Size(WxLxH): 167X83X169mm
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020



Model: DST0220W-2
Power: 20WX2
Cutout : 210X110mm
Size(WxLxH): 220X110X132mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020



Direct
DST0220W-2




Polarizer
PST0220W-2



TIANYUE


Tianyue series is a variety of optical applications based on Linan series radiators,It integrates key lighting, facade lighting, indirect lighting, basic lighting, etc.Covering points, lines, surfaces and lighting optical applications can be based on different architectural styles,Freely switch different models to achieve ideal optical functions,The installation method can be embedded, frameless, surface mounted, hoisting, etc.

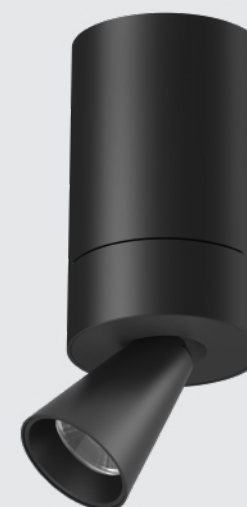

Power:6W



Model: MZ7001R-ZZ06W
MZ7001R-PG06W
MZ7001R-FG06W
Power: 6W
Size(WxLxH): Ø65X135mm
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020

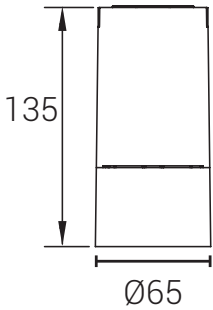

Direct




Polarizer



Acrylic



Model: DZ7001R-ZZ06W
DZ7001R-PG06W
DZ7001R-FG06W
Power: 6W
Size(WxLxH): Ø 65X135mm
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020

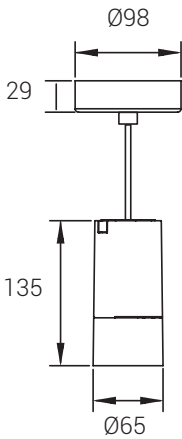

Direct




Polarizer



Acrylic



Model: MZ7001S-ZZ06W
MZ7001S-PG06W
MZ7001S-FG06W
Power: 6W
Size(WxLxH): 60X60X135mm
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020




Direct




Polarizer



Acrylic

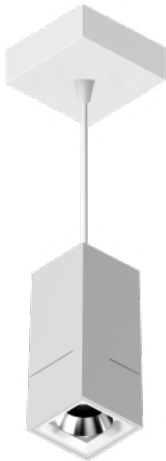

Model: DZ7001S-ZZ06W
DZ7001S-PG06W
DZ7001S-FG06W
Power: 6W
Size(WxLxH): 60X60X135mm
Standard holder: **CREE** 1304
Optional holder: **ITILED** 020

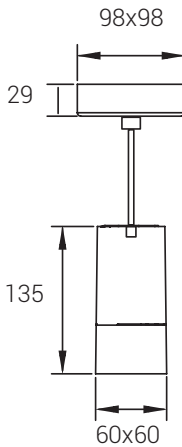

Direct




Polarizer




Acrylic


Power:10W

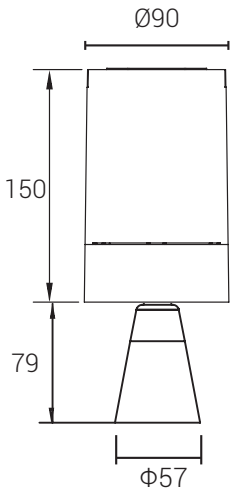



Model: MZ7001R-10W-DLBSD
Power: 10W
Size(WxLxH): Ø90X229mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

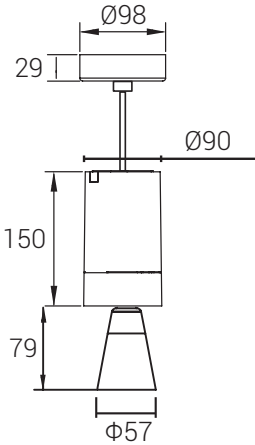

Model: DZ7001R-12W-DLBSD
Power: 10W
Size(WxLxH): Ø90X229mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

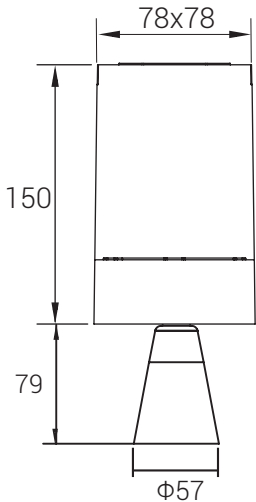

Model: MZ7001S-10W-DLBSD
Power: 10W
Size(WxLxH): 78X78X229mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

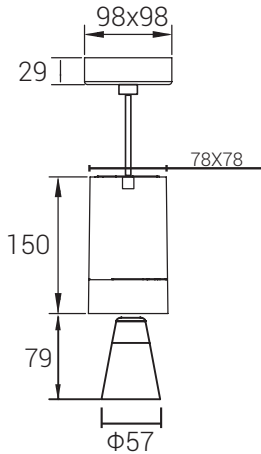


Model: DZ7001S-10W-DLBSD
Power: 10W
Size(WxLxH):78X78X229mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

Power:12W



Model: MZ7001R-ZZ12W
MZ7001R-PG12W
MZ7001R-FG12W
Power: 12W
Size(WxLxH): Ø90X150mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020



Direct




Polarizer



Acrylic



Model: DZ7001R-ZZ12W
DZ7001R-PG12W
DZ7001R-FG12W
Power: 12W
Size(WxLxH): Ø90X150mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

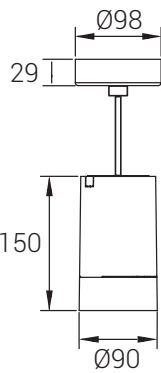

Direct





Polarizer



Acrylic



Model: MZ7001S-ZZ12W
MZ7001S-PG12W
MZ7001S-FG12W
Power: 12W
Size(WxLxH): 78X78X150mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

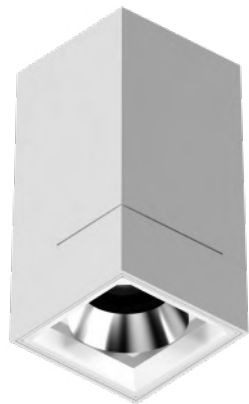

Direct





Polarizer



Acrylic



Model: DZ7001S-ZZ12W
DZ7001S-PG12W
DZ7001S-FG12W
Power: 12W
Size(WxLxH): 78X78X150mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

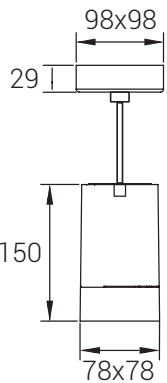

Direct




Polarizer




Acrylic



Power:12W





Model: MZ7001R-12W-HD
Power: 12W
Size(WxLxH): Ø90X150mm
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD

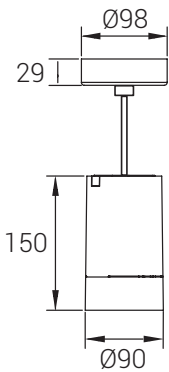

Model: DZ7001R-12W-HD
Power: 12W
Size(WxLxH): Ø90X150mm
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD

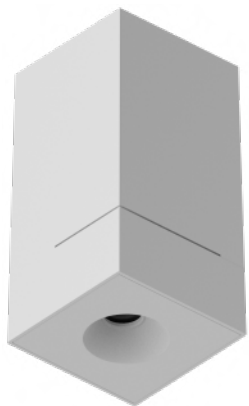


Model: MZ7001S-12W-HD
Power: 12W
Size(WxLxH): 78X78X150mm
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD

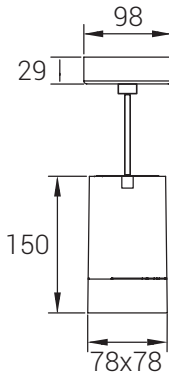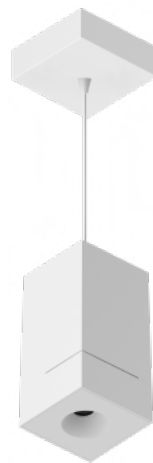

Model: DZ7001S-12W-HD
Power: 12W
Size(WxLxH): 78X78X150mm
Standard holder: **Shinland** V4HD
Optional holder: **Shinland** CXA13-HD

Power:12W

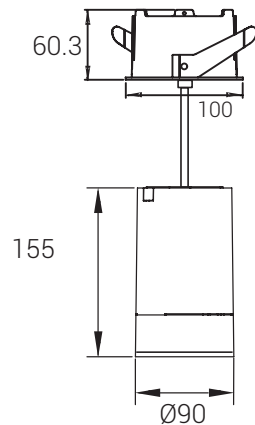

Ø94mm

Model: DZ7002R-12W-FG-YB


Power: 12W

Cutout : Ø94mm

Size(WxLxH): Ø90X155mm

Standard holder: **CREE** 1507

Optional holder: **ITILED** 020

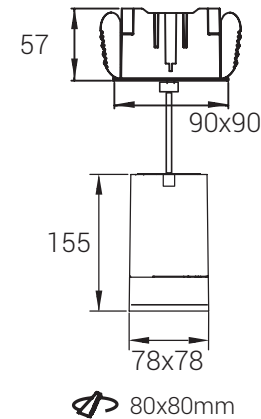

Model: DZ7002S-12W-FG-YB


Power: 12W

Cutout : 80x80mm

Size(WxLxH): 90x90X155mm

Standard holder: **CREE** 1507

Optional holder: **ITILED** 020

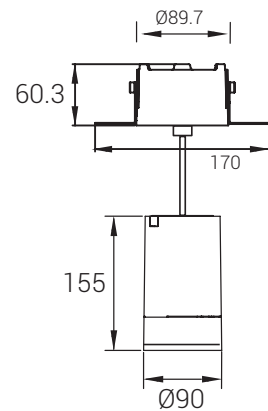

Ø105mm

Model: DZ7002R-12W-FG-WB



Power: 12W

Cutout : 1Ø105mm

Size(WxLxH): Ø90X155mm

Standard holder: **CREE** 1507

Optional holder: **ITILED** 020

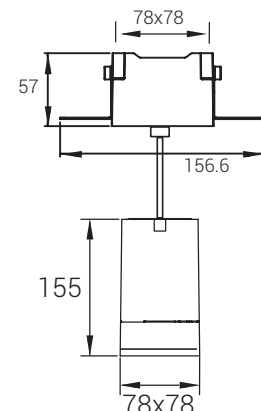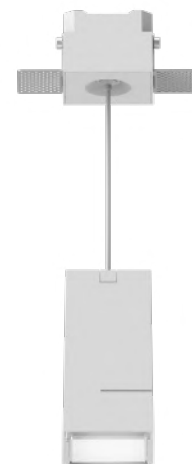

80x95mm

Model: DZ7002S-12W-FG-WB

Power: 12W


Cutout : 180x95mm

Size(WxLxH): 78x78X155mm


Standard holder: **CREE** 1507

Optional holder: **ITILED** 020



Power:18W





Model: MZ7001R-ZZ12W-TJ
Power: 18W
Size(WxLxH): Ø90X150mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

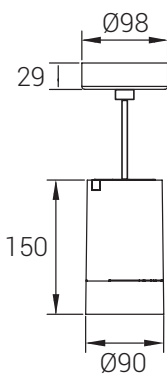

Model: DZ7001R-ZZ12W-TJ
Power: 18W
Size(WxLxH): Ø90X150mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

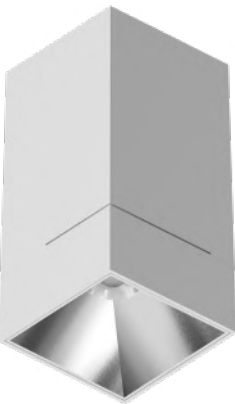

Model: MZ7001R-12W-TJ
Power: 18W
Size(WxLxH): 78X78X150mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

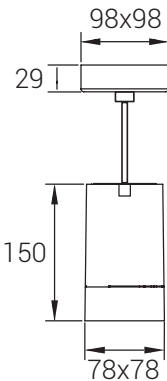

Model: DZ7001S-ZZ12W-TJ
Power: 18W
Size(WxLxH): 78X78X150mm
Standard holder: **CREE** 1507
Optional holder: **ITILED** 020

Power:20W




Model: MZ7001R-ZZ20W
MZ7001R-PG20W

Power: 20W

Size(WxLxH): Ø107X197mm

Standard holder: **CREE** 1507

Optional holder: **ITILED** 020



Direct



Polarizer




Model: DZ7001R-ZZ20W
DZ7001R-PG20W

Power: 20W

Size(WxLxH): Ø107X197mm

Standard holder: **CREE** 1507


Optional holder: **ITILED** 020

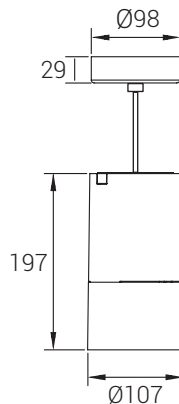

Direct



Polarizer

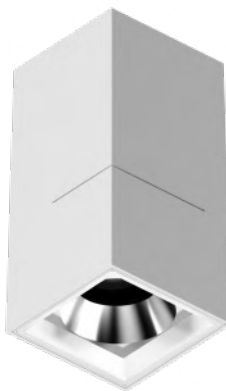


Model: MZ7001R-ZZ20W
MZ7001R-PG20W

Power: 20W

Size(WxLxH): 100X100X197mm

Standard holder: **CREE** 1507


Optional holder: **ITILED** 020



Direct



Polarizer

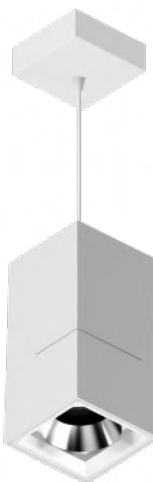



Model: DZ7001R-ZZ20W
DZ7001R-PG20W

Power: 20W

Size(WxLxH): 100X100X197mm

Standard holder: **CREE** 1507

Optional holder: **ITILED** 020

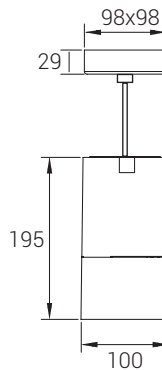




Direct




Polarizer

NICE

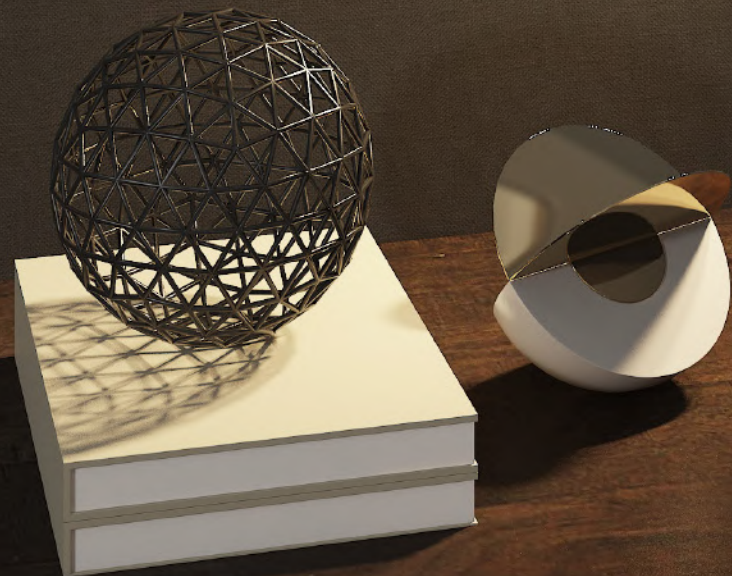




- Die-cast aluminium lamp body can effectively prevent corrosion and rust, make the lamp body fully heat dissipation, improve heat dissipation efficiency.
- Two optical structures: fixed direct/adjustable oblique.
- Equipped with an extremely narrow Beam Angle, can be from different angles to accurately illuminate the subject.

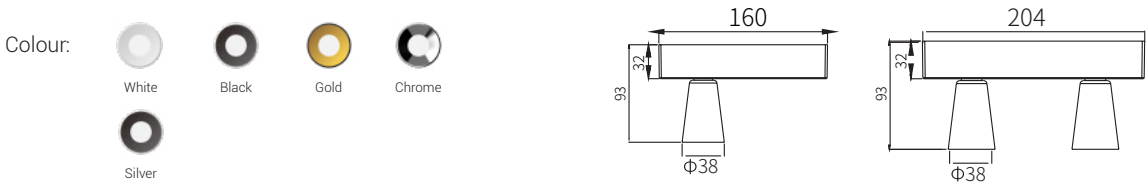


T3008A-5W / T3008A-5W-2

Model: T3008A-5W	Model: T3008A-5W-2
Power: 5W	Power: 2X5W
Cutout: Surface	Cutout: Surface
Size(WxLxH): Φ 40x60mm	Size(WxLxH): Φ 40x60mm
Electrical box: 32x38x160	Electrical box: 32x38x204
Beam Angle: 15° /24° /38°	Beam Angle: 15°/24°/38°
Standard holder:  1304	Standard holder:  1304
Optional holder:  020	Optional holder:  020



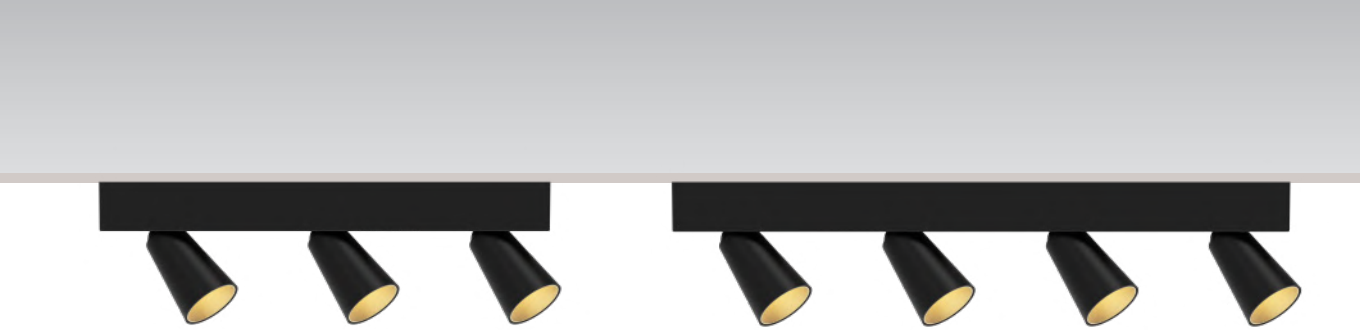


Colour:




T3008A-5W-3/T3008A-5W-4

Model: T3008A-5W-3	Model: T3008A-5W-4
Power: 3X5W	Power: 4X5W
Cutout: Surface	Cutout: Surface
Size(WxLxH):Φ40x60mm	Size(WxLxH):Φ40x60mm
Electrical box: 32x38x310	Electrical box: 32x38x416
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder: 1304	Standard holder: 1304
Optional holder: 020	Optional holder: 020

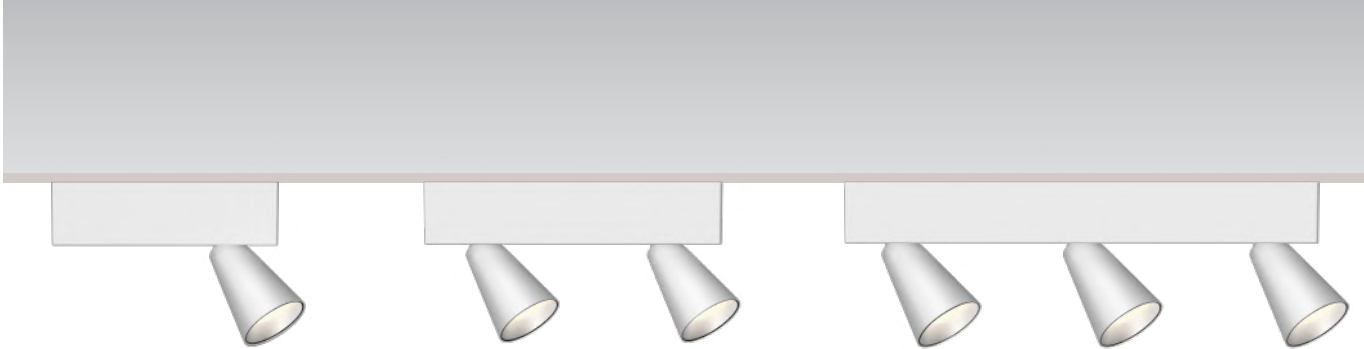


Colour:




T3008A-10W /T3008A-10W-2 / T3008A-10W-3

Model: T3008A-10W	Model: T3008A-10W-2	Model: T3008A-10W-3
Power: 10W	Power: 2X10W	Power: 3X10W
Cutout: Surface	Cutout: Surface	Cutout: Surface
Size(WxLxH):Φ63x83mm	Size(WxLxH):Φ63x83mm	Size(WxLxH):Φ40x60mm
Electrical box: 50x58x190	Electrical box: 50x58x252	Electrical box: 50x58x402
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder: 1507	Standard holder: 1507	Standard holder: 1507
Optional holder: 020	Optional holder: 020	Optional holder: 020






- Colour:
-  White
-  Black
-  Gold
-  Chrome
-  Silver

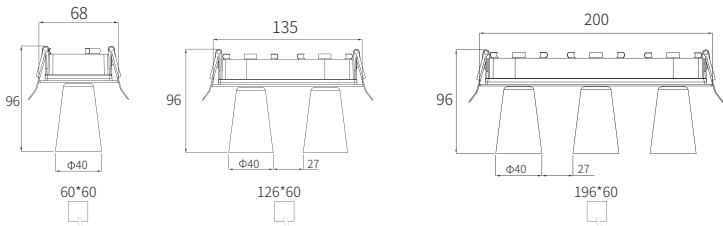


NICE NEW OUTERRING

Model: T3008SE-5W-AZ	Model: T3008SE-5W-AZ-2	Model: T3008SE-5W-AZ-3
Power: 5W	Power: 2X5W	Power: 3X5W
Cutout: 60X60	Cutout: 130X60	Cutout: 196X60
Size(WxLxH):68X96X68	Size(WxLxH):135X96X68	Size(WxLxH):200X96X68
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder:  1304	Standard holder:  1304	Standard holder:  1304
Optional holder:  020	Optional holder:  020	Optional holder:  020

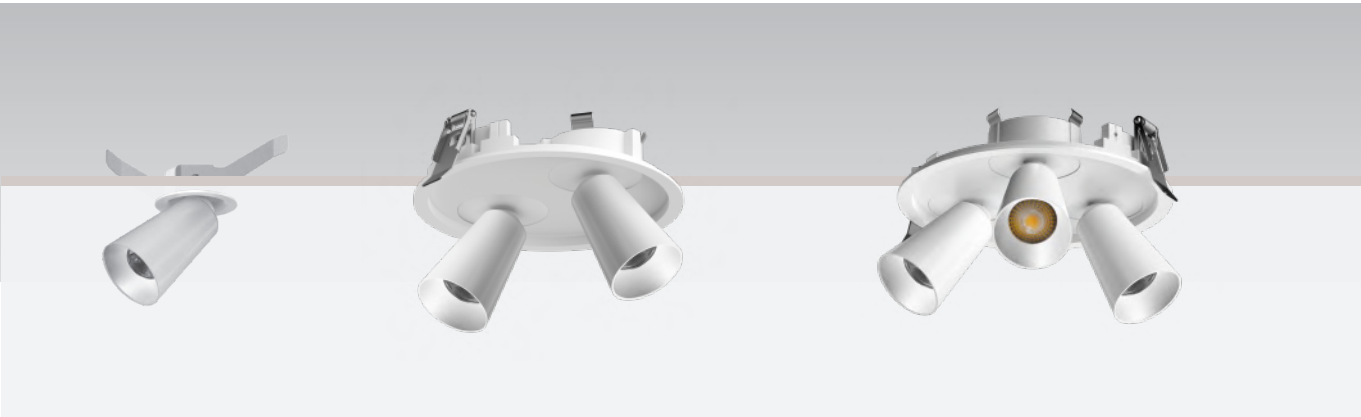



- Colour:
-  White
-  Black
-  Gold
-  Chrome
-  Silver

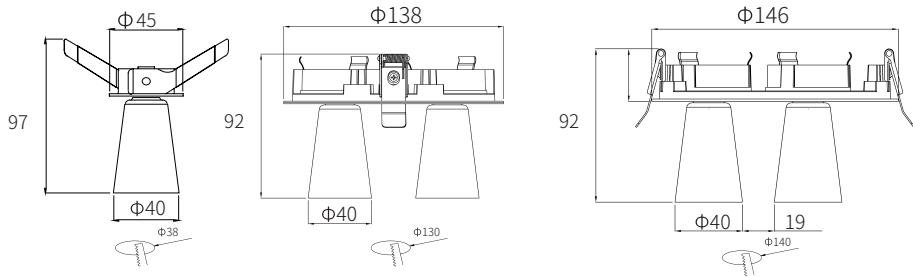

NICE NEW OUTERRING



Model: T3008RE-5W-AZ	Model: T3008RE-5W-AZ-2	Model: T3008RE-5W-AZ-3
Power: 5W	Power: 2X5W	Power: 3X5W
Cutout: 40	Cutout: 130	Cutout: 140
Size(WxLxH): 45X97	Size(WxLxH): 138X92	Size(WxLxH): 146X92
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder:  1304	Standard holder:  1304	Standard holder:  1304
Optional holder:  020	Optional holder:  020	Optional holder:  020



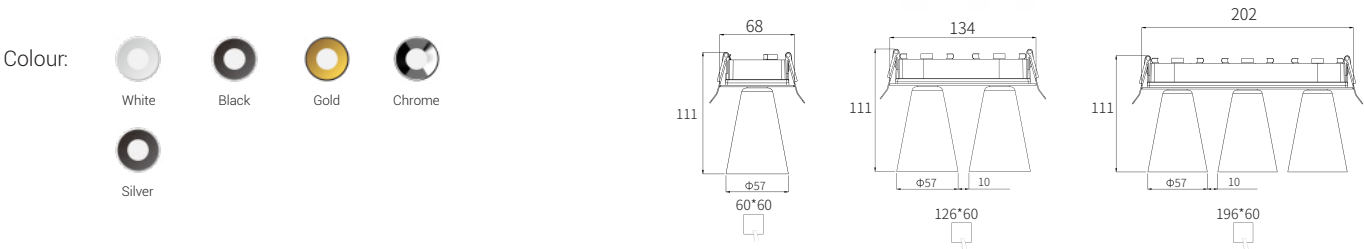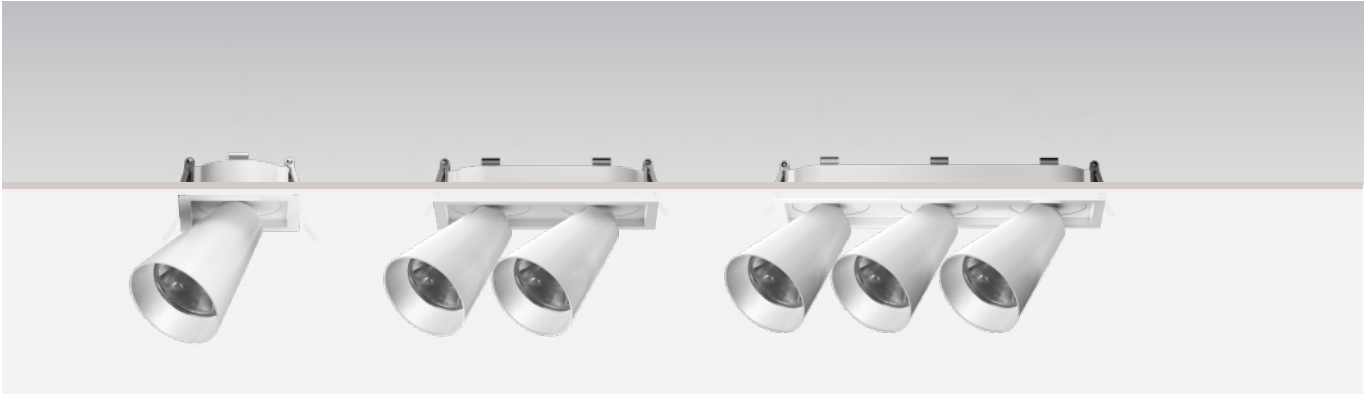


NICE NEW OUTERRING

Model: T3008SE-10W-AZ	Model: T3008SE-10W-2-AZ	Model: T3008SE-10W-3-AZ
Power: 10W	Power: 2X10W	Power: 3X10W
Cutout: 60X60	Cutout: 126X60	Cutout: 196X60
Size(WxLxH):68X111X68	Size(WxLxH):134X111X68	Size(WxLxH):202X111X68
Beam Angle: 15°/24°/38°	Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°
Standard holder:  1507	Standard holder:  1507	Standard holder:  1507
Optional holder:  020	Optional holder:  020	Optional holder:  020

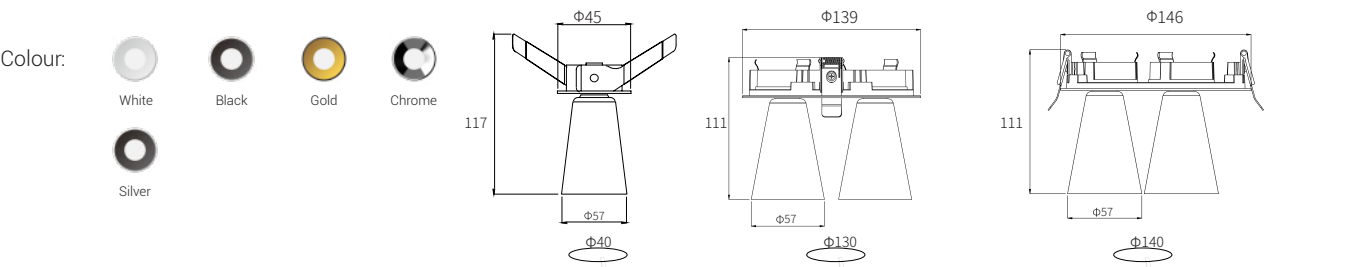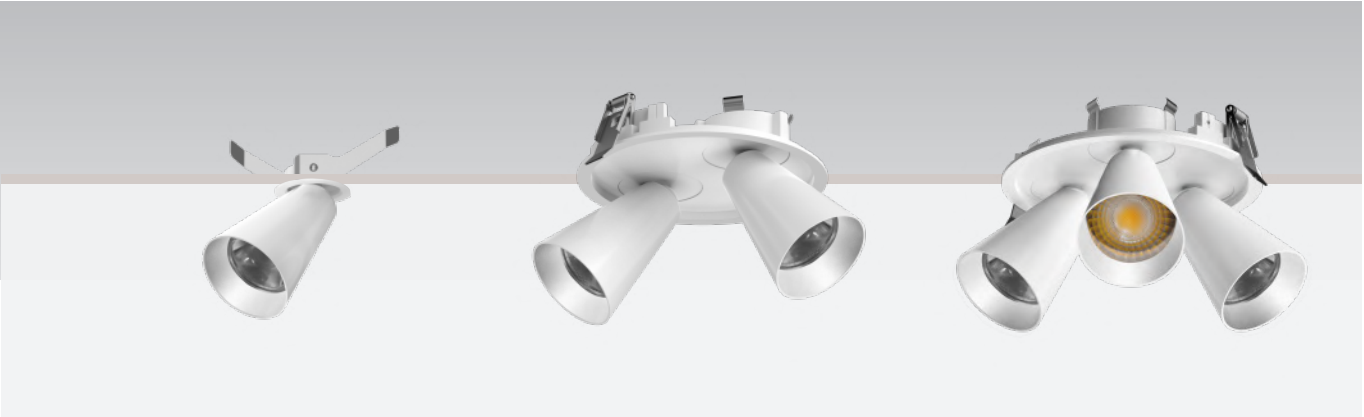



NICE NEW OUTERRING

Model: T3008RE-10W-AZ	Model: T3008RE-10-2-AZ	Model: T3008RE-10-3-AZ
Power: 10W	Power: 2X10W	Power: 3X10W
Cutout: Φ 40	Cutout: Φ 130	Cutout: Φ 140
Size(WxLxH): Φ 45x117	Size(WxLxH): Φ 139x111	Size(WxLxH): Φ 146x111
Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°
Standard holder:  1507	Standard holder:  1507	Standard holder:  1507
Optional holder:  020	Optional holder:  020	Optional holder:  020

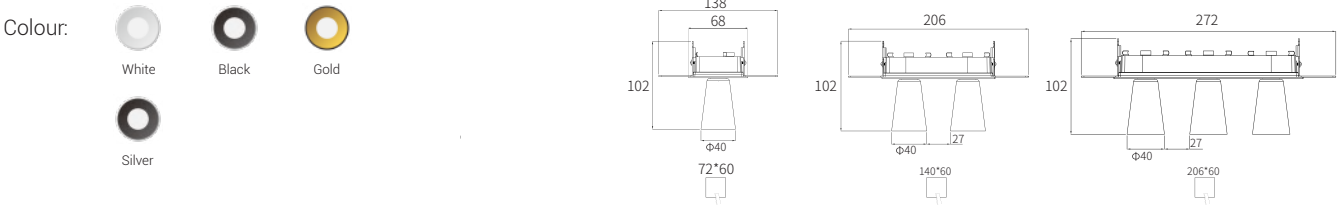

NICE NEW OUTERRING



Model: T3008ST-5W-AZ	Model: T3008ST-5W--2-AZ	Model: T3008ST-5W-3-AZ
Power: 5W	Power: 2X5W	Power: 3X5W
Cutout: 72X60	Cutout: 140X60	Cutout: 206X60
Size(WxLxH):138X102X68	Size(WxLxH):206X102X68	Size(WxLxH):272X102X68
Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°
Standard holder:  1304	Standard holder:  1304	Standard holder:  1304
Optional holder:  020	Optional holder:  020	Optional holder:  020

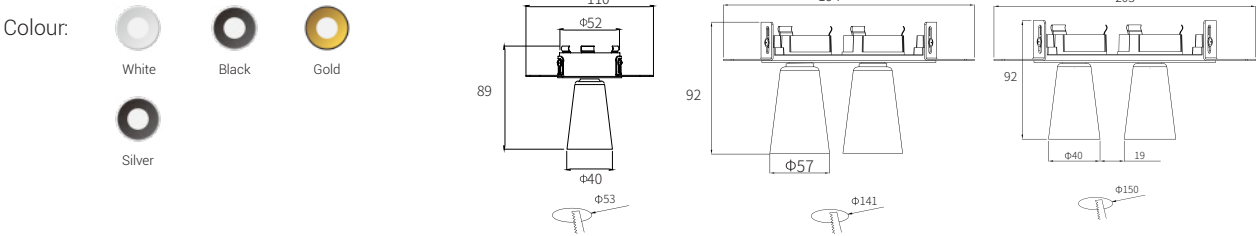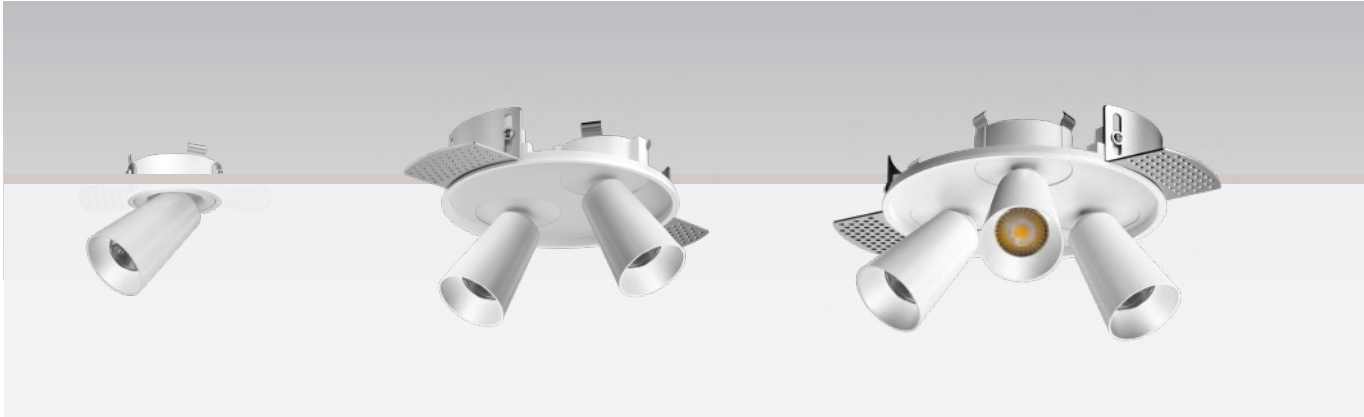

NICE NEW OUTERRING



Model: T3008RT-5W-AZ	Model: T3008RT-5W-2-AZ	Model: T3008RT-5W-3-AZ
Power:5W	Power2X5W	Power3X5W
Cutout: 53	Cutout: 141	Cutout: 150
Size(WxLxH):110X89	Size(WxLxH):139X92	Size(WxLxH):203X92
Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°
Standard holder:  1304	Standard holder:  1304	Standard holder:  1304
Optional holder:  020	Optional holder:  020	Optional holder:  020



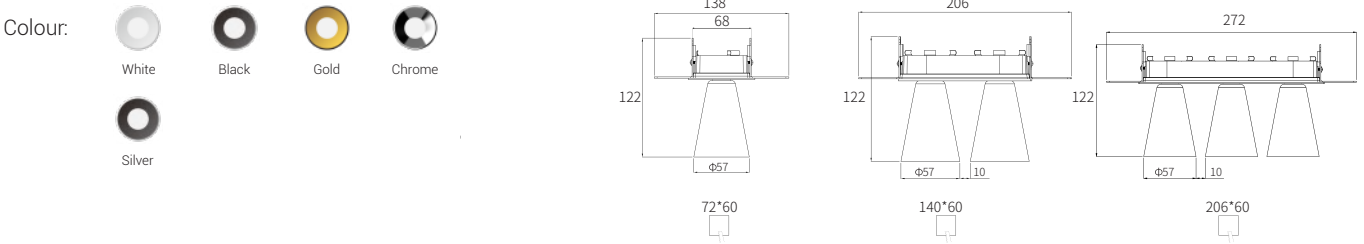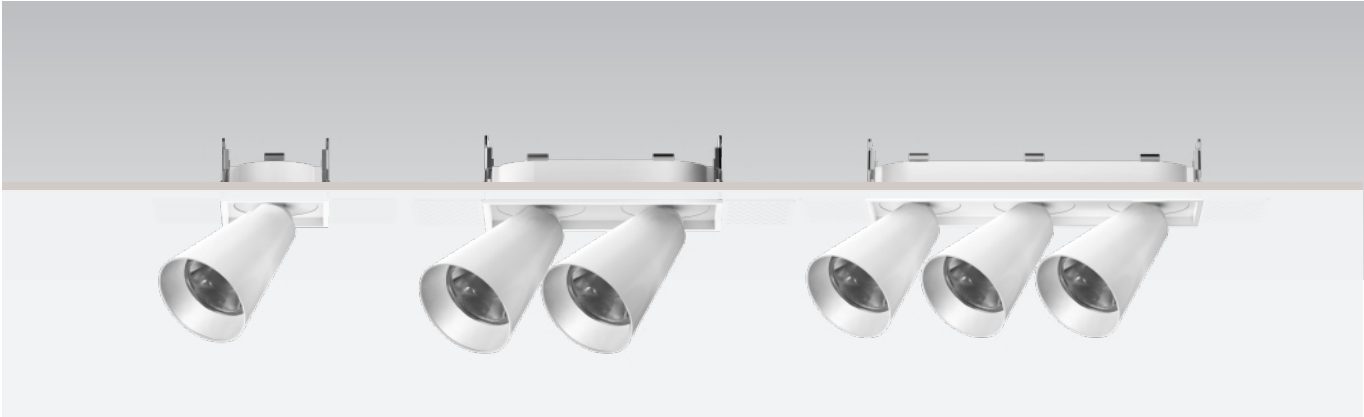


NICE NEW OUTERRING

Model: T3008ST-10W-AZ	Model: T3008ST-10W-2-AZ	Model: T3008ST-10W-3-AZ
Power: 10W	Power: 2X10W	Power: 3X10W
Cutout: 72X60	Cutout: 140X60	Cutout: 206X60
Size(WxLxH):138X122X68	Size(WxLxH):206X122X68	Size(WxLxH):272X122X68
Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°
Standard holder:  1507	Standard holder:  1507	Standard holder:  1507
Optional holder:  020	Optional holder:  020	Optional holder:  020

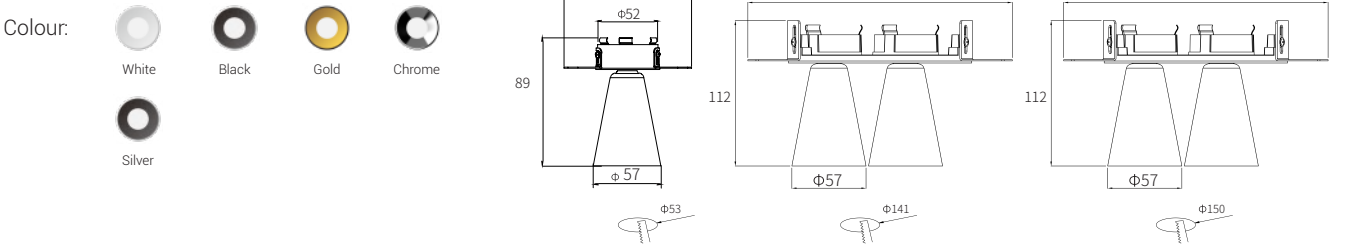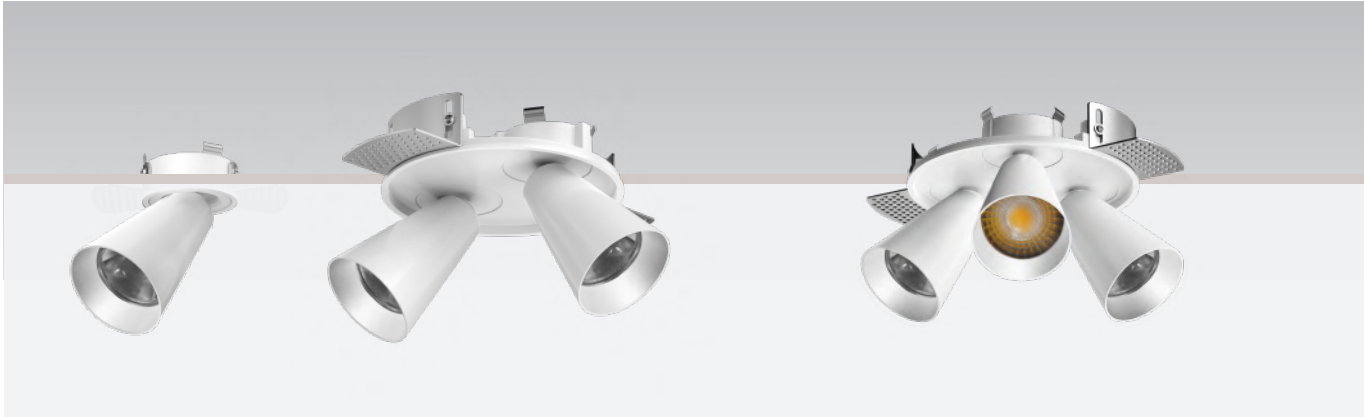


NICE NEW OUTERRING

Model: T3008RT-10W-AZ	Model: T3008RT-10W-2-AZ	Model: T3008RT-10W-3-AZ
Power: 2X10W	Power: 2X10W	Power: 3X10W
Cutout: 53	Cutout: 141	Cutout: 150
Size(WxLxH):110x89	Size(WxLxH):194X112	Size(WxLxH):203X112
Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°	Beam Angle:15°/24°/38°
Standard holder:  1507	Standard holder:  1507	Standard holder:  1507
Optional holder:  020	Optional holder:  020	Optional holder:  020

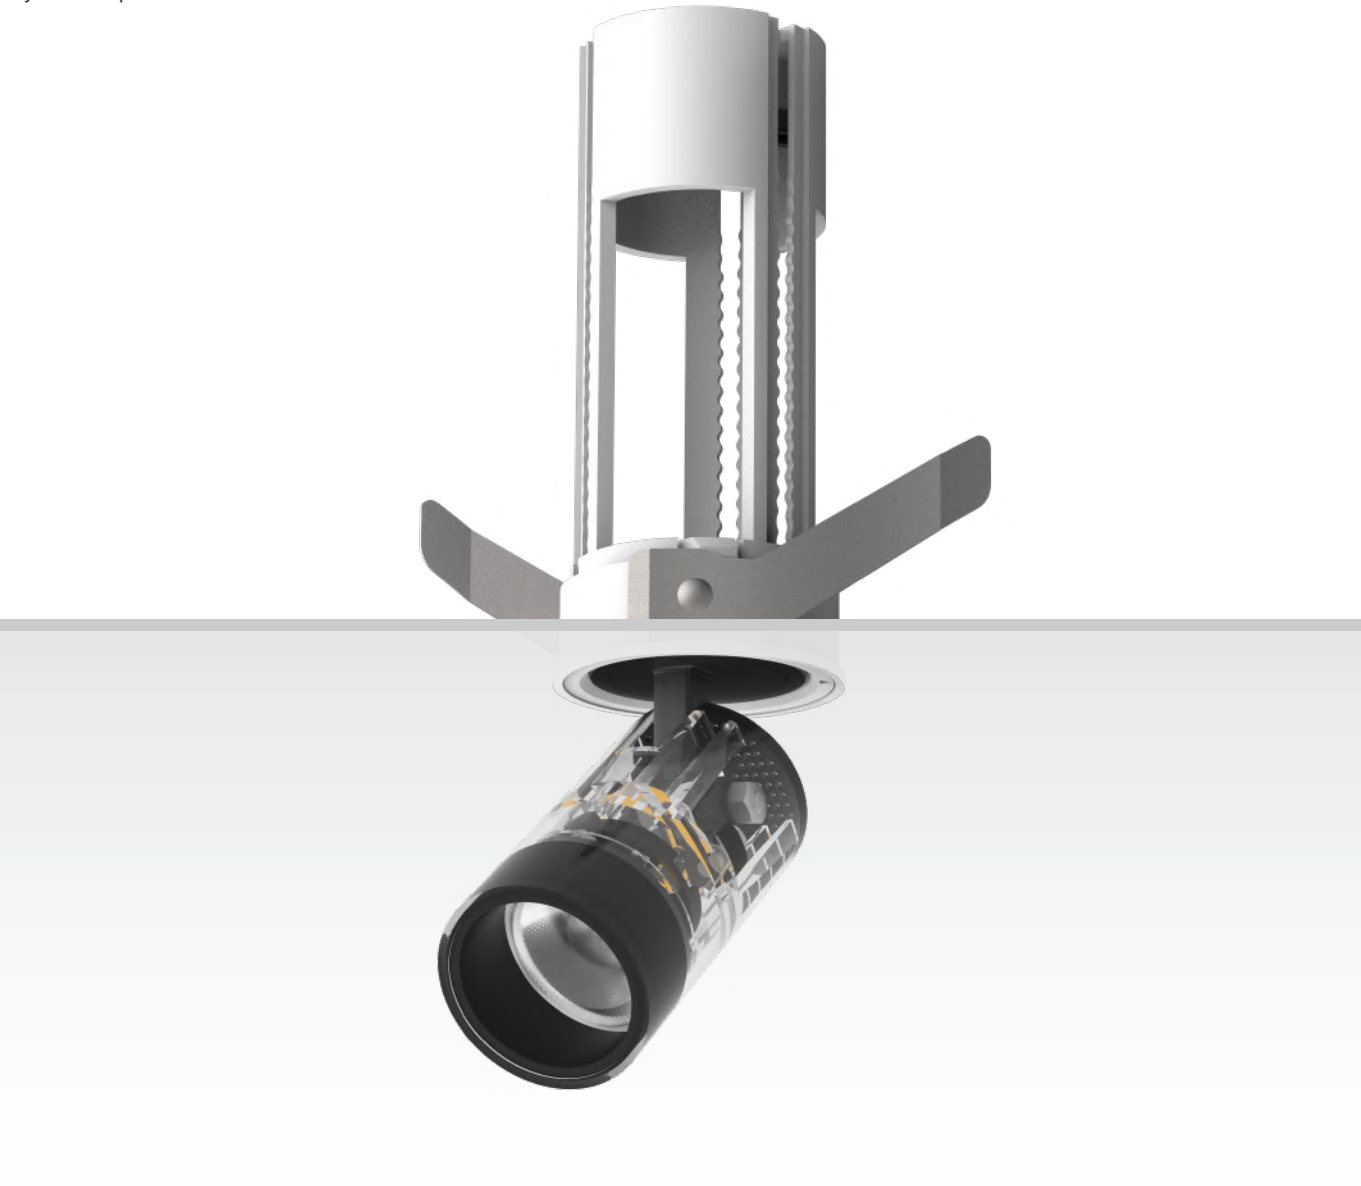

CREE **HONOURTEK**


- Series design, deep anti-glare design, effectively reduce glare.
- The module rotates 355° horizontally and 60° vertically to meet different illumination angles.
- Narrow border/no border design, perfect combination of lighting and installation ceiling, enhance the consistency of space vision.
- The light body can be freely stretched downward upward to meet the high demand of different layers

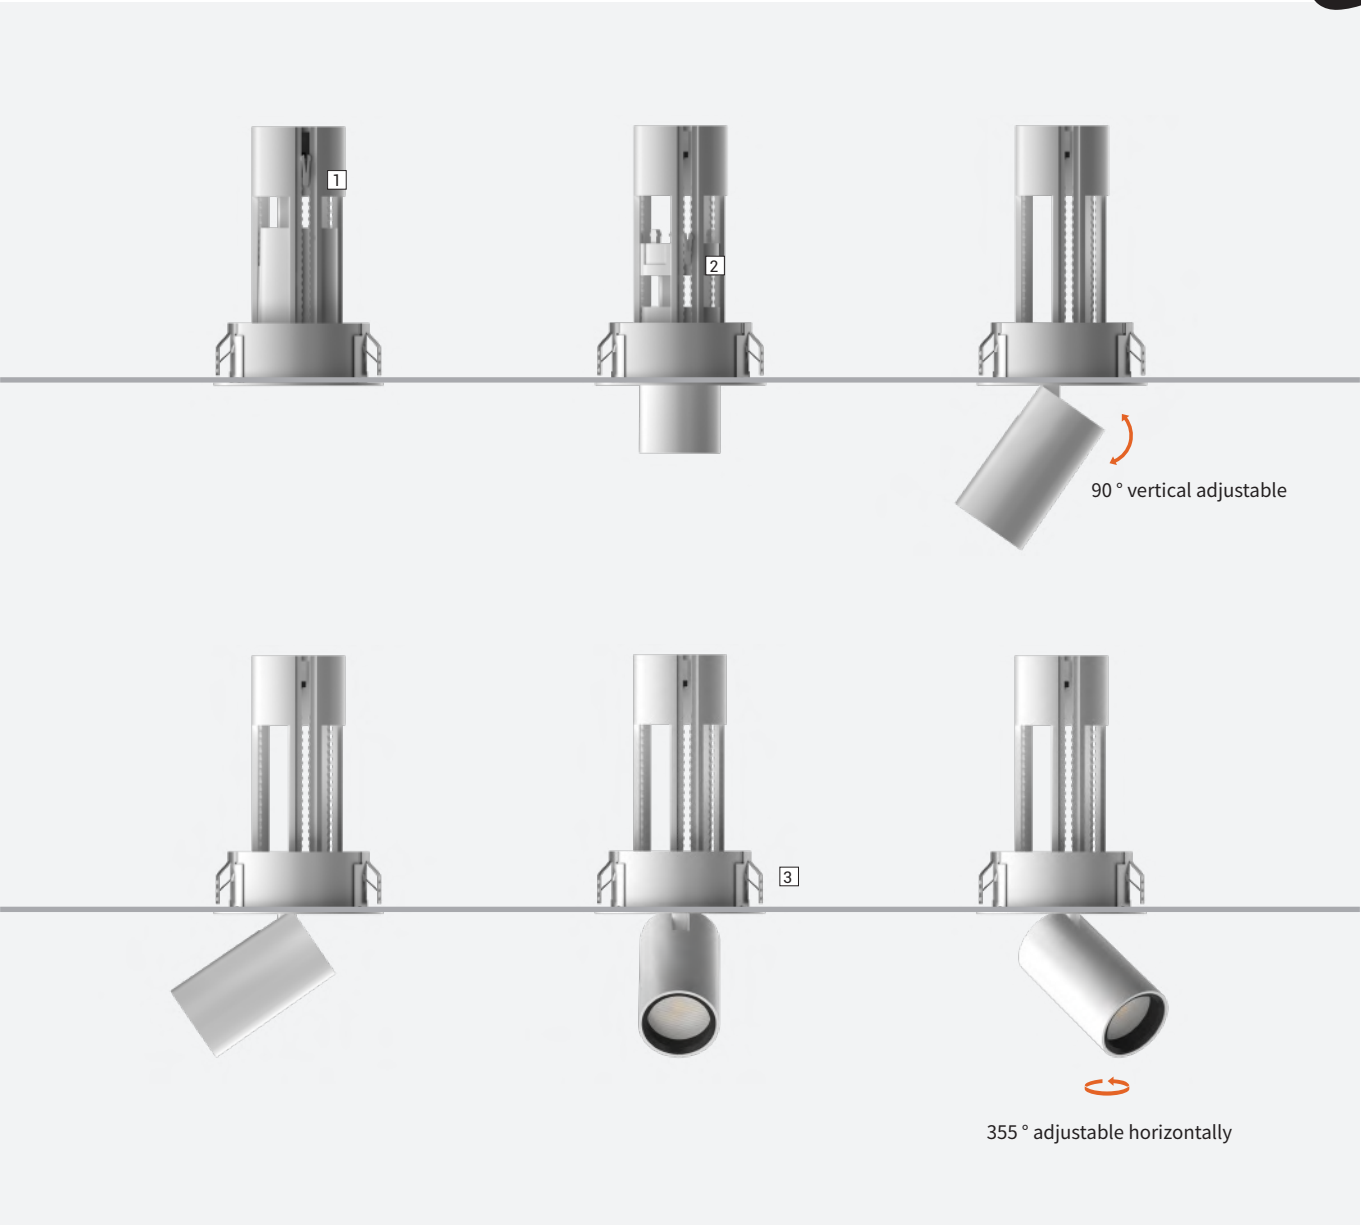

Adjustable telescopic spotlight

Optional light effect accessories can be used to create different lighting effects.
Can be combined with Linan series, light efficiency, flexible one without leakage.

- 1 Press-type fixed buckle, so that the lamp body is not easy to loosen, maintain a fixed state.
- 2 Fixed chuck with height adjustment, so that the lamp body can be fixed in the middle without slipping.
- 3 Various specifications are available, 1/2/3/4 lamp holder, reasonable installation structure can make the ceiling simple, natural and visual.

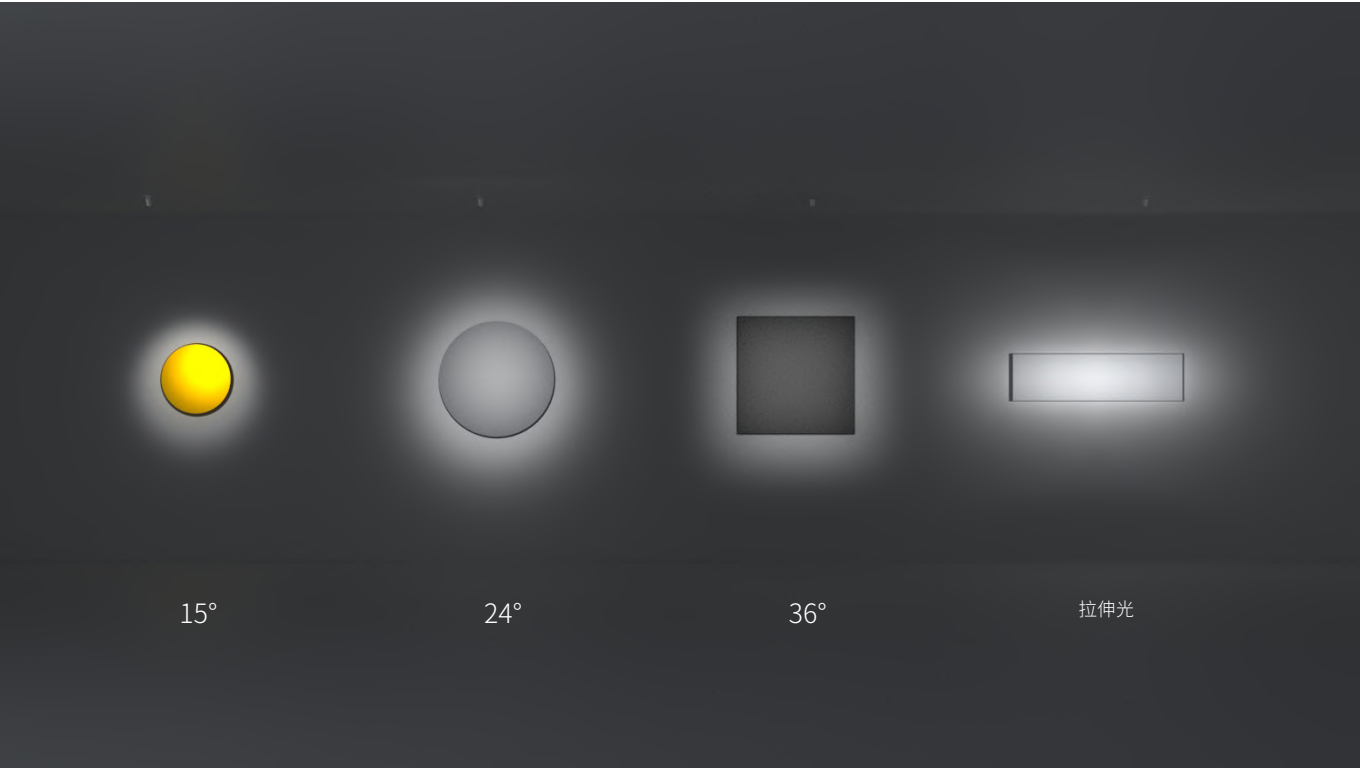

LIGHT-EFFECT ACCESSORIES



Honey comb

Soft Lens

Square

Stripe

Family Design



White + White



White + Black



Black + Gold



Black + Black



BEAUTY OF DIFFERENT COLORS



White + White



White + Black



Black + Gold




Black + Black




Family Design




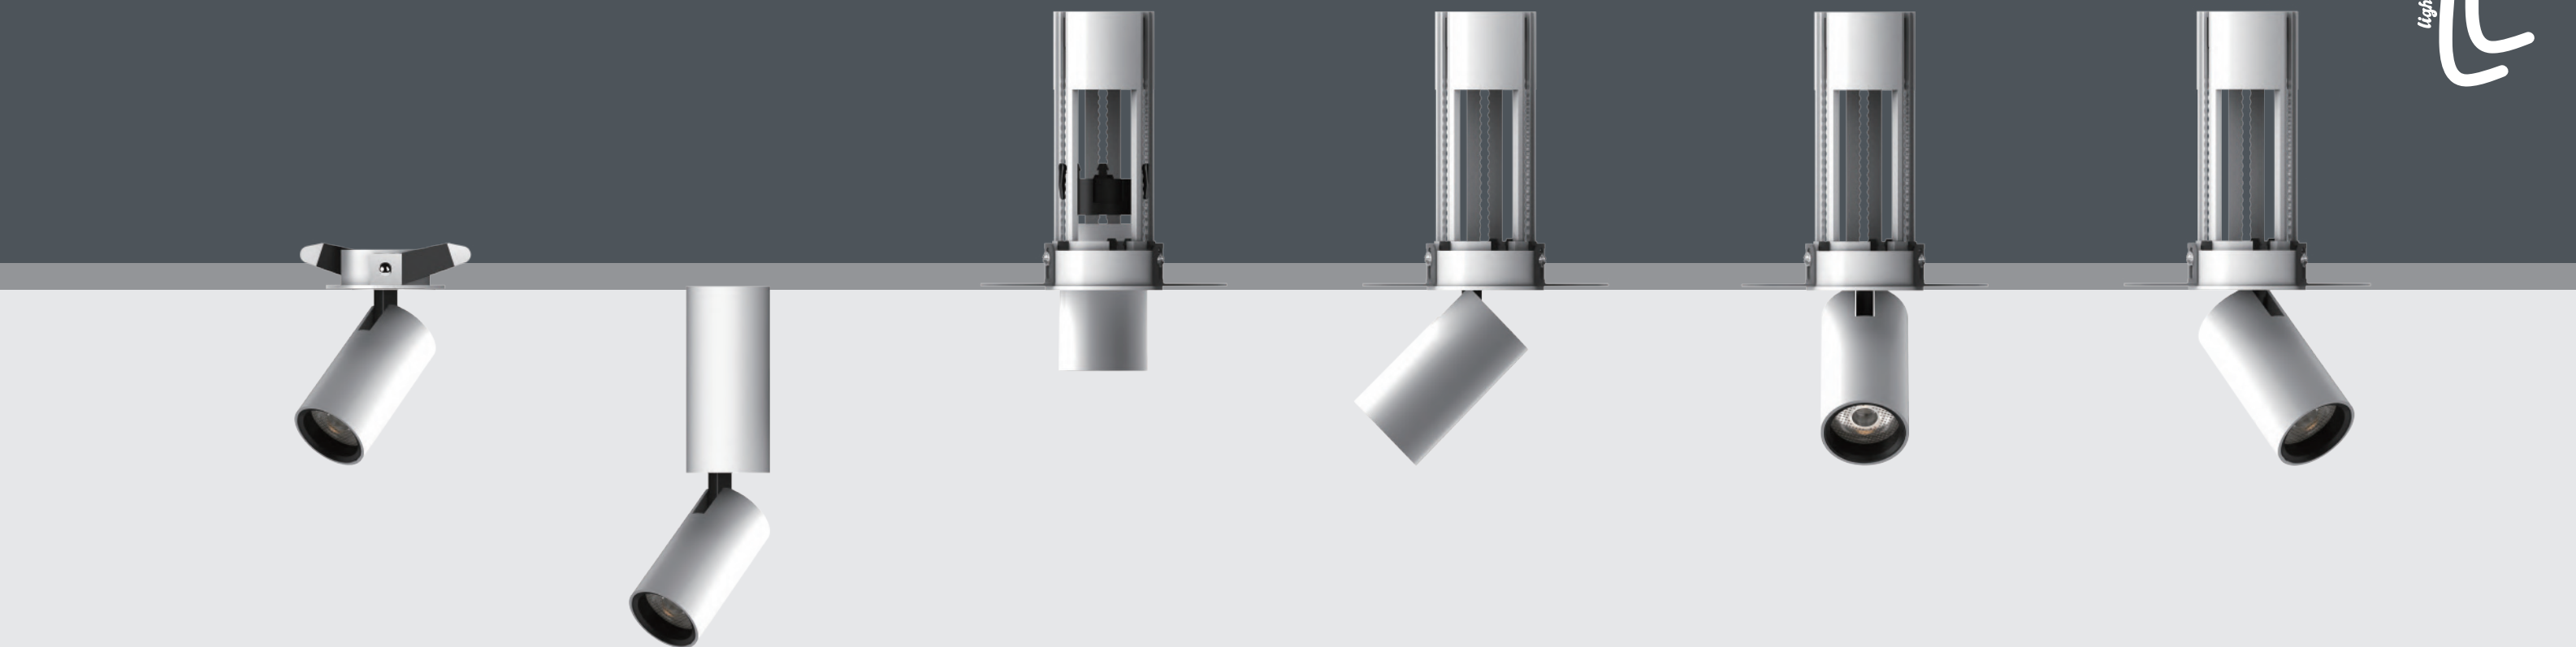

Adjustable Spot series

355°-Rotate degree ,90°-Tilt degree for head.
1/2/3/4 head, trim or trimless installation for choice



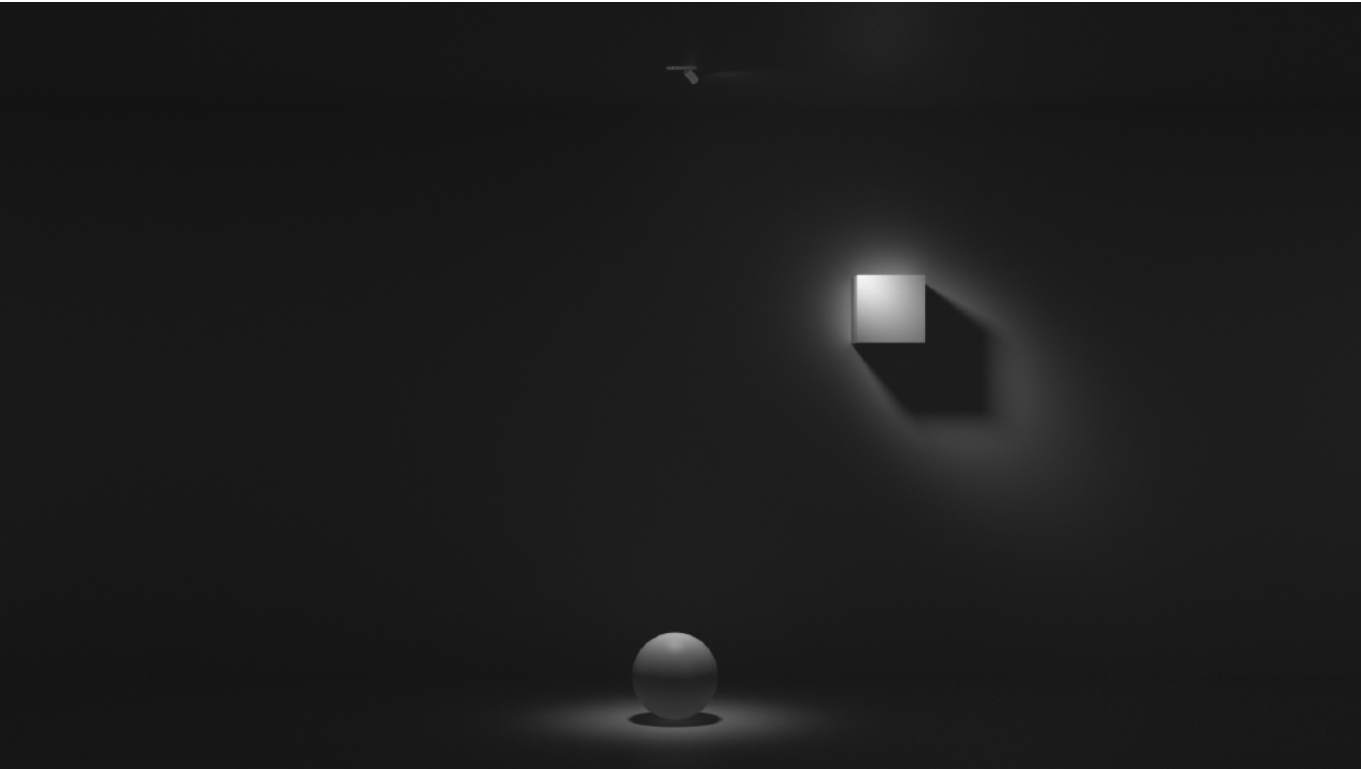

REMOVE



REPLACE



COMBINATION

Combination, more than one

Family mold design, improve the versatility of the lamp module, achieve a multi-purpose lamp; Can be combined with Linan series, light efficiency, flexible one without leakage.



ADJUSTABLE SPOT



Split structure

1 The stretching lamp holder contains a height adjusting fixing chute. The lamp body can be fixed in the middle without slipping.




Height adjustment fixing slot



Press type fixing buckle

2 Rotating clasp with positioning groove for fixing rotation angle to make lamp adjust more accurately.



Position the rotating ring

3 Main body lamp body.

4 Light Source Chip.



5 Chip Bracket.



6 Nano Reflector Cup.





7 High Definition Lens.



8 Fixed front ring, optional three color replacement, white/black/gold.



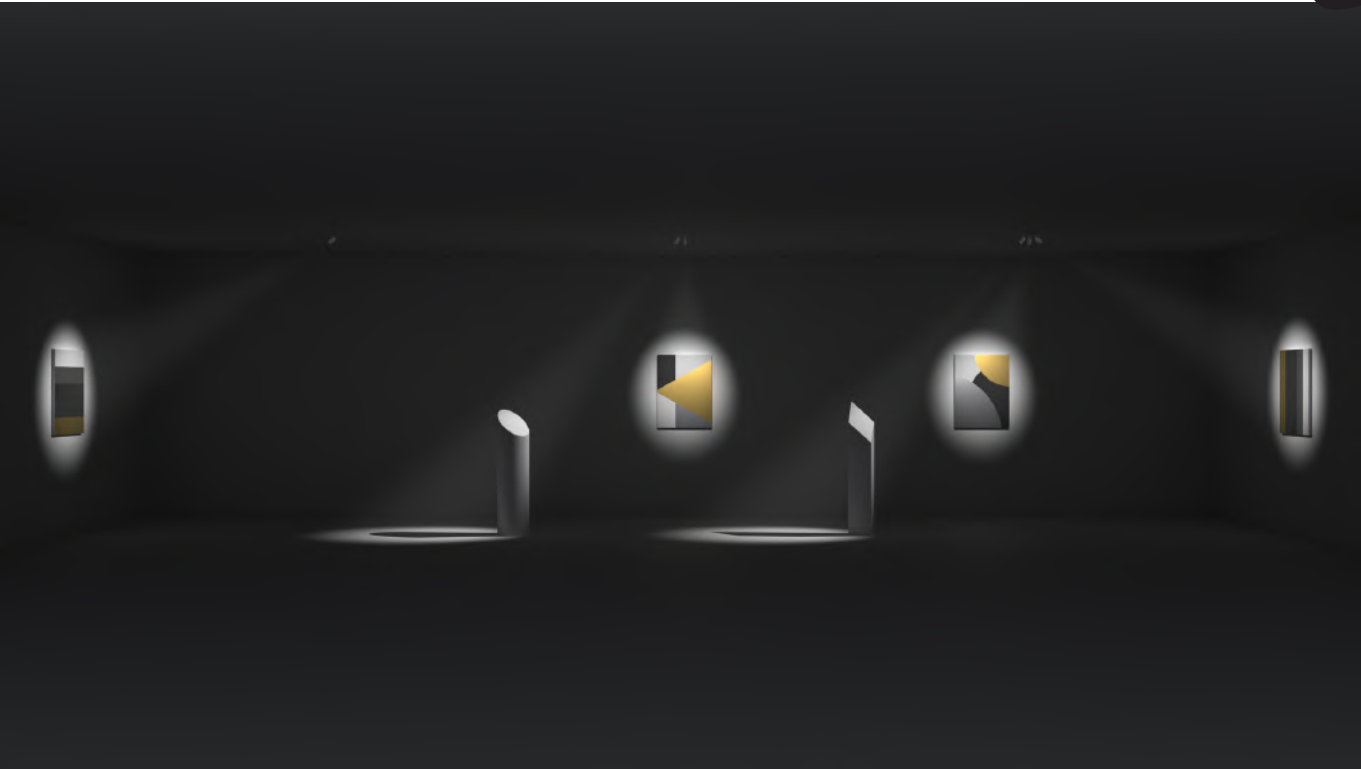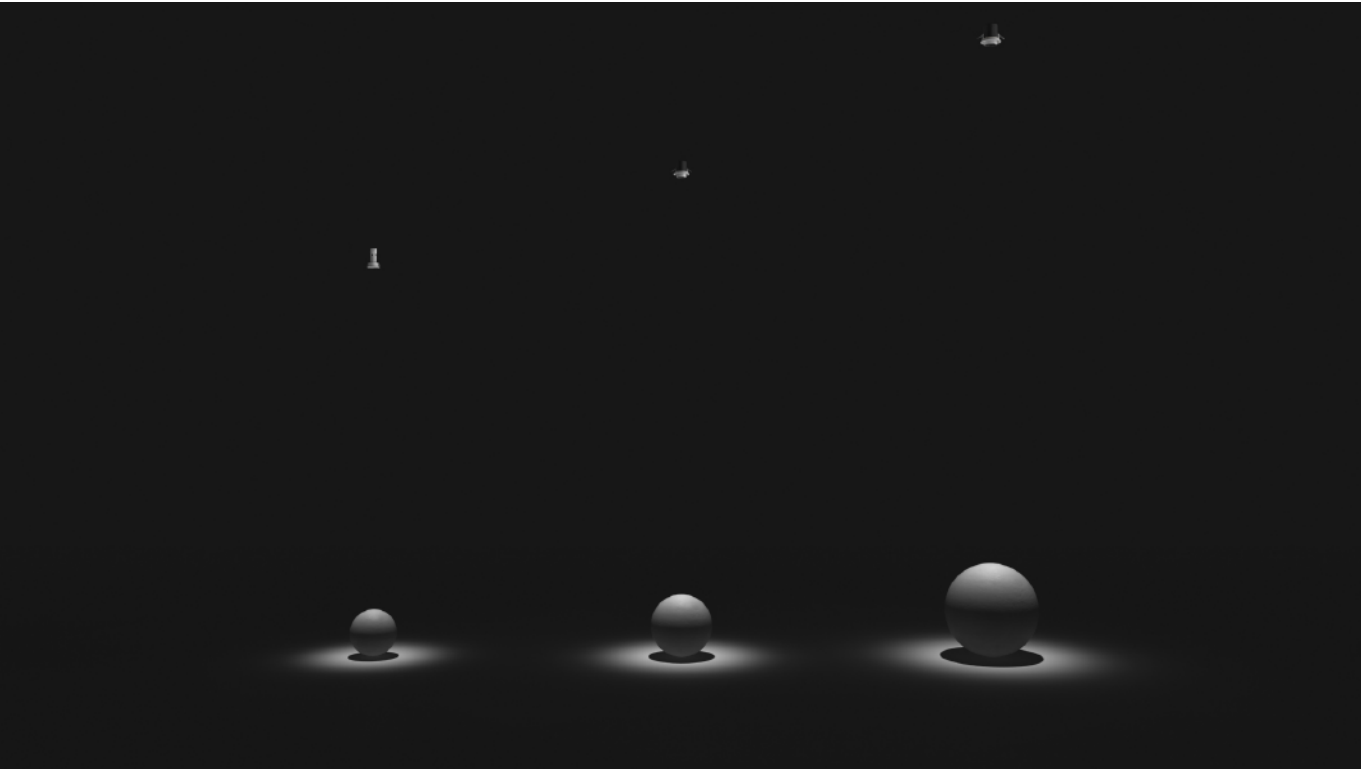

6W



6W



12W



28W

Brightness, more than one

Three kinds of power specifications are available to suit different layers.



SINGLE



DUAL



TRIPLE



TETRAD

Flexibility, more than one

Various installation structures are optional, family design, enhance visual unity; Let the light move at will to maximize the value of light efficiency.

Scene application



Scene application




Scene application




Scene application



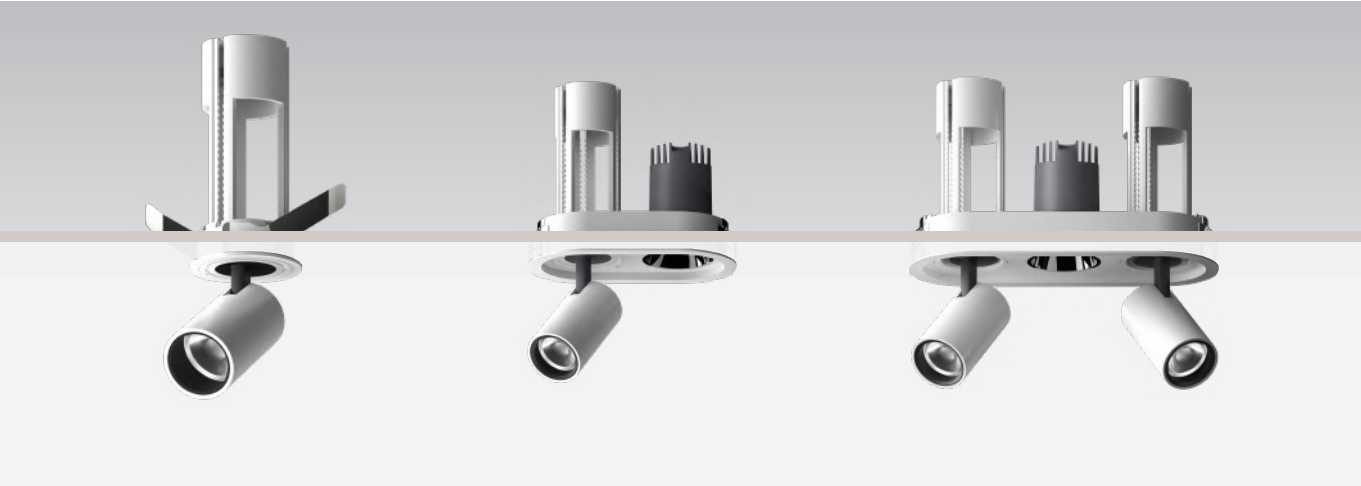


Colour:  White  Black  Gold  Chrome  Silver

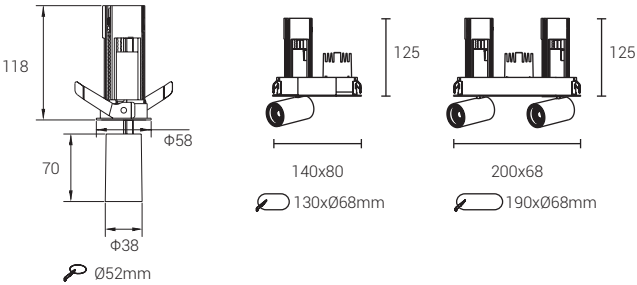


LS3005E50 / LS3005E70-250 / LS3005E70-350

Model: LS3005E50	Model: LS3005E70-250	Model: LS3005E70-350
Power: 6W	Power: 2X6W	Power: 3X6W
Cutout: $\Phi 52\text{mm}$	Cutout: 130x $\Phi 68\text{mm}$	Cutout: 188X $\Phi 68\text{mm}$
Size(WxLxH): $\Phi 58\text{x}118\text{mm}$	Size(WxLxH): 140X80X125mm	Size(WxLxH): 200X68X125mm
Beam Angle: 15°/24°/38°	Beam Angle: 15°/24°/38°	Beam Angle: 15°/24°/38°
Standard holder:  1304	Standard holder:  1304	Standard holder:  1304
Optional holder:  020	Optional holder:  020	Optional holder:  020

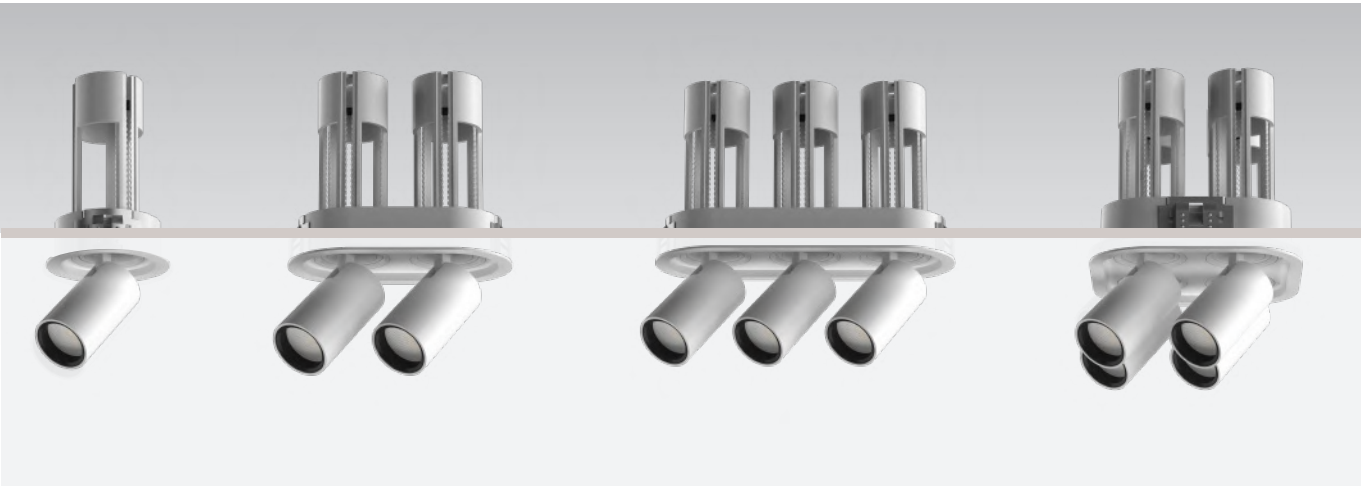

Colour:  White+White  White+Black  Black+Gold  Black+Black



Optional :  Honey comb  Soft Lens  Square  Stripe

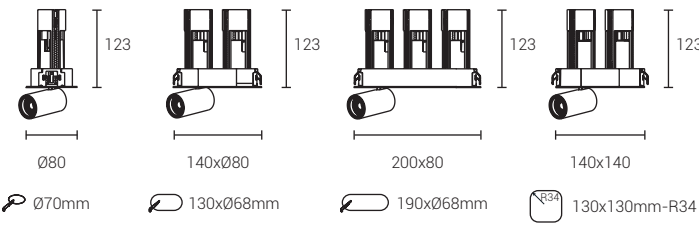


LS3005E70 / LS3005E70-2 / LS3005E70-3 / LS3005E70-4

Model: LS3005E70	Model: LS3005E70-2	Model: LS3005E70-3	Model: LS3005E70-4
Power: 6W	Power: 2X6W	Power: 3X6W	Power: 4X6W
Cutout: $\Phi 70\text{mm}$	Cutout: 130x $\Phi 68\text{mm}$	Cutout: 190X $\Phi 68\text{mm}$	Cutout: 130X130mm-R34
Size(WxLxH): $\Phi 80\text{x}123\text{mm}$	Size(WxLxH): 140X80X123mm	Size(WxLxH): 200X80X123mm	Size(WxLxH): 140X140X123mm
Beam Angle: 15°/24°/38°	Beam Angle: 15°/24°/38°	Beam Angle: 15°/24°/38°	Beam Angle: 15° /24° /38°
Standard holder:  1304	Standard holder:  1304	Standard holder:  1304	Standard holder:  1304
Optional holder:  020	Optional holder:  020	Optional holder:  020	Optional holder:  020



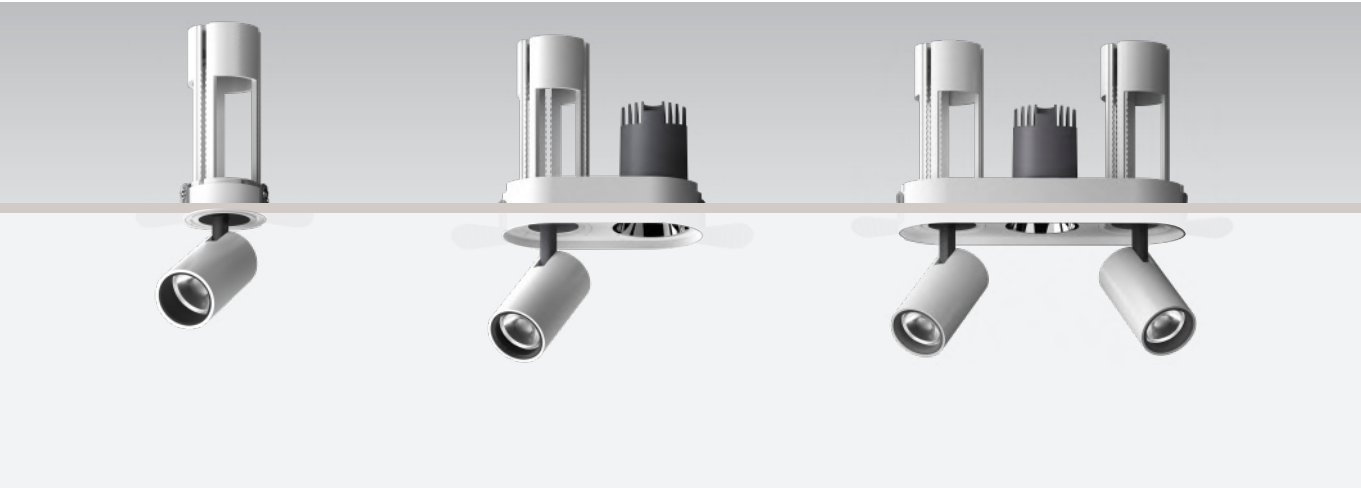


Colour:  White  Black  Gold  Chrome  Silver

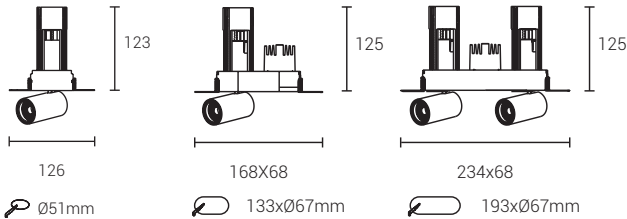


LS3005T50/LS3005T70-250 /LS3005T70-350

Model: LS3005T50	Model: LS3005T70-250	Model: LS3005T70-350
Power: 6W	Power: 2X6W	Power: 3X6W
Cutout: Ø51mm	Cutout: 133xØ67mm	Cutout: 193xØ67mm
Size(WxLxH): 126x123mm	Size(WxLxH): 168X68X125mm	Size(WxLxH): 234X68X125mm
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder:  1304	Standard holder:  1304	Standard holder:  1304
Optional holder:  020	Optional holder:  020	Optional holder:  020

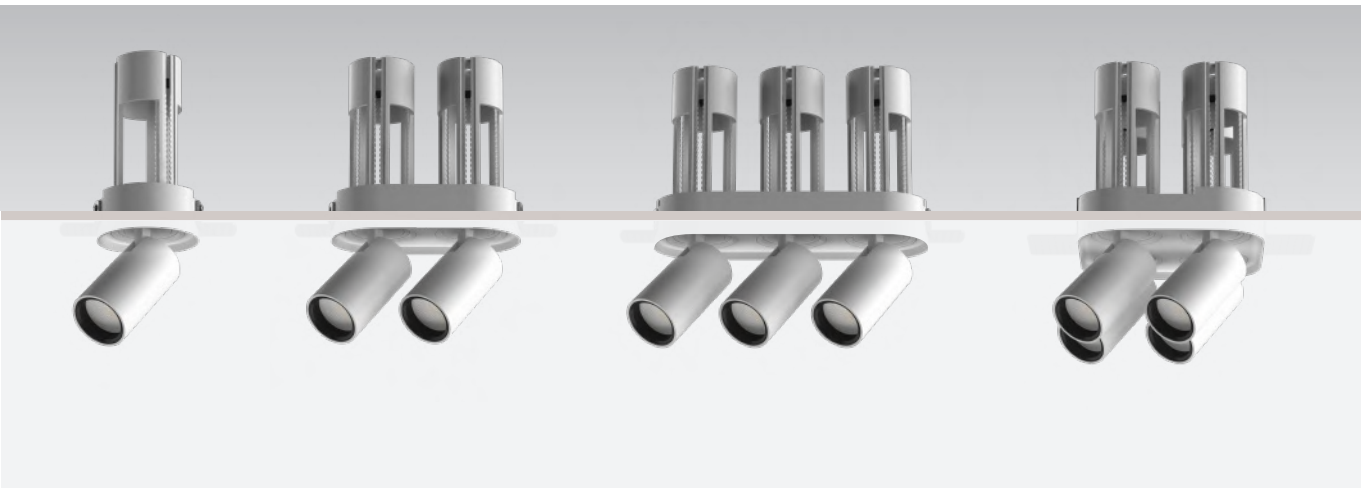

Colour:  White+White  White+Black  Black+Gold  Black+Black


Optional :  Honey comb  Soft Lens  Square  Stripe

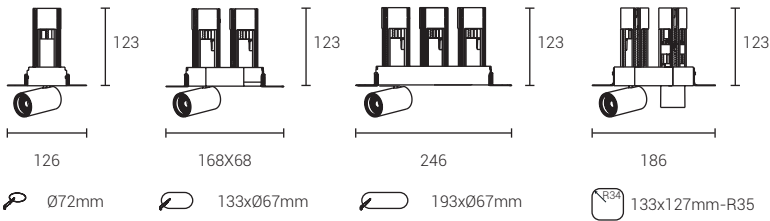


LS3005T70 / LS3005T70-2 / LS3005T70-3 / LS3005T70-4

Model: LS3005T70	Model: LS3005T70-2	Model: LS3005T70-3	Model: LS3005T70-4
Power: 6W	Power: 2X6W	Power: 3X6W	Power: 4X6W
Cutout: Ø72mm	Cutout: 133xØ67mm	Cutout: 193xØ67mm	Cutout: 133X127mm-R35
Size(WxLxH): Φ126x123mm	Size(WxLxH): 168X68X123mm	Size(WxLxH): 246X66X123mm	Size(WxLxH): 186X126X123mm
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder:  1304	Standard holder:  1304	Standard holder:  1304	Standard holder:  1304
Optional holder:  020	Optional holder:  020	Optional holder:  020	Optional holder:  020



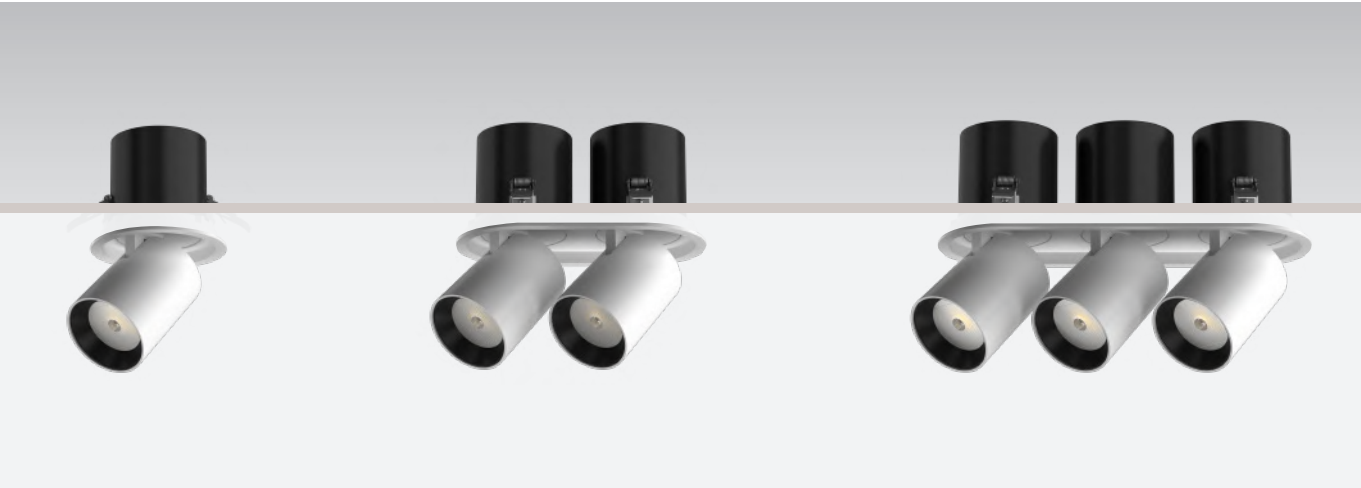

- Colour:
-  White+White
-  White+Black
-  Black+Gold
-  Black+Black
- Optional :
-  Honey comb
-  Soft Lens
-  Square
-  Stripe

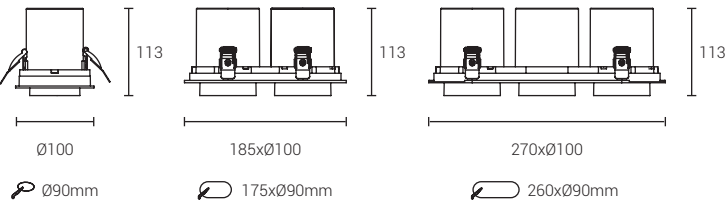


LS3005R90 / LS3005R90-2 / LS3005R90-3

Model: LS3005R90	Model: LS3005R90-2	Model: LS3005R90-3
Power: 12W	Power: 2X12W	Power: 3X12W
Cutout: Ø90mm	Cutout: 175x Ø90mm	Cutout: 260X Ø90mm
Size(WxLxH): Ø100x113mm	Size(WxLxH): 185XØ100X113mm	Size(WxLxH): 270XØ100X113mm
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder:  1507	Standard holder:  1507	Standard holder:  1507
Optional holder:  020	Optional holder:  020	Optional holder:  020



- Colour:
-  White+White
-  White+Black
-  Black+Gold
-  Black+Black
- Optional :
-  Honey comb
-  Soft Lens
-  Square
-  Stripe

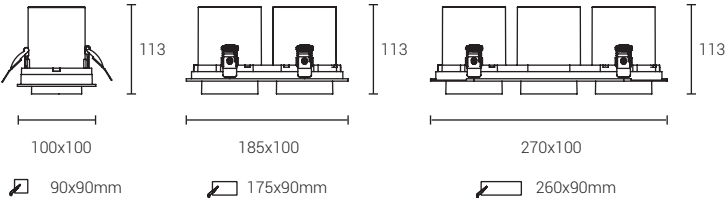


LS3005P90 / LS3005P90-2 / LS3005P90-3

Model: LS3005P90	Model: LS3005P90-2	Model: LS3005P90-3
Power: 12W	Power: 2X12W	Power: 3X12W
Cutout: 90x90mm	Cutout: 175x90mm	Cutout: 260x90mm
Size(WxLxH): 100x100x113mm	Size(WxLxH): 185x100x113mm	Size(WxLxH): 270x100x113mm
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder:  1507	Standard holder:  1507	Standard holder:  1507
Optional holder:  020	Optional holder:  020	Optional holder:  020





- Colour:
- White+White
 - White+Black
 - Black+Gold
 - Black+Black
- Optional :
- Honey comb
 - Soft Lens
 - Square
 - Stripe

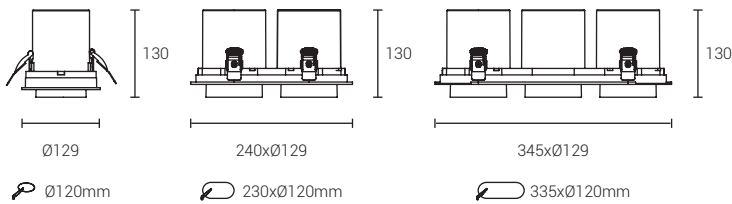


LS3005R120 / LS3005R120-2 / LS3005R120-3

Model: LS3005R120	Model: LS3005R120-2	Model: LS3005R120-3
Power: 25W	Power: 25Wx2	Power: 25Wx3
Cutout: Ø120mm	Cutout: Ø120x230mm	Cutout: Ø120x335mm
Size(WxLxH): Ø129x130mm	Size(WxLxH): Ø129x240x135mm	Size(WxLxH): Ø129x345x130 mm
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder: 1816	Standard holder: 1816	Standard holder: 1816
Optional holder: CXM-14	Optional holder: CXM-14	Optional holder: CXM-14



- Colour:
- White+White
 - White+Black
 - Black+Gold
 - Black+Black
- Optional :
- Honey comb
 - Soft Lens
 - Square
 - Stripe

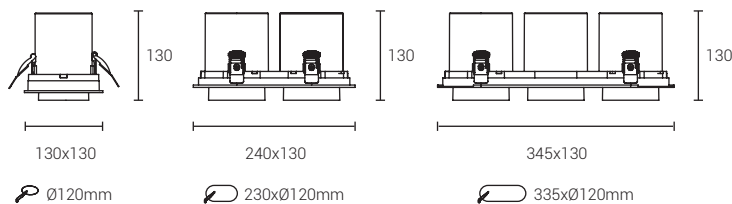


LS3005P120 / LS3005P120-2 / LS3005P120-3

Model: LS3005P120	Model: LS3005P120-2	Model: LS3005P120-3
Power: 25W	Power: 25Wx2	Power: 25Wx3
Cutout: Ø120mm	Cutout: Ø120x230 mm	Cutout: Ø120x335 mm
Size(WxLxH): 130x130x130mm	Size(WxLxH): 130x240x130mm	Size(WxLxH): 130x345x130mm
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder: 1816	Standard holder: 1816	Standard holder: 1816
Optional holder: CXM-14	Optional holder: CXM-14	Optional holder: CXM-14



Colour:

Optional :

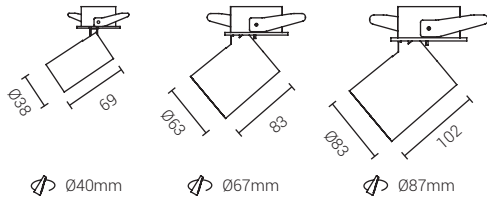


LS3001R40 / LS3001R65 / LS3001R85

Model: LS3001R40	Model: LS3001R65	Model: LS3001R85
Power: 6W	Power: 12W	Power: 25W
Cutout: Ø40mm	Cutout: Ø67mm	Cutout: Ø87mm
Size(WxLxH):Ø50x38x102mm	Size(WxLxH): Ø73x63x114mm	Size(WxLxH): Ø83x102mm
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder: 1304	Standard holder: 1507	Standard holder: 1816
Optional holder: 020	Optional holder: 1304	Optional holder: CXM-14



Colour:

Optional :

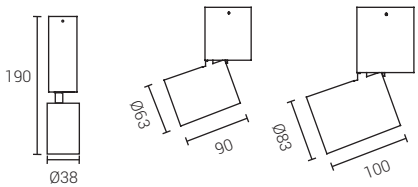


LS3003R45 / LS3003R65 / LS3003R85

Model: LS3003R45	Model: LS3003R65	Model: LS3003R85
Power: 6W	Power: 12W	Power: 25W
Cutout: Surface mounted	Cutout: Surface mounted	Cutout: Surface mounted
Size(WxLxH): Ø38x190mm	Size(WxLxH): Ø63x152mm	Size(WxLxH): Ø83x204mm
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder: 1304	Standard holder: 1507	Standard holder: 1816
Optional holder: 020	Optional holder: 1304	Optional holder: CXM-14




- Colour:
- White+White
 - White+Black
 - Black+Gold
 - Black+Black
- Optional :
- Honey comb
 - Soft Lens
 - Square
 - Stripe

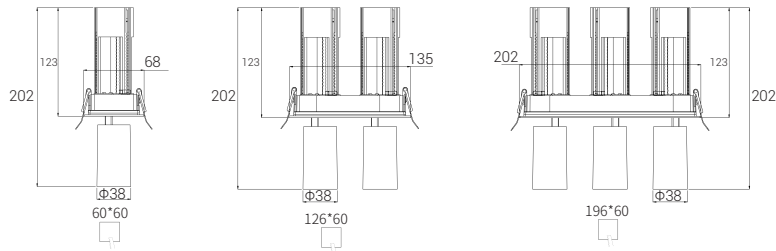


LS3005SE60/ LS3005SE60-2/ LS3005SE60-3

Model: LS3005SE60	Model: LS3005SE60-2	Model: LS3005SE60-3
Power: 6W	Power: 2X6W	Power: 3X6W
Cutout: 60X60mm	Cutout: 126X60mm	Cutout: 196*60mm
Size(WxLxH): $\Phi 38 \times 68 \times 202$ mm	Size(WxLxH): $\Phi 38 \times 135 \times 202$ mm	Size(WxLxH): $\Phi 38 \times 202 \times 202$ mm
Beam Angle: 15°/24°/38°	Beam Angle: 15°/24°/38°	Beam Angle: 15°/24°/38°
Standard holder: CREE 1304	Standard holder: CREE 1304	Standard holder: CREE 1304
Optional holder: ITILED 020	Optional holder: ITILED 020	Optional holder: ITILED 020

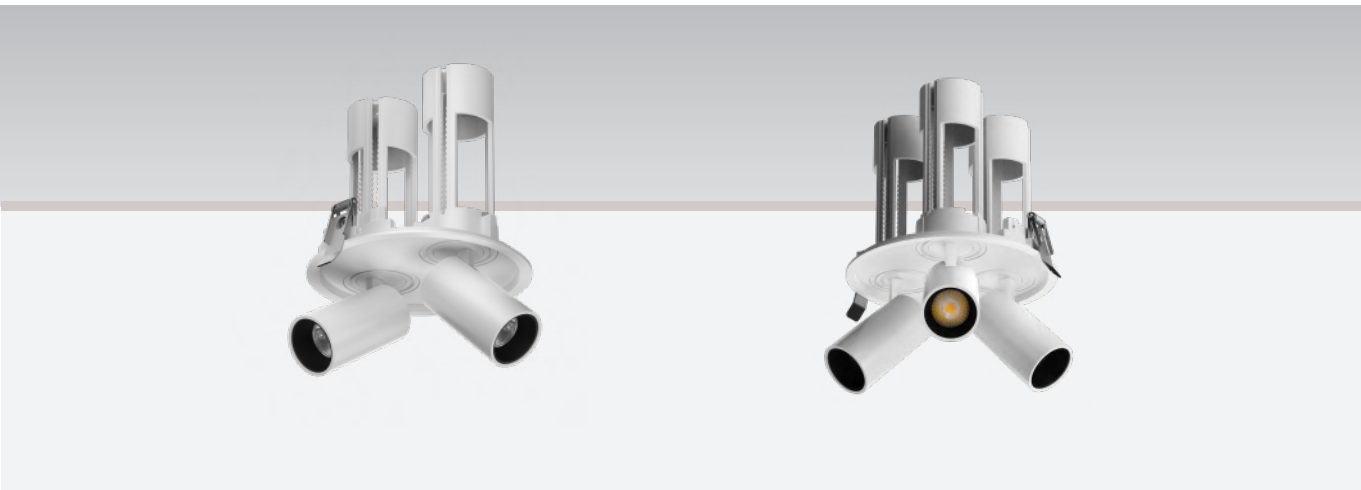

- Colour:
- White+White
 - White+Black
 - Black+Gold
 - Black+Black
- Optional :
- Honey comb
 - Soft Lens
 - Square
 - Stripe

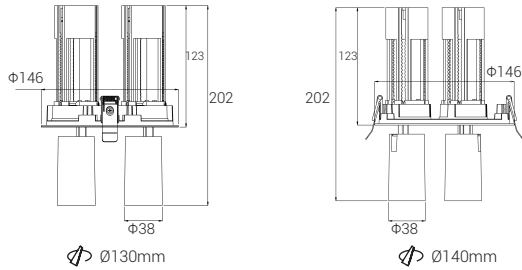


LS3005RE60-2/ LS3005RE60-3

Model: LS3005RE60-2	Model: LS3005RE60-3
Power: 2X6W	Power: 3X6W
Cutout: $\Phi 130$ mm	Cutout: $\Phi 140$ mm
Size(WxLxH): $\Phi 38 \times 146 \times 202$ mm	Size(WxLxH): $\Phi 38 \times 146 \times 202$ mm
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder: CREE 1304	Standard holder: CREE 1304
Optional holder: ITILED 020	Optional holder: ITILED 020




- Colour:
- White+White
 - White+Black
 - Black+Gold
 - Black+Black
- Optional :
- Honey comb
 - Soft Lens
 - Square
 - Stripe

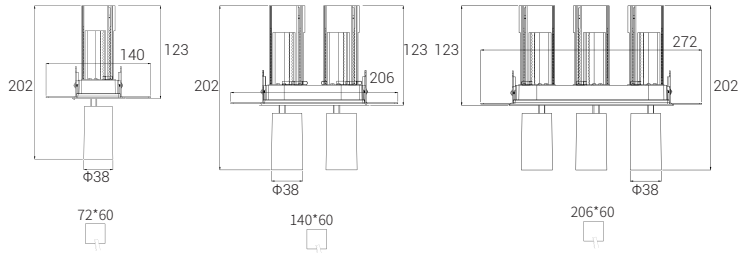


LS3005ST60/LS3005ST60-2/LS3005ST60-3

Model: LS3005ST60	Model: LS3005ST60-2	Model: LS3005ST60-3
Power: 6W	Power: 2X6W	Power: 3X6W
Cutout: 72X60mm	Cutout: 140X60mm	Cutout: 206X60mm
Size(WxLxH): $\Phi 38 \times 140 \times 202 \text{mm}$	Size(WxLxH): $\Phi 38 \times 206 \times 202 \text{mm}$	Size(WxLxH): $\Phi 38 \times 272 \times 202 \text{mm}$
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /36°	Beam Angle: 15° /24° /38°
Standard holder: 1304	Standard holder: 1304	Standard holder: 1304
Optional holder: 020	Optional holder: 020	Optional holder: 020


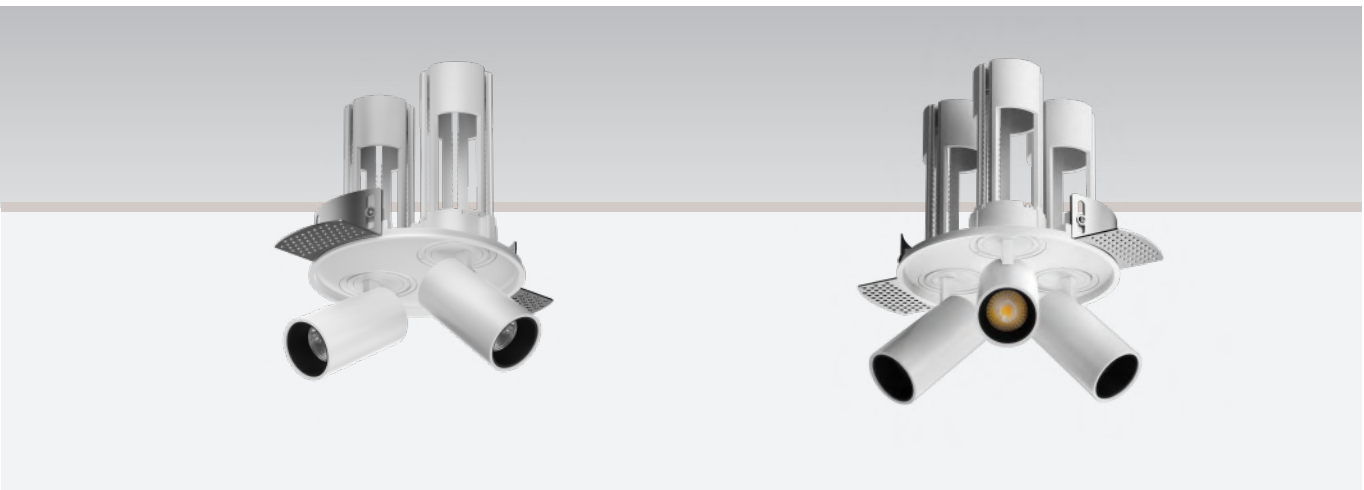


- Colour:
- White+White
 - White+Black
 - Black+Gold
 - Black+Black
- Optional :
- Honey comb
 - Soft Lens
 - Square
 - Stripe

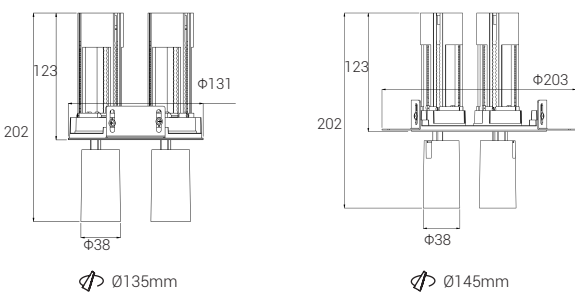



LS3005RT60-2/LS3005RT60-3

Model: LS3005RT60-2	Model: LS3005RT60-3
Power: 6WX2	Power: 6WX3
Built inCutout: 130mm	Built inCutout: 140mm
External Cutout: 135mm	External Cutout: 145mm
Size(WxLxH): $\Phi 38 \times 131 \times 202 \text{mm}$	Size(WxLxH): $\Phi 38 \times 203 \times 202 \text{mm}$
Beam Angle: 15° /24° /36°	Beam Angle: 15° /24° /38°
Standard holder: 1304	Standard holder: 1304
Optional holder: 020	Optional holder: 020

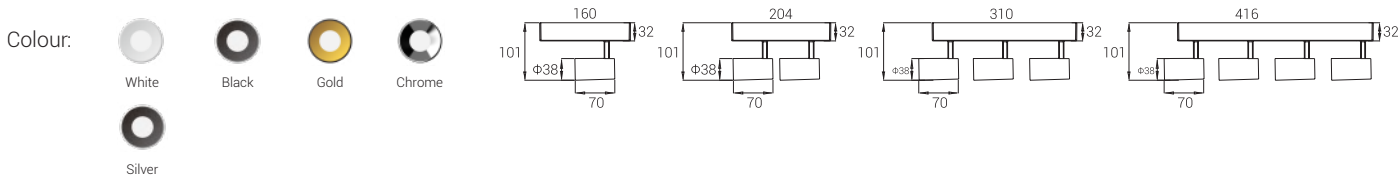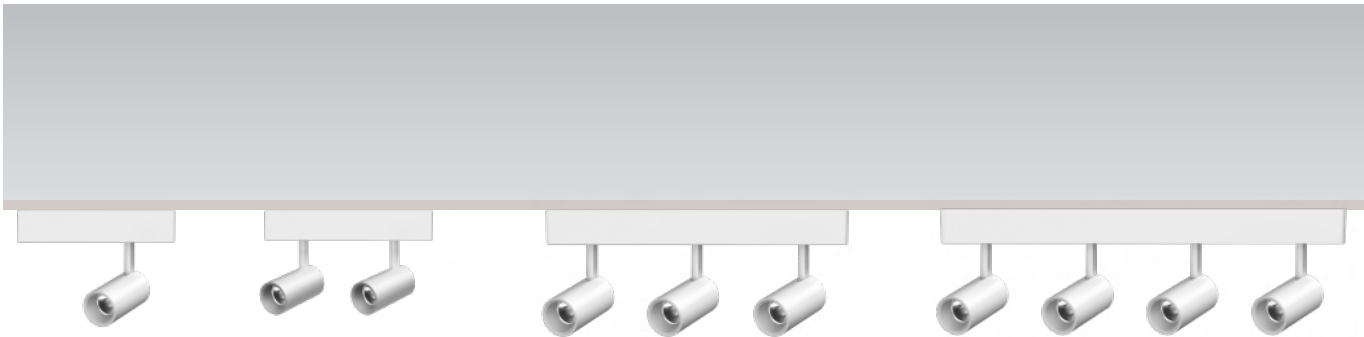

T3007A-6W / T3007A-6W-2 / T3007A-6W-3/T3007A-6W-4


Model: T3007A-6W	Model: T3007A-6W-2	Model: T3007A-6W-3	Model: T3007A-6W-4
Power: 6W	Power: 2X6W	Power: 3X6W	Power: 4X6W
Size(WxLxH):Φ38x69mm	Size(WxLxH): Φ38x69mm	Size(WxLxH): Φ38x69mm	Size(WxLxH): Φ38x69mm
Electrical box: 32x38x160	Electrical box: 32x38x204	Electrical box: 32x38x310	Electrical box: 32x38x416
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder: 1304	Standard holder: 1304	Standard holder: 1304	Standard holder: 1304
Optional holder: 020	Optional holder: 020	Optional holder: 020	Optional holder: 020

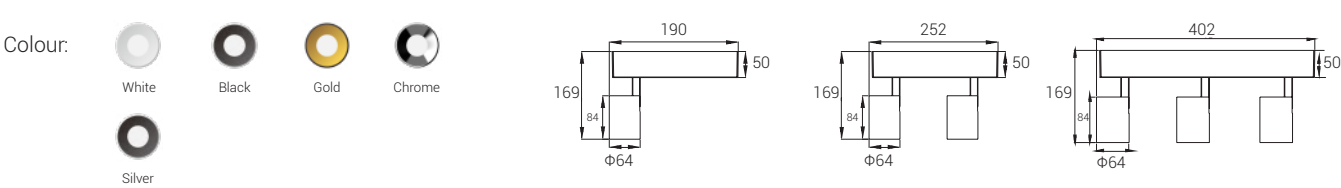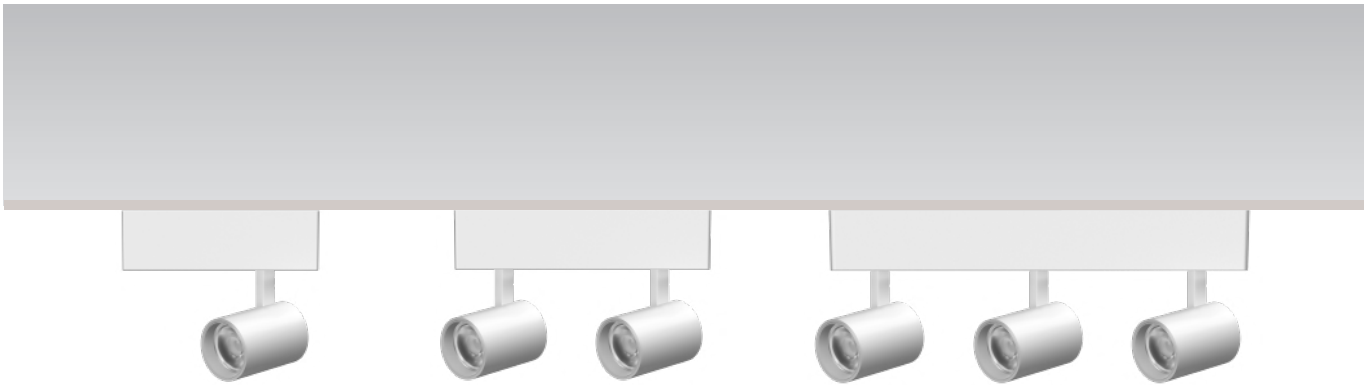

T3007A-12W /T3007A-12W-2 / T3007A-12W-3

Model: T3007A-12W	Model: T3007A-12W-2	Model: T3007A-12W-3
Power: 12W	Power: 2x12W	Power: 3x12W
Cutout: Surface	Cutout: Surface	Cutout: Surface
Size(WxLxH):Φ63x83mm	Size(WxLxH):Φ63x83mm	Size(WxLxH):Φ63x83mm
Electrical box: 50x58x190	Electrical box: 50x58x252	Electrical box: 50x58x420
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder: 1507	Standard holder: 1507	Standard holder: 1507
Optional holder: CXM-6	Optional holder: CXM-6	Optional holder: CXM-6



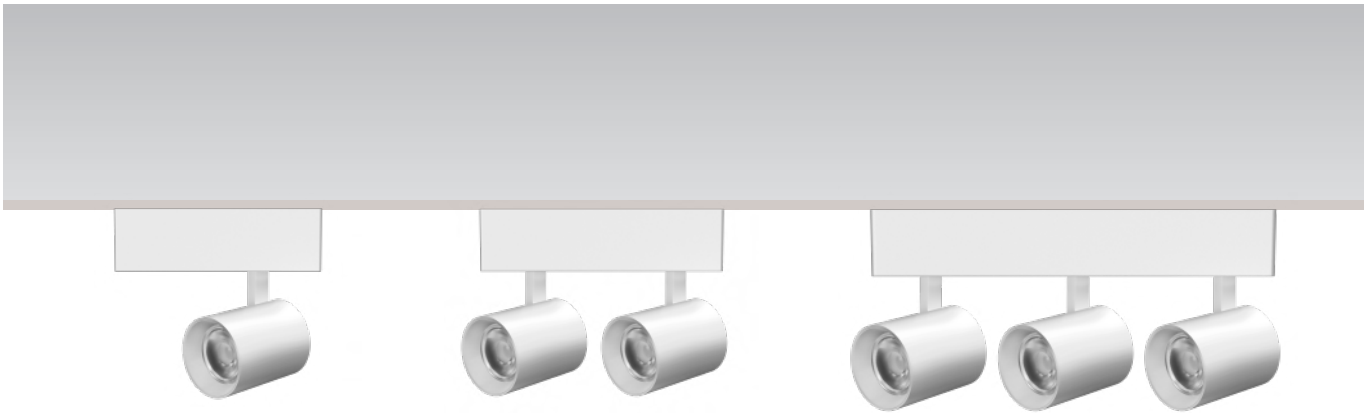

Colour:


White

Black

Gold


Chrome

Silver

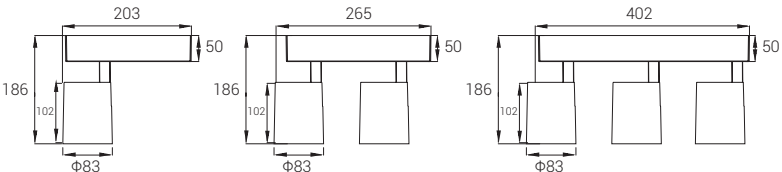


T3007A-25W / T3007A-25W-2 / T3007A-25W-3

Model: T3007A-25W	Model: T3007A-25W-2	Model: T3007A-25W-3
Power: 25W	Power: 2x25W	Power: 3x25W
Cutout: Surface	Cutout: Surface	Cutout: Surface
Size(WxLxH): Φ 83x102mm	Size(WxLxH): Φ 83x102mm	Size(WxLxH): Φ 83x102mm
Electrical box: 50x58x190	Electrical box: 50x58x252	Electrical box: 50x58x420
Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°	Beam Angle: 15° /24° /38°
Standard holder: 1816	Standard holder: 1816	Standard holder: 1816
Optional holder: 1830	Optional holder: 1830	Optional holder: 1830

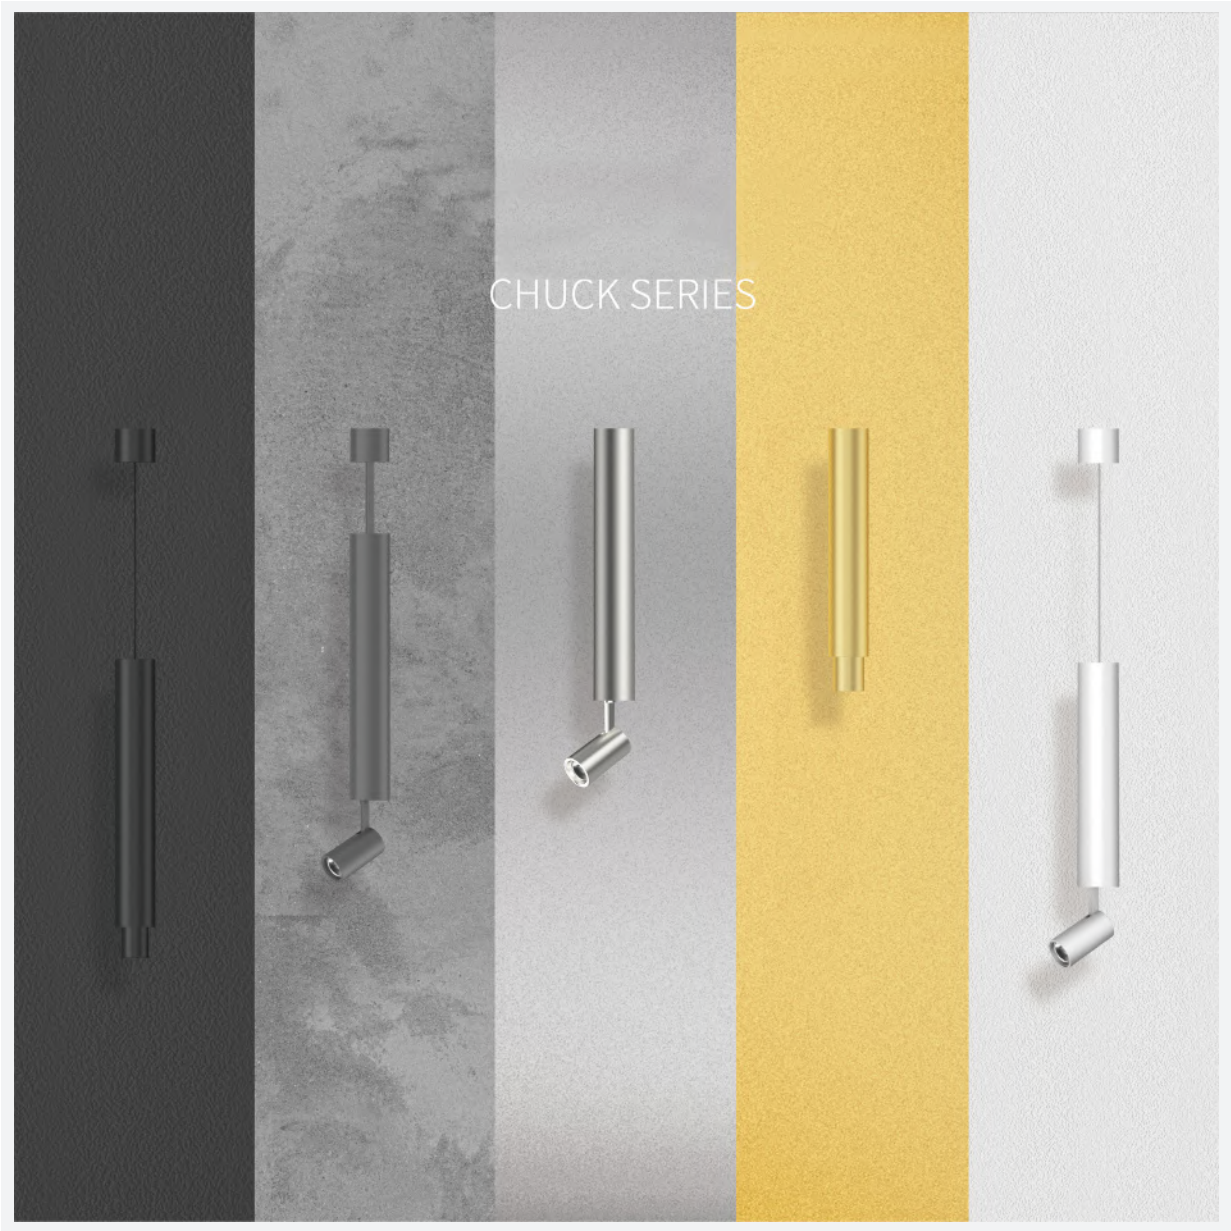


- Series design, deep anti-glare design, effectively reduce glare.
- The module rotates 355° horizontally and 60° vertically to meet different illumination angles.
- The light body can be freely stretched downward upward to meet the high demand of different layers

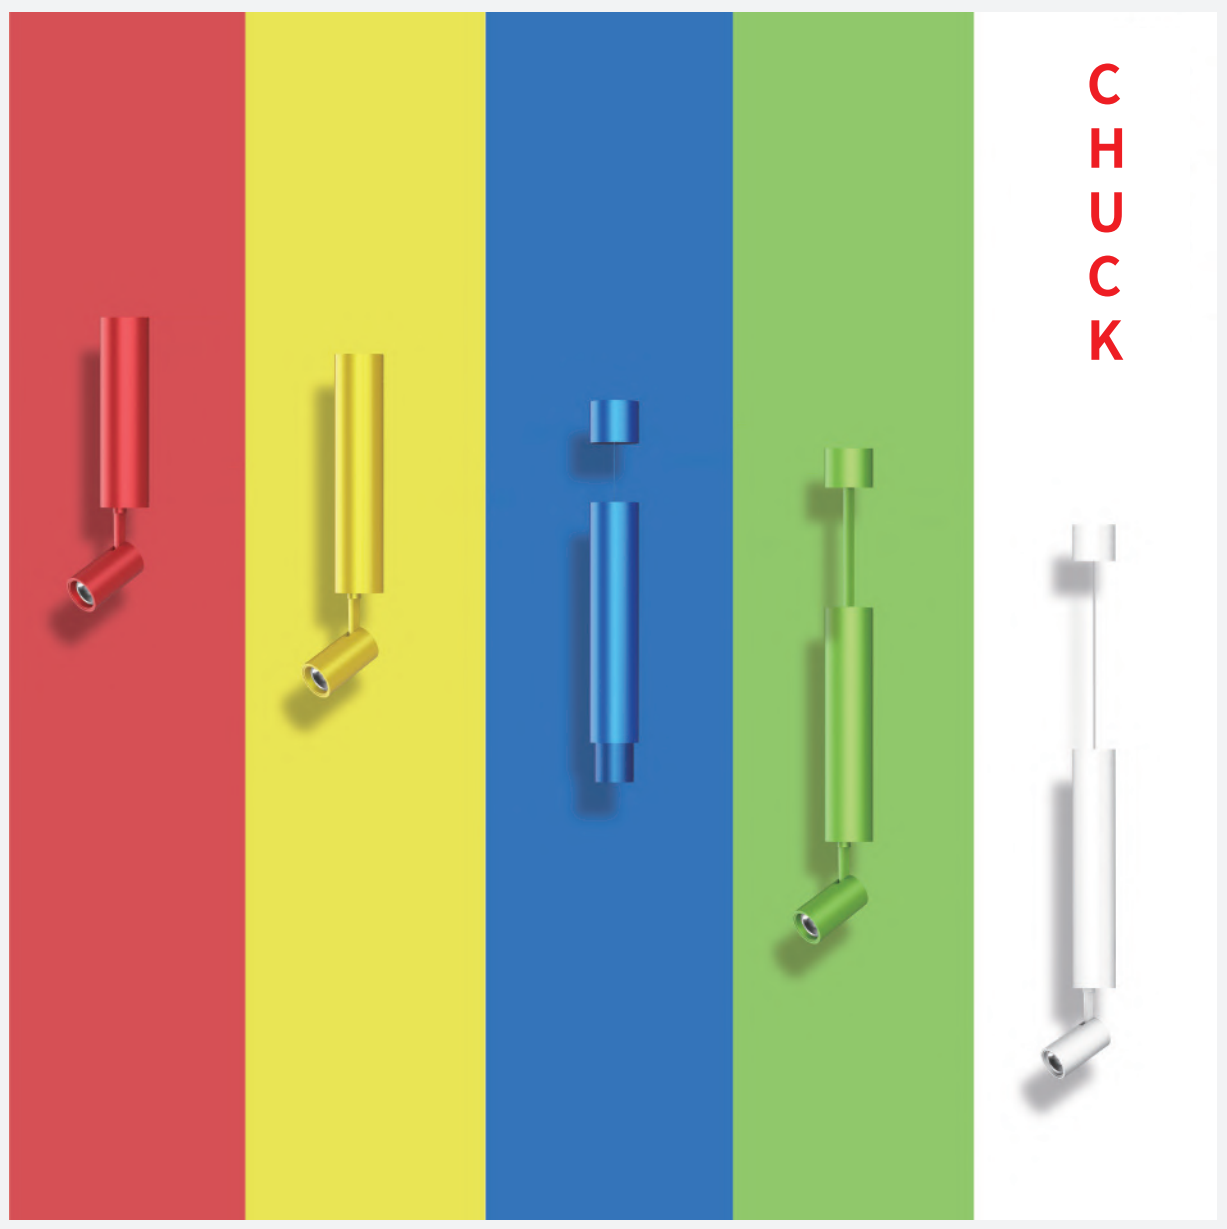


Colorful More choices

A variety of colors to choose from, rich color matching, so that the space is no longer monotonous, full of color, bring a different feeling

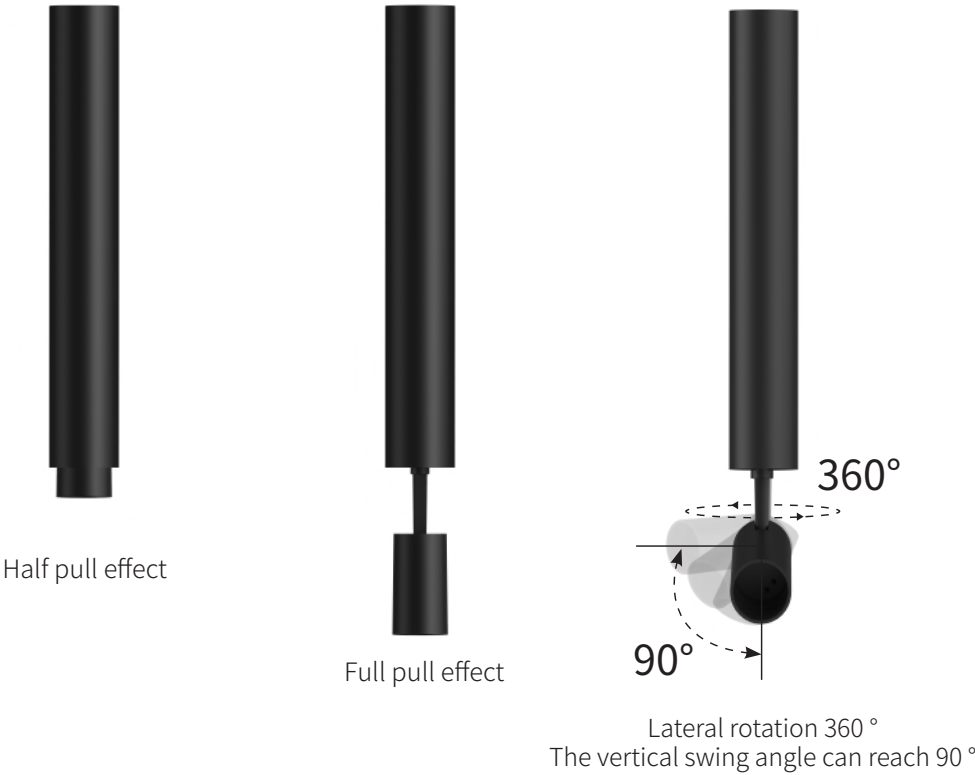

Multi angle selection

Stretchable radiator tube can be used for more purposes and more lighting scenes.



Colour:




White



Black



Gold




LS50-MZ230

Model Code	LS50-MZ320
Power	6W
Installation	Surface
Size(DxH)	Φ38x70mm
Size(DxH)	Φ50x320
Beam angle	15° /24° /36°
Standard light source	CREE 1304

LED brand: **CREE** **ITILED**
The Light Engine



IP40

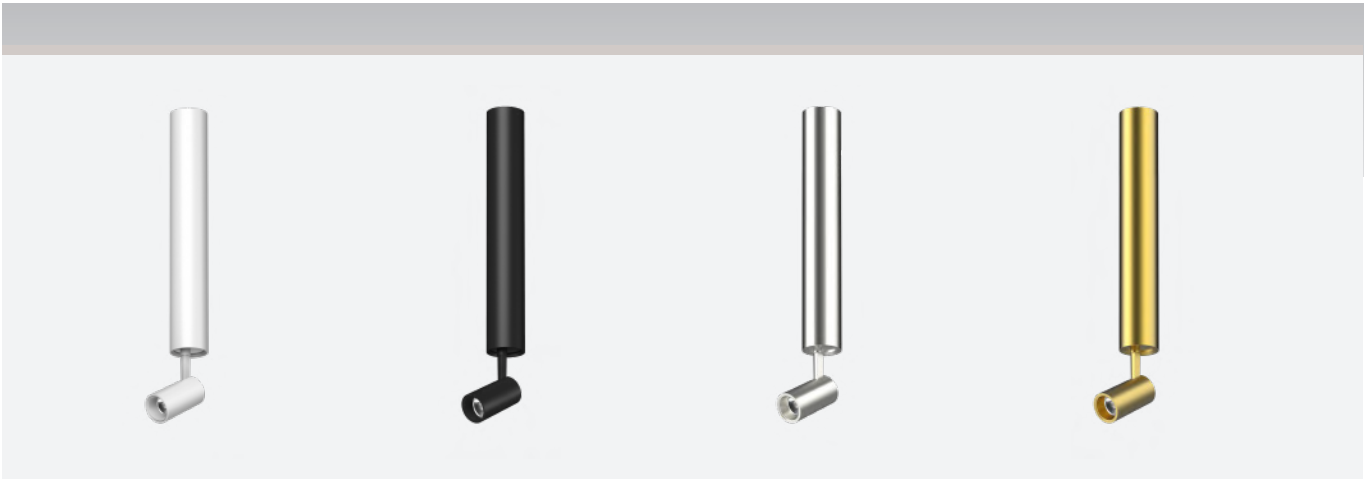

Colour:




White



Black



Gold




LS50-MZ320

Model Code	LS50-MZ320
Power	6W
Installation	Surface
Size(DxH)	Φ38x70mm
Size(DxH)	Φ50x320
Beam angle	15° /24° /36°
Standard light source	CREE 1304

LED brand: **CREE** **ITILED**
The Light Engine



IP40

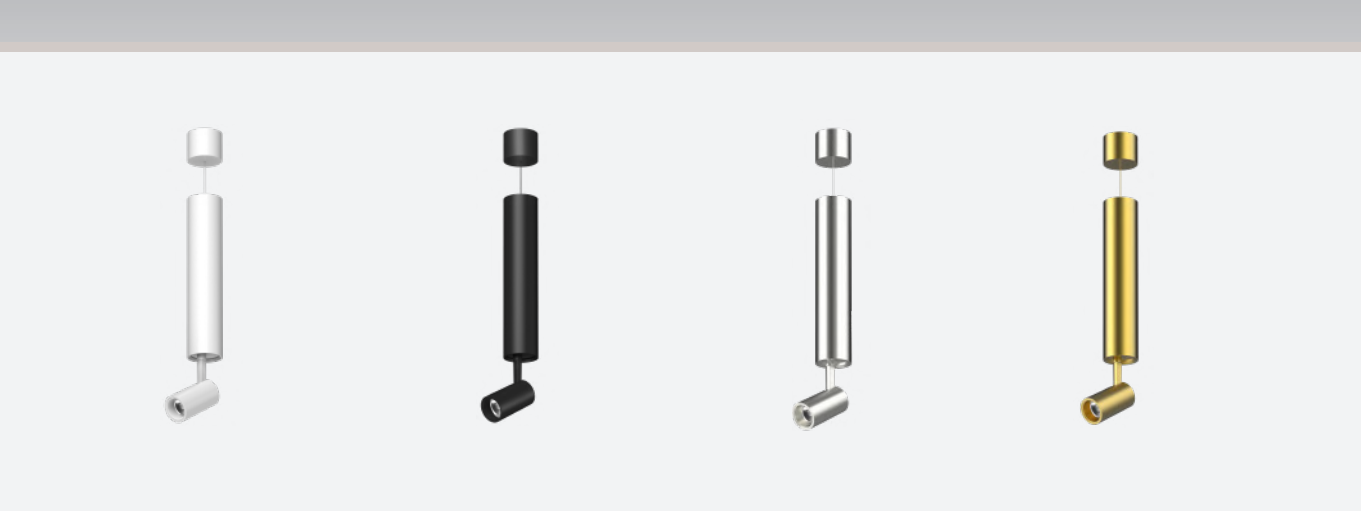


Colour:

White

Black

Gold



LS50-DZ230

Model Code	LS50-DZ230
Power	6W
Installation	Suspendant
Size(DxH)	Φ38x70mm
Size(DxH)	Φ50x230
Beam angle	15° /24° /36°
Standard light source	CREE 1304

LED brand: **CREE**




Colour:

White

Black

Gold





LS50-DZ320

Model Code	LS50-DZ320
Power	6W
Installation	Suspendant
Size(DxH)	Φ38x70mm
Size(DxH)	Φ50x320
Beam angle	15° /24° /36°
Standard light source	CREE 1304

LED brand: **CREE**





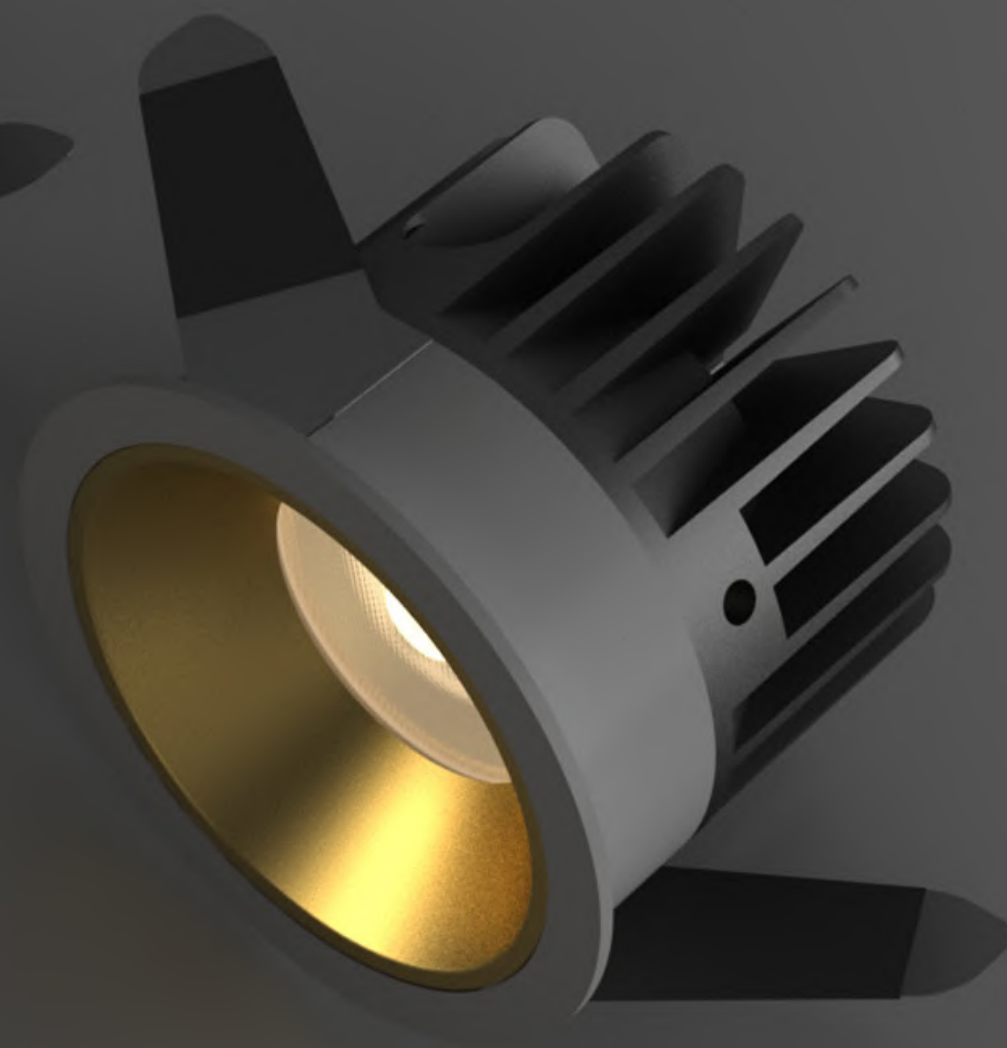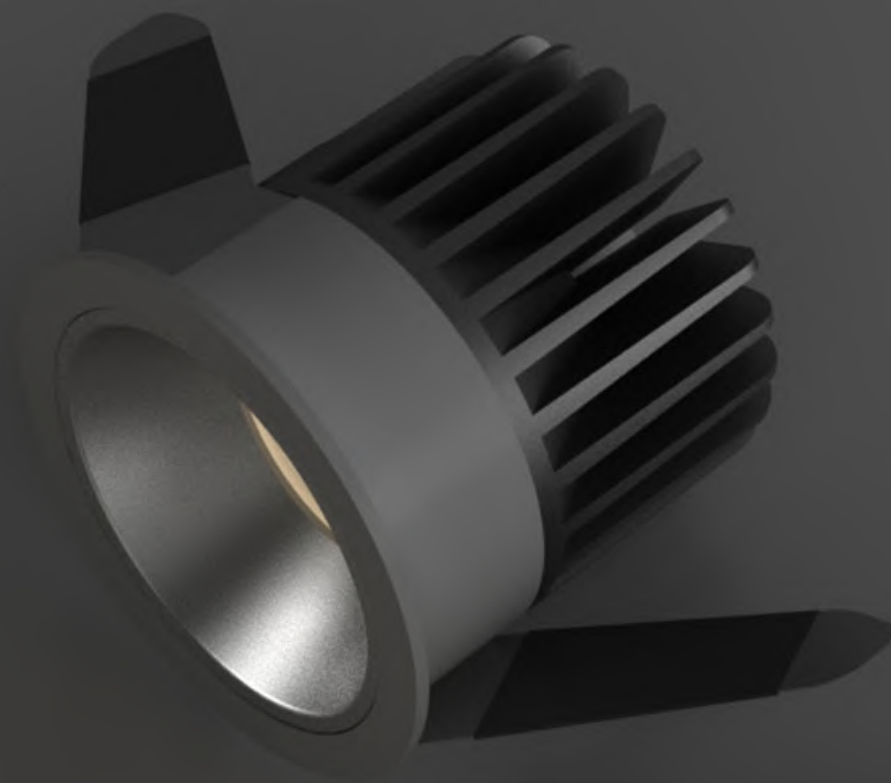



CREE

- Die-cast aluminium lamp body can effectively prevent corrosion and rust, make the lamp body fully heat dissipation, improve heat dissipation efficiency.
- It can be used as IP43 anti-fog and prevent fog and spray from contacting light source. It is suitable for kitchen and toilet.
- Two optical structures: fixed direct/adjustable oblique.
- Equipped with an extremely narrow beam Angle, can be from different angles to accurately illuminate the subject.


SPOTLIGHT




Anti-glare spotlight

The unique ultra-thin shell design of this series makes it flexible to use in the limited space of the ceiling, thus reducing the construction difficulty. In addition, luminous surface no dark area, no point of light, uniform degree of highly consistent light effect, is Simple large space to provide basic lighting preferred products.

- 1 The maximum lamp body of 16° can adjust the Angle, which greatly facilitates the lighting needs of on-site debugging.
- 2 Can be combined with honeycomb grid, effectively prevent excess astigmatism.
- 3 Reflectors of different colors can be selected according to the ceiling and the overall color of the space.

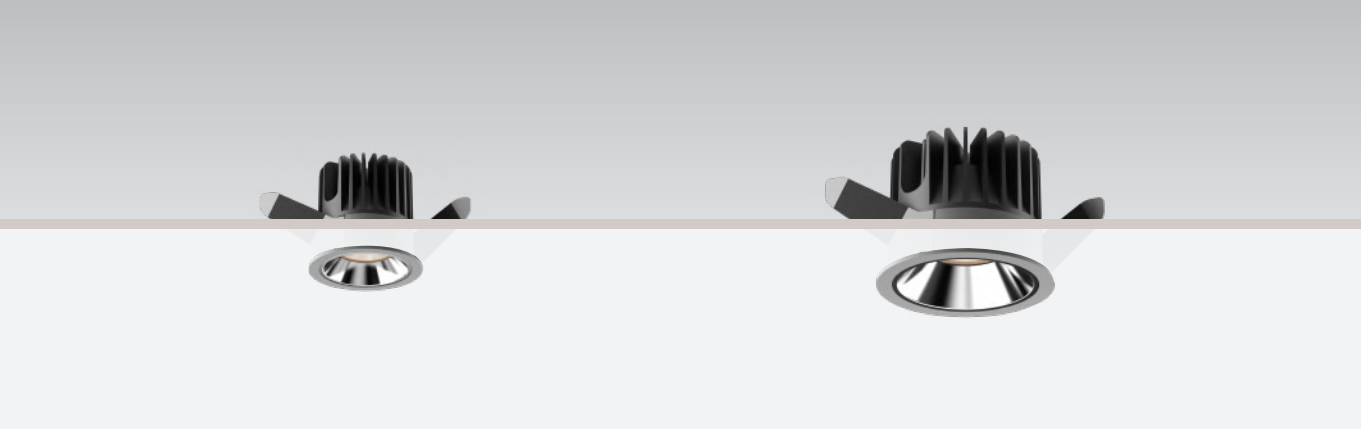

- Colour :
- Sand gold
 - Black
 - Silver
 - Chrome
- Optional :
- Honey comb

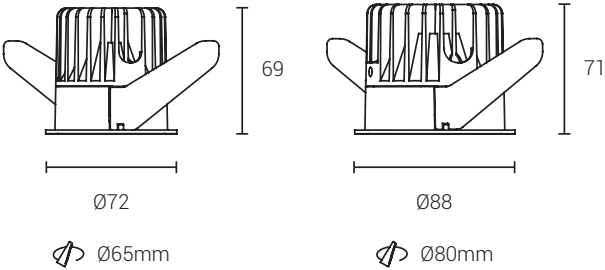

XQ1004	
model: XQ1004	model: XQ1004
power: 10W	power: 15W
Cutout: Ø65mm	Cutout: Ø80mm
size(WxLxH): Ø72x69mm	size(WxLxH): Ø88x71mm
Beam angle: 15° /24° /36°	Beam angle: 15° /24° /36°
Standard holder: CREE 1507	Standard holder: CREE 1507
Optional holder: CREE 1304	Optional holder: CREE 1304


LED brand: **CREE**



SPOTLIGHT




- Colour :
- Sand gold
 - Black
 - Silver
 - Chrome
- Optional :
- Honey comb

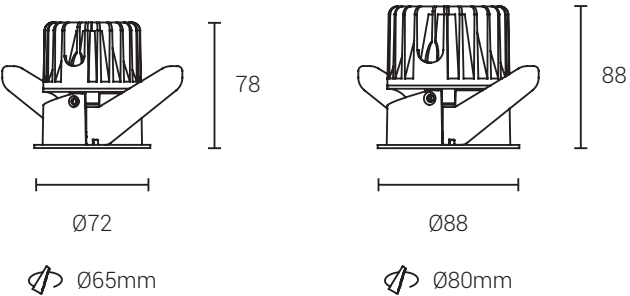

XQ1004	
model: XQ1004A	model: XQ1004A
power: 10W	power: 15W
Cutout: Ø65mm	Cutout: Ø80mm
size(WxLxH): Ø72x78mm	size(WxLxH): Ø88x88mm
Beam angle: 15° /24° /36°	Beam angle: 15° /24° /36°
Standard holder: CREE 1507	Standard holder: CREE 1507
Optional holder: CREE 1304	Optional holder: CREE 1304

LED brand: **CREE**



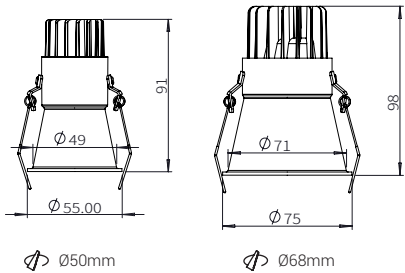


XQ1007-50 / XQ1007-68

model: XQ1007-50	model: XQ1007-68
power: 5W	power: 10W
Cutout: Φ 50mm	Cutout: Φ 68mm
size(WxLxH): Φ 55x120mm	size(WxLxH): Φ 75x106mm
Beam angle: 15° /24° /36°	Beam angle: 15° /24° /36°
Standard holder: CREE 1304	Standard holder: CREE 1507

LED brand: **CREE**



SPOTLIGHT

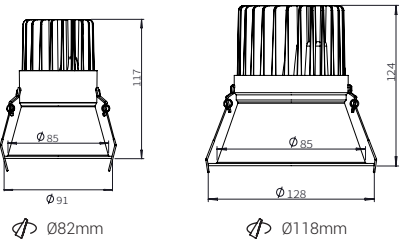

XQ1007-82 / XQ1007-118


model: XQ1007-82	model: XQ1007-118
power: 15W	power: 20W
Cutout: Φ 82mm	Cutout: Φ 118mm
size(WxLxH): Φ 91x120mm	size(WxLxH): Φ 128x130mm
Beam angle: 15° /24° /36°	Beam angle: 15° /24° /36°
Standard holder: CREE 1507	Standard holder: CREE 1816

LED brand: **CREE**






Color filter

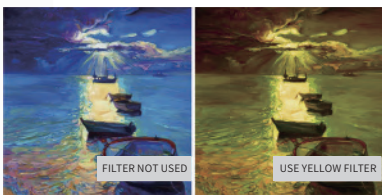

The luminous color of lamps can be changed according to your needs

ND filter

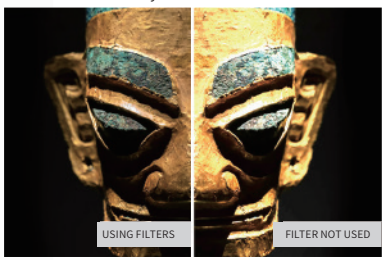

With electronic dimming, the illumination at small angle can be reduced below 75lux
Generally used for authentic lighting

UV filter



It can effectively filter the UV rays in LED lamps and protect the illuminated objects
It performs very well in the lighting of cultural relics and silk products.

CPL filter




It can eliminate the reflection on the surface of the object and make the object show its original appearance in an over bright environment.

GND filter



Gradient filter is used to change the light ratio entering the lens, such as illuminating the object in an oblique direction. The use of gradient filter can make the object still illuminate evenly and without fault.

Other filter

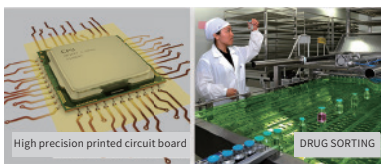

Various filters with special bands can be customized according to your actual needs and can be used in various special places, such as crystal Park cutting, high-precision circuit board printing, drug sorting, etc.

CUTTING LIGHT SERIES

Light cutting / zoom / projection / intelligent control

Completely independent intellectual property rights, global patents, global certification!

Dry electrodeless linear zoom cutting. Frame 1:0.8



Industrial grade optical filter

It can match various industrial grade optical filters, and can customize special narrowband and extremely narrowband optical filters. Some filter functions can be superimposed, such as HD UV + color filter, HD UV + soft light filter, etc.



CUTTING LIGHT SERIES

Light cutting / zoom / projection / intelligent control

Completely independent intellectual property rights,
global patents, global certification!


Dry electrodeless linear zoom cutting. Frame 1:0.8



① Design of cold forging integrated radiator

The utility model relates to a radiator made of 1070# pure aluminum by molding, which has the advantages of high heat conduction, low temperature difference, low light attenuation and high service life.


Thermal conductivity 226w /m.k

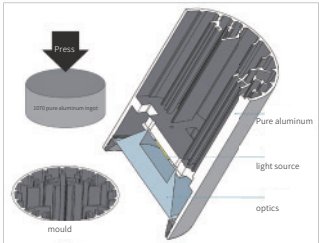

② 360° manual rotation design

Loosen the manual screw and rotate the lens part to realize the 360° rotation adjustment function of the light spot.


The utility model relates to a device for solving the 360 rotation of projection and light spot.

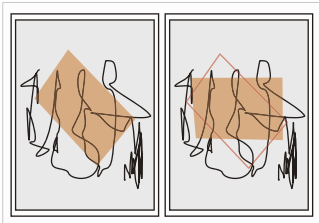

③ HD optical lens design


The whole lamp has the characteristics of high light output efficiency, high spot uniformity, small distortion, large linear zoom range and good spot cut-off line.

A new optical path specially designed for cob light source

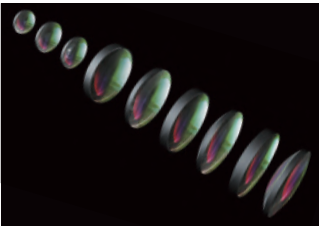

④ Design of optical grade variable aperture


An optical aperture with high precision and special material. No burr, no jamming during plugging. The shape of the light spot can be changed at will by manually inserting and inserting the light cutting device.

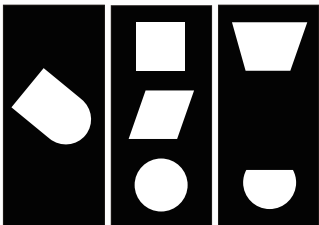

⑤ Multilayer dry damping design

The utility model relates to a focusing device without lubricating oil, which has the advantages of smooth hand feeling, stability and reliability, wear resistance, high temperature resistance, and no coke running and sliding during long-term operation.


Rotating the device can change the sharpness of the light spot.

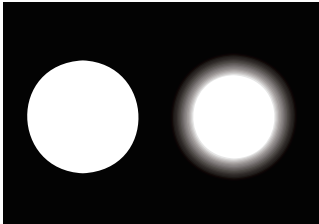

⑥ Multilayer dry damping design

The utility model relates to a focusing device without lubricating oil, which has the advantages of smooth hand feeling, stability and reliability, wear resistance, high temperature resistance, and no coke running and sliding during long-term operation.

Rotating the device can adjust the size of the light spot

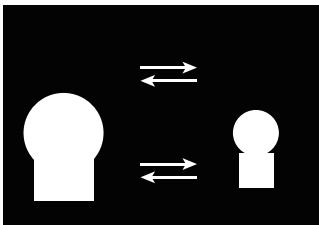

Maximum angle Minimum angle




After ten years , the original design

Light cutting / zoom / projection / intelligent control

Completely independent intellectual property rights, global patents, global certification!

Not only because of professional, but also from love!

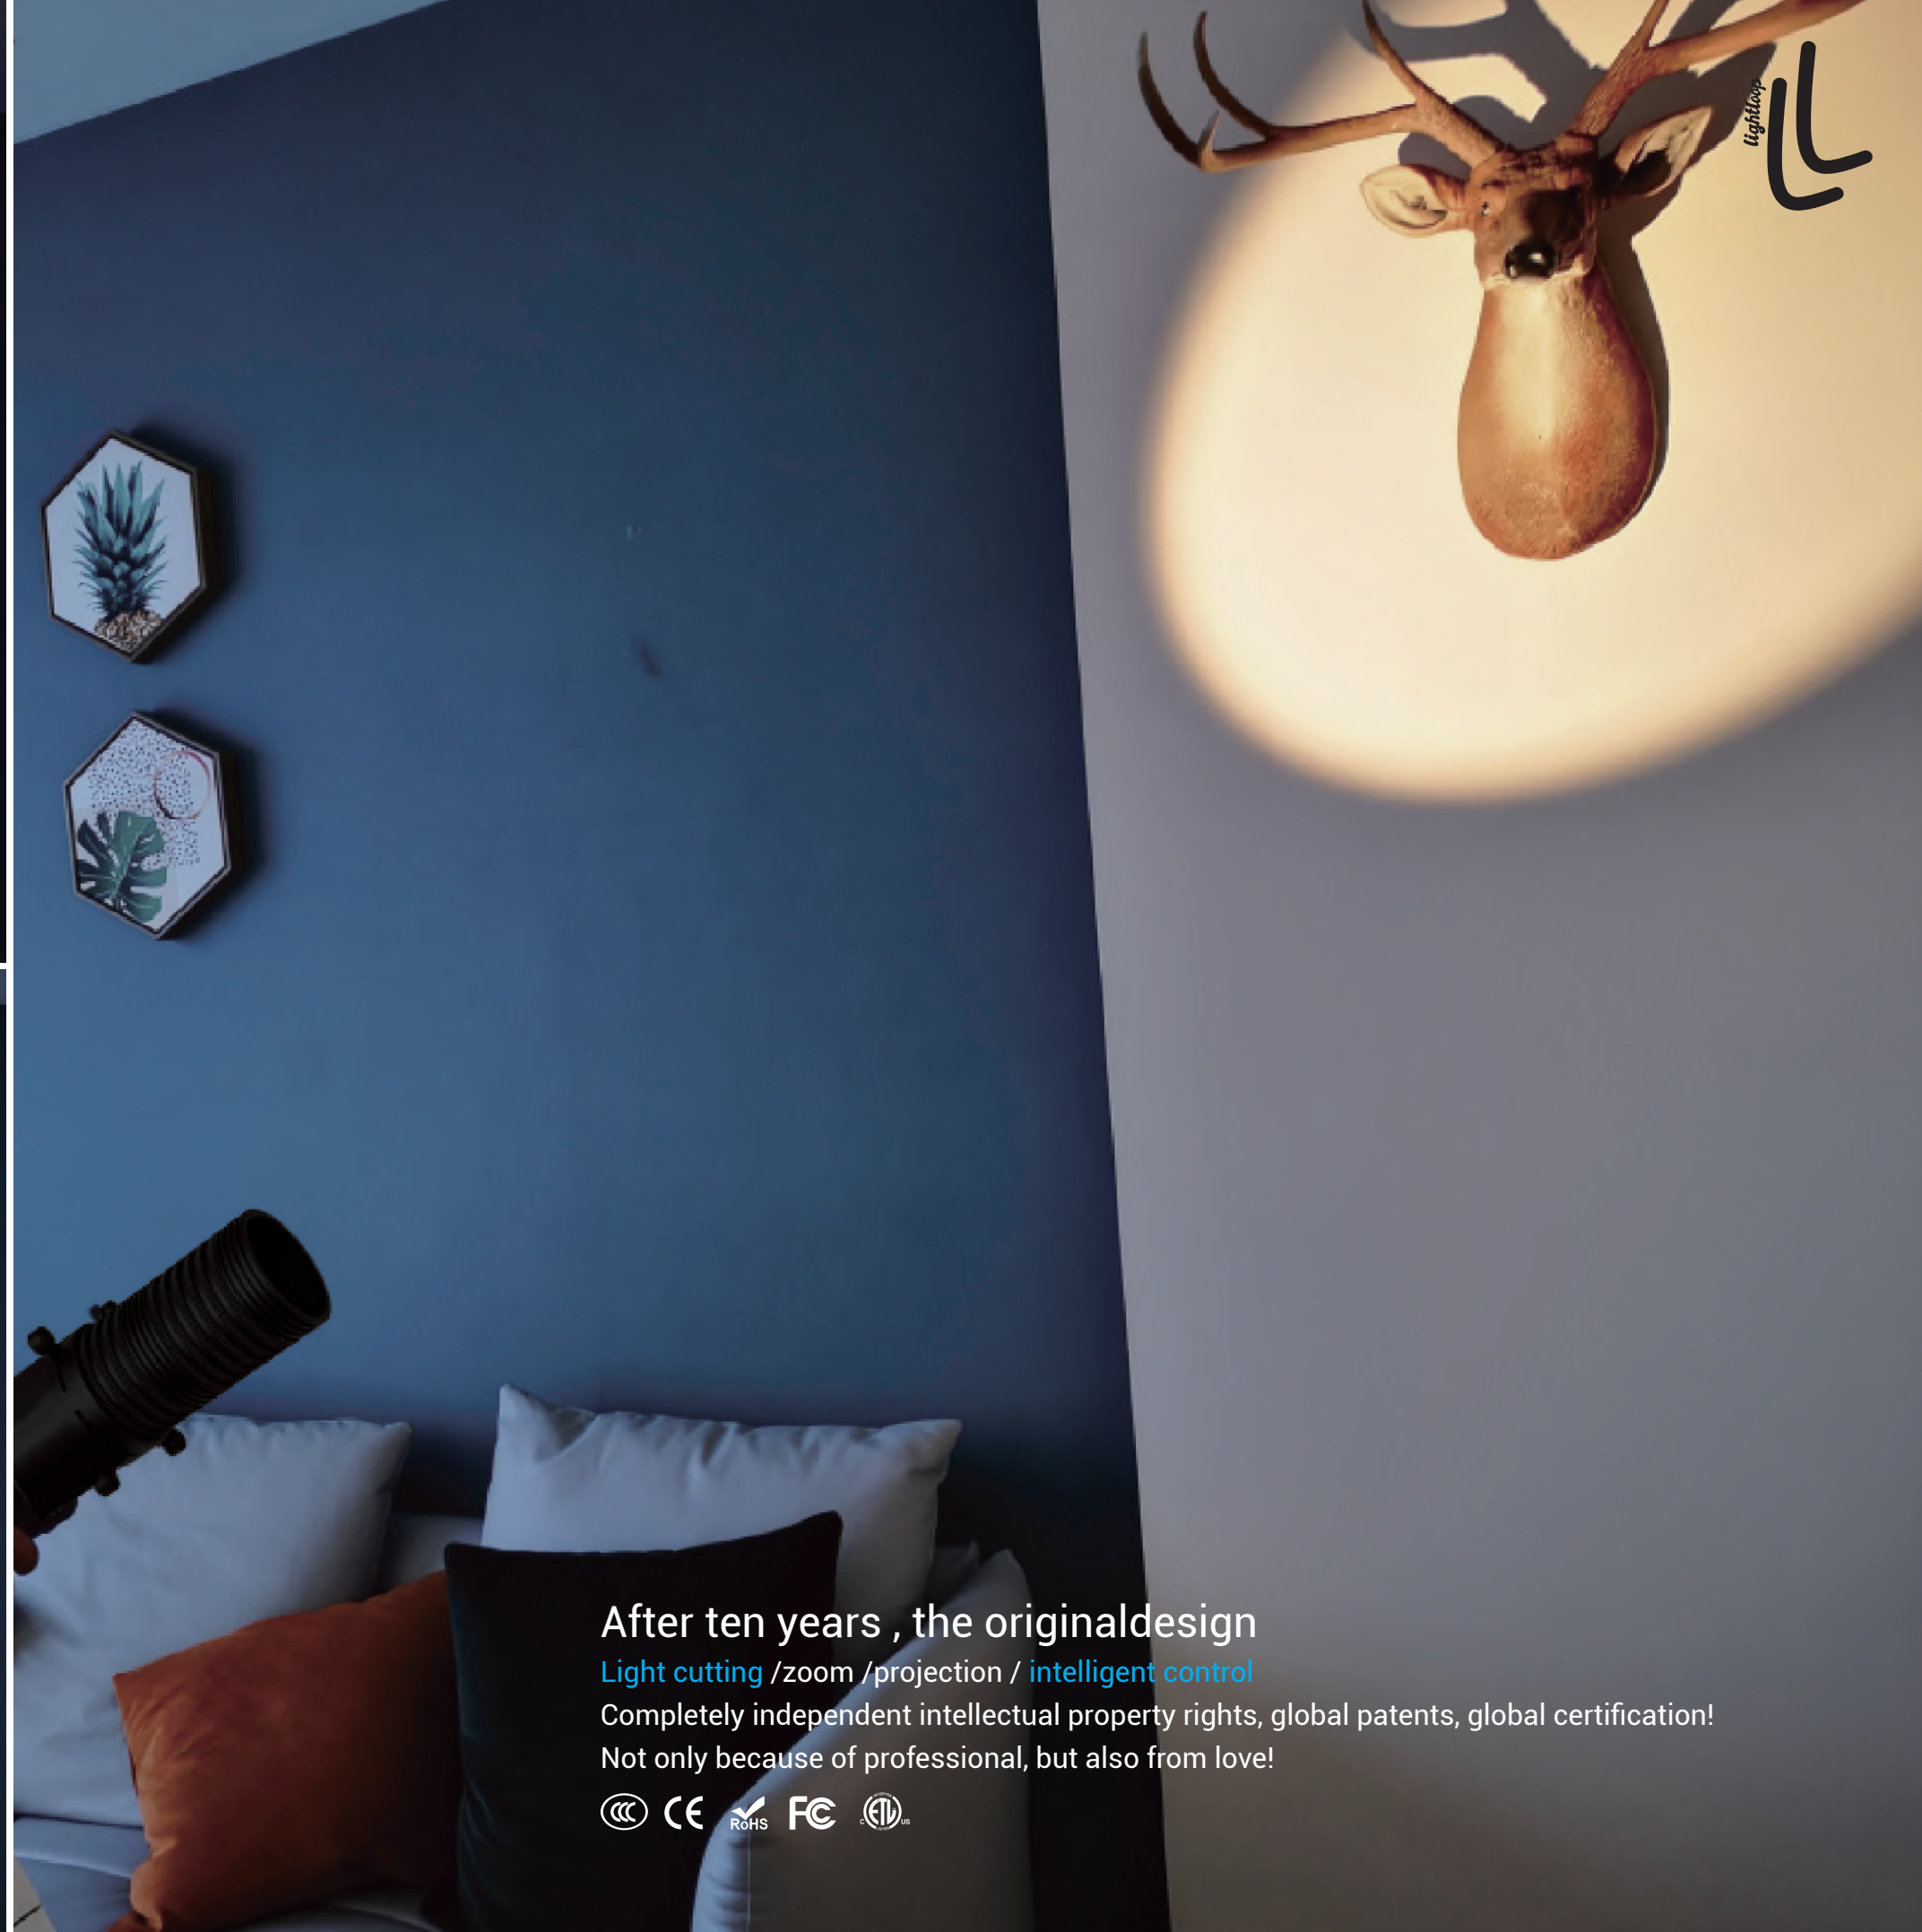

After ten years , the originaldesign

Light cutting /zoom /projection / intelligent control

Completely independent intellectual property rights, global patents, global certification!

Not only because of professional, but also from love!





After ten years , the originaldesign

Light cutting /zoom /projection / intelligent control

Completely independent intellectual property rights, global patents, global certification!

Not only because of professional, but also from love!





After ten years , the originaldesign

Light cutting /zoom /projection / intelligent control

Completely independent intellectual property rights, global patents, global certification!

Not only because of professional, but also from love!









After ten years , the originaldesign

Light cutting /zoom /projection / intelligent control

Completely independent intellectual property rights, global patents, global certification!

Not only because of professional, but also from love!

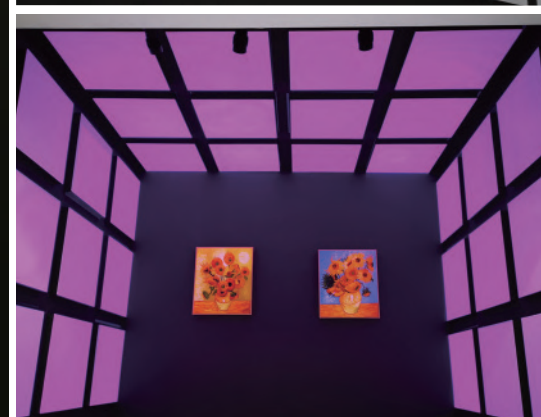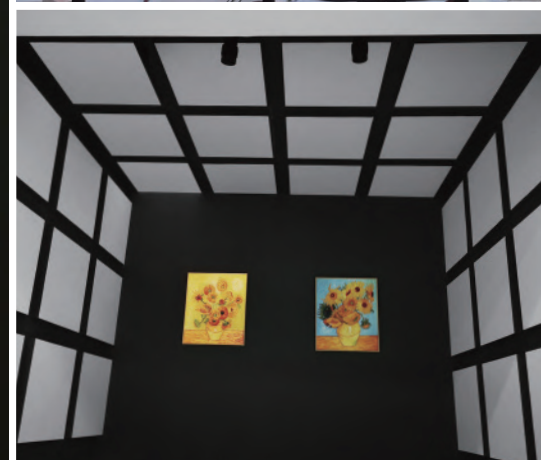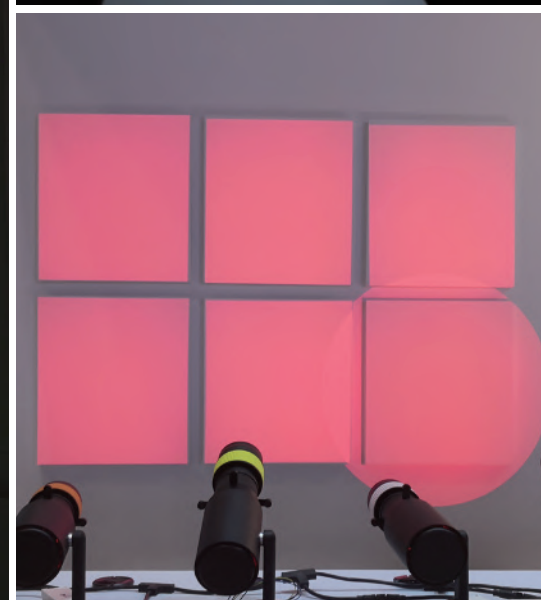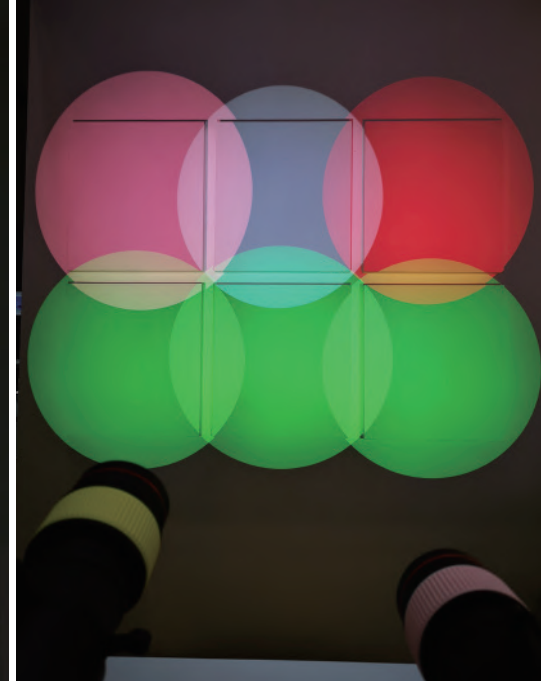

lightloop

our "CLIENTS"

We are trusted by a variety of leading businesses, including industrial plants, hotels, retail outlets, and major real estate developments.

Our projects reflect our ability to tailor lighting solutions to meet diverse client.

our "TEAM"

Our expert team brings extensive experience in lighting procurement and installation.

We are dedicated to delivering the best solutions to meet the specific needs of every client.

Contact Us

Light Loop

Pracha Uthit Road, Klong Bung Plakot,
Nai Klong Bung Plakot Subdistrict, Phra Samut Chedi District,
Samut Prakan Province 10290

Phone: +66 82-919-9941

Email: sales@constufftrading.com

