



## Modular Design

Miracle series modular design has a variety of optical accessories, up to tens of thousands of combinations, light efficiency upgrade.

*“Bring you beyond”*

# Human Centric Lighting

Humans and their perception of the lighting environment have become increasingly important. The pioneering concept of human-centered lighting supports this trend by focusing on people and providing optimal lighting to meet their needs. The interaction between light and interior ambiance creates a positive impact on human life, learning, work, and health.



# MIRACLE

Miracle Modular Hotel Downlight

New designs are  
presented with new  
work and materials.  
Creativity and care  
fulness contribute to  
unique lighting art.



# MIRACLE

The miracle series is based on the modularization, a variety of optical accessories with different light effects. To provide customers with a variety of functional options: narrow edge, boundless, adjustable Angle, ultra-broad light, polarized light wall washing, directional lighting, so that light and space more perfect harmony.

---

8°/15°/24°/36°/ 50°/ Wallwasher

---

Φ55~150mm

---

5~40W



# Modular Design


Miracle series modular design has a variety of optical accessories, up to tens of thousands of combinations, light efficiency upgrade.



# SMALL SIZE HIGH POWER NEW MIRACLE 55




More unique design, let you revel in the atmosphere full of artistic beauty.

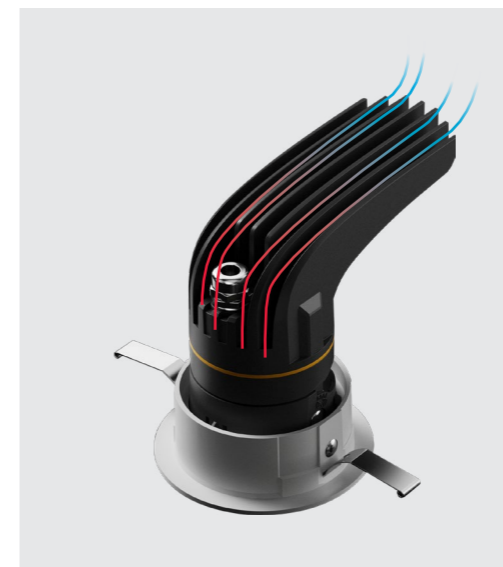


## The cooling system

Unique radiator design, combined with the principle of physics, the formation of exhaust heat dissipation, heat dissipation function is improved, faster to remove the chip heat, to ensure reasonable thermal performance so that the flexible lamp body can also achieve greater power, maximum lumen and longer service life.

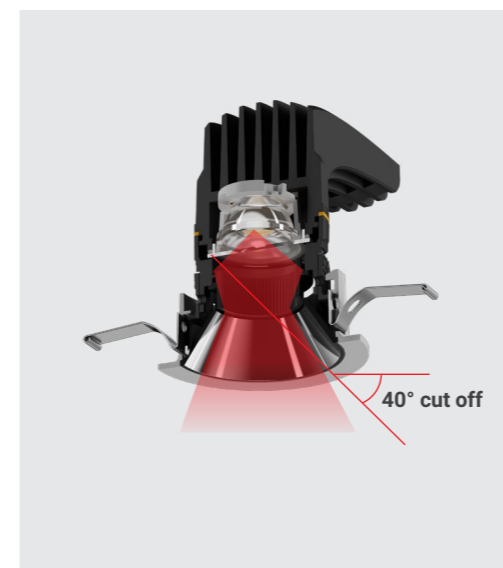

## Anti Glare

LED chip is fixed deep inside to create a perfect cutoff angle in 40°, Dark light effect achieves UGR<9, reduces discomfort glare and provides better visual effect.

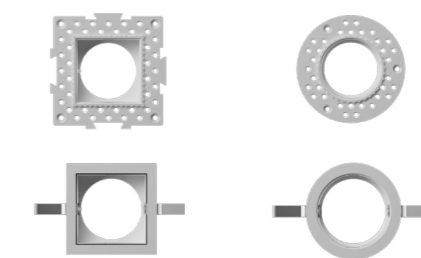

## Many kinds of collocation

With bezel-free and narrow frame components, a variety of face ring accessories to meet different decoration styles.

# Multiple Light Effects

Miracle series develops a wide range of precise optical distribution solutions: base lighting, wall-wash lighting and key lighting.




Ultra-wide floodlight distribution



Elliptical floodlight distribution



Wall-washing lens type

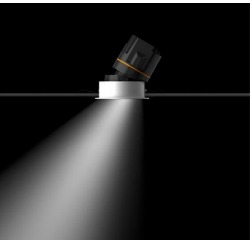

Directional lighting




# High altitude lighting

Miracle hotel downlights have a variety of power options, covering home, commercial space commonly used specifications; High-power lamps are suitable for use on higher floors, such as hotel lobbies, banquet halls, department stores and other high floor lighting places.



Power:20W/35W

## Height map

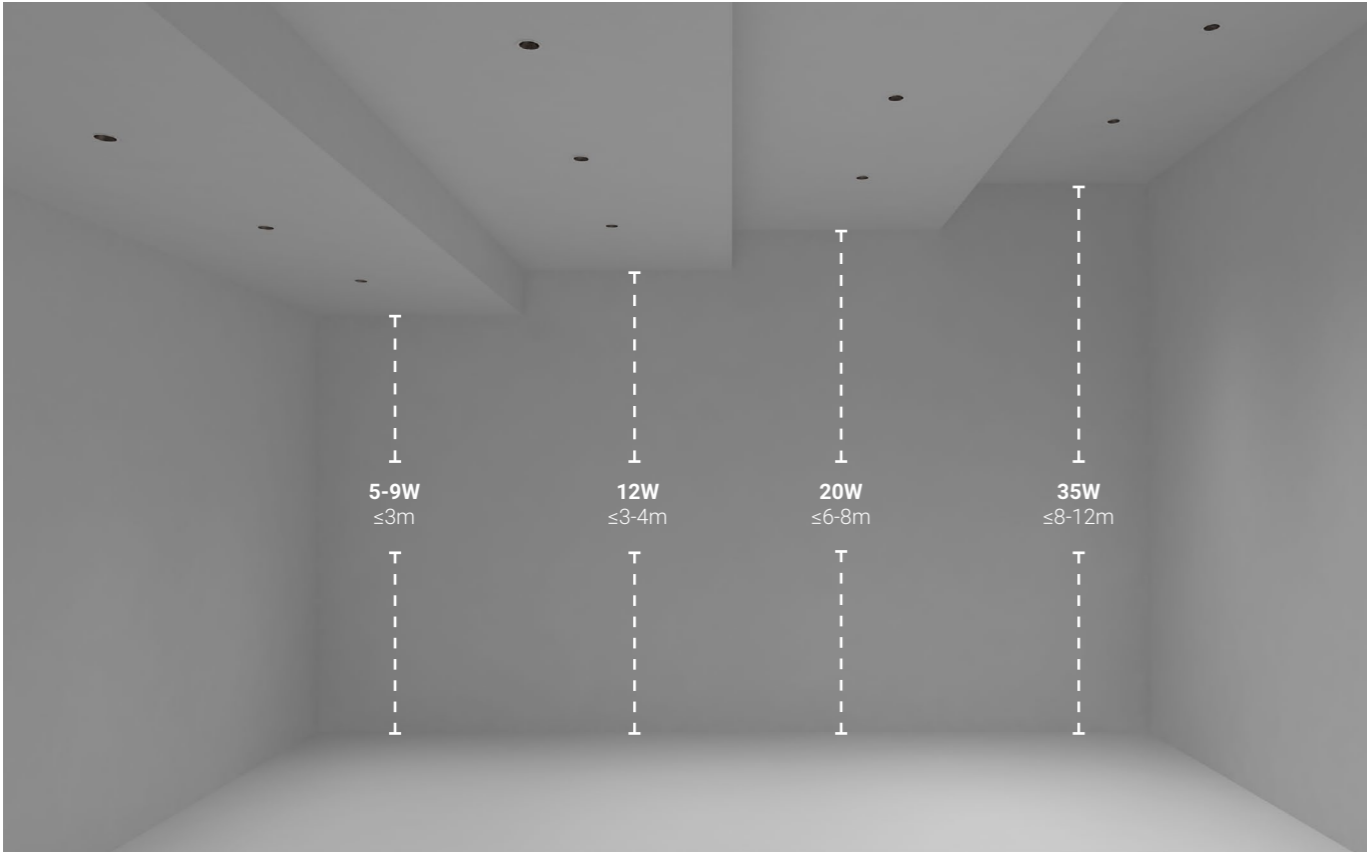

# Miracle System

Lighting Effects




## MANY KINDS OF COLLOCATION

With frameless and narrow frame components, a variety of face ring accessories, create a variety of professional lighting effects.




## Point light ittings

Frame module	
Secondary Reflector	
Accessory	
Reflector color	
Reflector color	
Packaging	<div><div>1 pocket</div><div></div></div> <div><div>2 pocket</div><div></div></div>

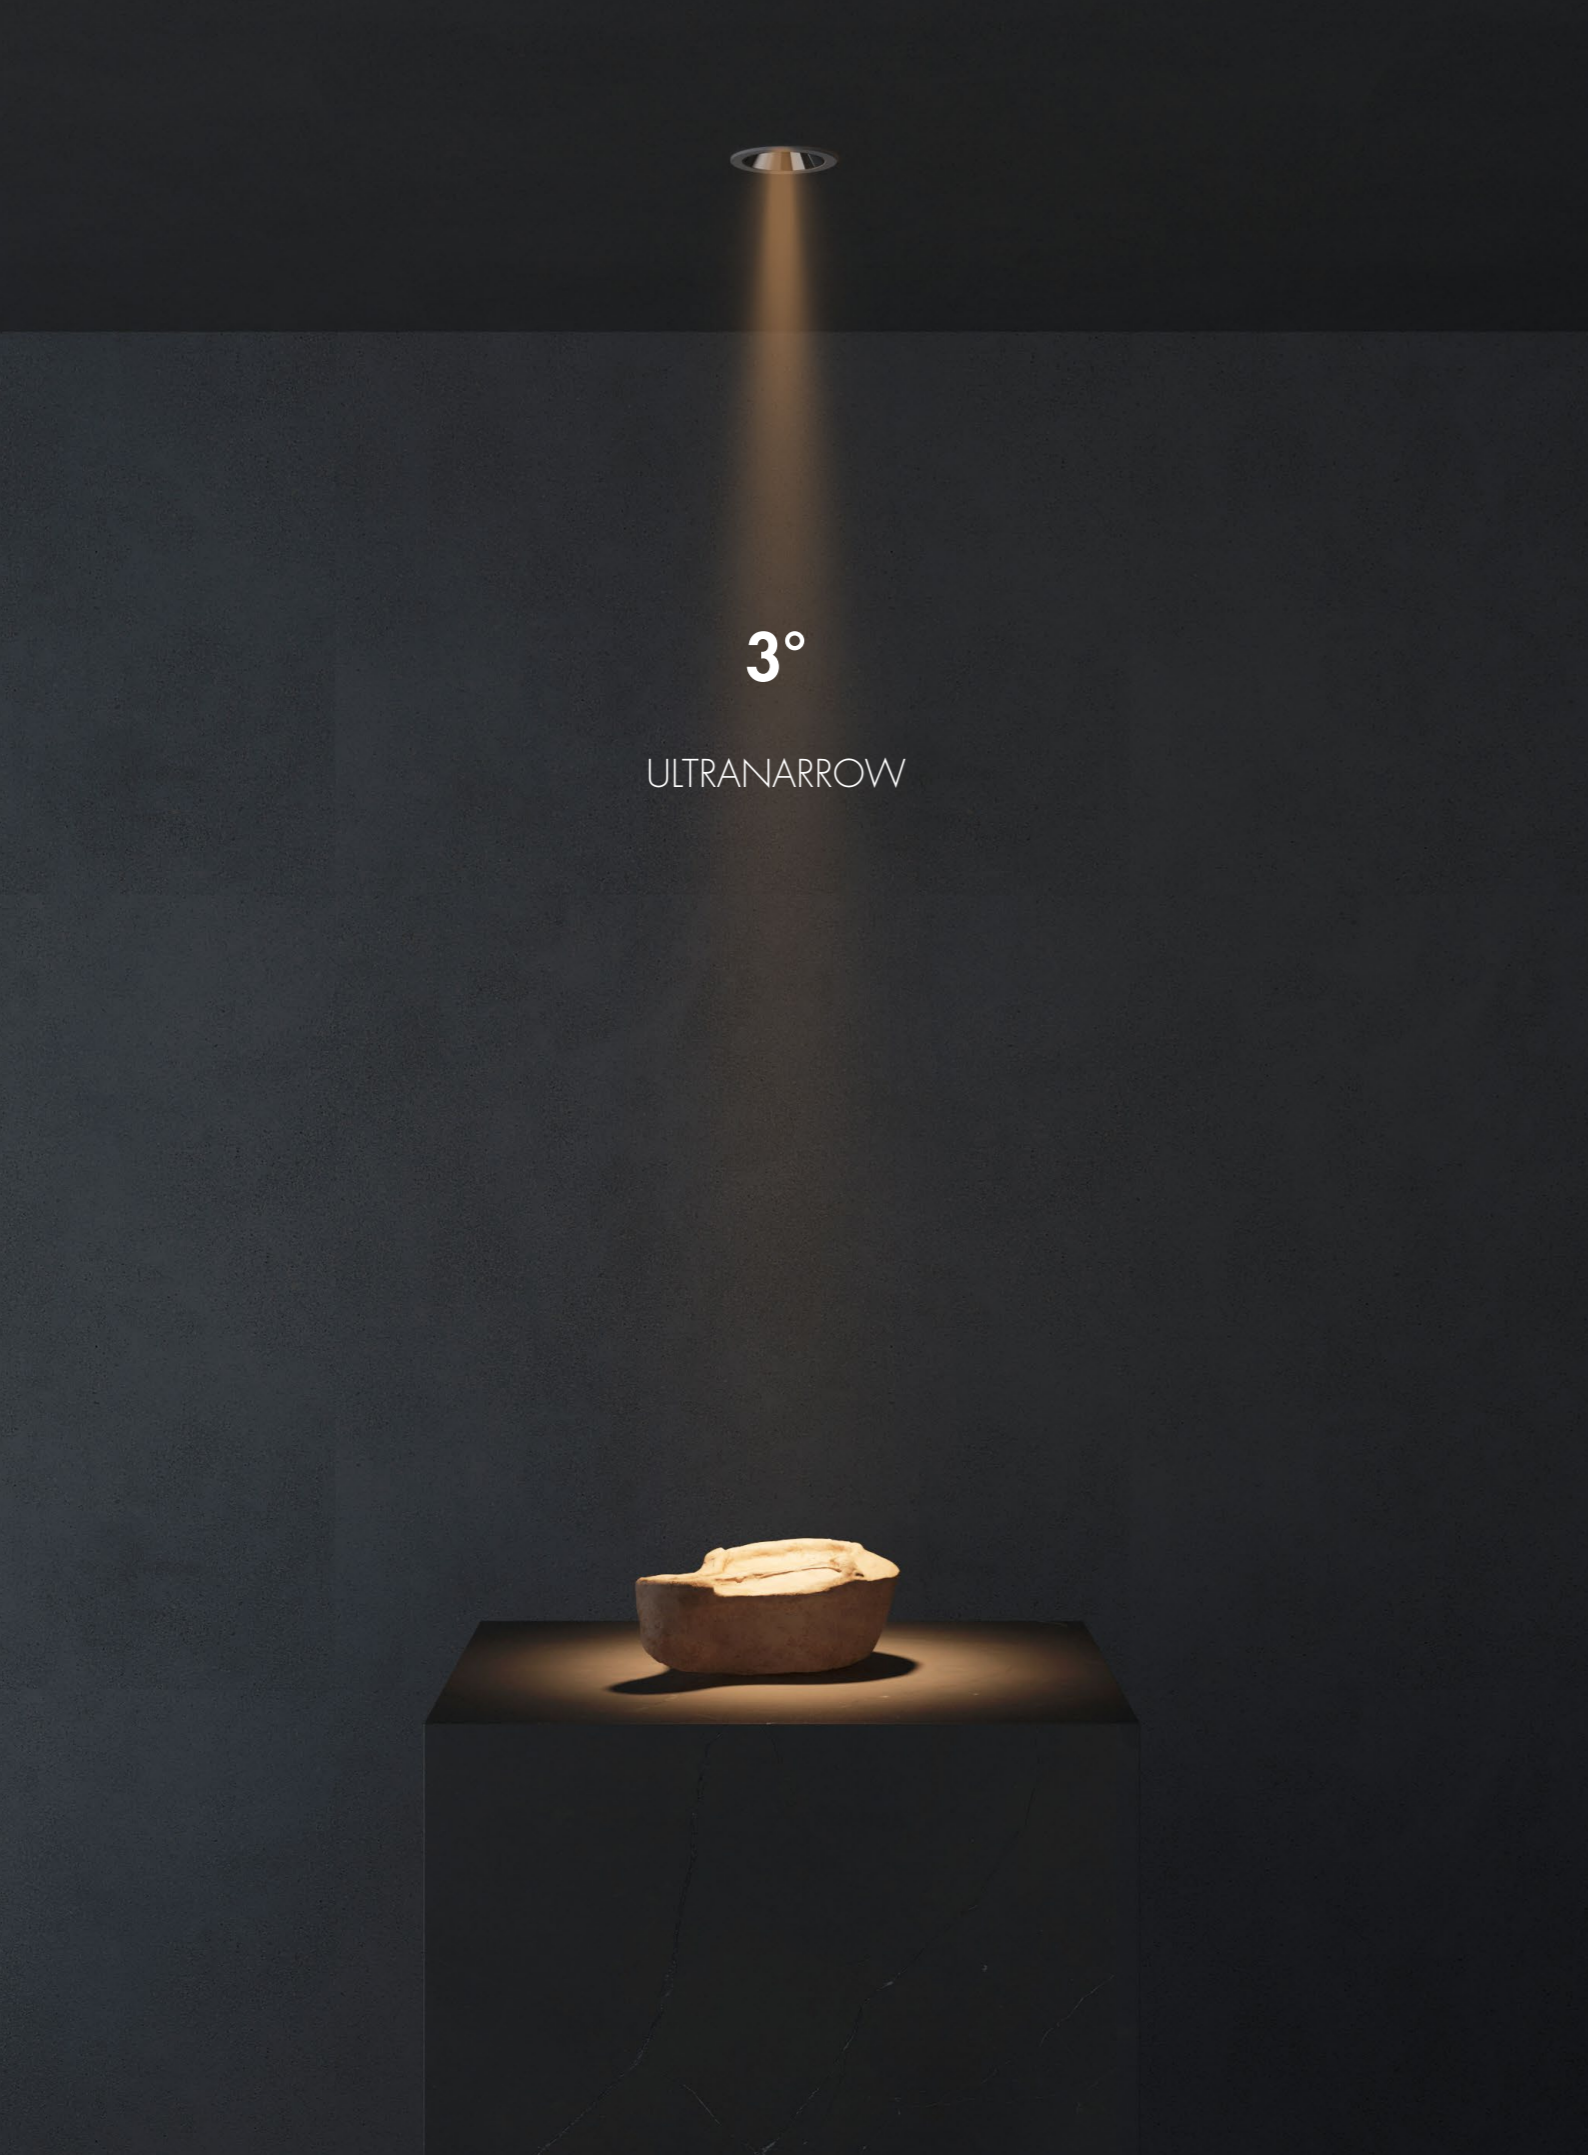


MIRACLE Spotlight



The quadruple anti dazzle structure and anti dazzle cellular network filter the light layer by layer. The dual lens design is highly focused on the spot. The extremely narrow 3 ° beam angle achieves high brightness with low power. The spot transition is natural and soft, creating a delicate spot effect in the lighting space.

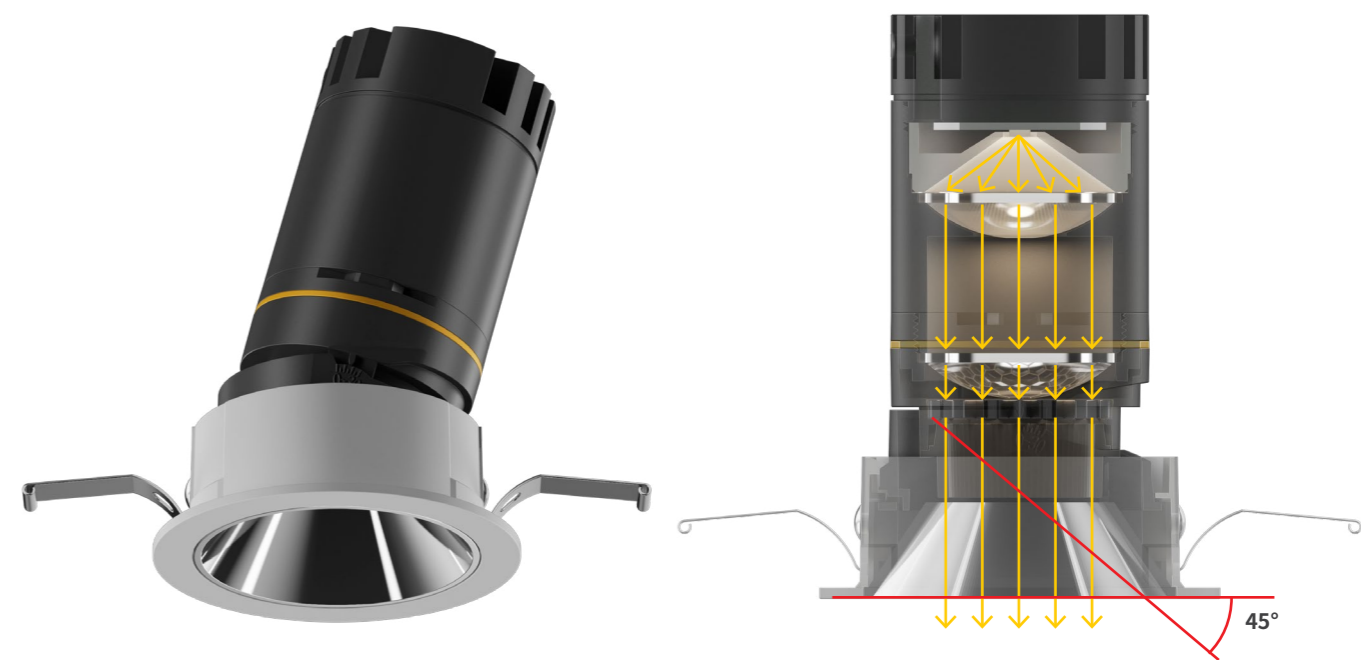

XJE09055A N


Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
5W	LED SMD	3°	2700K	50lm	95+	Φ55mm	Direct lighting
			3000K				Adjustable
			3500K				
			4000K				



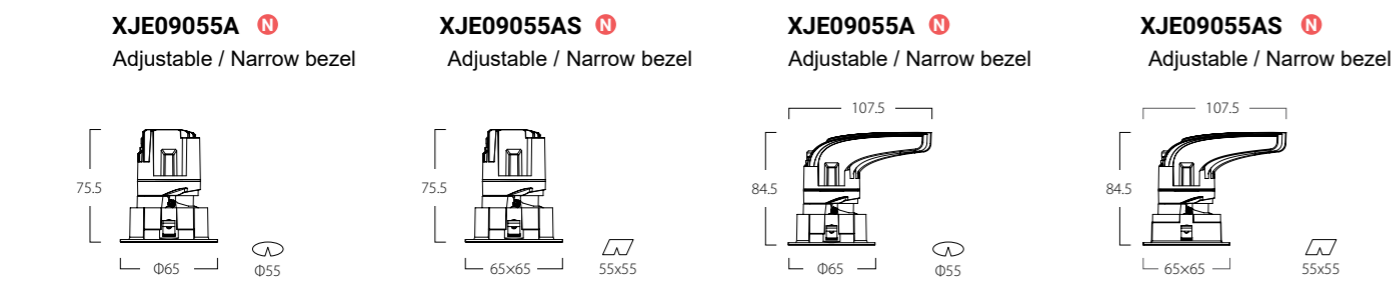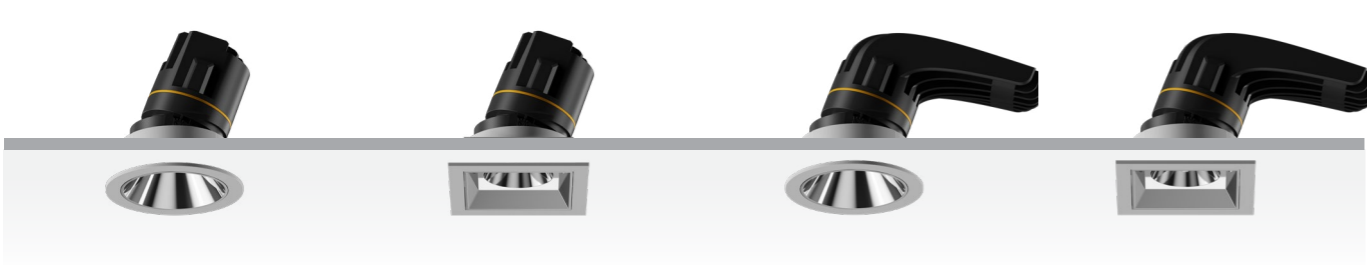


MIRACLE




XJE09055AT 


Adjustable / Frameless

XJE09055AST 





Adjustable / Frameless

XJE09055AT 

Adjustable / Frameless

XJE09055AST 

Adjustable / Frameless

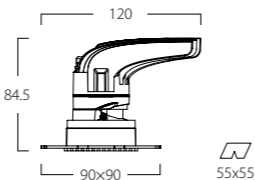

UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Optical system

opal diffusor

Light source

LED SMD / COB

Light distributions



Electrical connection

on/off

Control

Triac dimming / 1-10V dimming / DALI dimming / 24° (36°)  
supports dimming and color tuning

Power supply

33-38V, 120mA / 200mA

Type of installation



Trimless

Reflector color



象牙

INFORMATION

XJE09055AT




Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
5W	LED SMD	8°	2700K	325lm	90+	Φ55mm	Direct lighting
Max.7W	LED COB	15°	3000K		95+		Adjustable
	LED COB	24°	3500K				
	LED COB	36°	4000K				
	LED COB	50°	2700K-6000K★				

XJE09055AST




Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
5W	LED SMD	8°	2700K	325lm	90+	55×55mm	Direct lighting
Max.7W	LED COB	15°	3000K		95+		Adjustable
	LED COB	24°	3500K				
	LED COB	36°	4000K				
	LED COB	50°	2700K-6000K★				

XJE09055AT



Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
9W	LED COB	15°	2700K	585lm	90+	Φ55mm	直照
Max.12W		24°	3000K		95+		Adjustable
		36°	3500K				
		50°	4000K				
			2700K-6000K★				


XJE09055AST




Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
9W	LED COB	15°	2700K	585lm	90+	55×55mm	Direct lighting
Max.12W		24°	3000K		95+		Adjustable
		36°	3500K				
		50°	4000K				
			2700K-6000K★				




MIRACLE

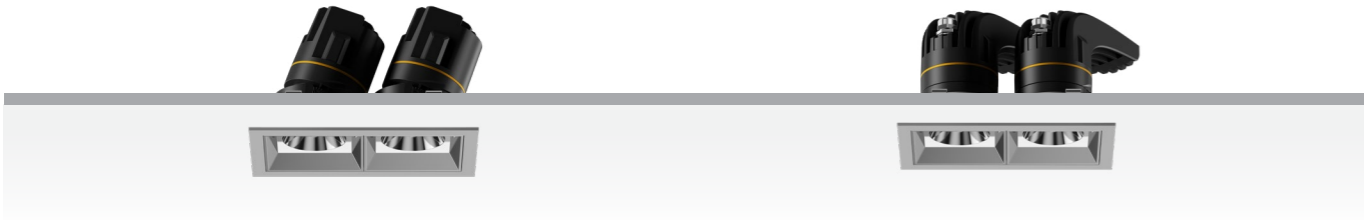

XJE09105AS N  
Adjustable / Narrow bezel

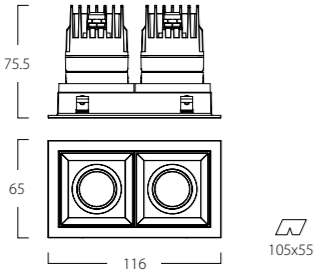

XJE09105AS N  
Adjustable / Narrow bezel

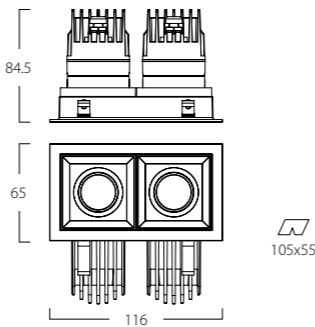

UNIT: mm

INFORMATION





XJE09105AS

Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
2×5W	LED COB	15°	2700K	2×325lm	90+	105×55mm	Direct lighting
Max.2×7W		24°	3000K		95+		Adjustable
		36°	3500K				
		50°	4000K				
			2700K-6000K★				



XJE09105AS


Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
2×9W	LED COB	15°	2700K	2×585lm	90+	105×55mm	Direct lighting
Max.2×12W		24°	3000K		95+		Adjustable
		36°	3500K				
		50°	4000K				
			2700K-6000K★				

TECHNICAL DETAILS

<b>Material</b> aluminium	<b>Electrical connection</b> on/off	<b>Reflector color</b> 
<b>Optical system</b> opal diffusor	<b>Control</b> Triac dimming / 1-10V dimming / DALI dimming / 24° (36°) supports dimming and color tuning	<b>Optional</b> 
<b>Light source</b> LED COB	<b>Power supply</b> 33-38V, 120mA / 200mA	
<b>Light distributions</b> 	<b>Type of installation</b>  Trim	




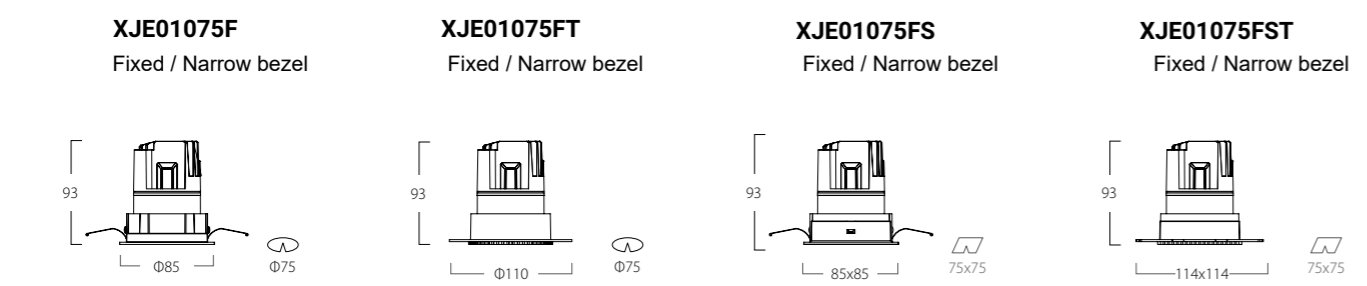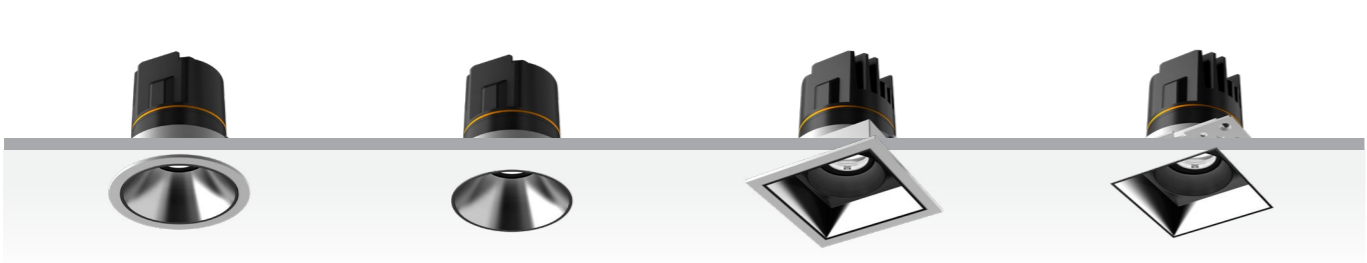

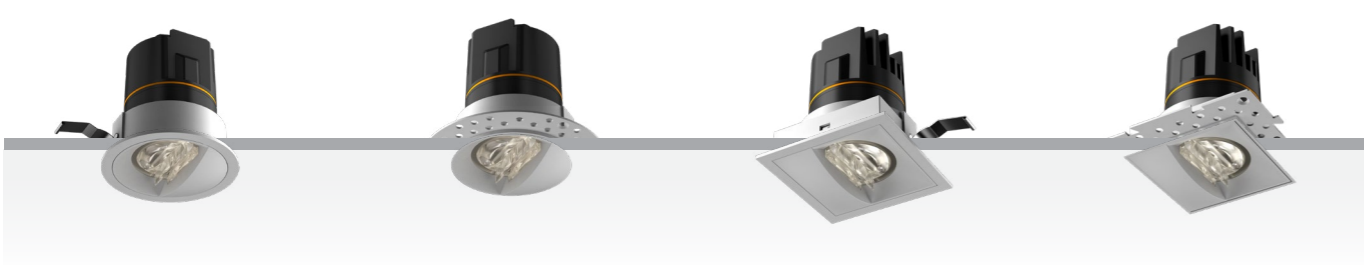


XJE01075W

Polarization / Slim frame




XJE01075WT

Polarization / Slim frame




XJE01075WS

Polarization / Slim frame



XJE01075WST

Polarization / Slim frame



UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffuser

Control

Triac dimming / 1-10V dimming / DALI dimming / Wired /  
Wireless dimming and color tuning

Light source

LED COB

Power supply

33-38V, 300mA

Light distributions



Type of installation



Trimless



Trim

INFORMATION

XJE01075W



Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
Max.12W	LED COB	Polarized wall washing	2700K	840lm	90+	Φ75mm	-
			3000K				
			3500K				
			4000K				
			2700K-6000K				

XJE01075WT



Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
Max.12W	LED COB	Polarized wall washing	2700K	840lm	90+	Φ75mm	-
			3000K				
			3500K				
			4000K				
			2700K-6000K				

XJE01075WS




Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
Max.12W	LED COB	Polarized wall washing	2700K	840lm	90+	75x75mm	-
			3000K				
			3500K				
			4000K				
			2700K-6000K				

XJE01075WST



Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
Max.12W	LED COB	Polarized wall washing	2700K	840lm	90+	75x75mm	-
			3000K				
			3500K				
			4000K				
			2700K-6000K				



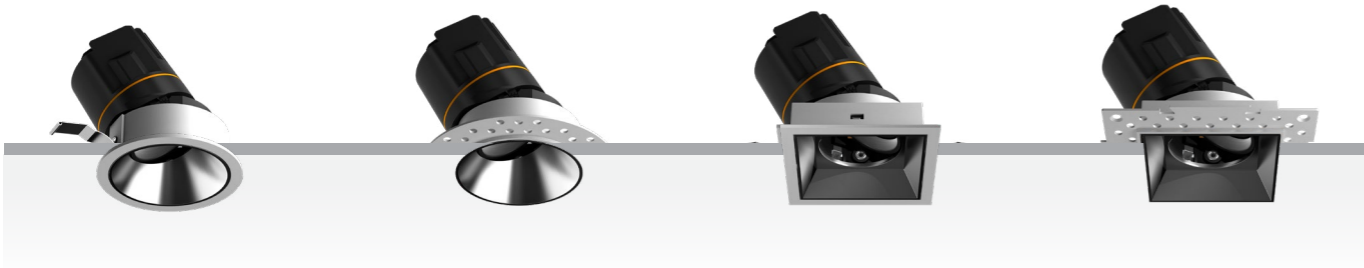

**XJE01075A**  
Adjustable / Narrow bezel

**XJE01075AT**  
Adjustable / Narrow bezel

**XJE01075AS**  
Adjustable / Narrow bezel

**XJE01075AST**  
Adjustable / Narrow bezel

UNIT: mm

TECHNICAL DETAILS

**Material**  
aluminium

**Optical system**  
opal diffusor

**Light source**  
LED SMD / COB

**Light distributions**

**Electrical connection**  
on/off

**Control**  
Triac dimming / 1-10V dimming / DALI dimming / Wired /  
Wireless dimming and color tuning

**Power supply**  
33-38V, 200mA

**Type of installation**  

Trimless

Trim

**Reflector color**

**Optional**

INFORMATION

**XJE01075A**

Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
9W	LED SMD	8°	2700K	585lm	90+	Φ75mm	Adjustable
Max.15W	LED COB	15°	3000K		95+		Elliptical hole
	LED COB	24°	3500K				
	LED COB	36°	4000K				
	LED COB	50°	2700K-6000K <sup>*</sup>				

**XJE01075AT**

Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
9W	LED SMD	8°	2700K	585lm	90+	Φ75mm	Adjustable
Max.15W	LED COB	15°	3000K		95+		Elliptical hole
	LED COB	24°	3500K				
	LED COB	36°	4000K				
	LED COB	50°	2700K-6000K <sup>*</sup>				

**XJE01075AS**


Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
9W	LED SMD	8°	2700K	585lm	90+	75×75mm	Adjustable
Max.15W	LED COB	15°	3000K		95+		
	LED COB	24°	3500K				
	LED COB	36°	4000K				
	LED COB	50°	2700K-6000K <sup>*</sup>				

**XJE01075AST**

Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
9W	LED SMD	8°	2700K	585lm	90+	75×75mm	Adjustable
Max.15W	LED COB	15°	3000K		95+		
	LED COB	24°	3500K				
	LED COB	36°	4000K				
	LED COB	50°	2700K-6000K <sup>*</sup>				




MIRACLE

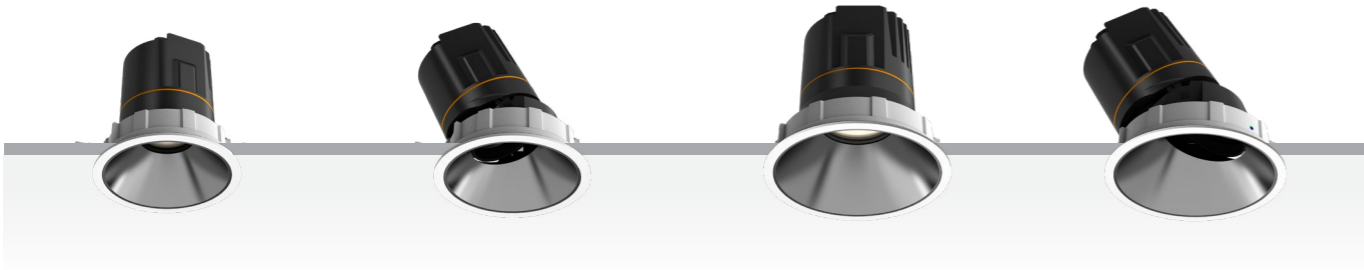


XJE05105F

Direct lighting / Narrow bezel




XJE05105A

Adjustable / Narrow bezel




XJE06150F

Direct lighting / Narrow bezel



XJE06150A

Direct lighting / Narrow bezel



UNIT: mm

TECHNICAL DETAILS

Material

aluminium


Optical system

opal diffusor

Light source

LED COB

Light distributions



Electrical connection

on/off

Control

Triac dimming / 1-10V dimming / DALI dimming / Wired /  
Wireless dimming and color tuning

Power supply

33-38V, 500mA / 850mA

Type of installation



Reflector color



INFORMATION

XJE05105F

Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
20W	LED COB	15°	2700K	1300lm	90+	Φ105mm	Direct lighting
Max.24W		24°	3000K				
		36°	3500K				
		50°	4000K				
			2700K-6000K*				

XJE05105A

Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
20W	LED COB	15°	2700K	1300lm	90+	Φ105mm	Adjustable
Max.24W		24°	3000K				
		36°	3500K				
		50°	4000K				
			2700K-6000K*				

XJE06150F

Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
35W	LED COB	15°	2700K	2200lm	90+	Φ150mm	Direct lighting
Max.40W		24°	3000K				
		36°	3500K				
		50°	4000K				
			2700K-6000K*				

XJE06150A

Power	Light Source	Beam angle	CCT	Flux	CRI	Cut-out	Optiona
35W	LED COB	15°	2700K	2200lm	90+	Φ150mm	Adjustable
Max.40W		24°	3000K				
		36°	3500K				
		50°	4000K				
			2700K-6000K*				



# MOON



Moon Series downlight adopts advanced lighting technology, which is deeply hidden, anti glare and more excellent light efficiency. It has a variety of color temperature and beam angle choices to meet various use needs and provide greater space for space creativity. It is suitable for lighting places such as villas, hotels, clubs and so on.

5W / 7W/ 9W/12W

8°/15°/24°/36°/ 50°


Φ55 /Φ75mm



# MOON down light

MOON series adopts the concentric design of lamp body and reflector, which is compatible with downward illumination and adjustment. The lamp body adopts deep structure anti glare technology, with low glare and glare value  $\leq 9$ , so as to minimize the stimulation of light to human eyes and provide comfortable visual comfort.

UGR $\leq 9$

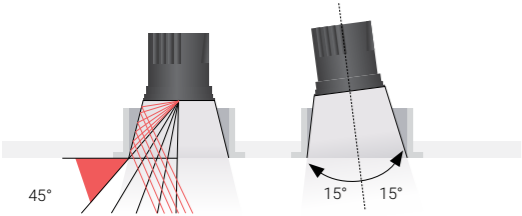


- 1.Thickened heat dissipation: Exhaust-style ventilation ensures airflow and extends light lifespan by reducing lumen depreciation.
- 2.Optical filters: Soft light, clear light, and stretch filters effectively diffuse light and reduce glare.
- 3.Honeycomb grid: Filters light and further reduces glare.
- 4.Black-gold reflector: Greatly reduces scattered light, resulting in more comfortable visual experience.






INFORMATION

XJE07055A





Power	Beam angle	CCT	Flux	CRI	Installation	Power supply	Optiona
5W	15°	2700K	255lm	95+	嵌入式	36V,120mA	{ 30° } 30°
Max.7W	24°	3000K					large round
	36°	3500K					
	50°	4000K					
2700K-6000K*							

XJE08075A

Power	Beam angle	CCT	Flux	CRI	Installation	Power supply	Optiona
9W	15°	2700K	450lm	95+	嵌入式	36V,200mA	mini round
Max.12W	24°	3000K					large round
	36°	3500K					elliptical
	50°	4000K					
2700K-6000K*							


UNIT: mm

TECHNICAL DETAILS

<b>Material</b> aluminium	<b>Electrical connection</b> on/off	<b>Optiona</b>   
<b>Optical system</b> opal diffuser	<b>Control</b> on/off	
<b>Light source</b> LED COB	<b>Color</b> <input type="radio"/> <input checked="" type="radio"/>	
<b>Light distributions</b> 		



# MOON 2

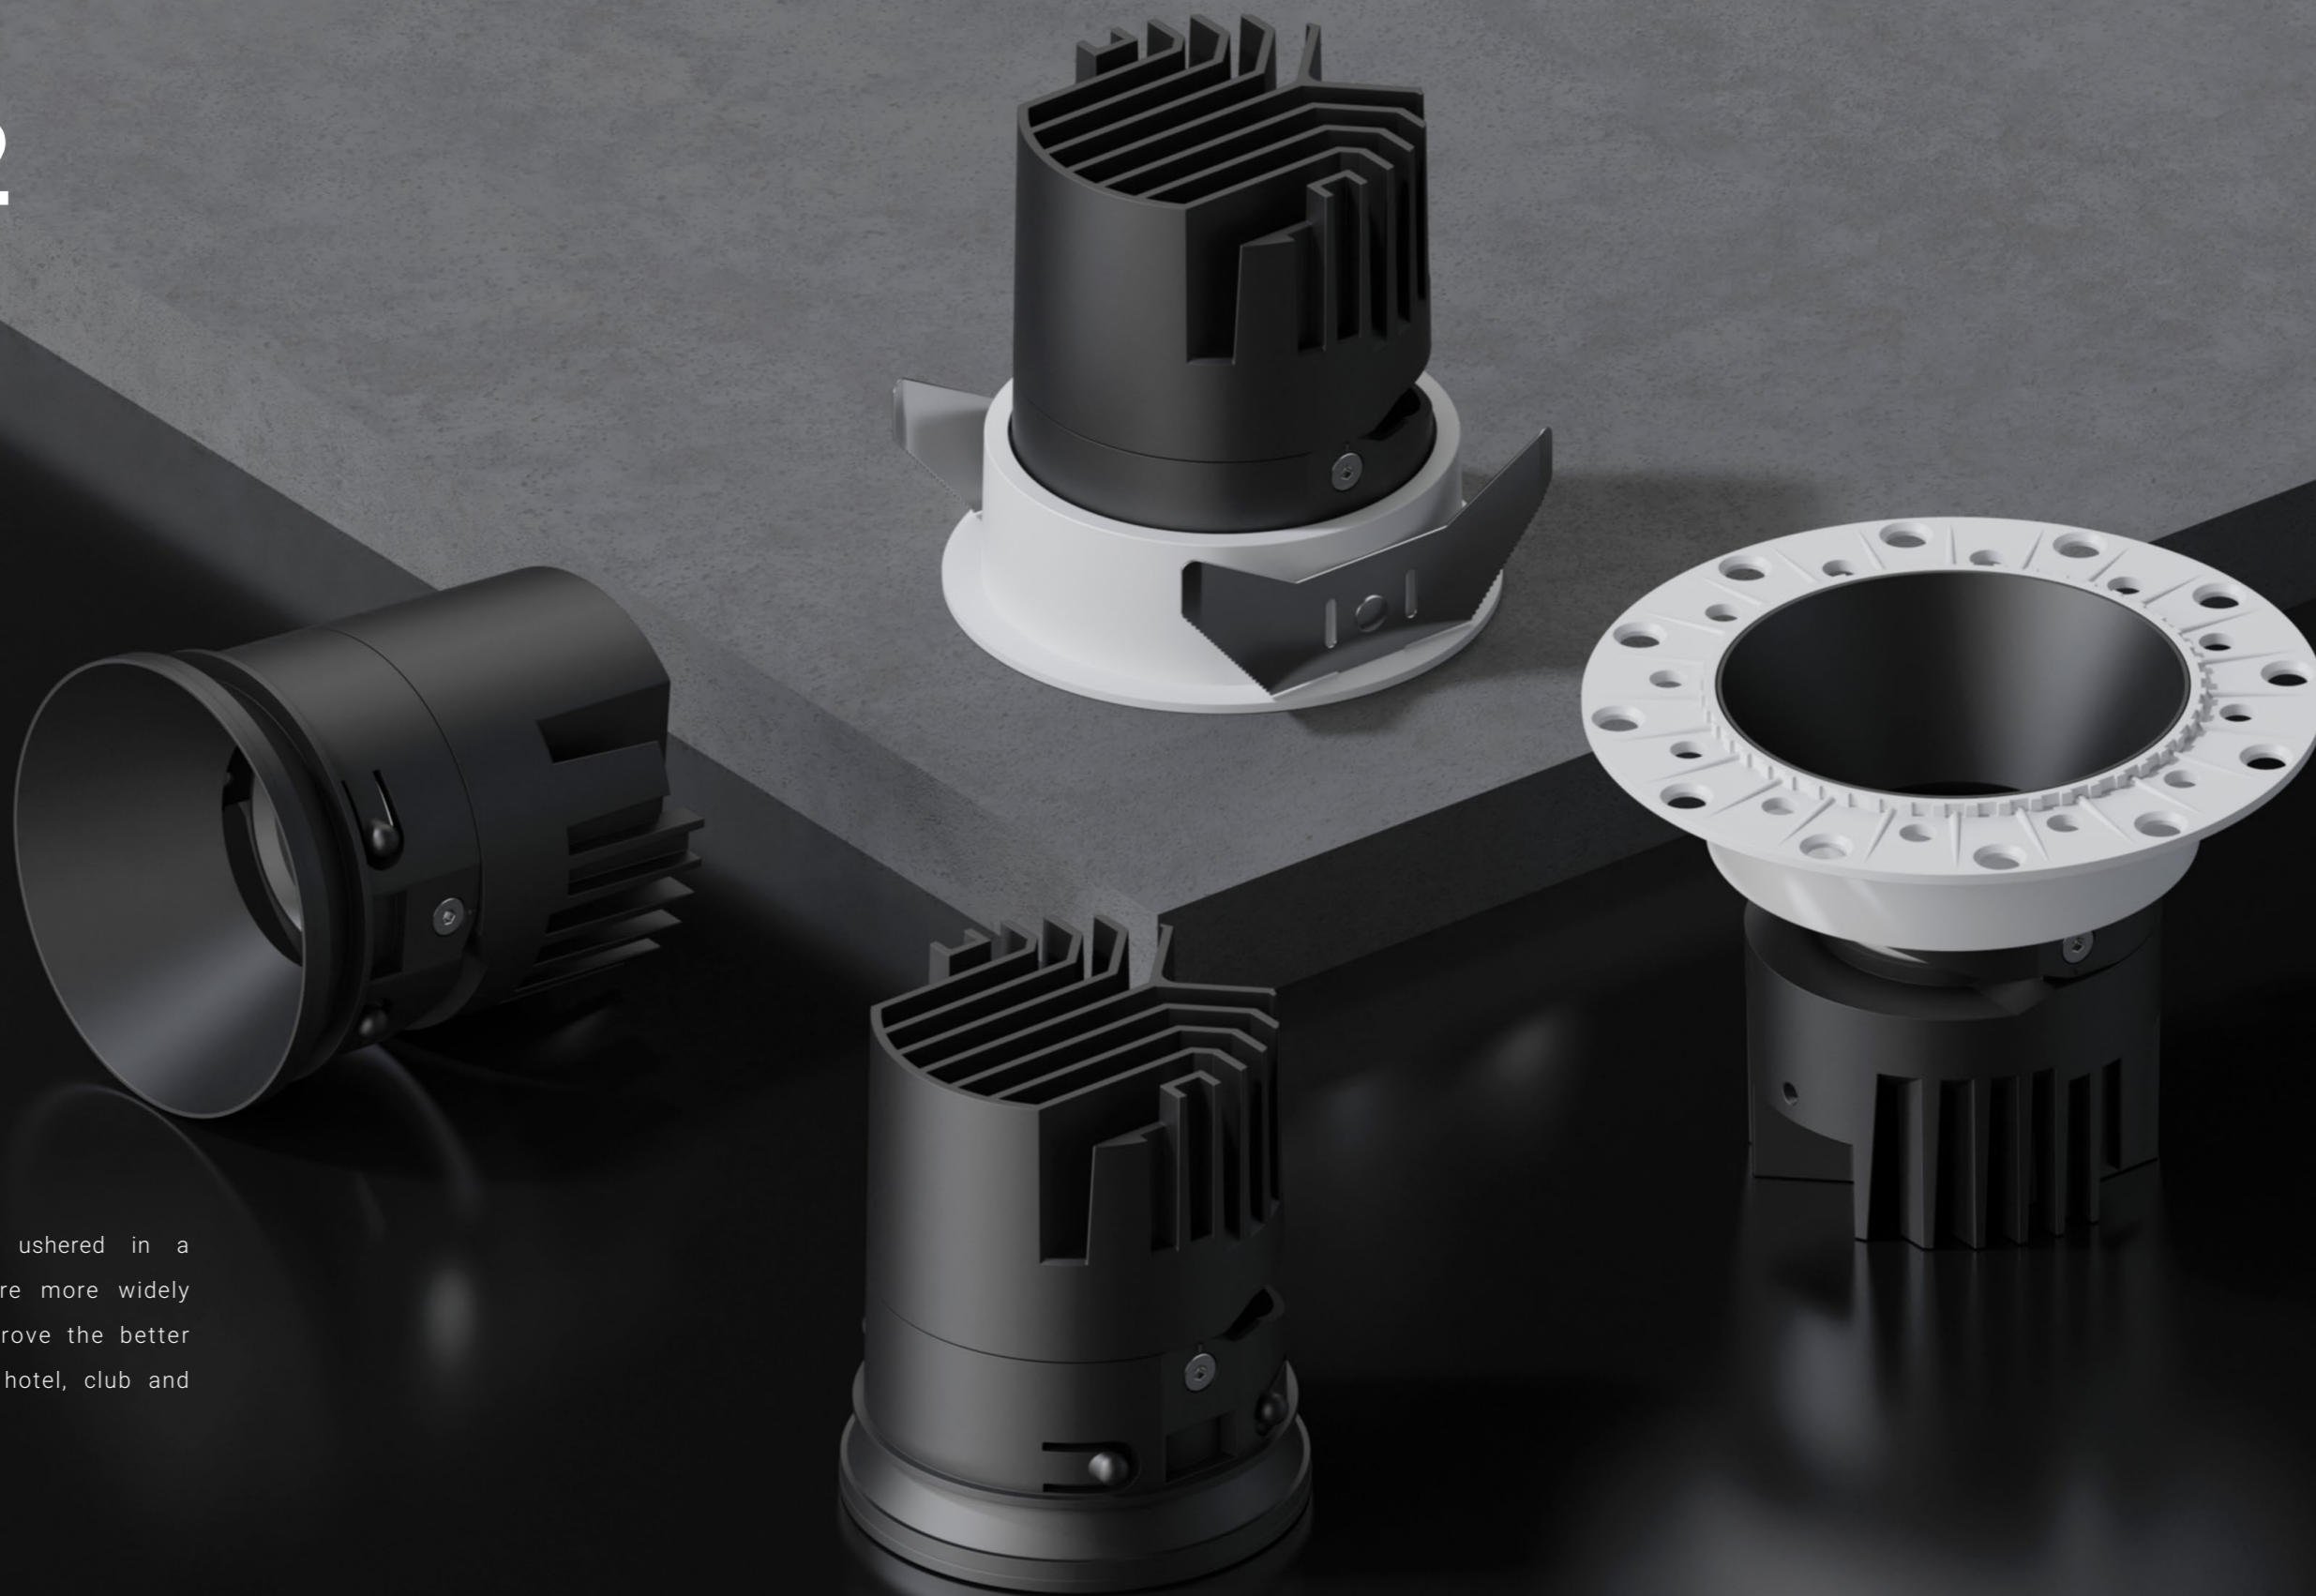

The new Tsukiyama II generation ushered in a qualitative leap, change the structure more widely used, optimize the light effect, improve the better anti-glare effect. Suitable for villa, hotel, club and other lighting places.

7W/ 9W/12W

10°/15°/24°/36°/ 50°

Φ75mm

## MOON 2

The all-new moon 2 hotel downlight brings a qualitative leap in luminaire structure and optical light distribution. The entire lamp adopts a split-body design, allowing the main lamp body to detach from the trim ring, enabling pre-installation of embedded parts and effectively preserving ceiling integrity. The lamp body height is controlled within 80mm, perfectly addressing ceiling height limitations and allowing for wider application.

moon 2 adopts a new TIR hidden light lens to increase the light refraction rate and effectively reduce glare, achieving UGR < 6. The entire series features enlarged light outlet openings, improving luminous efficacy up to 85 lm/W, significantly enhancing brightness and visual comfort.




### Product characteristics

The new Tsukimi II hotel downlights bring a qualitative leap in the light body structure and optical distribution. The whole lamp adopts separate structure, the main lamp body can be separated from the face ring, to realize the installation of embedded parts, effectively protect the integrity of the ceiling; The height of the lamp body is controlled within 80mm to solve the problem of ceiling height limit.

**<6**  
UGR

**85lm/w**  
Luminous efficacy upgrade

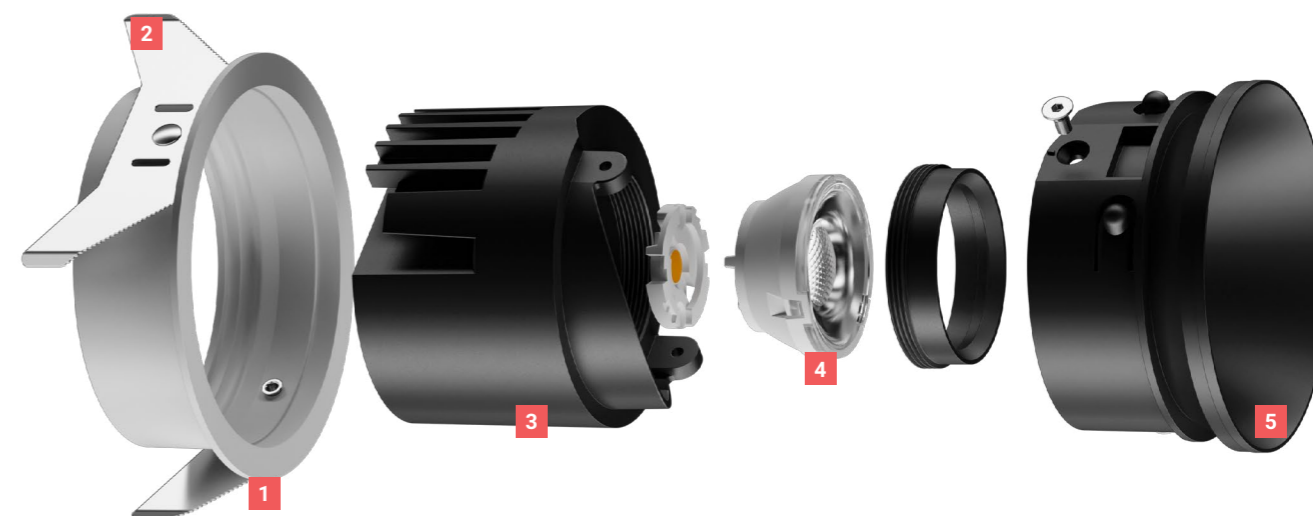

1

The anti-glare cover is available in narrow bezel and frameless designs, with a stronger aluminum texture.

2

Dual spring clip installation is suitable for ceiling thicknesses of 2–25mm, providing stronger and more stable mounting.

3

Thickened heat sink: Convection-based cooling ensures efficient heat dissipation and extends the lamp's lifespan.


4

Adopts a new TIR hidden light lens, achieving a UGR value of less than 6 for an ideal anti-glare effect.

5

moon 2.0 features an enlarged light outlet opening, increasing luminous efficacy to 85 lm/W.

MOON 2

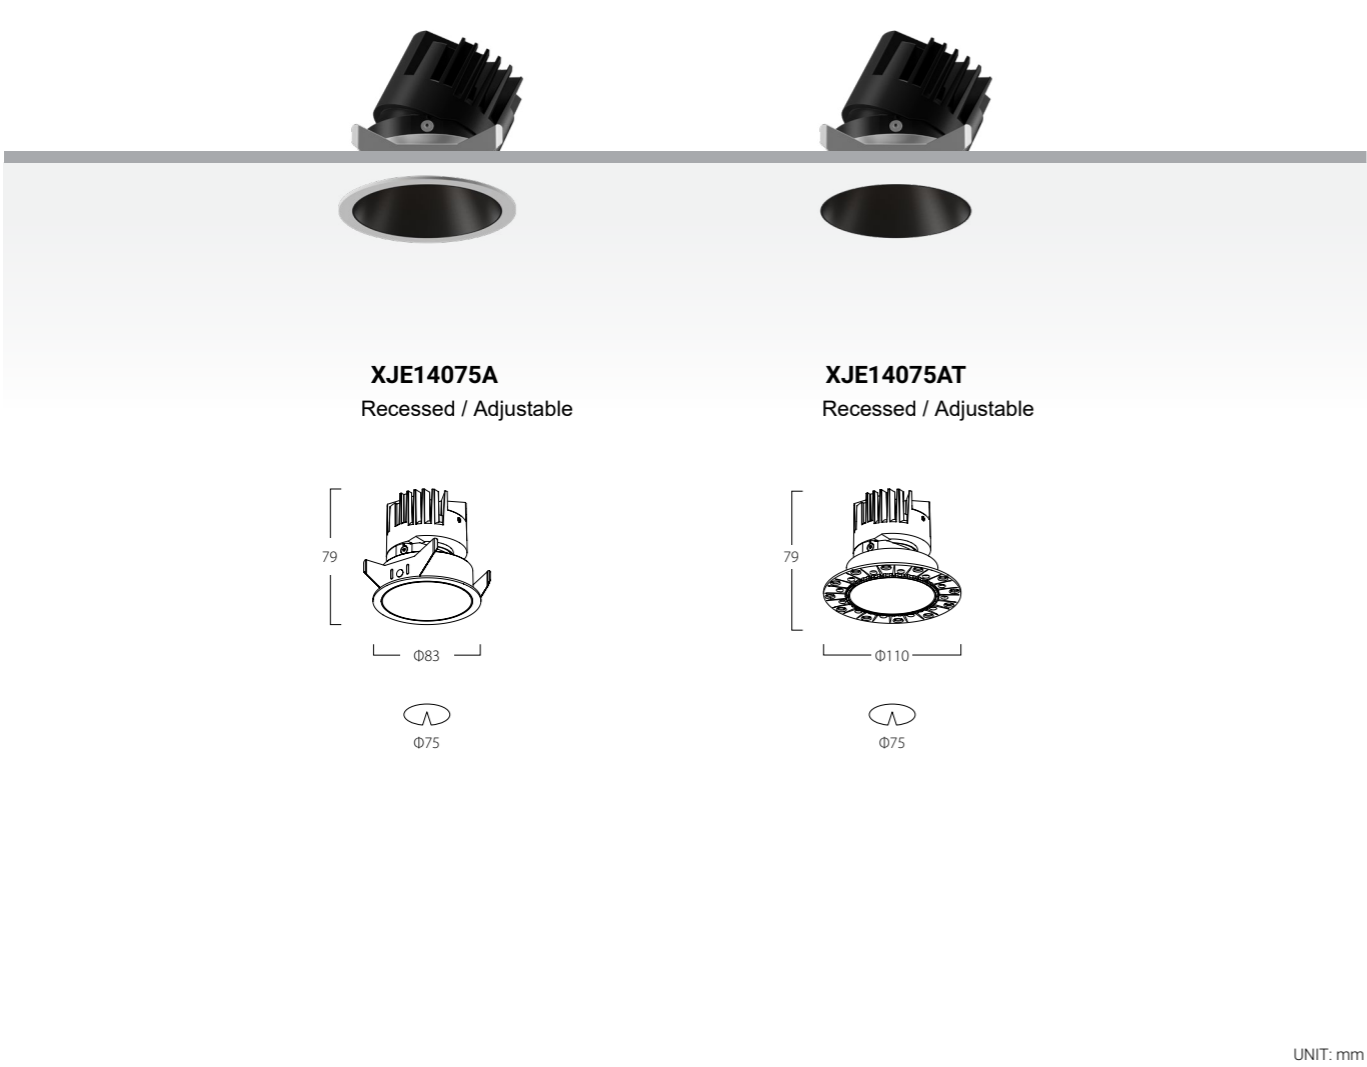

INFORMATION

XJE14075A



Power	Light Source	Beam angle	CCT	Flux	CRI	Power supply
9W	LED SMD	10°	2700K	315lm	90+	10.5-12V650mA
7W	LED COB	15°	3000K	595lm	95+	36V,150mA
9W	LED COB	24°	3500K	765lm	95+	36V,200mA
12W	LED COB	36°	4000K	1020lm	95+	36V,300mA
		50°				

XJE14075AT



Power	Light Source	Beam angle	CCT	Flux	CRI	Power supply
9W	LED SMD	10°	2700K	315lm	90+	10.5-12V650mA
7W	LED COB	15°	3000K	595lm	95+	36V,150mA
9W	LED COB	24°	3500K	765lm	95+	36V,200mA
12W	LED COB	36°	4000K	1020lm	95+	36V,300mA
		50°				

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffuser

Control

Wired dimming:

Triac dimming / 1-10V dimming / DALI dimming /

24° (36°) dimming and color tuning


Wireless dimming:

24° (36°) Tuya / Mi Home dimming and color tuning

Light source

LED COB

Light distributions



Color ☐ Matte white



The Shape Of The Moon

Shadow Of Light

# REFLECTION

Moon Shadow  
Hotel Downlight

Dot line line, outline shadow crisscross

Relaxed from body to mind

We are in the light,

But you don't feel where the source is




# REFLECTION

The Shape Of The Moon  
Shadow Of Light



REFLECTION series is designed to emphasize lighting. Its unique product structure can tilt and rotate, and can adjust the illumination height of lamps. High quality optical accessories are selected to make lamps project clear, clean and spot free light, creating a more dramatic lighting effect.

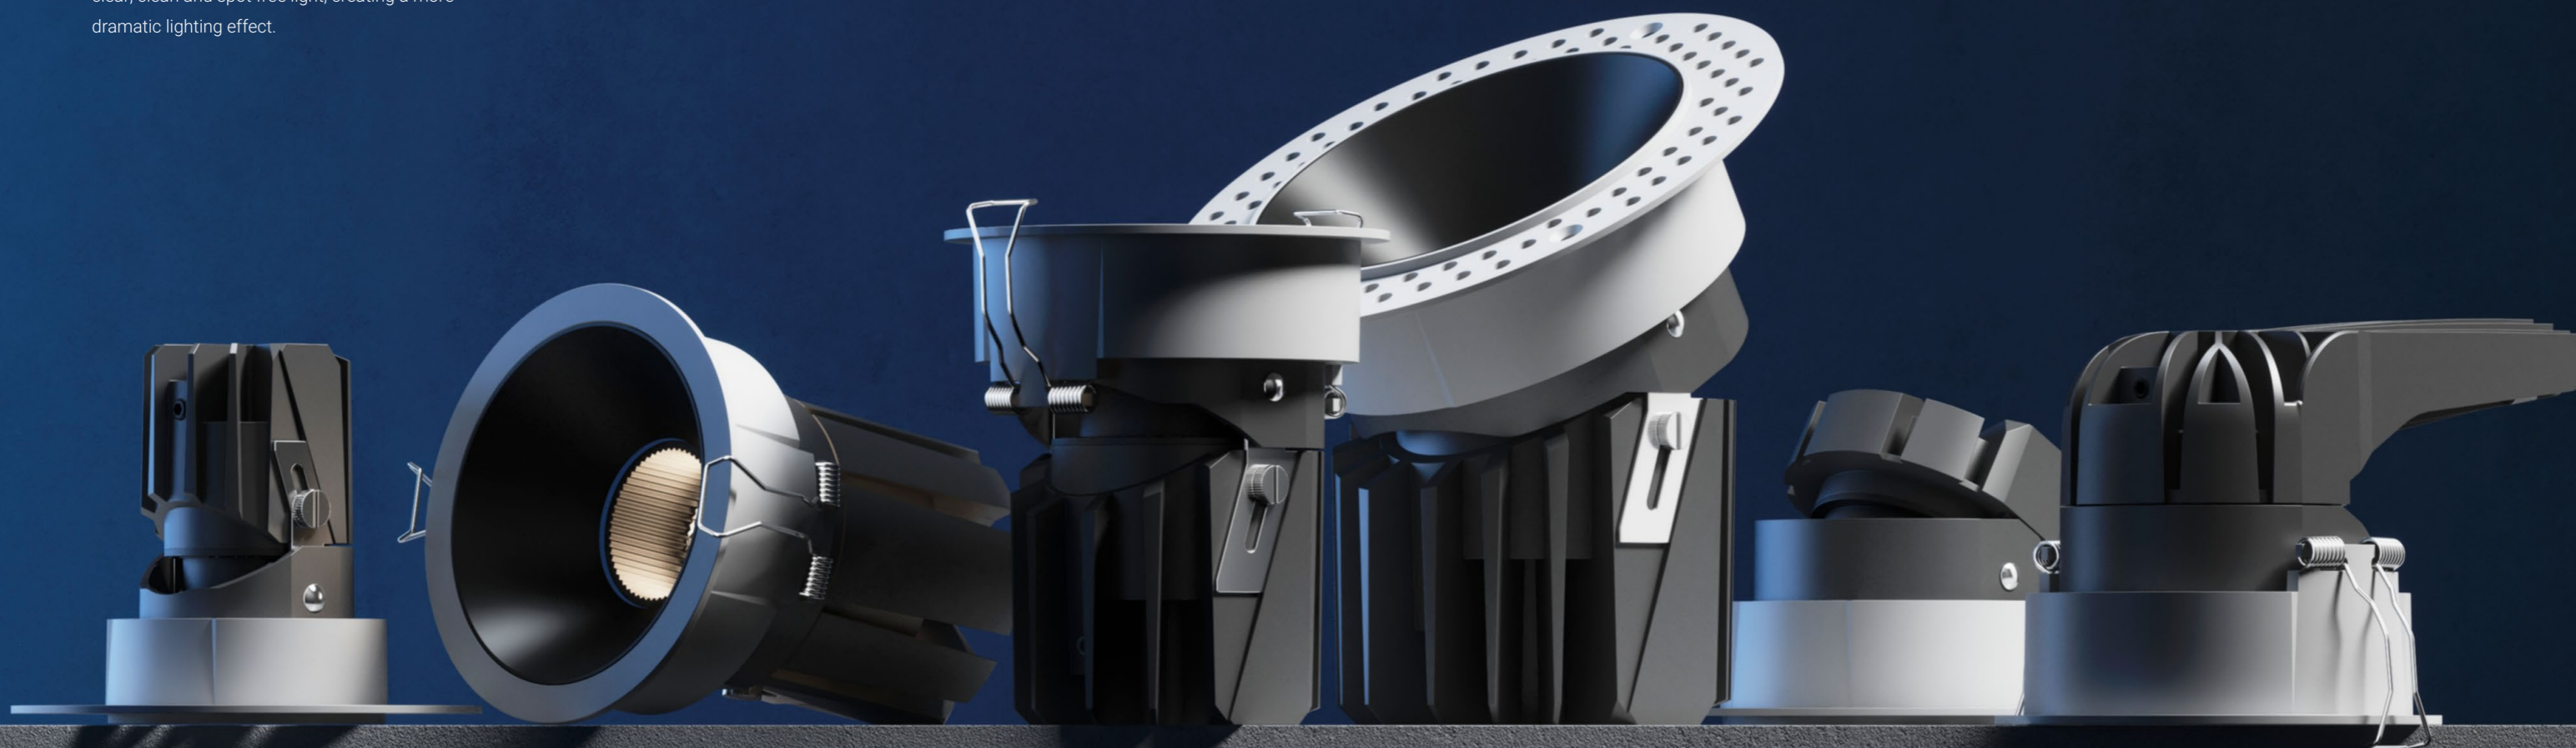




5W/7W/9W/12W/15W/20W

8°/15°/24°/36°/50°

Φ55~110mm

# Five Anti Dazzle Black Technology

Anti-glare

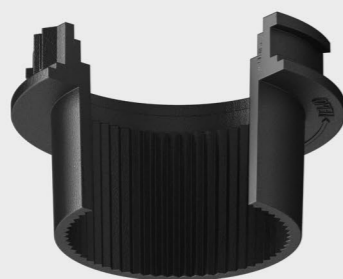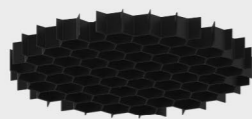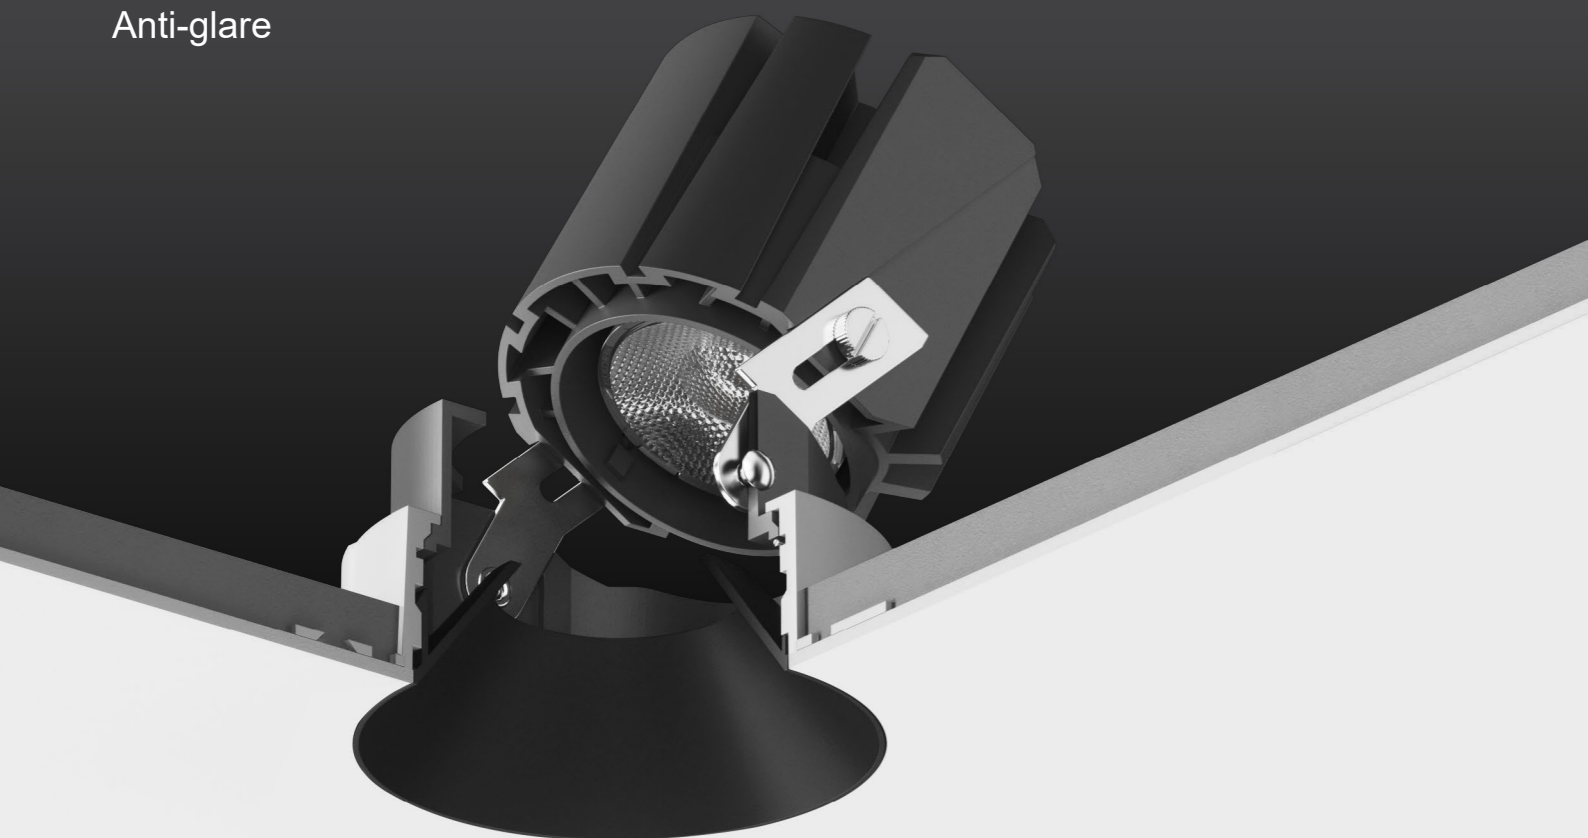

**+10%**

Lighting Efficiency Upgrade

**<6**



UGR Comfort Level



Anti-glare and Eye Protection

## Craftsman light control

Moon Shadow wall washing lamp series is committed to creating delicate but not dazzling lighting, based on modular research and development of five-fold anti-glare structure. Whether it is the choice of accessories, the depth of hidden light, the height of the lamp body and fine to every detail, all for the lamps in the lighting space to create a delicate spot effect. The design of close to zero frame fits perfectly with the ceiling, making everything perfect.

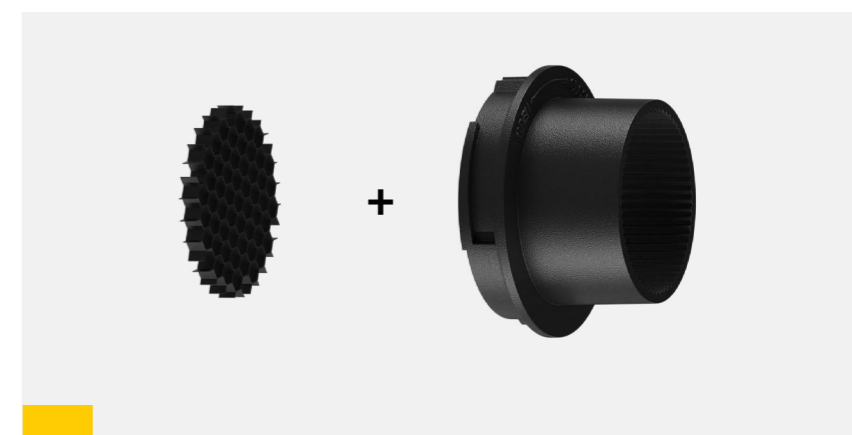
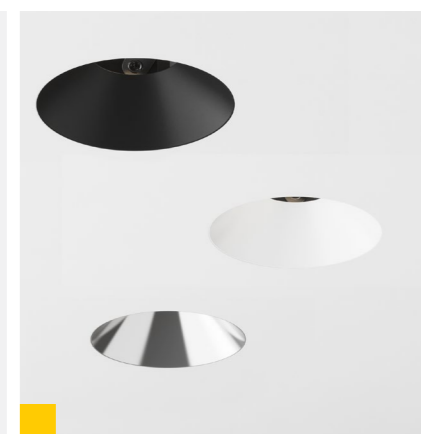


# The Shape Of The Moon Shadow Of Light



## Clean the wall flawlessly

Five anti-glare lamp structure to achieve high quality light effect, no layer, no secondary light spot wall washing effect is suitable for a variety of lighting scenes. With high and low radiators and multiple size choices, can cover 1-40mm high ceiling, ultra-high utility rate.

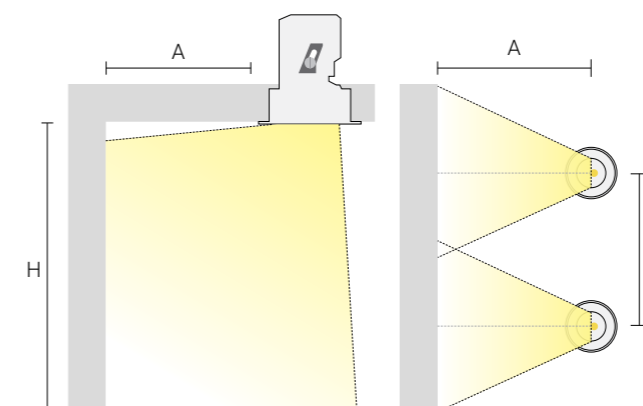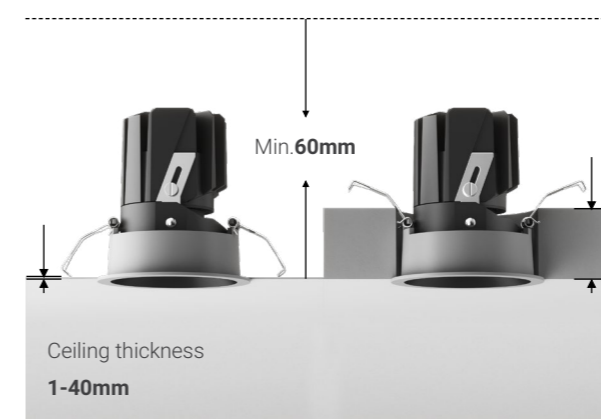

## Space between luminaires and wall

$A = 1/3 \text{ to } 1/5 \text{ of } B$


## Space between luminaires

灯具间距


A=B	A=1.35B	A=2B
uniformity	uniformity	uniformity
$\geq 0.95$	$\pm 0.9$	$\pm 0.65$
art galleries	retail	offices, residential
Art Gallery	Commercial Space	Office / Residential

# REFLECTION down light

79mm

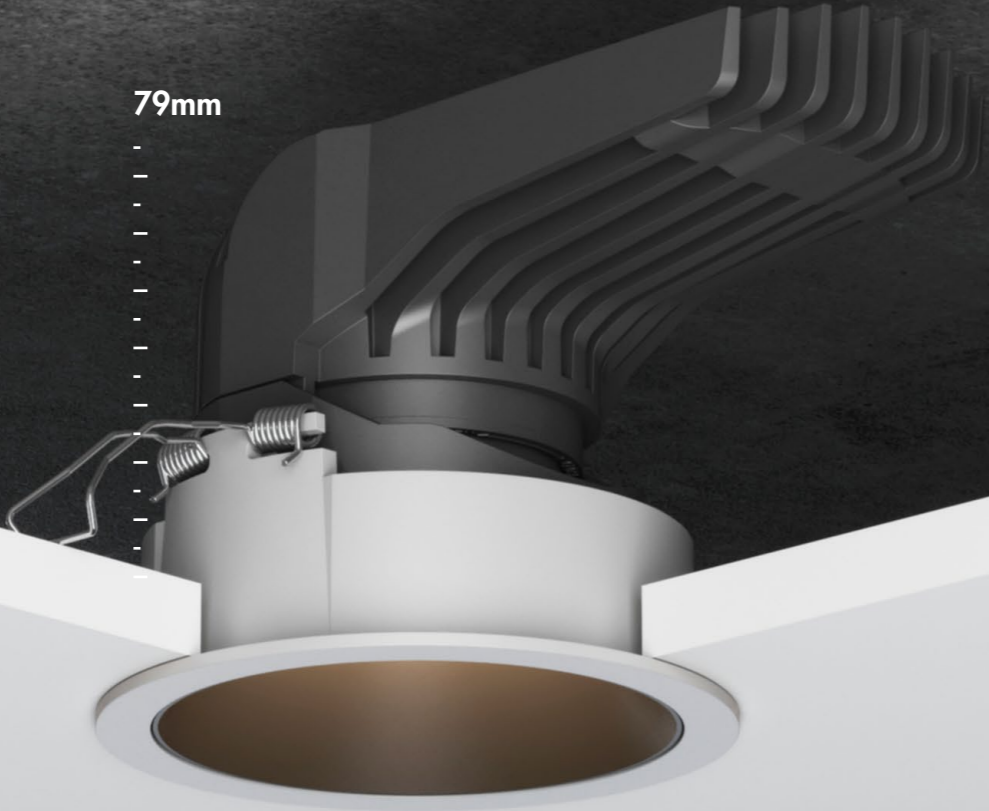

The unique extended radiator enables the exquisite lamps to have high power output. The scale shape effectively accelerates the air convection, efficiently dissipates heat, and ensures the stability and safety of the lamps.

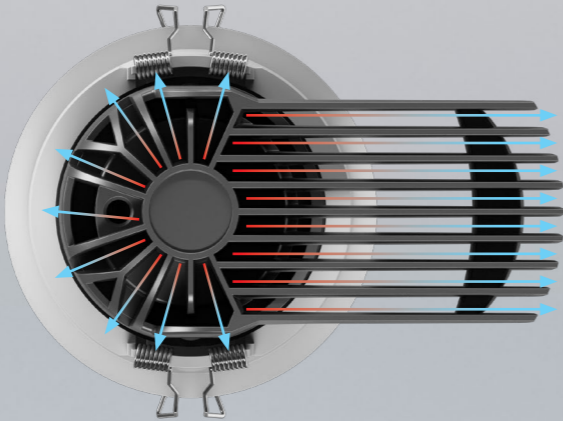

## Application

A small lamp body combined with a long-tail heat sink creates a high-power luminaire, suitable for lighting spaces with high floors and low ceilings, such as unit floors, shops, cafes, and other lighting venues.



# Full Color Interpretation Of Natural Color

The data sheet of the Moon Shadow series luminaires clearly and accurately shows the high-efficiency color rendering performance of LED light sources using Ra, Rf, and Rg (TM30) values, with high saturation and high fidelity in reproducing true colors.



**Ra80+**

**CRI98+**


**Rf>95 Rg>98**

Comparable to sunlight, even better than  
the original colors

## Rf (Fidelity)

The fidelity index represents color fidelity. It varies within a range of 0 to 100, where 100 indicates a perfect match to the sample source.

Light sources with a score below 60 are unsuitable for indoor use, while those scoring above 90 are more ideal because their chromaticity characteristics are similar to daylight.

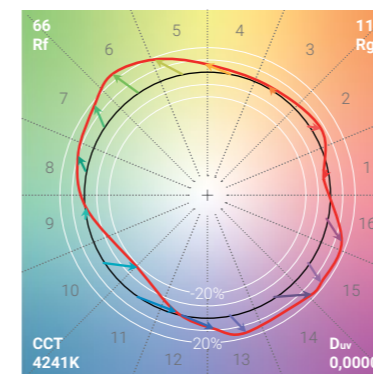

## Rg (Color Gamut Saturation)

The color gamut index introduces the concept of saturation by assessing the intensity of colors (the width of the color range) under specific lighting.

It varies within a range of 60 to 140, where a gamut score of 100 indicates that the light source does not alter the hue and color saturation reproduction compared to the sample source.

REFLECTION



XJE10055A

N

Adjustable / Narrow bezel

XJE10055AT

N

Adjustable / Narrow bezel

XJE11075A

N

Adjustable / Narrow bezel

XJE11075AT

N

Adjustable / Narrow bezel

UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Optical system

opal diffusor

Light source

LED COB

Light distributions

Electrical connection

on/off

Control



-

Reflector color



Matte white

Optional



INFORMATION

XJE10055A



Power	Light Source	Beam angle	CCT	CRI	Flux	Cut-out	Power supply
5W	LED SMD	8°	2700K	95+	175lm	Φ55mm	2.8-3.1V 1.25A
5W	LED COB	15°	3000K	97+	325lm	Φ55mm	33-38V 120mA
7W	LED COB	24°	3500K	97+	450lm	Φ55mm	33-38V 150mA
		36°	4000K				

XJE10055AT

Power	Light Source	Beam angle	CCT	CRI	Flux	Cut-out	Power supply
5W	LED SMD	8°	2700K	95+	175lm	Φ55mm	2.8-3.1V 1.25A
5W	LED COB	15°	3000K	97+	325lm	Φ55mm	33-38V 120mA
7W	LED COB	24°	3500K	97+	450lm	Φ55mm	33-38V 150mA
		36°	4000K				


XJE11075A

Power	Light Source	Beam angle	CCT	CRI	Flux	Cut-out	Power supply
9W	LED SMD	8°	2700K	90+	285Lm	Φ75mm	10.5-12V 650mA
9W	LED COB	15°	3000K	97+	585lm	Φ75mm	33-38V 200mA
12W	LED COB	24°	3500K		780lm	Φ75mm	33-38V 300mA
		36°	4000K				

XJE11075AT


Power	Light Source	Beam angle	CCT	CRI	Flux	Cut-out	Power supply
9W	LED SMD	8°	2700K	90+	285Lm	Φ75mm	10.5-12V 650mA
9W	LED COB	15°	3000K	97+	585lm	Φ75mm	33-38V 200mA
12W	LED COB	24°	3500K		780lm	Φ75mm	33-38V 300mA
		36°	4000K				

REFLECTION

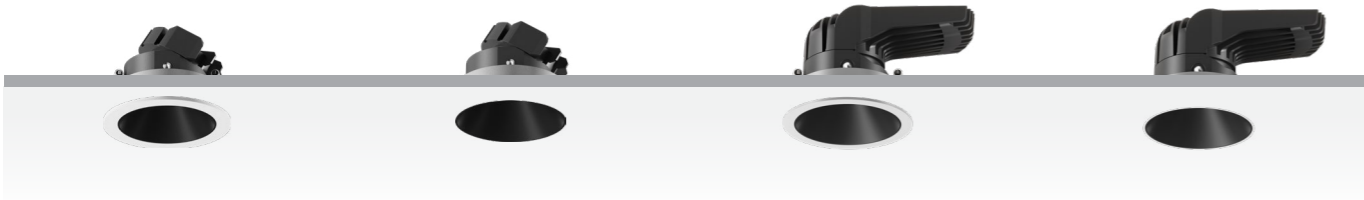


XJE11075AL N

Adjustable / Narrow bezel




XJE11075ATL N

Adjustable / Narrow bezel




XJE11075AM N

Adjustable / Narrow bezel



XJE11075ATM N

Adjustable / Narrow bezel



UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffusor

Control

-

Light source

LED COB

Light distributions



Reflector color



Matte white

Optional



INFORMATION

XJE11075AL



Power	Light Source	Beam angle	CCT	CRI	Flux	Cut-out	Power supply
5W	LED SMD	8°	2700K	90+	175lm	Φ75mm	10.5-12V 350mA
5W	LED COB	15°	3000K	97+	325lm	Φ75mm	33-38V 120mA
7W	LED COB	24°	3500K	97+	325lm	Φ75mm	33-38V 150mA
		36°	4000K				
		50°					

XJE11075ATL



Power	Light Source	Beam angle	CCT	CRI	Flux	Cut-out	Power supply
5W	LED SMD	8°	2700K	90+	175lm	Φ75mm	10.5-12V 350mA
5W	LED COB	15°	3000K	97+	325lm	Φ75mm	33-38V 120mA
7W	LED COB	24°	3500K	97+	325lm	Φ75mm	33-38V 150mA
		36°	4000K				
		50°					

XJE11075AM



Power	Light Source	Beam angle	CCT	CRI	Flux	Cut-out	Power supply
9W	LED SMD	8°	2700K	90+	315Lm	Φ75mm	10.5-12V 650mA
9W	LED COB	15°	3000K	97+	450Lm	Φ75mm	33-38V 200mA
12W	LED COB	24°	3500K	97+	600Lm	Φ75mm	33-38V 300mA
15W	LED COB	36°	4000K	97+	750Lm	Φ75mm	33-38V 350mA
		50°*					


XJE11075ATM




Power	Light Source	Beam angle	CCT	CRI	Flux	Cut-out	Power supply
9W	LED SMD	8°	2700K	90+	315Lm	Φ75mm	10.5-12V 650mA
9W	LED COB	15°	3000K	97+	450Lm	Φ75mm	33-38V 200mA
12W	LED COB	24°	3500K	97+	600Lm	Φ75mm	33-38V 300mA
15W	LED COB	36°	4000K	97+	750Lm	Φ75mm	33-38V 350mA
		50°*					




REFLECTION

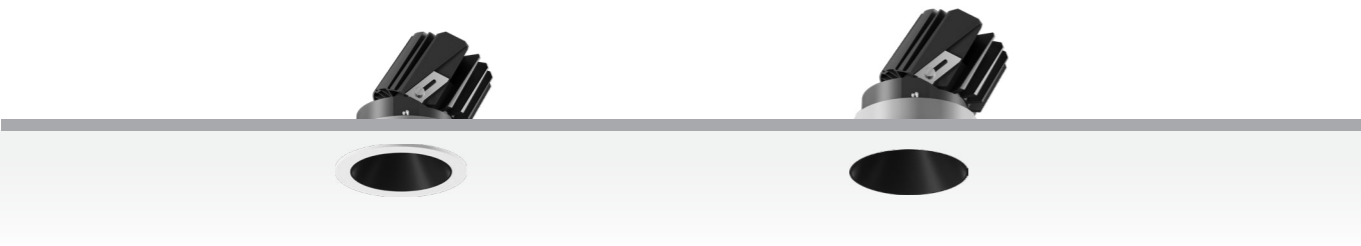

XJE12095A N  
Adjustable / Narrow bezel






XJE12095AT N  
Adjustable / Narrow bezel





UNIT: mm

TECHNICAL DETAILS

<b>Material</b> aluminium	<b>Electrical connection</b> on/off	<b>Reflector color</b>  Matte white
<b>Optical system</b> opal diffusor	<b>Control</b> Triac dimming / 1-10V dimming / 24°/36° supports DALI	<b>Optional</b> 
<b>Light source</b> LED COB		
<b>Light distributions</b> 		

INFORMATION


<b>XJE12095A</b> 							
Power	Light Source	Beam angle	CCT	CRI	Flux	Cut-out	Power supply
12W	LED COB	10°	2700K	97+	600lm	Φ95mm	33-38V 300mA
15W	LED COB	15°	3000K	97+	975lm	Φ95mm	33-38V 350mA
20W	LED COB	24°	3500K	97+	1300lm	Φ95mm	33-38V 500mA
		36°	4000K				
		50°					

<b>XJE12095AT</b> 							
Power	Light Source	Beam angle	CCT	CRI	Flux	Cut-out	Power supply
12W	LED COB	10°	2700K	97+	600lm	Φ95mm	33-38V 300mA
15W	LED COB	15°	3000K	97+	975lm	Φ95mm	33-38V 350mA
20W	LED COB	24°	3500K	97+	1300lm	Φ95mm	33-38V 500mA
		36°	4000K				
		50°					

**REFLECTION** Track  
Light



Small and delicate lamp body, universal rotating structure, flexible rotating shaft design, 15° /24° /36° /50° beam angle optional, and more accurate projection. The embedded anti dazzle cellular network makes the light spot more comfortable and soft.

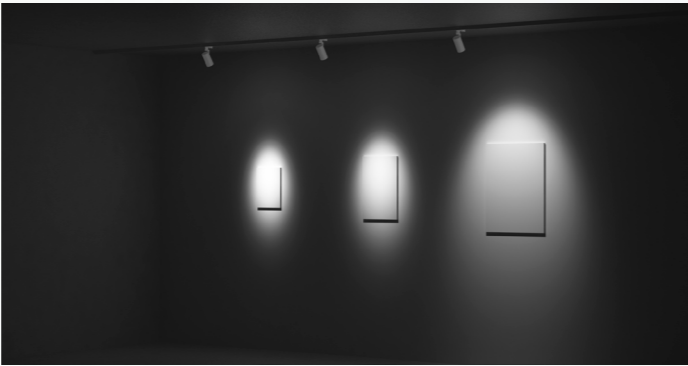


**Horizontal Rotation**  
The universal lamp body structure allows 0~355° horizontal rotation.




**Vertical rotation**  
Adjust the vertical rotation angle beyond 90° for precise illumination.




REFLECTION

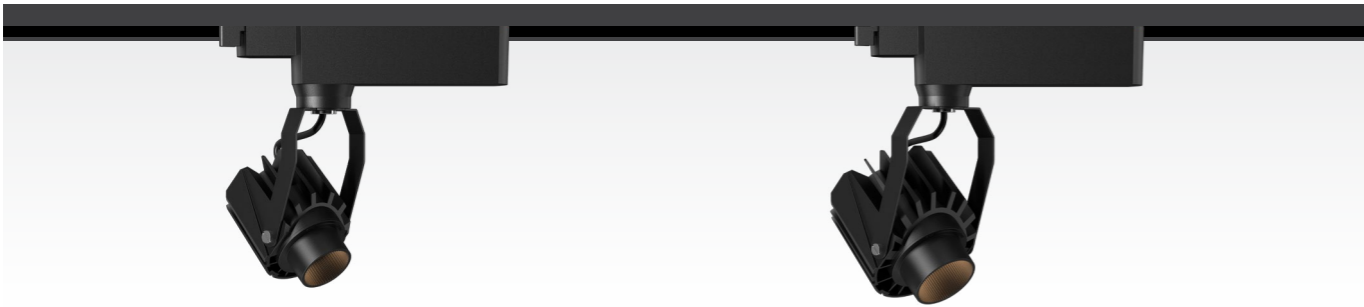

XLE10060CL N  
Track spotlight

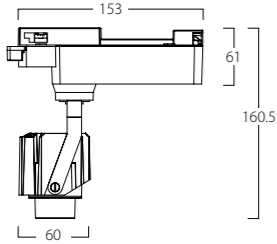

XLE11080CL N  
Track spotlight

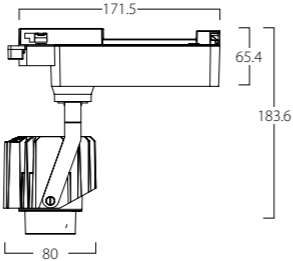

UNIT: mm

TECHNICAL DETAILS

<b>Material</b> aluminium	<b>Electrical connection</b> on/off	<b>Reflector color</b> <div><div>Sandy whiteSandy black</div></div>
<b>Optical system</b> opal diffusor	<b>Control</b> -	
<b>Light source</b> LED COB		
<b>Light distributions</b> <div></div>		<b>Accessories</b> <div><div>Honeycomb grid</div></div>

INFORMATION

XLE10060CL



Power	Light Source	Beam angle	CCT	CRI	Flux	Power supply
9W	LED SMD	10°	2700K	90+	360lm	10.5-12V650mA
9W	LED COB	15°	3000K	97+	540lm	33-38V200mA
12W	LED COB	24°	3500K	97+	720lm	33-38V300mA
		36°	4000K			
		50°				

XLE11080CL




Power	Light Source	Beam angle	CCT	CRI	Flux	Power supply
12W	LED COB	10°	2700K	97+	600lm	33-38V300mA
15W	LED COB	15°	3000K	97+	540lm	33-38V350mA
20W	LED COB	24°	3500K	97+	720lm	33-38V500mA
		36°	4000K			
		50°				



**REFLECTION** Surface Mounted Spotlight



The classic geometric modeling is simple and versatile. The aluminum lamp body can effectively speed up heat dissipation and ensure the normal use of lamps. High quality aluminum mirrors provide narrow, medium and flood angles; The series of products can be matched with cellular network and various light effect glasses, so the efficient anti glare effect is more soft and comfortable. It is suitable for home and villa decoration style without main lights.



Honeycomb grid



Striped glass



Diffused glass



Clear glass




REFLECTION




XME08074L N

Fixed surface-mounted




XME09074L N

Fixed surface-mounted



XME10100L N

Adjustable surface-mounted

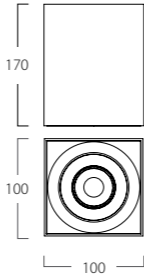

UNIT: mm

INFORMATION

XME08074L




Power	Light Source	Beam angle	CCT	CRI	Flux	Power supply	Color
9W	LED SMD	10°	2700K	90+	360lm	10.5-12V 650mA	Matte white
9W	LED COB	15°	3000K	97+	540lm	33-38V 200mA	Matte black
12W	LED COB	24°	3500K	97+	720lm	33-38V 300mA	Sand gold
		36°	4000K				
		50°					

XME09074L



Power	Light Source	Beam angle	CCT	CRI	Flux	Input voltage	Color
7W	LED DOB	36°	2700K	90+	630lm	220V/50-60Hz	Matte white
9W	LED DOB	50°	3000K	90+	810lm	220V/50-60Hz	Matte black
			3500K				Sand gold
			4000K				

XME10100L



Power	Light Source	Beam angle	CCT	CRI	Flux	Power supply	Color
12W	LED COB	10°	2700K	97+	600lm	33-38V 300mA	Matte white
15W	LED COB	15°	3000K	97+	825lm	33-38V 350mA	Matte black
20W	LED COB	24°	3500K	97+	1100lm	33-38V 500mA	Sand gold
		36°	4000K				
		50°					

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffuser

Control

-

Light source

LED COB / DOB

Light distributions



Reflector color




Optional



# WISDOM


As a concise,visually striking lighting fixture,the light source has deep anti-glare, precise light control, and can present perfect lighting

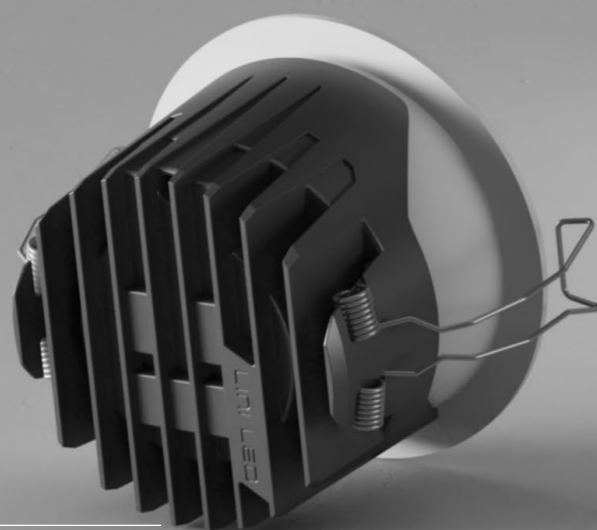


7~40W

15°/24°/36° /70°


Φ75~150mm

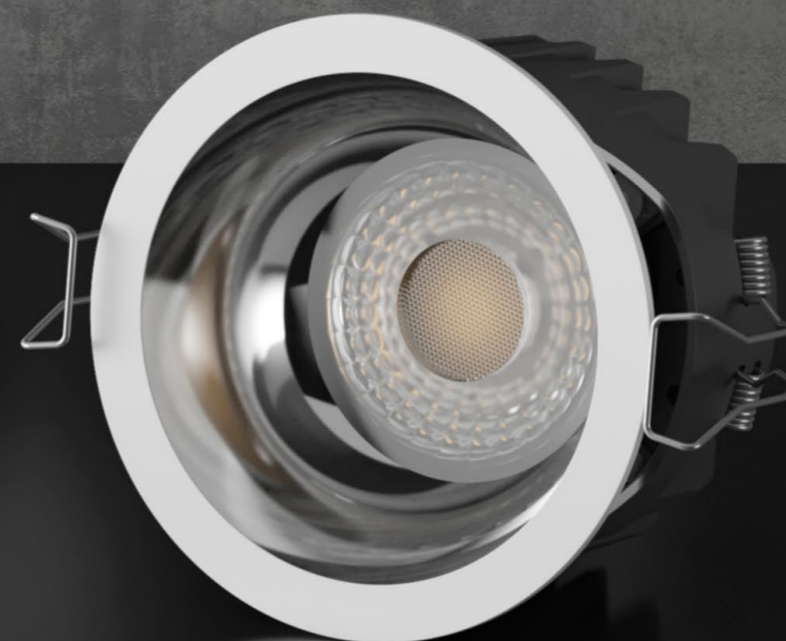

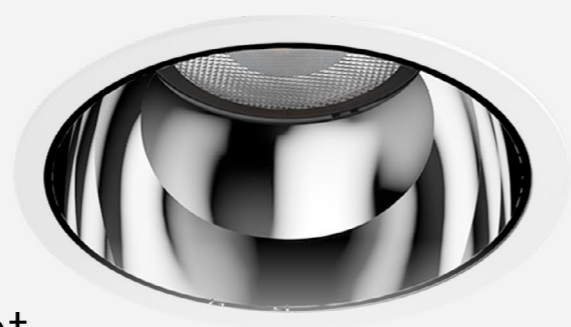

## WISDOM IP65 Downlight

**SIZE**  $\Phi 75/\Phi 95/\Phi 125/\Phi 150\text{mm}$

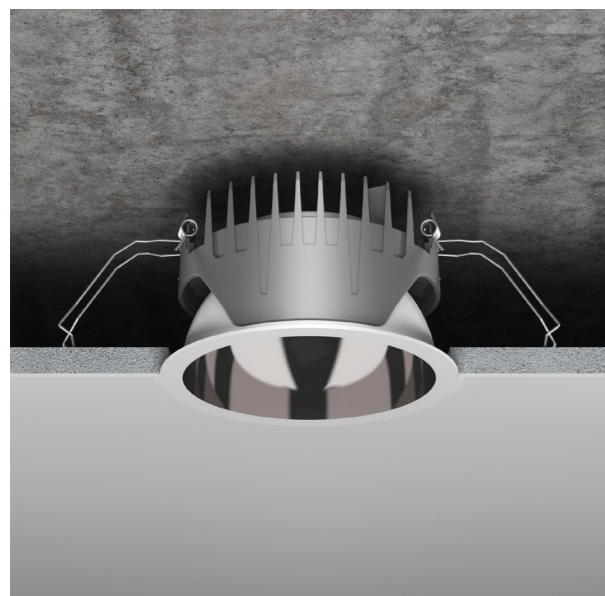


The ultra-thin lamp body is suitable for various ceiling heights.


Lens and diffuser versions offer optimal reflection control and UGR.  $\text{UGR} \leq 19$  ensures a comfortable lighting environment.

Customizable honeycomb grids and interchangeable accessories allow adjustment of individual light characteristics for higher professional lighting performance.


The reflector is available in two color options: bright silver / black nickel.




Diffuser panel version




Lens version



Honeycomb grid version




Basic version floodlight 70°

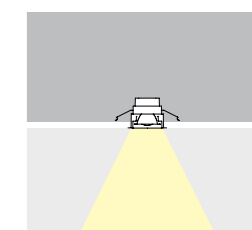


Extended version beam angles:  
15° / 24° / 36°




XAE85075F  
IP65\*




XAE86095F  
IP65\*



XAE87125F  
IP65\*



XAE88150F  
IP65\*



UNIT: mm

TECHNICAL DETAILS

Material  
aluminium

Optical system  
opal diffuser

Light source  
LED COB

Light distributions



Electrical connection  
on/off

Control  
Triac dimming / 1-10V dimming / DALI dimming /  
70° beam angle with dimming and color tuning

\*Matters needing attention

- 1. The standard product is rated IP65, while the driver is rated IP20.
- 2. The entire luminaire (including the driver) can be customized to IP65.

Type of installation



透镜款



扩散板款

Reflector color



Optional



INFORMATION

XAE85075F Lens version / Diffuser panel version



Power	Light Source	Beam angle	CCT	Flux	CRI	Power supply	Optiona
9W	LED COB	15°	3000K	760lm	95+	36V,200mA	Honeycomb grid
		24°	3500K				*
		36°	4000K				
		70°	6000K				
			2700K-6000K*				

XAE86095F 透镜款 / 扩散板款



Power	Light Source	Beam angle	CCT	Flux	CRI	Power supply	Optiona
15W	LED COB	15°	3000K	1250lm	95+	36V,350mA	Honeycomb grid
		24°	3500K				*
		36°	4000K				
		70°	6000K				
			2700K-6000K*				

XAE87125F 透镜款 / 扩散板款



Power	Light Source	Beam angle	CCT	Flux	CRI	Power supply	Optiona
24W	LED COB	15°	3000K	2000lm	95+	36V,550mA	Honeycomb grid
		24°	3500K				*
		36°	4000K				
		70°	6000K				
			2700K-6000K*				

XAE88150F 透镜款 / 扩散板款



Power	Light Source	Beam angle	CCT	Flux	CRI	Power supply	Optiona
35W	LED COB	15°	3000K	2950lm	95+	36V,850mA	Honeycomb grid
		24°	3500K				*
		36°	4000K				
		70°	6000K				
			2700K-6000K*				



## YOUNG IP65 downlight



### IP65


Use of die-cast aluminum lamp combined with silicone sealing structure to prevent water infiltration in the lamp, up to IP65 protection level, lamps are widely used in wet environments, such as the underground garage, bathroom, balcony, or any humidity environment.




Cutout:  $\Phi 75$  /  $\Phi 105$  /  $\Phi 125$  /  $\Phi 160$

#### ULTRA-WIDE LIGHT

A large area of luminous surface brings a broad and uniform lighting effect, to ensure greater luminous Angle and luminous uniformity. The light is bright and soft, the brightness is even and excessive, and the visual effect is comfortable and natural. Applicable to fitness clubs, indoor swimming pools, office, home, shops and other public areas.

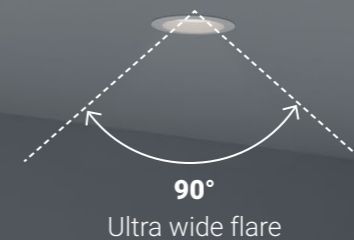

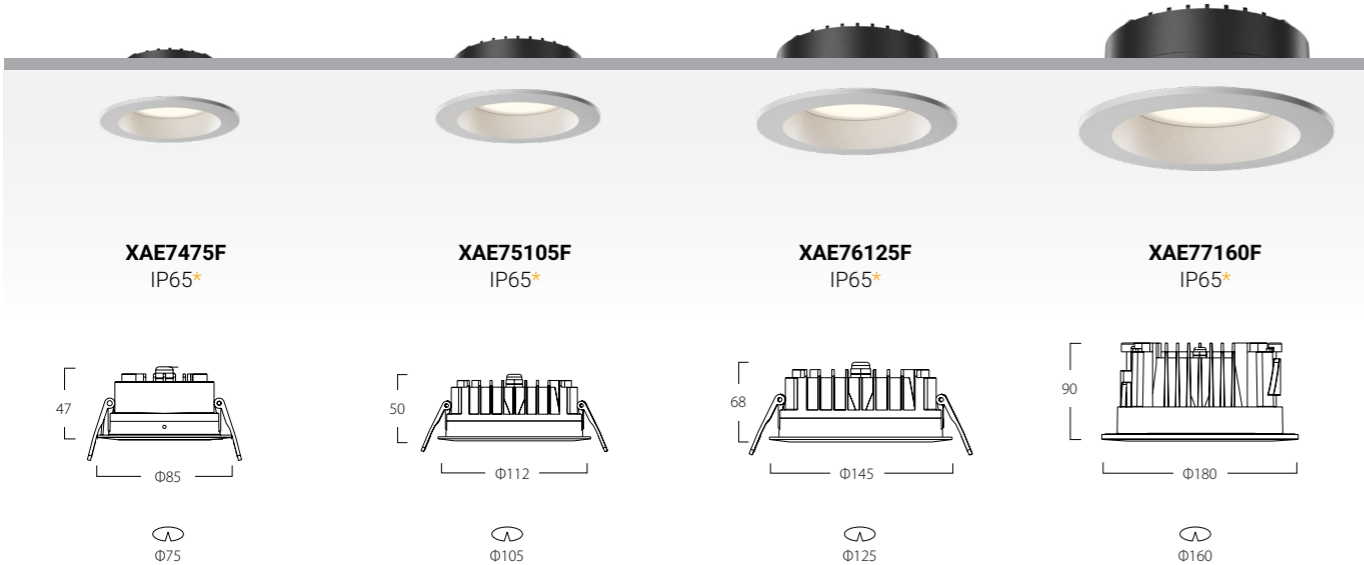

UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Optical system

opal diffusor

Light source

LED SMD

Light distributions



Electrical connection

on/off

Control

Triac dimming / 1-10V dimming / DALI dimming / Wired and wireless dimming and color tuning

\*Matters needing attention

1. The standard product is rated IP65, while the driver is rated IP20.
2. The entire luminaire (including the driver) can be customized to IP65.

color



白色

INFORMATION

XAE7475F IP65



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
9W	LED SMD	90°	2700K	560lm	90+	Recessed	36V,200mA
			3000K				
			3500K				
			4000K				

XAE75105F IP65



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
15W	LED SMD	90°	2700K	950lm	90+	Recessed	36V,350mA
			3000K				
			3500K				
			4000K				

XAE76125F IP65



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
24W	LED SMD	90°	2700K	1665lm	90+	Recessed	36V,550mA
			3000K				
			3500K				
			4000K				

XAE77160F IP65



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
35W	LED SMD	90°	2700K	2275lm	90+	Recessed	36V,850mA
			3000K				
			3500K				
			4000K				



# BIG DIPPER

Modular Grille Light

From the germ of the mind to the fingertips  
From a line in the paper on the caper to blossom  
Turn a one into a ten, stretch out an infinite number of  
possibilities The infinite possibilities of creating light

# BIG DIPPER

BIG DIPPER series has excellent miniaturized linear design of lamps, so that lighting is properly integrated into the modern decorative design style, to provide users with a variety of functional choices, narrow edge, endless, adjustable Angle, stretching, ceiling, etc., suitable for different lighting places.

2~20W

15°/24°/36°




## FAMILY DESIGN

The Big Dipper series of mini grid shocking appearance of point-line grid design,rich style,mini ultra samll size,have been loaded for the final lighting experience is ready





### Breakthrough lens optical design

Breakthrough lens optical design of a black hole, so that the light reflectors light intersection, define how the light again, don't let the light refraction on the reflectors, matching reflectors of nano-spray technology, black-light technology upgrades!

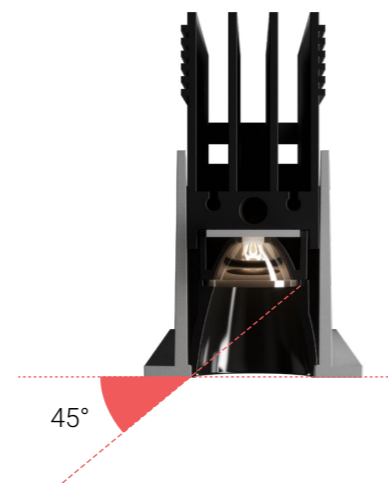

**MASTERWORK  
DESIGN**

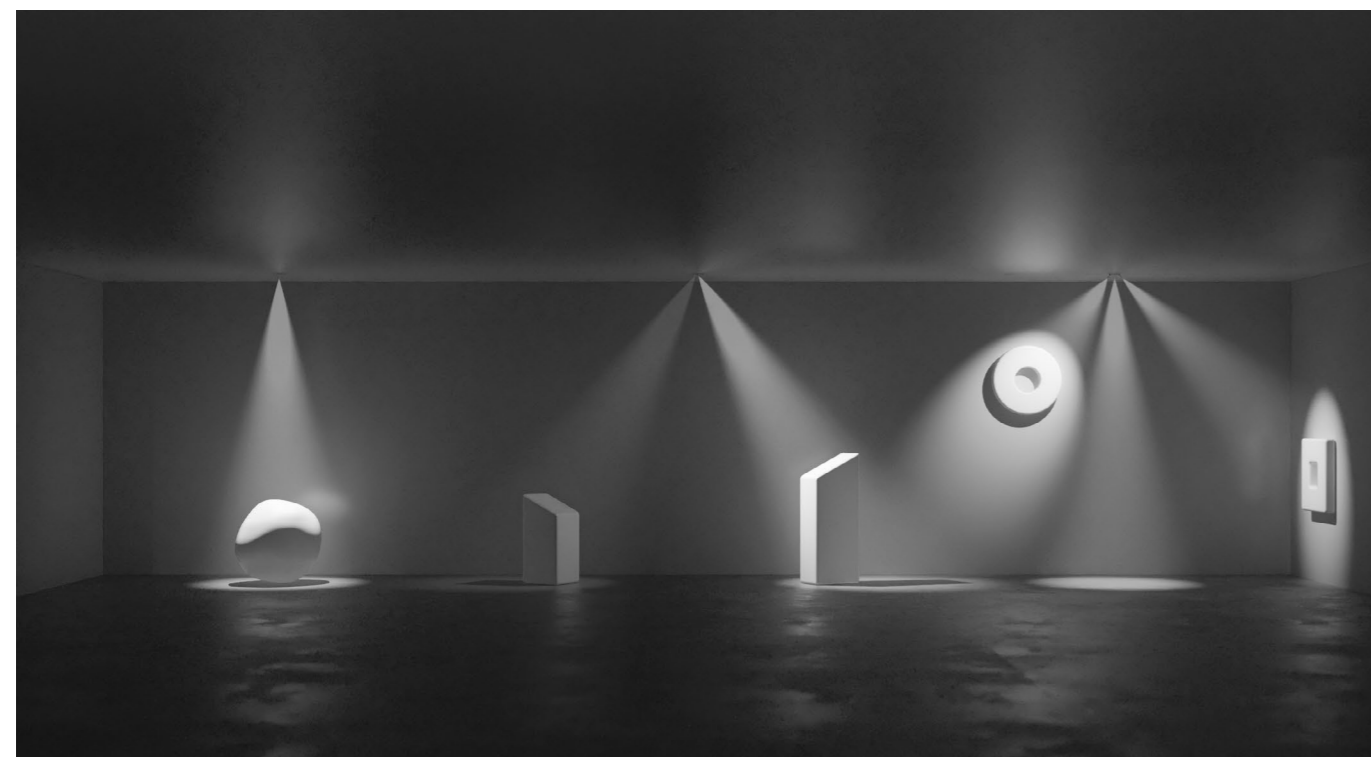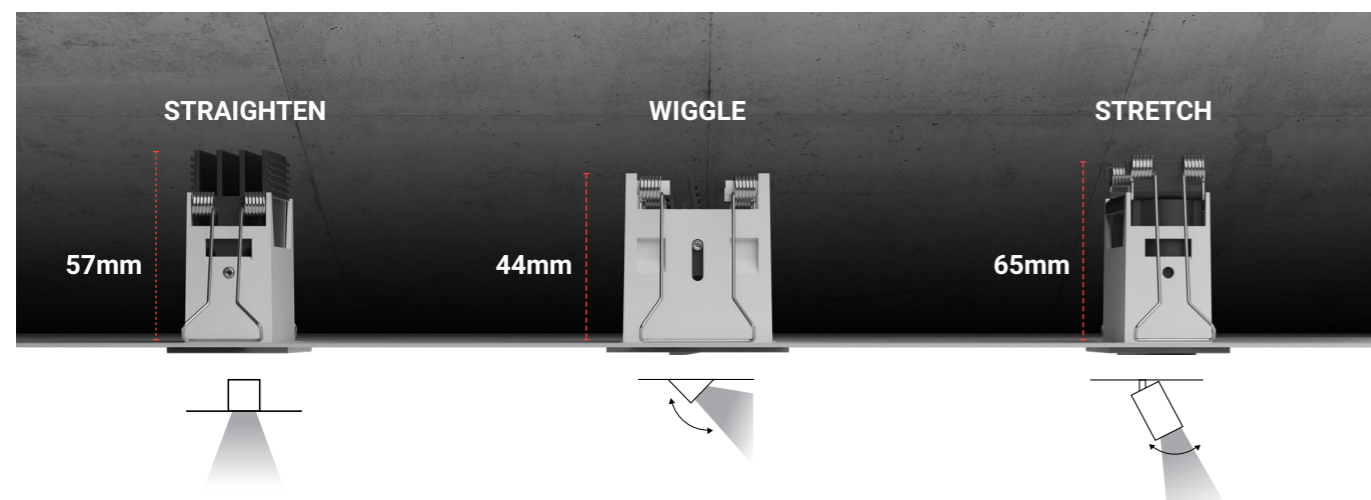

And traditional tube lighting contrast, a high proportion of the Big Dipper has excellent, can adapt to meet a variety of junior high places, card spring structure of the long arm of force, from 1mm sheet metal, multi layer gypsum board to 25mm thick, is easy to control, and ensures easy installation and removal.

Selected for the user to provide a wide range of features: flood, washing walls, directional lights, adjustable corner, stretch, can be freely combined, the application of different places lighting solutions.




BIG DIPPER




XFE0101FS 


Fixed / Narrow Frame



XFE0103FS 


Fixed / Narrow Frame

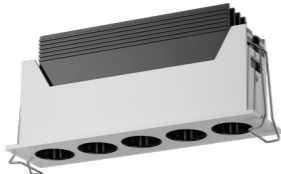

XFE0105FS 

Fixed / Narrow Frame



XFE0110FS 


Fixed / Narrow Frame



34x34




25x25



34x81




73x25



34x127



119x25



34x242



234x25

UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffuser

Control

Triac Dimming/ 1-10V  
Dimming

Light source

LED COB

Color ☐ Matte White

Light distributions



Type of installation



Trim

INFORMATION

XFE0101FS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
1x2W	15°	2700K	100lm	95+	25x25mm	3V, 500mA
	24°	3000K				
	36°	3500K				
		4000K				

XFE0103FS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
3x2W	15°	2700K	300lm	95+	73x25mm	9V, 500mA
	24°	3000K				
	36°	3500K				
		4000K				

XFE0105FS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
5x2W	15°	2700K	500lm	95+	119x25mm	15V, 600mA
	24°	3000K				
	36°	3500K				
		4000K				

XFE0110FS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
10x2W	15°	2700K	1000lm	95+	242x25mm	30V, 600mA
	24°	3000K				
	36°	3500K				
		4000K				

IP20




BIG DIPPER




XFE0101FST N

Fixed / Borderless




XFE0103FST N

Fixed / Borderless




XFE0105FST N

Fixed / Borderless



XFE0110FST N

Fixed / Borderless



UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffusor

Control

Triac Dimming / 1-10V Dimming /DALI  
Dimming

Light source

LED COB

Color ☐ Matte White

Light distributions



Type of installation



Trimless

INFORMATION

XFE0101FST 

Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
1×2W	15°	2700K	100lm	95+	40×40mm	3V, 500mA
	24°	3000K				
	36°	3500K				
		4000K				

XFE0103FST 

Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
3×2W	15°	2700K	300lm	95+	86×40mm	9V, 500mA
	24°	3000K				
	36°	3500K				
		4000K				

XFE0105FST 

Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
5×2W	15°	2700K	500lm	95+	132×40mm	15V, 600mA
	24°	3000K				
	36°	3500K				
		4000K				

XFE0110FST 

Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
10×2W	15°	2700K	1000lm	95+	247×40mm	30V, 600mA
	24°	3000K				
	36°	3500K				
		4000K				

IP20




BIG DIPPER




XFE0103AS N

Adjustable / Narrow Frame




XFE0105AS N

Adjustable / Narrow Frame



XFE0110AS N


Adjustable / Narrow Frame

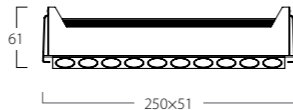

UNIT: mm


INFORMATION

XFE0103AS




Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
3x2W	15°	2700K	300lm	95+	94x57mm	9V, 500mA
	24°	3000K				9V, 500mA
	36°	3500K				9V, 500mA
		4000K				9V, 500mA
		2700K-6000K*				18V,300mA*

XFE0105AS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
5x2W	15°	2700K	500lm	95+	140x57mm	15V, 600mA
	24°	3000K				15V, 600mA
	36°	3500K				15V, 600mA
		4000K				15V, 600mA
		2700K-6000K*				30V,300mA*

XFE0110AS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
10*2W	15°	2700K	1000lm	95+	255x57mm	30V, 600mA
	24°	3000K				30V, 600mA
	36°	3500K				30V, 600mA
		4000K				30V, 600mA
		2700K-6000K*				30V,600mA*

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffuser

Control


Triac Dimming / 1-10V Dimming / DALI Dimming / 36° Dimming and Color Tuning

Light source

LED COB

Color ☐ Matte White

Light distributions




Type of installation



Trim




BIG DIPPER

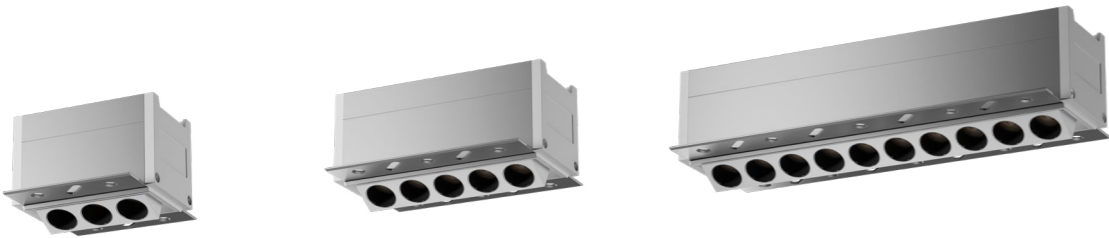

XFE0103AST


Adjustable / Borderless



94x57

XFE0105AST


Adjustable / Borderless



140x57

XFE0110AST

Adjustable / Borderless

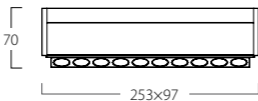


255x57

UNIT: mm


INFORMATION

XFE0103AST




Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
3x2W	15°	2700K	300lm	95+	82x44mm	9V, 500mA
	24°	3000K				9V, 500mA
	36°	3500K				9V, 500mA
		4000K				9V, 500mA
		2700K-6000K*				18V,300mA*

XFE0105AST



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
5x2W	15°	2700K	500lm	95+	128x44mm	15V, 600mA
	24°	3000K				15V, 600mA
	36°	3500K				15V, 600mA
		4000K				15V, 600mA
		2700K-6000K*				30V,300mA*

XFE0110AST



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
10x2W	15°	2700K	1000lm	95+	243x44mm	30V, 600mA
	24°	3000K				30V, 600mA
	36°	3500K				30V, 600mA
		4000K				30V, 600mA
		2700K-6000K*				30V,600mA*

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffuser

Control


Triac Dimming / 1-10V Dimming / DALI Dimming /  
36° Dimming and Color Tuning

Light source

LED COB

Color Matte White

Light distributions




Type of installation




BIG DIPPER







XFE0201AS   
Adjustable / Narrow Frame



XFE0203AS   
Adjustable / Narrow Frame




XFE0205AS   
Adjustable / Narrow Frame



UNIT: mm

INFORMATION

XFE0201AS




Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
1×2W	15°	2700K	100lm	95+	25×25mm	3V, 500mA
	24°	3000K				
	36°	3500K				
		4000K				

XFE0203AS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
3×2W	15°	2700K	300lm	95+	73×25mm	9V, 600mA
	24°	3000K				
	36°	3500K				
		4000K				

XFE0205AS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
5×2W	15°	2700K	500lm	95+	119×25mm	15V, 600mA
	24°	3000K				
	36°	3500K				
		4000K				

TECHNICAL DETAILS

**Material**  
aluminium

**Optical system**  
opal diffuser

**Light source**  
LED COB

**Light distributions**

**Electrical connection** on/off


**Control**  
Triac Dimming / 1-10V Dimming

**Color** ☐ Matte White


**Type of installation**  
  
Trim




## BIG DIPPE Surface mounted Spotlight

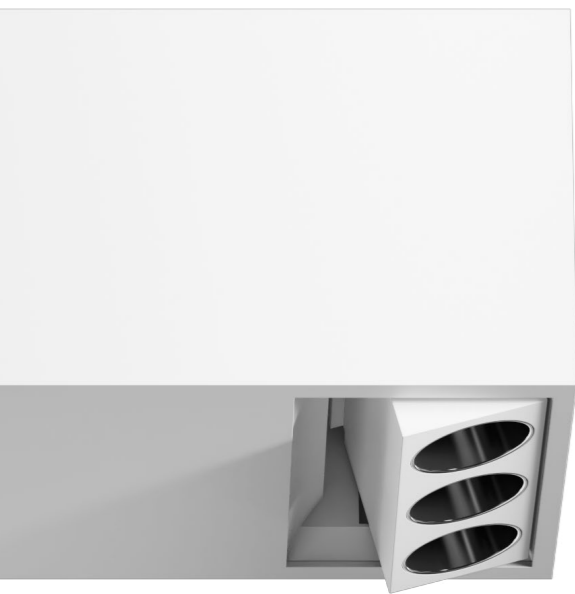


The unique surface mounted product structure can adjust the lighting angle by  $\pm 15^\circ$ , More flexible application, suitable for popular loft industrial style decoration style.

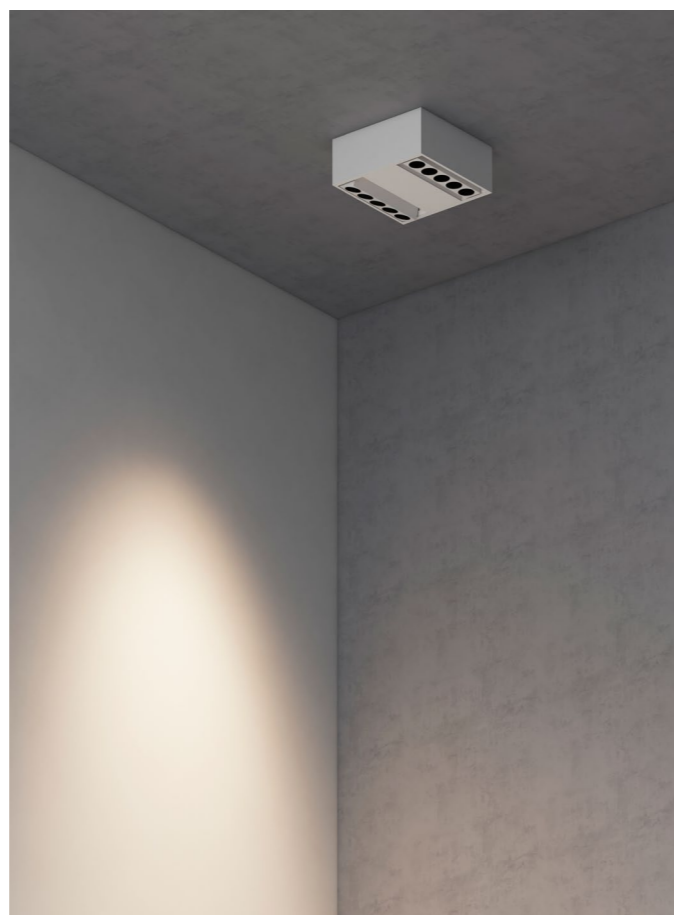


BIG DIPPER

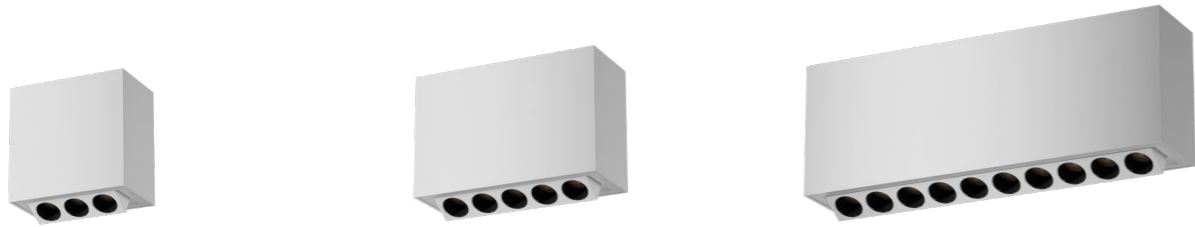


XXE0703AS  
Adjustable / Surface Mounted





XXE0705AS  
Adjustable / Surface Mounted





XXE0710AS  
Adjustable / Surface Mounted



XXE0723AS N  
Adjustable / Surface Mounted



XXE0725AS N  
Adjustable / Surface Mounted



UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Optical system

opal diffusor

Light source

LED COB


Electrical connection on/off

Control

Triac Dimming / 1-10V Dimming

Color ☐ Matte White

Light distributions



INFORMATION

XXE0703AS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
3×2W	15°	2700K	300lm	95+	明装	9V, 500mA
	24°	3000K				
	36°	3500K				
		4000K				

XXE0705AS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
5×2W	15°	2700K	500lm	95+	明装	15V, 500mA
	24°	3000K				
	36°	3500K				
		4000K				

XXE0710AS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
10×2W	15°	2700K	1000lm	95+	明装	30V, 600mA
	24°	3000K				
	36°	3500K				
		4000K				

XXE0723AS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
6×2W	15°	2700K	600lm	95+	明装	18V,600mA
	24°	3000K				
	36°	3500K				
		4000K				

XXE0725AS



Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
10×2W	15°	2700K	1000lm	95+	明装	30V, 600mA
	24°	3000K				
	36°	3500K				
		4000K				




**BIG DIPPE** Spotlight



Four hole fixed concentrated light, deep anti glare light, soft and comfortable, high brightness. It has hoisting, surface installation and embedded installation methods, which are suitable for various decoration styles.




BIG DIPPER




XFE0104FS

Non-adjustable / Recessed

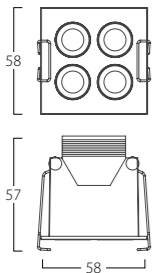


XME07060L

Fixed / Surface Mounted

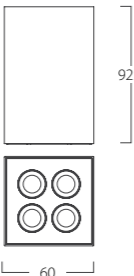

XDE07060L

吊装

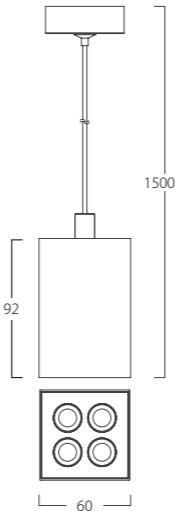

UNIT: mm

INFORMATION

XFE0104FS

Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
4x2W	15°	2700K	400lm	95+	嵌装	12V, 550mA
	24°	3000K				12V, 550mA
	36°	3500K				12V, 550mA
		4000K				12V, 550mA
		2700K-6000K				24V, 300mA

XME07060L

Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
4x2W	15°	2700K	400lm	95+	明装	12V, 550mA
	24°	3000K				
	36°	3500K				
		4000K				

XDE07060L

Power	Beam angle	CCT	Flux	CRI	Cut-out	Power supply
4x2W	15°	2700K	400lm	95+	吊装	12V, 550mA
	24°	3000K				
	36°	3500K				
		4000K				

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffuser

Control

-

Light source

LED COB

Color



Matte White

Light distributions





The minimalist shape and comfortable anti glare optical structure create a natural and pleasant light environment for you.
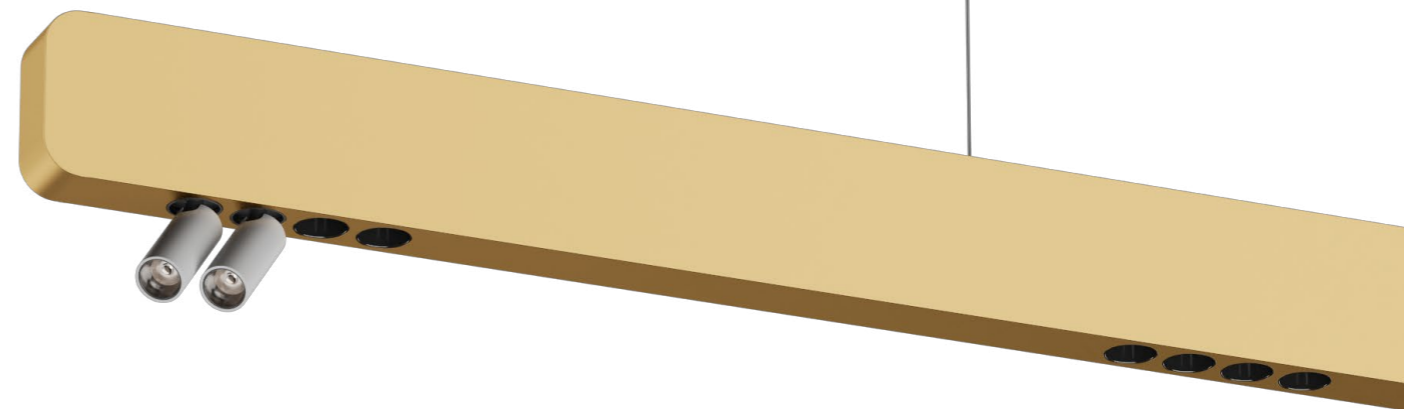
## CUSTOMIZATION DESIGN

Fixed / Adjustable  
Different modules can be customized according to customer needs.



Gold




White




Black

# BIG DIPPER

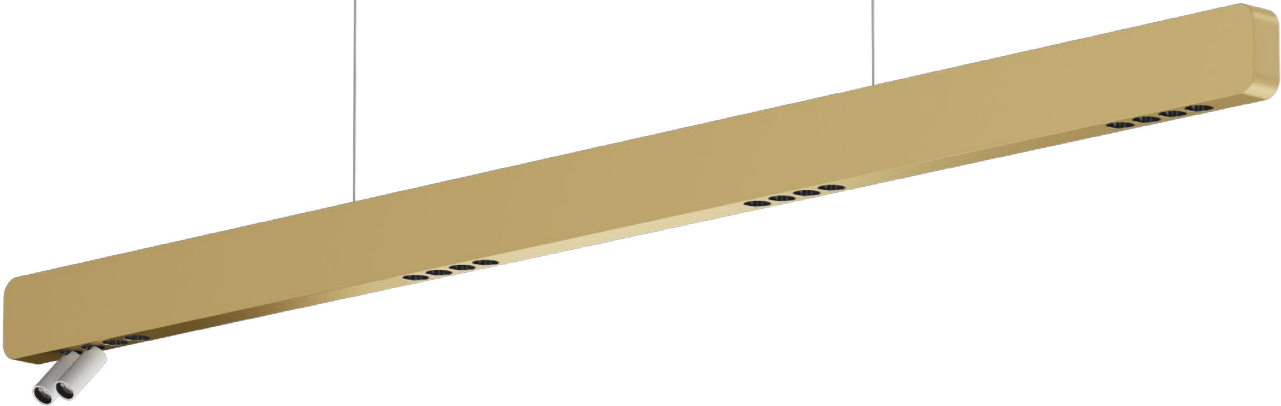


XDE07120L 吊线

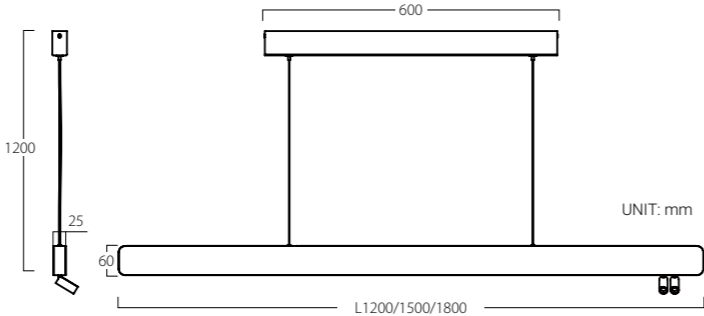

## TECHNICAL DETAILS

<b>Material</b> aluminium	<b>Electrical connection</b> on/off
<b>Optical system</b> opal diffuser	<b>Control</b> Triac Dimming / 1-10V Dimming / Hand Wave Sensor Dimming
<b>Light source</b> LED COB	<b>Color</b> <span>○</span> <span>●</span> <span>●</span>
<b>Light distributions</b>	



## INFORMATION

XDE07120L

Power	Beam angle	CCT	Flux	CRI	Size	Power supply
40W	24°	3000K	2000 lm	95+	1200×25×60mm	12V, 3.2A



XDE07150L

Power	Beam angle	CCT	Flux	CRI	Size	Power supply
40W	24°	3000K	2000 lm	95+	1500×25×60mm	12V, 3.2A



XDE07180L

Power	Beam angle	CCT	Flux	CRI	Size	Power supply
40W	24°	3000K	2000 lm	95+	1800×25×60mm	12V, 3.2A



# SMALL 2.0

The new and upgraded Smart 2.0 series is aimed at optical technology upgrade, the appearance of the work requirements are more exquisite, the pursuit of details is more perfect, to ensure that users enjoy a more comfortable light environment.



2W / 3W / 5W / 7W

15°/24°/36°

Φ18~60mm

# SMALL 2.0-Mini



## Mini Size

The Small 2.0 series introduces two new ultra-mini spotlights with an overall height of just 54mm—compact and lightweight. Built-in high-quality COB LED chips and crafted from premium die-cast aluminum in a one-piece design, they are ideal for modular lighting, display cabinet lighting, and more. Small size, big impact.



## Finishes / Finiture

- White + Black
- Black
- Chrome

Smart 2.0 series adds two new ultra mini small shoot light, overall height is only 5.4cm compact and light. Built-in high quality COB light source chip, made of high quality die-cast aluminum integrated molding, can be used for combined lighting, display cabinet lighting, small size big effect.


Φ18  
CUTOUT



Φ25  
CUTOUT



SMALL

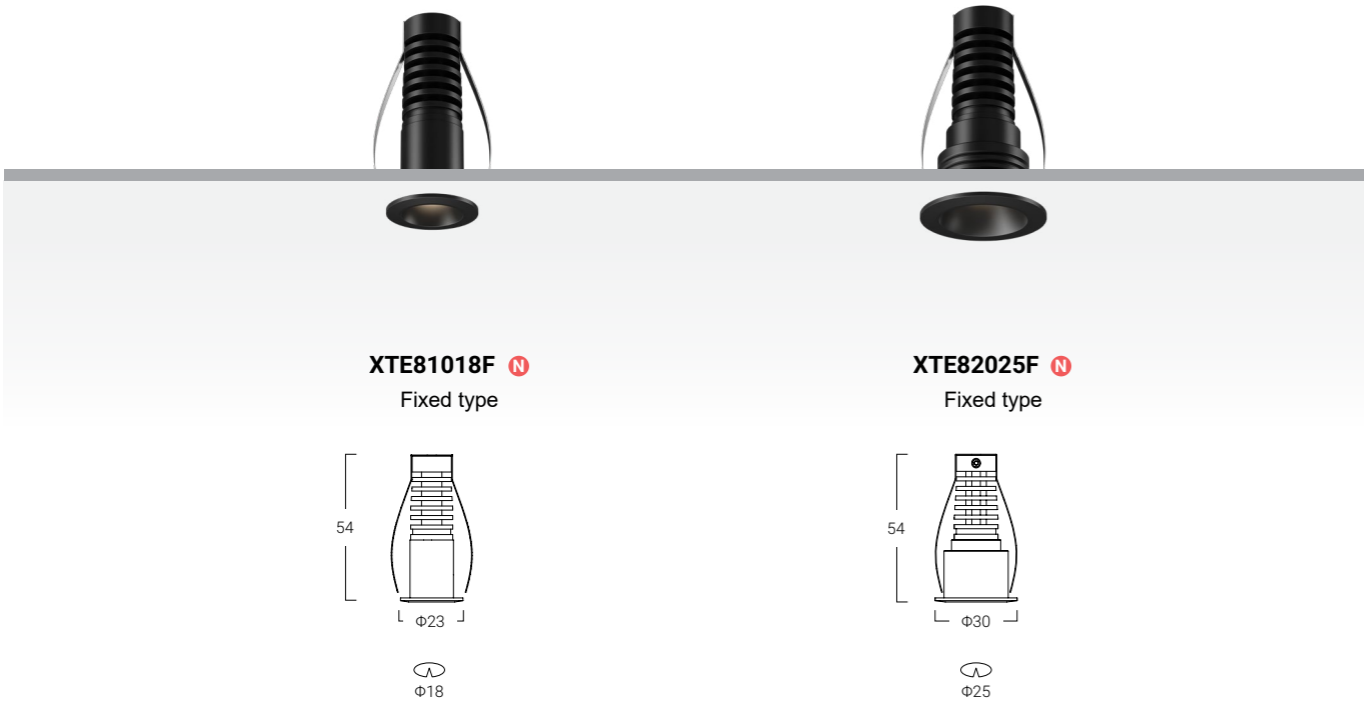

INFORMATION

XTE81018F ●●●●

Power	Light Source	Beam angle	CCT	Flux	CRI	Cutout	Power supply
2W	LED SMD	15°	2700K	100lm	95+	Φ18	3V,500mA
		24°	3000K				
		36°	3500K				
			4000K				

XTE82025F ●●

Power	Light Source	Beam angle	CCT	Flux	CRI	Cutout	Power supply
2W	LED SMD	15°	2700K	100lm	95+	Φ25	3V,500mA
		24°	3000K				
		36°	3500K				
			4000K				

UNIT: mm

TECHNICAL DETAILS

**Material**  
aluminium

**Optical system**  
opal diffusor

**Light source**  
LED SMD

**Light distributions**

**Electrical connection**  
on/off

**Control**  
-

**Color**  
●●●●

**Color**



# SMALL 2.0



## Multiple color options

SMALL 2.0 Mini spotlight series provides a large number of color choices, combined with the deep anti glare lamp body structure to effectively reduce the generation of glare. The miniature lamp body can be used for key lighting or combined lighting, providing unlimited creation for the lighting environment.






Small space lighting

Mini lamp body shape, with built-in convex lens for highly focusing, 3 ° extremely narrow light speed angle, small spot and high brightness is suitable for small space display lighting, creating a starry lighting atmosphere.




XTE7750F N ●

Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
5W	LED SMD	3°	2700K	50lm	95+	嵌入式	3V,1.25A
			3000K				
			3500K				
			4000K				




SMALL

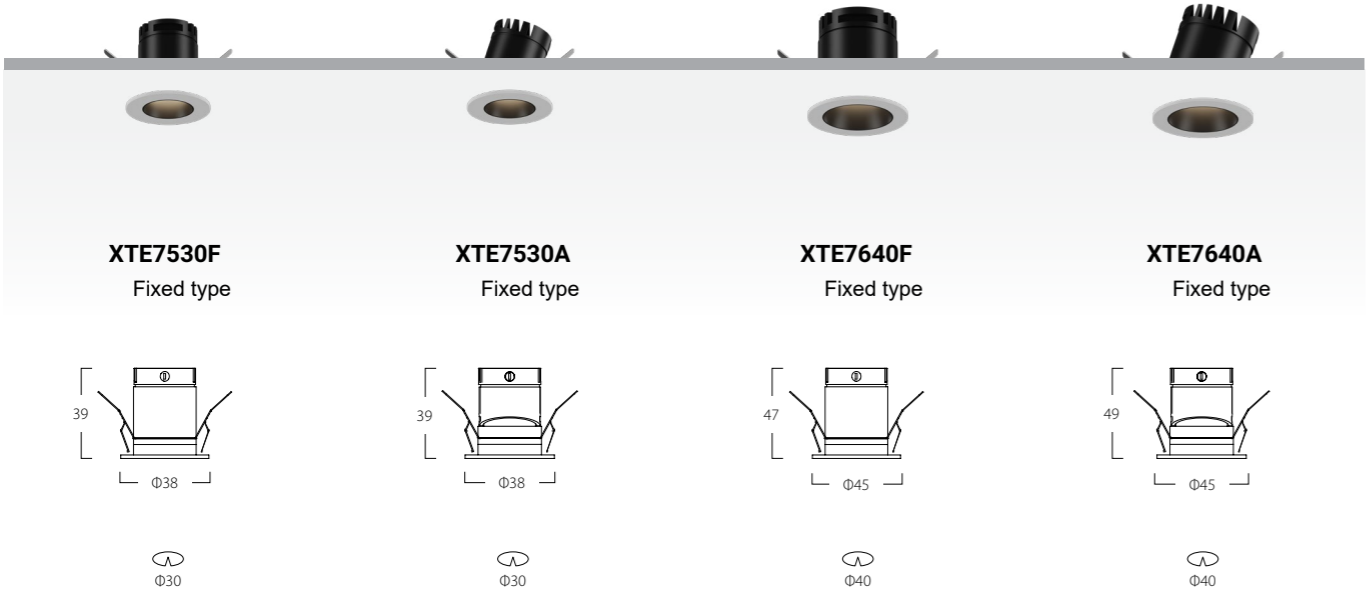

UNIT: mm

TECHNICAL DETAILS

<b>Material</b> aluminium	<b>Electrical connection</b> on/off
<b>Optical system</b> opal diffusor	<b>Control</b> Triac dimming / 1-10V
<b>Light source</b> LED SMD	dimming
<b>Light distributions</b>	

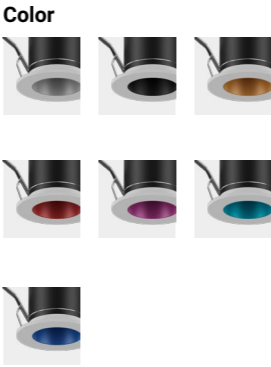

INFORMATION

<b>XTE7530F</b>								
<b>Power</b>	<b>Light Source</b>	<b>Beam angle</b>	<b>CCT</b>	<b>Flux</b>	<b>CRI</b>	<b>Installation</b>	<b>Power supply</b>	
2W	LED SMD	15°	2700K	50lm	95+	Recessed	3V,500mA	
		24°	3000K					
		36°	3500K					
			4000K					


<b>XTE7530A</b>								
<b>Power</b>	<b>Light Source</b>	<b>Beam angle</b>	<b>CCT</b>	<b>Flux</b>	<b>CRI</b>	<b>Installation</b>	<b>Power supply</b>	
2W	LED SMD	15°	2700K	50lm	95+	Recessed	3V,500mA	
		24°	3000K					
		36°	3500K					
			4000K					

<b>XTE7640F</b>								
<b>Power</b>	<b>Light Source</b>	<b>Beam angle</b>	<b>CCT</b>	<b>Flux</b>	<b>CRI</b>	<b>Installation</b>	<b>Power supply</b>	
3W	LED SMD	15°	2700K	100lm	95+	Recessed	3V,700mA	
		24°	3000K					
		36°	3500K					
			4000K					

<b>XTE7640A</b>								
<b>Power</b>	<b>Light Source</b>	<b>Beam angle</b>	<b>CCT</b>	<b>Flux</b>	<b>CRI</b>	<b>Installation</b>	<b>Power supply</b>	
3W	LED SMD	15°	2700K	100lm	95+	Recessed	3V,700mA	
		24°	3000K					
		36°	3500K					
			4000K					



SMALL

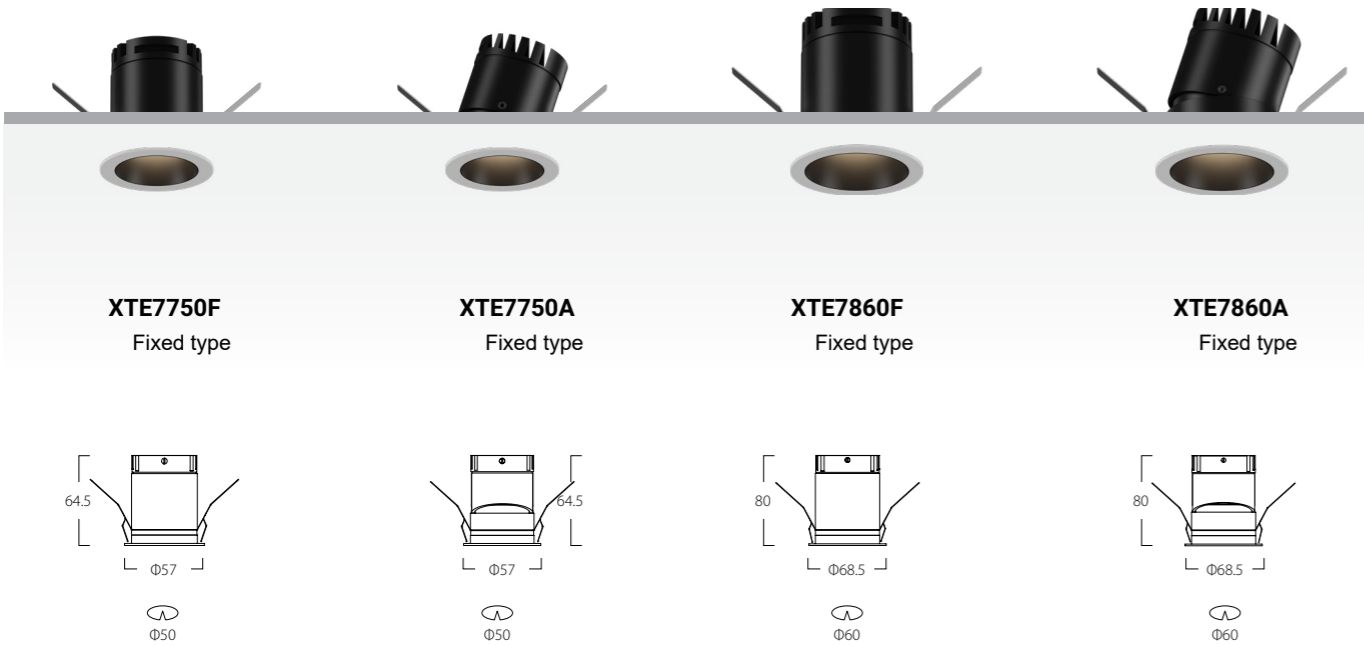

UNIT: mm

TECHNICAL DETAILS

<b>Material</b> aluminium	<b>Electrical connection</b> on/off	<b>Color</b> 
<b>Optical system</b> opal diffusor	<b>Control</b> Triac dimming / 1-10V dimming / DALI dimming / Wired and wireless dimming and color tuning	<b>Optional</b> 
<b>Light source</b> LED COB		蜂窝网
<b>Light distributions</b> 		

INFORMATION

XTE7750F ●

Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
5W	LED COB	15°	2700K	250lm	95+	Recessed type	36V,120mA
		24°	3000K				
		36°	3500K				
			4000K				

XTE7750A ●

Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
5W	LED COB	15°	2700K	250lm	95+	Recessed type	36V,120mA
		24°	3000K				
		36°	3500K				
			4000K				

XTE7860F ●

Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
7W	LED COB	15°	2700K	350lm	95+	Recessed type	36V,150mA
		24°	3000K				
		36°	3500K				
			4000K				

XTE7860A ●

Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
7W	LED COB	15°	2700K	350lm	95+	Recessed type	36V,150mA
		24°	3000K				
		36°	3500K				
			4000K				



# SHADOW


In a perfect combination of Aesthetics and performance, excellent combination of sophisticated design of vertical stripes of TIR optical design of the new visual experience. Phantom series provides rail-mounted, ceiling, embedded, Plumb different type of installation.





SHADOW Track light

15°/24°/36° accurate beam Angle, with different effects of light spots. Zoom type is optional, and the stretch zoom can be switched between 15° and 36°.

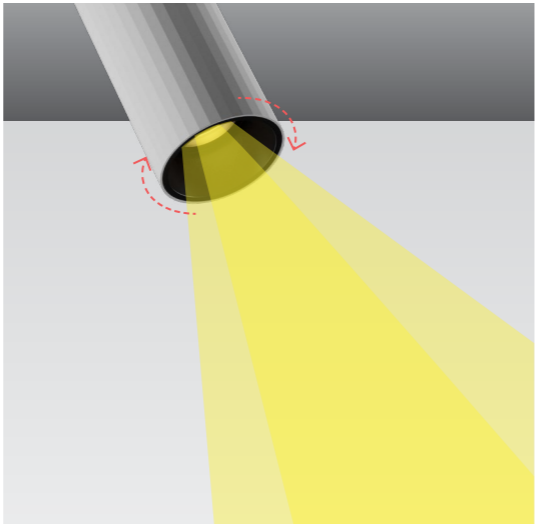


SHADOW Ceiling Surface



Flexible adjustable structure, 90° vertical adjustment, 355° horizontal rotation meet all kinds of lighting needs.

**SHADOW** stretchable type spotlight

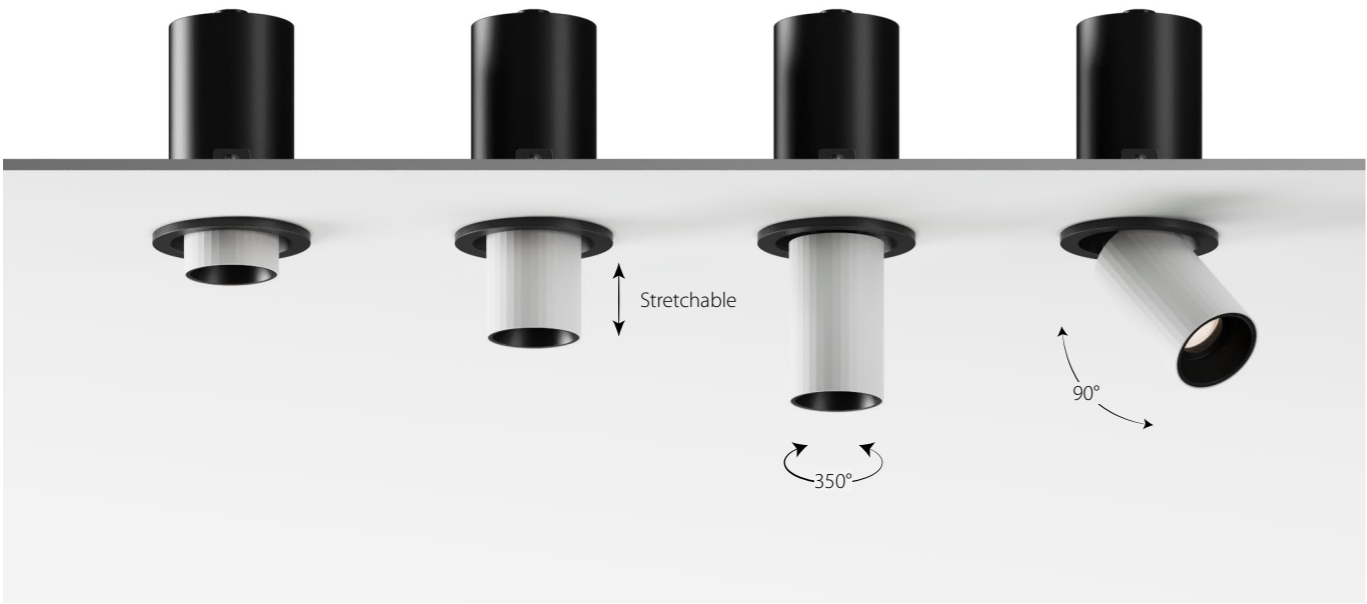

Design of drawing control, are free to adjust the height of tension and adjust the exposure direction 0-360° degrees horizontal adjusatment, 0-90° degrees vertically adjustable, mix of various angles no corners or focus enables limitless exposure.




**SHADOW** pandent

The lamps are painted in white, gold and black. The special design of vertical texture is suitable for all kinds of decorative styles and is perfectly integrated with the architectural space.




SHADOW

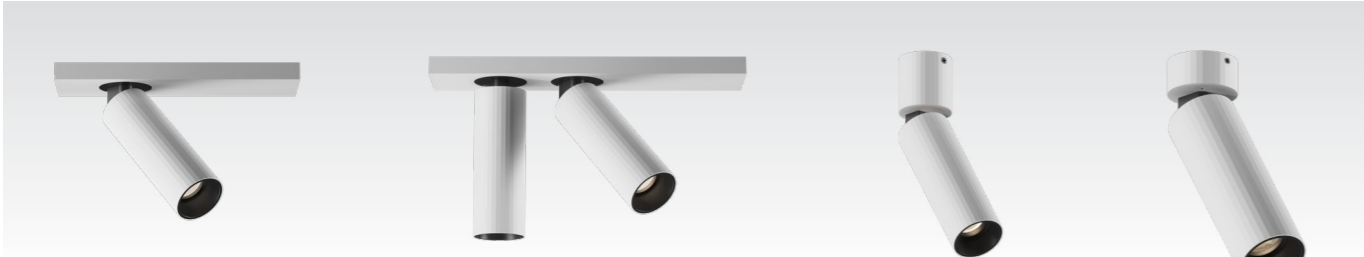


XXE0407A

Adjustable type




XXE0514A

Adjustable type

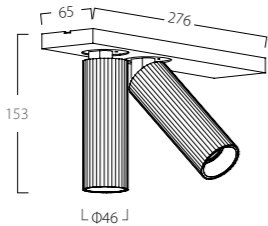

XXE0603A

Adjustable type



XXE0607A

Adjustable type



UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffusor

Control

-


Light source

LED COB

Light distributions



Color



INFORMATION

XXE0407A



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
1×10W	LED COB	15°	2700K	700lm	90+	Ceiling-mounted	33-38V,250mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					

XXE0514A



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
2×10W	LED COB	15°	2700K	1400lm	90+	Ceiling-mounted	33-38V,250mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					

XXE0603A




Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
5W	LED COB	15°	2700K	350lm	90+	Ceiling-mounted	33V,120mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				

XXE0607A




Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
10W	LED COB	15°	2700K	700lm	90+	Ceiling-mounted	33-38V,250mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					



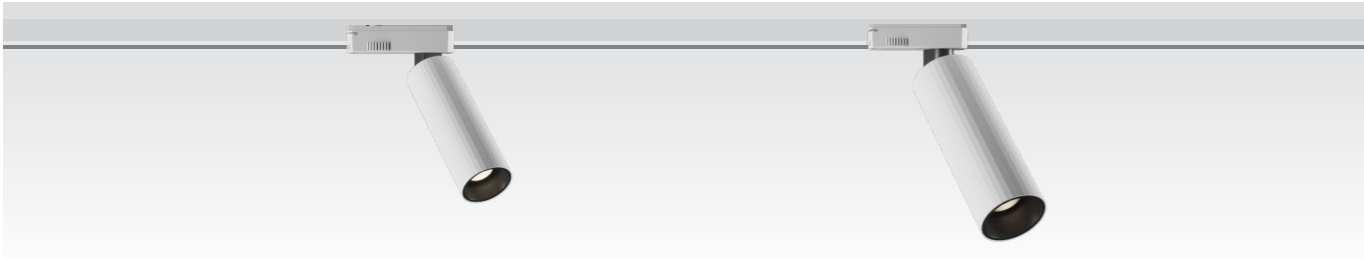


XLE0403A

Track-mounted type



XLE0407A

Track-mounted type



UNIT: mm

INFORMATION

XLE0403A

Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
5W	LED COB	15°	2700K	300lm	90+	Track light	33-38V,120mA
		24°	3000K		95+		
		36°	3500K				
			4000K				

XLE0407A

Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
10W	LED COB	15°	2700K	700lm	90+	Track light	33-38V,250mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					

TECHNICAL DETAILS

- Material

aluminium
- Electrical connection

on/off
- Optical system

opal diffusor
- Control

-
- Light source

LED COB
- Light distributions

Color

白色


黑色

金色




幻影·嵌入式

SHADOW

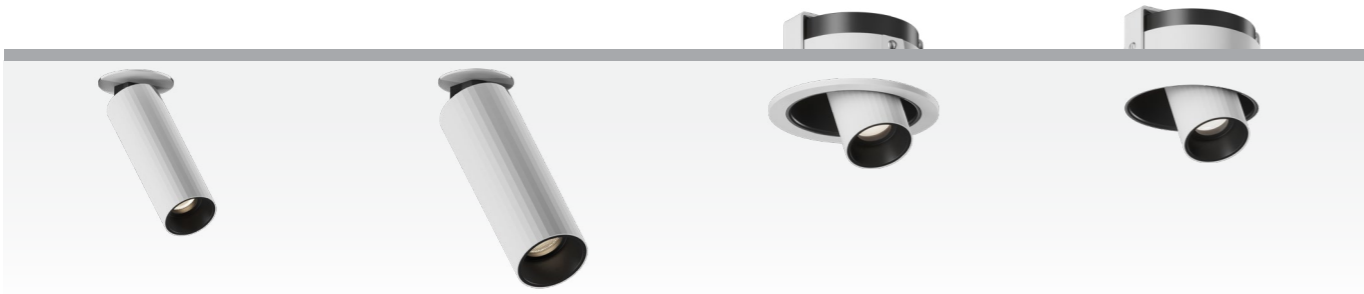


XTE2240A

Recessed type




XTE2340A

Recessed type




XTE2675A

Framed version



XTE2675AT

Framed version



UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffuser

Control

-

Light source

LED COB

Light distributions



INFORMATION

XTE2240A



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
5W	LED COB	15°	2700K	350lm	90+	Recessed type	33-38V,120mA
		24°	3000K		95+		
		36°	3500K				
			4000K				

XTE2340A



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
10W	LED COB	15°	2700K	700lm	90+	Recessed type	33-38V,250mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					

XTE2675A



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
5W	LED COB	15°	2700K	350lm	90+	Recessed type	33-38V,120mA
		24°	3000K		95+		
		36°	3500K				
			4000K				

XTE2675AT



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
5W	LED COB	15°	2700K	350lm	90+	Recessed type	33-38V,120mA
		24°	3000K		95+		
		36°	3500K				
			4000K				




幻影·嵌入式

SHADOW



XTE2690A


Framed version



Φ95

XTE2690AT


Framed version无边款



Φ95

XTE26105A


Framed version



Φ110

XTE26105AT

Framed version



Φ110

UNIT: mm

TECHNICAL DETAILS

Material

aluminium

Electrical connection

on/off

Optical system

opal diffuser

Control

-

Light source

LED COB

Light distributions



Color



INFORMATION

XTE2690A



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
7W	LED COB	15°	2700K	700lm	90+	Recessed type	33-38V,150mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					

XTE2690AT



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
7W	LED COB	15°	2700K	700lm	90+	Recessed type	33-38V,150mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					

XTE26105A



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
15W	LED COB	15°	2700K	1120lm	90+	Recessed type	33-38V,350mA
		24°	3000K				
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					


XTE26105AT



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
15W	LED COB	15°	2700K	1120lm	90+	Recessed type	33-38V,350mA
		24°	3000K				
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					



SHADOW

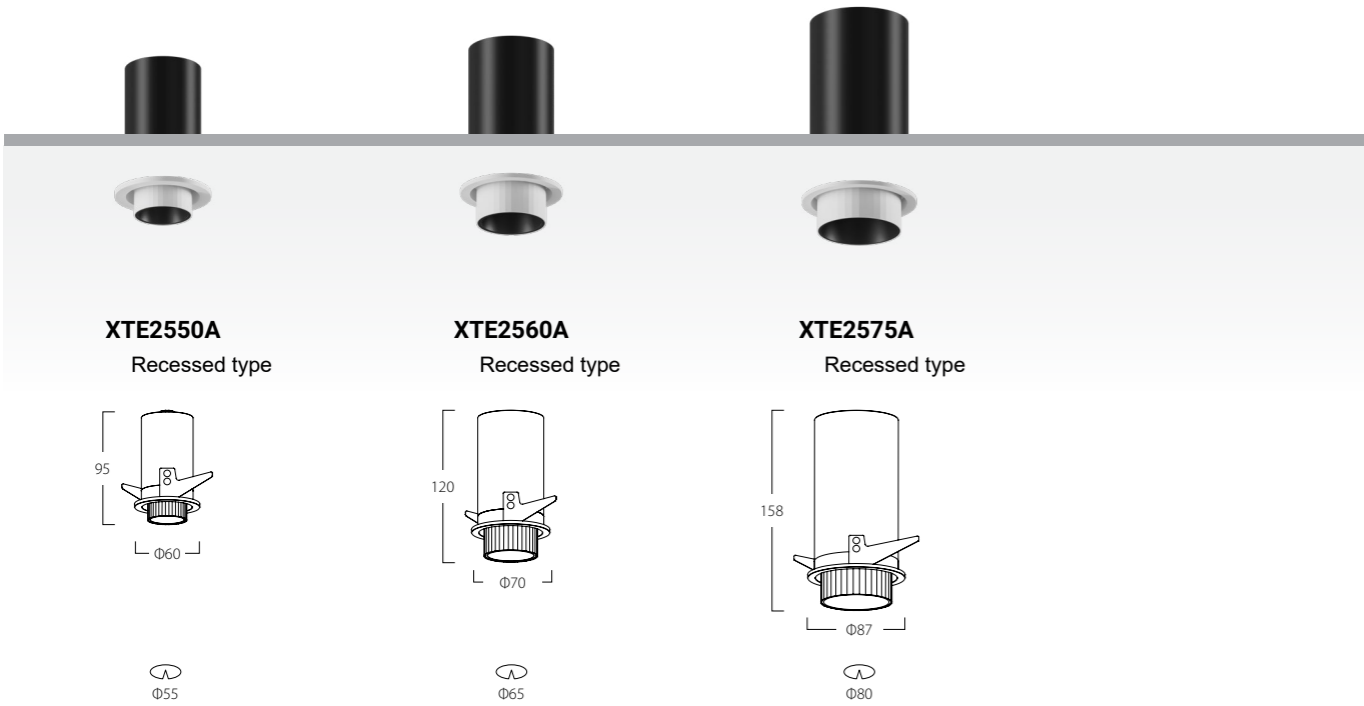

UNIT: mm

TECHNICAL DETAILS

**Material**

aluminium

**Optical system**

opal diffusor

**Light source**

LED COB

**Light distributions**

**Electrical connection**

on/off

**Control**

Triac dimming / 1-10V dimming / DALI dimming / 24° (36°) beam angle with dimming and color tuning


**Color**

白色


黑色

金色


INFORMATION

XTE2550A

Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
5W	LED COB	15°	2700K	300lm	90+	Recessed type	33-38V,120mA
		24°	3000K		95+		
		36°	3500K				
			4000K				

XTE2560A

Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
7W	LED COB	15°	2700K	700lm	90+	Recessed type	33-38V,150mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°	2700K-6000K★				

XTE2575A

Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
15W	LED COB	15°	2700K	1120lm	90+	Recessed type	33-38V,350mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°	2700K-6000K★				




SHADOW



XXE0303A

Suspension type




XXE0307A

Suspension type



XXE0318A

Suspension type



UNIT: mm

INFORMATION

XXE0303A



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
5W	LED COB	15°	2700K	300lm	90+	Suspension type	33-38V,120mA
		24°	3000K		95+		
		36°	3500K				
			4000K				

XXE0307A



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
10W	LED COB	15°	2700K	700lm	90+	Suspension type	33-38V,250mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					

XXE0318A



Power	Light Source	Beam angle	CCT	Flux	CRI	Installation	Power supply
16W	LED COB	15°	2700K	1120lm	90+	Suspension type	33-38V,400mA
		24°	3000K		95+		
		36°	3500K				
		Random beam	4000K				
		angle:15°~36°					

TECHNICAL DETAILS

Material

aluminium

Optical system

opal diffusor

Light source

LED COB

Light distributions




Electrical connection

on/off


Control

Triac dimming / 1-10V dimming / DALI dimming / 24°(36°)  
beam angle with dimming and color tuning


Color




SHADOW

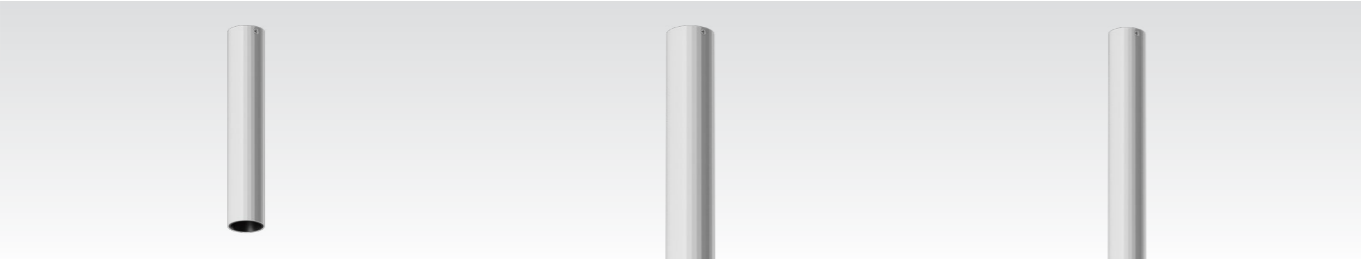


**XME06196L**  
surface-mounted spotligh



**XME06350L**  
surface-mounted spotligh



**XME06450L**  
surface-mounted spotligh



UNIT: mm

INFORMATION

XME06196L



Power	Light Source	Flux	Beam angle	CCT	CRI	Installation	Power supply
9W	LED COB	500lm	15°	2700K	95+	Surface-mounted	33-38V,200mA
			24°	3000K			
			36°	3500K			
				4000K			

XME06350L





Power	Light Source	Flux	Beam angle	CCT	CRI	Installation	Power supply
12W	LED COB	650lm	15°	2700K	95+	Surface-mounted	33-38V,300mA
			24°	3000K			
			36°	3500K			
				4000K			

XME06450L





Power	Light Source	Flux	Beam angle	CCT	CRI	Installation	Power supply
9W	LED COB	500lm	15°	2700K	95+	Surface-mounted	33-38V,200mA
			24°	3000K			
			36°	3500K			
				4000K			

TECHNICAL DETAILS

<b>Material</b> aluminium	<b>Electrical connection</b> on/off	<b>Color</b> 
<b>Optical system</b> opal diffusor	<b>Control</b> -	
<b>Light source</b> LED COB		
<b>Light distributions</b> 		

## SHADOW stretchable type spotlight

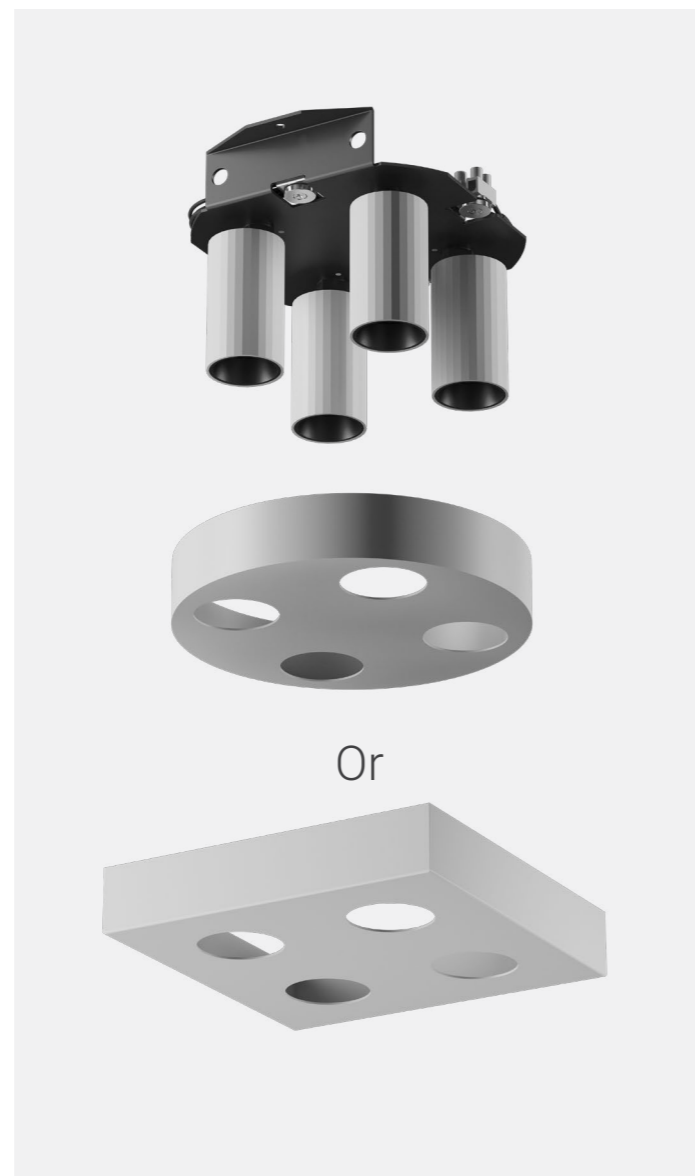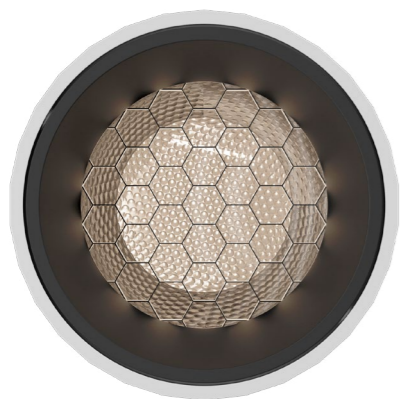


Four-head combination spotlights, optional round or square face frame replacement; The lamp body can adjust the irradiation direction independently, 0-360° in the horizontal direction and 0-90° in the vertical direction to realize no dead Angle of irradiation. Deep anti-glare built-in honeycomb design, soft and comfortable light.




SHADOW



**XXE11160A** N  
Adjustable surface-mounted

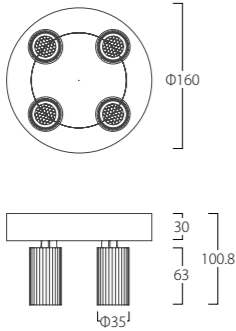



**XXE11160AS** N  
Adjustable surface-mounted

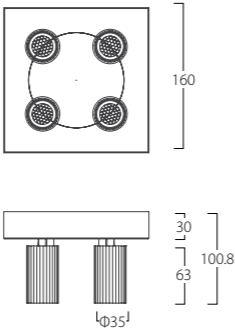

UNIT: mm

TECHNICAL DETAILS

<b>Material</b> aluminium	<b>Electrical connection</b> on/off
<b>Optical system</b> opal diffusor	<b>Control</b> Triac dimming / 1-10V dimming / DALI dimming
<b>Light source</b> LED COB	
<b>Light distributions</b>	

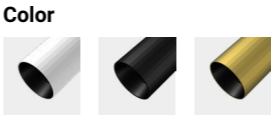

INFORMATION

**XXE11160A**

Power	Light Source	Flux	Beam angle	CCT	CRI	Power supply
4x5W	LED COB	1000lm	15°	2700K	95+	36V,500mA
		1400lm	24°	3000K	95+	
			36°	3500K	95+	
				4000K	90+	

**XXE11160AS**

Power	Light Source	Flux	Beam angle	CCT	CRI	Power supply
4x5W	LED COB	1000lm	15°	2700K	95+	36V,500mA
		1400lm	24°	3000K	95+	
			36°	3500K	95+	
				4000K	90+	



#### our "CLIENTS"

We are trusted by a variety of leading businesses, including industrial plants, hotels, retail outlets, and major real estate developments.

Our projects reflect our ability to tailor lighting solutions to meet diverse client.

#### our "TEAM"

Our expert team brings extensive experience in lighting procurement and installation.

We are dedicated to delivering the best solutions to meet the specific needs of every client.

#### Contact Us

##### Light Loop

Pracha Uthit Road, Klong Bung Plakot,  
Nai Klong Bung Plakot Subdistrict, Phra Samut Chedi District,  
Samut Prakan Province 10290

Phone: +66 82-919-9941

Email: [sales@constufftrading.com](mailto:sales@constufftrading.com)

