


LED Wall Washer | LED Linear Lighting | LED Flood light | Landscape Spot Light
LED Pixel Light | Inground Well Light | LED Underwater Light | Fountain Lamp
Pathway Light | Outdoor Wall Light | LED Step Light



OUTDOOR LIGHTING

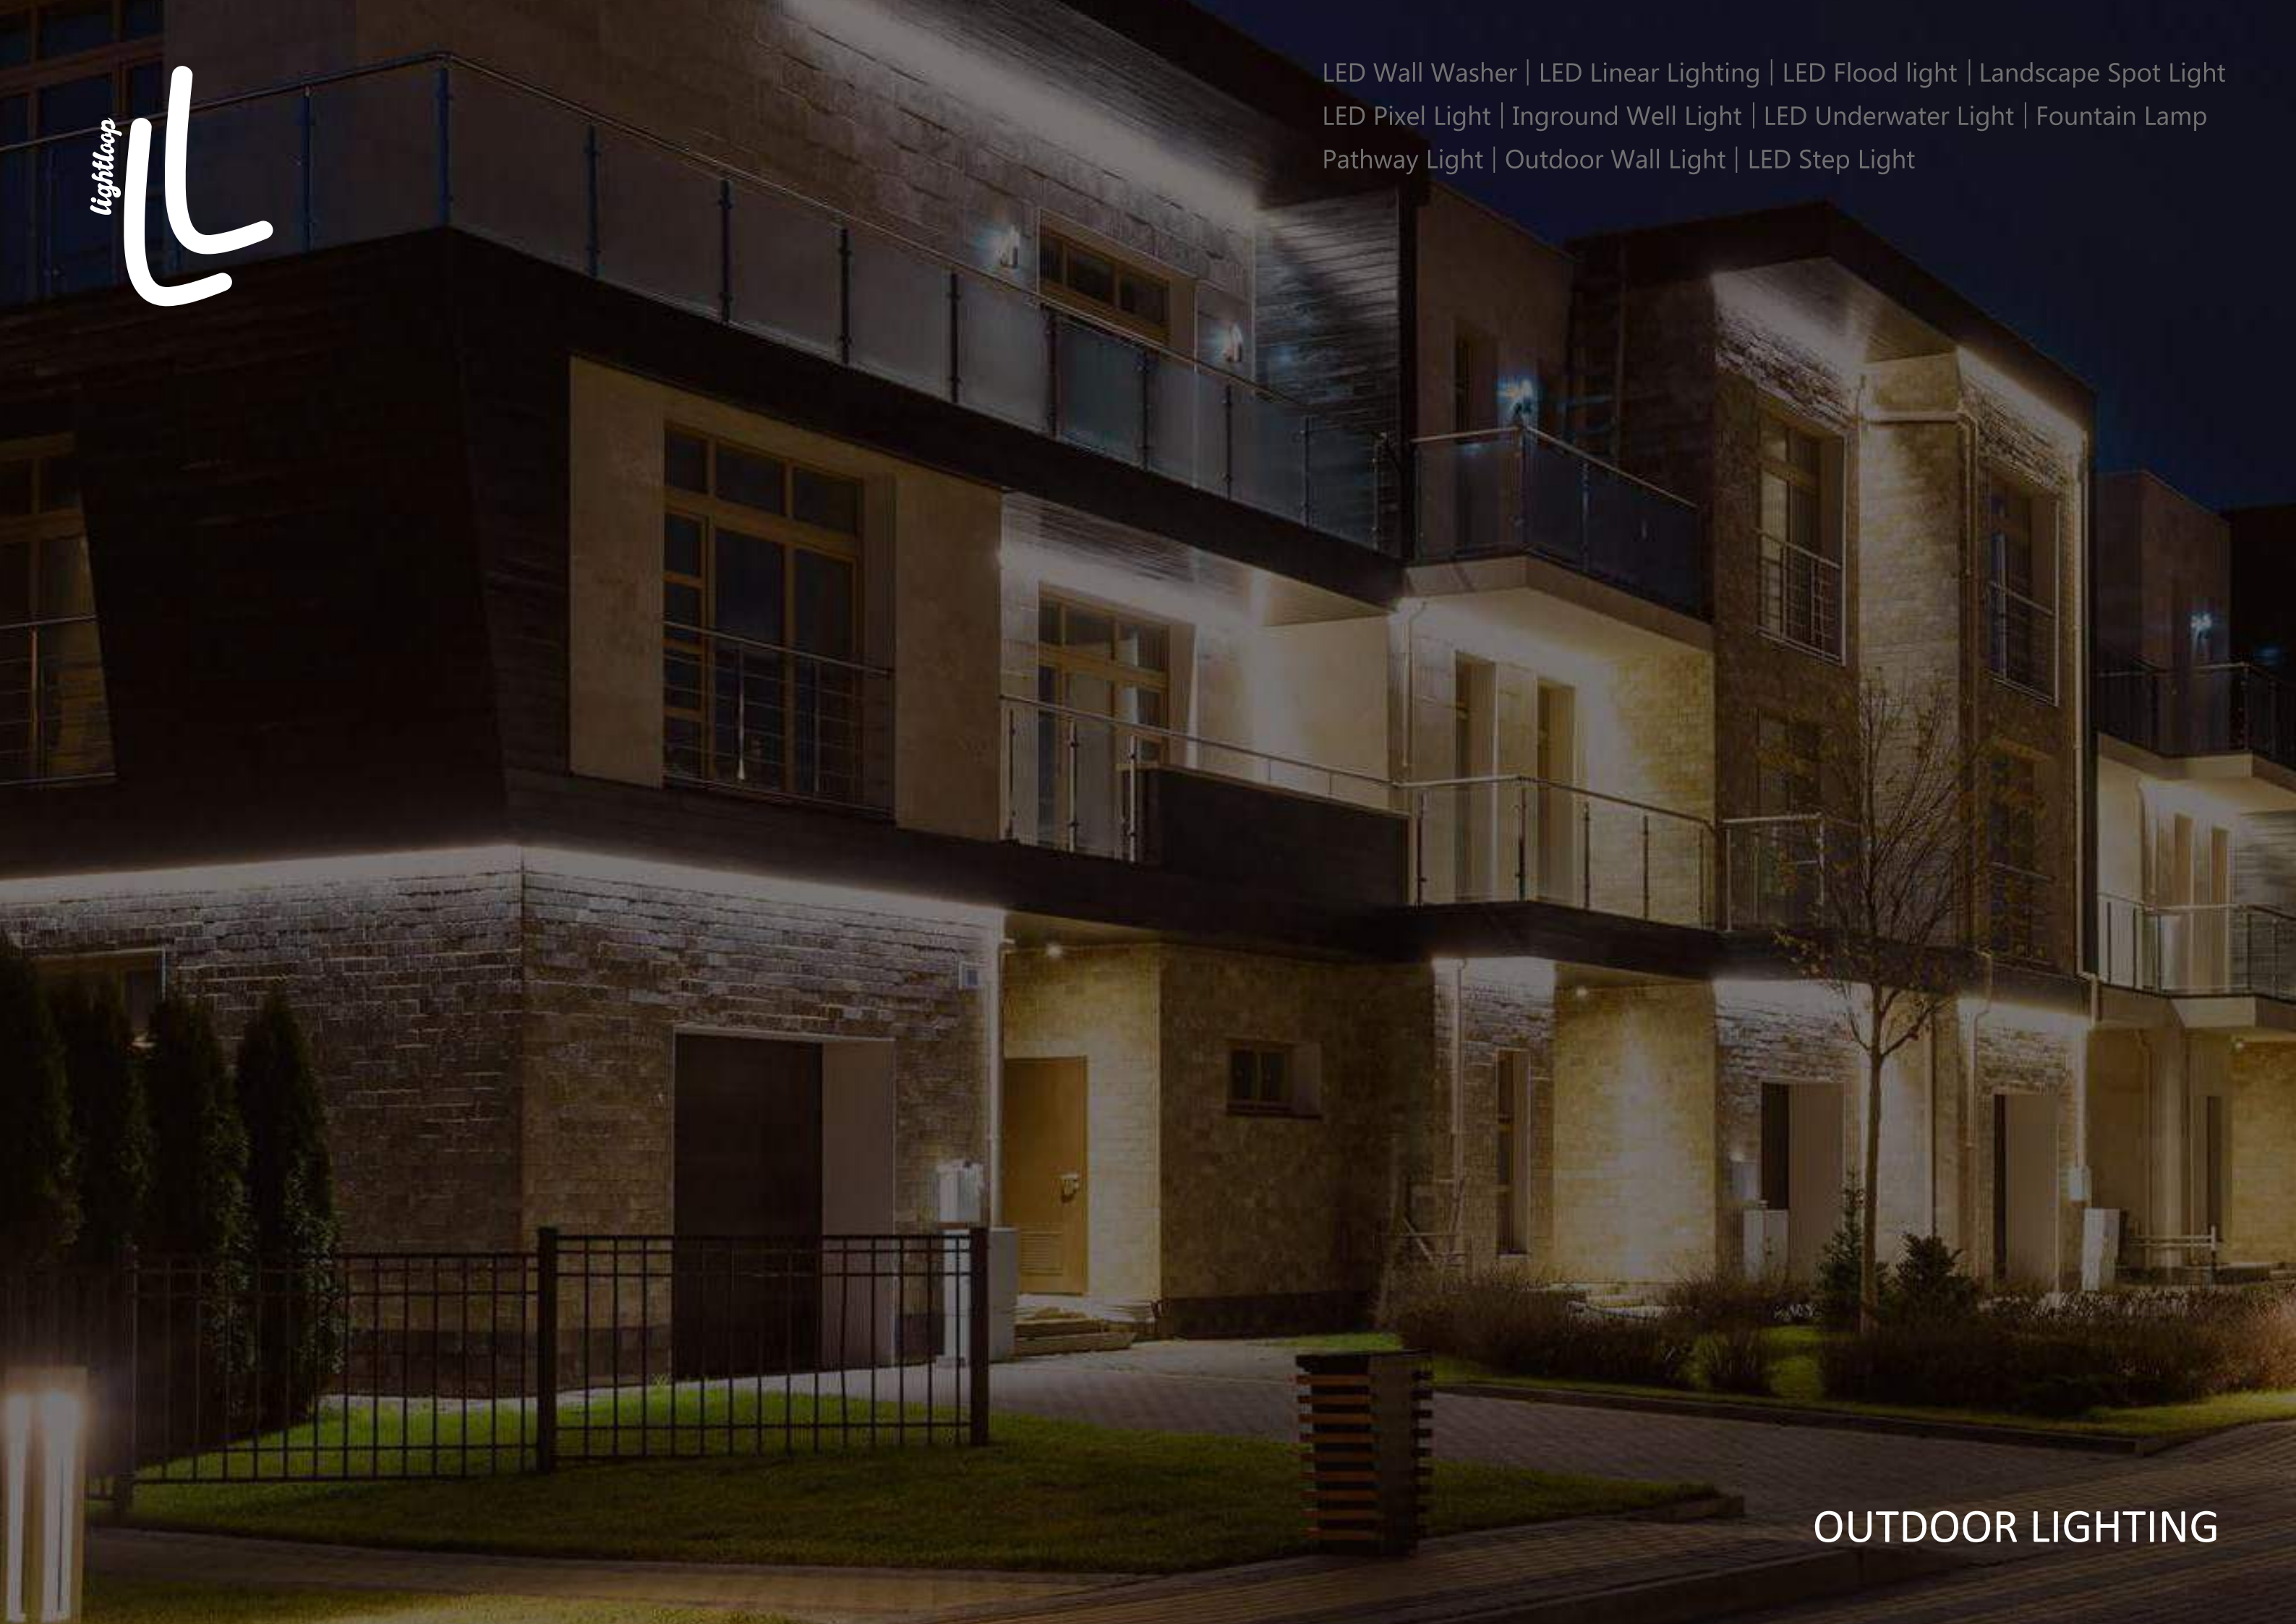


Innovative And Sustainable Landscape And Facade Lighting Solutions

Contents


LED Wall Washer Series 01-08	LED Linear Lighting Series 09-12	LED Flood light Series 13-40
Landscape Spot Light Series 41-54	LED Pixel Light Series 55-64	Inground Well Light Series 65-84
LED Underwater Light Series 85-92	Fountain Lamp Series 93-102	Pathway Light Series 103-148
Garden Light Series 149-168	Outdoor Wall Light Series 169-182	LED Step Light Series 183-192




LED Wall Washer Series




LED Wall Washer

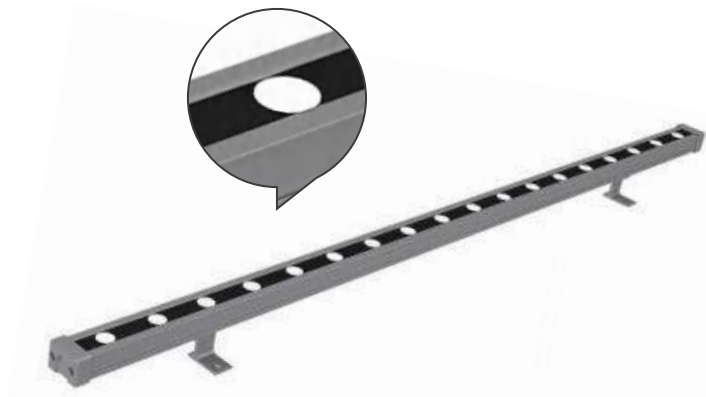


Dimension

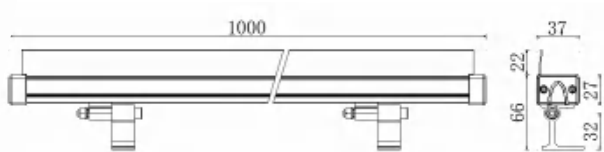

Light Distribution Curve (3000K 15X45°)



Lux Distance Curve (3000K 15X45°)

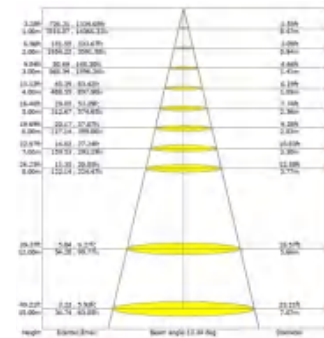


CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-VW1881
Power	18-24W
LED type	Cree/Osram/Lumileds
Luminous flux	90-100lm/W
CCT	2700-6000K
CRI	80+
Beam angle	10°/30°/45°/60°/20x40°/10x60°
Dimension	1000*37*31/ 1000*37*66 (L x W x H)
Net Weight	1.5kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V
Working temperature	-30℃ ~ +55℃
Control	On/off, DMX512, DALI Optional
Construction Data	
IP rating	IP67
Material	Aluminium+Tempered glass
Finishing	Anodized film for housing
Packaging	
PCS/CTN	12PCS/CTN
Carton size	102*32*26cm


Effect Picture




LED Wall Washer

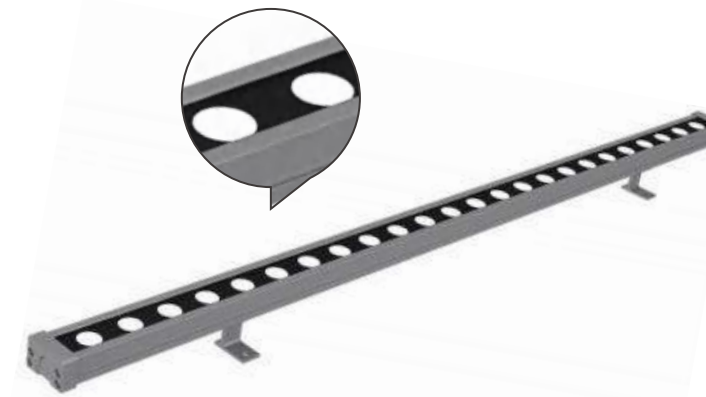


Dimension

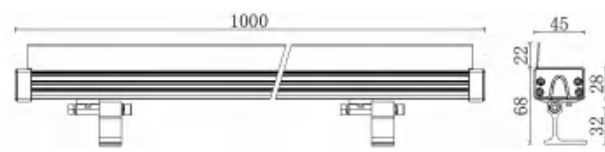

Light Distribution Curve (3000K 15X45°)

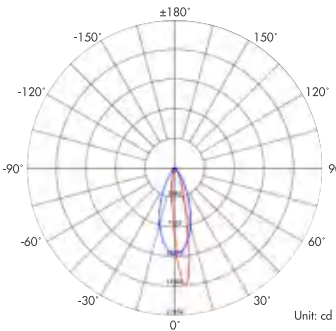

Lux Distance Curve (3000K 15X45°)



CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-VW1882
Power	24-36W
LED type	Cree/Osram/Lumileds
Luminous flux	90-100lm/W
CCT	2700K - 6500K/RGB/RGBW Optional
CRI	80+
Beam angle	10°/30°/45°/60°/20x40°/10x60°
Dimension	L1000*W45*H68 (L x W x H)
Net Weight	2.52kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V or AC100-265V
Working temperature	-30℃ ~ +55℃
Control	On/off, DMX512, DALI Optional
Construction Data	
IP rating	IP67
Material	Aluminium+Tempered glass
Finishing	Anodized film for housing
Packaging	
PCS/CTN	12PCS/CTN
Carton size	102*32*26cm


Effect Picture




LED Wall Washer




Dimension

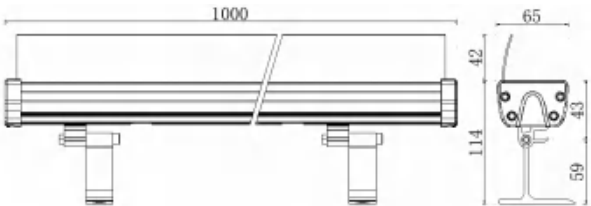

Light Distribution Curve (4000K 15X45°)

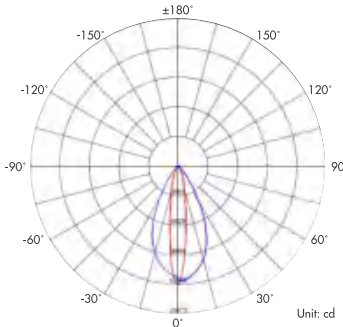

Lux Distance Curve (4000K 15X45°)

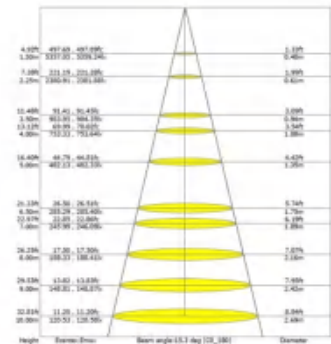

CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-VW1883
Power	48 Watts/ 60 Watts/ 72 Watts
LED type	Cree/Osram/Lumileds
Luminous flux	90-100lm/W
CCT	2700K-6000K/RGB/RGBW optional
CRI	80+
Beam angle	10° /30°/45°/60°/20x40°/10x60°
Dimension	L1000*W65*H114 (L x W x H)
Net Weight	3.5kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V or AC100-265V
Working temperature	-30 C ~ +55 C
Control	On/off, DMX512, DALI Optional
Construction Data	
IP rating	IP67
Material	Aluminium+Tempered glass
Finishing	Anodized film for housing
Packaging	
PCS/CTN	8PCS/CTN
Carton size	102*32*26cm


Effect Picture




LED Wall Washer




Dimension

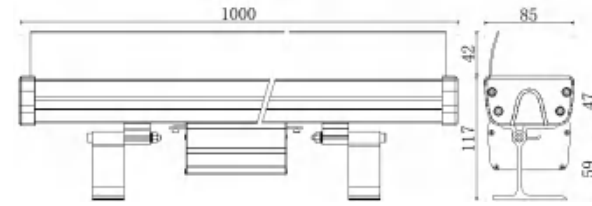

Light Distribution Curve (3000K 15X45°)

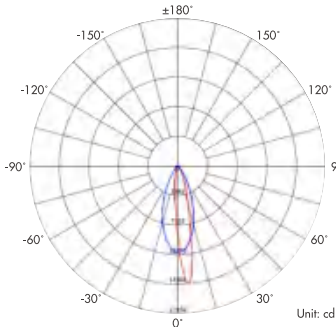

Lux Distance Curve (3000K 15X45°)




CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-VW1884
Power	100 Watts/ 120 Watts
LED type	Cree/Osram/Lumileds
Luminous flux	90-100lm/W
CCT	2700K-6000K/RGB/RGBW optional
CRI	80+
Beam angle	10° /30°/45°/60°/20x40°/10x60°
Dimension	L1000*W85*H117 (L x W x H)
Net Weight	4.5kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V or AC100-265V
Working temperature	-30 C ~ +55 C
Control	On/off, DMX512, DALI Optional
Construction Data	
IP rating	IP67
Material	Aluminium+Tempered glass
Finishing	Anodized film for housing
Packaging	
PCS/CTN	4PCS/CTN
Carton size	102*32*26cm


Effect Picture




LED Wall Washer

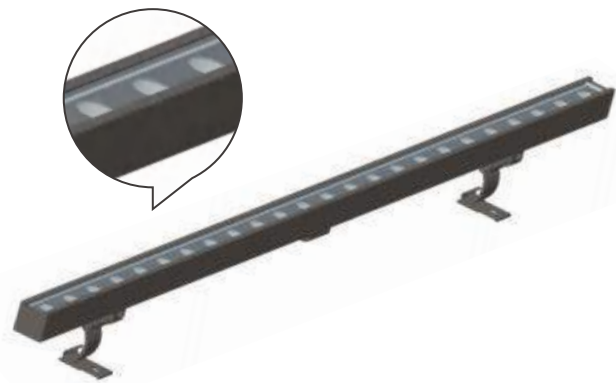


Dimension

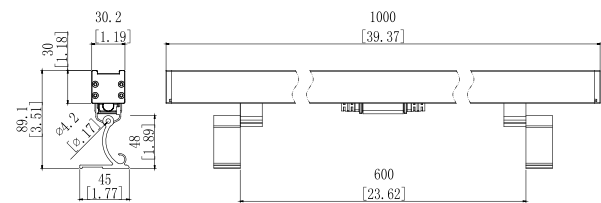

Light Distribution Curve (3000K, 10x30°)

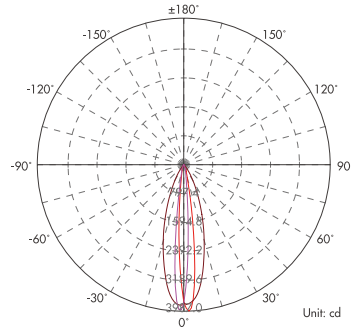

Lux Distance Curve (3000K, 10x30°)

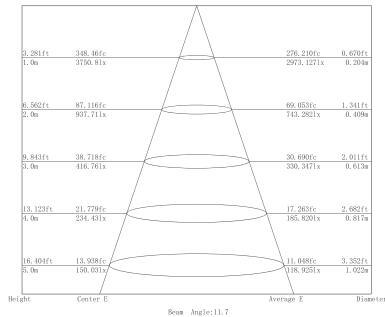


CE RoHS IP67 IK04

General Data	
Item No.	RC-WW1911
Power	12 Watts
LED type	Osram/Cree/Lumileds
Luminous flux	90~100lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	10° x 60° 10° x 45° 10° x 30° 15° x 30° 15° x 45°
Dimension	1000x30x89mm(LxWxH)
Net Weight	1.2kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V
Driver	Excluding
Control	On/Off, DMX512
Construction Data	
IP rating	IP67 Waterproof
Material	Aluminium+Tempered glass
Finishing	Anodized film for housing
Packaging	
PCS/CTN	16PCS/CTN
Carton size	101.5*33.5*25cm


Effect Picture




LED Wall Washer

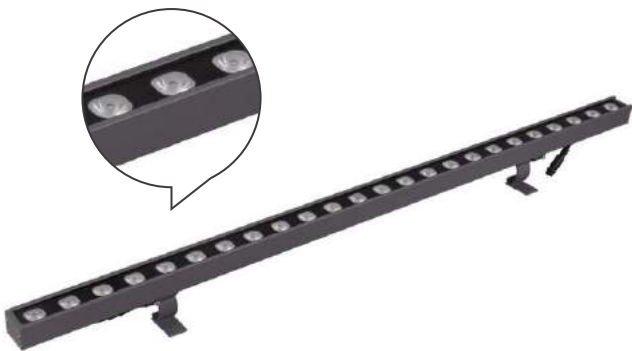


Dimension

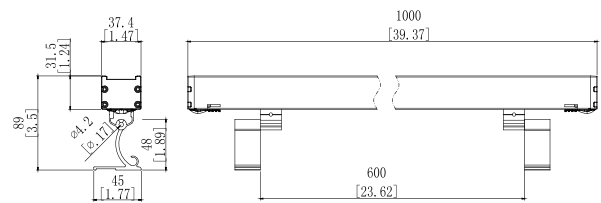

Light Distribution Curve (3000K 15X30°)

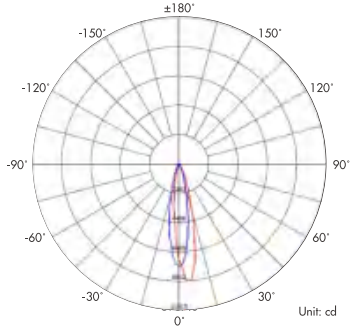

Lux Distance Curve (3000K 15X30°)

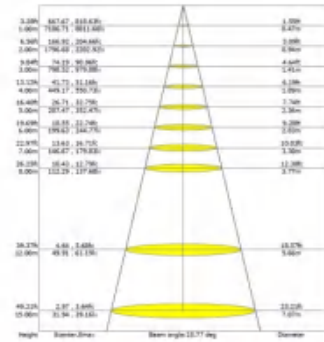


CE RoHS IP67 IK04

General Data	
Item No.	RC-WW1891
Power	18 Watts/ 24 Watts/ 36 Watts
LED type	Osram/Cree/Lumileds
Luminous flux	90~100lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	10° x 60° 10° x 45° 10° x 30° 15° x 30° 15° x 45°
Dimension	1000x37x89mm(LxWxH)
Net Weight	1.22kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V
Driver	Excluding
Control	On/Off, DMX512
Construction Data	
IP rating	IP67 Waterproof
Material	Aluminium+Tempered glass
Finishing	Anodized film for housing
Packaging	
PCS/CTN	16PCS/CTN
Carton size	102*32*26cm


Effect Picture




LED Wall Washer

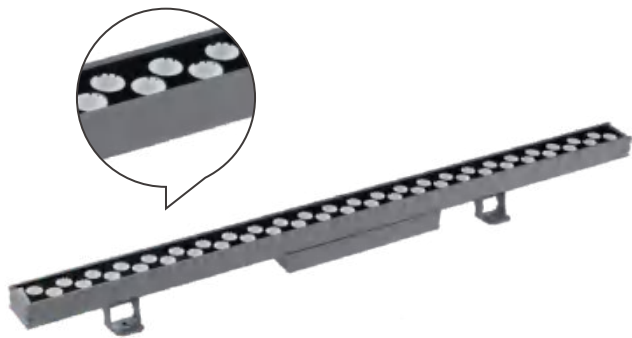


Dimension

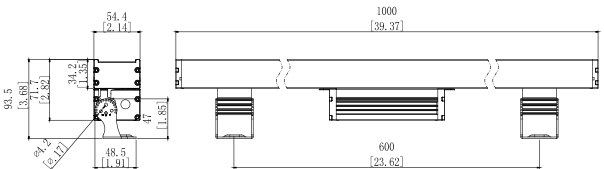

Light Distribution Curve (4000K 15X45°)

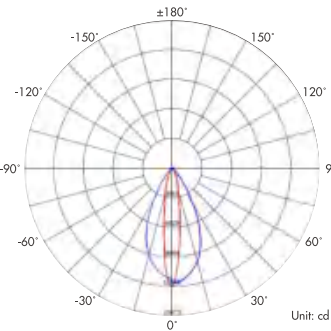

Lux Distance Curve (4000K 15X45°)




CE RoHS IP67 IK04

General Data	
Item No.	RC-WW1892
Power	48 Watts
LED type	Osram/Cree/Lumileds
Luminous flux	90~100lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	10° x 60° 10° x 45° 10° x 30° 15° x 30° 15° x 45°
Dimension	1000*54*92 (L x W x H)
Net Weight	2.8kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V or AC100-265V
Driver	Meanwell Inventronics options
Control	On/Off, DMX512
Construction Data	
IP rating	IP67 Waterproof
Material	Aluminium+Tempered glass
Finishing	Anodized film for housing
Packaging	
PCS/CTN	4 PCS/CTN
Carton size	101.5*24.5*23cm


Effect Picture




LED Wall Washer

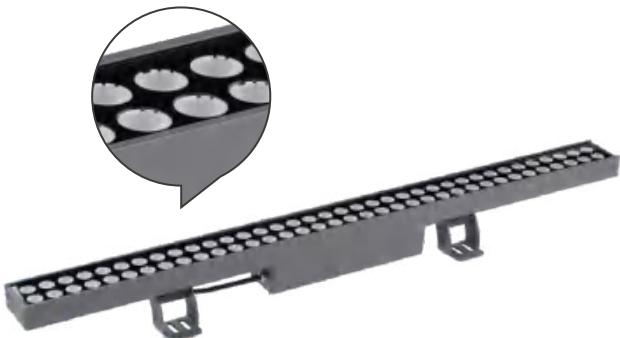


Dimension

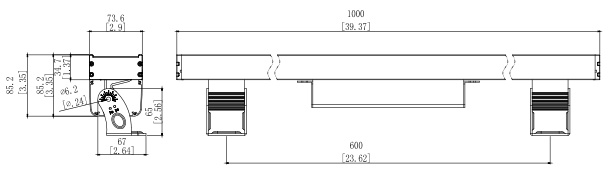

Light Distribution Curve (3000K 15X30°)

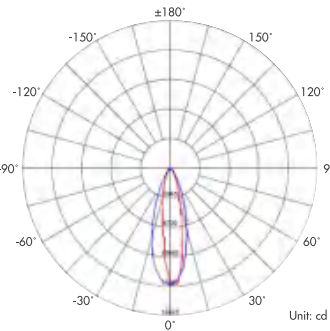

Lux Distance Curve (3000K 15X30°)



CE RoHS IP67 IK04


General Data	
Item No.	RC-WW1893
Power	54 Watts/ 72 Watts
LED type	Osram/Cree/Lumileds
Luminous flux	90~100lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	10° x 60° 10° x 45° 10° x 30° 15° x 30° 15° x 45°
Dimension	1000*74*114 (L x W x H)
Net Weight	3.8kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V or AC100-265V
Driver	Meanwell Inventronics options
Control	On/Off, DMX512
Construction Data	
IP rating	IP67 Waterproof
Material	Aluminium+Tempered glass
Finishing	Anodized film for housing
Packaging	
PCS/CTN	4 PCS/CTN
Carton size	101.5*24.5*23cm

Effect Picture






LED Linear Lighting Series




LED Linear Lighting




Dimension

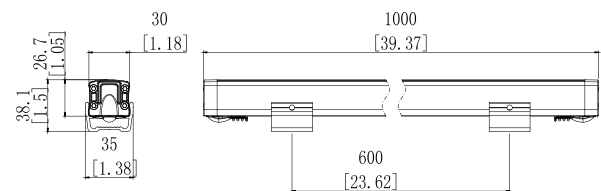

Light Distribution Curve (3000K 120°)

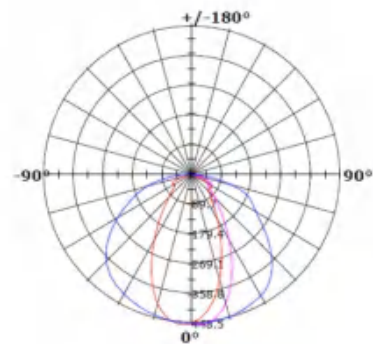

Lux Distance Curve (3000K 120°)

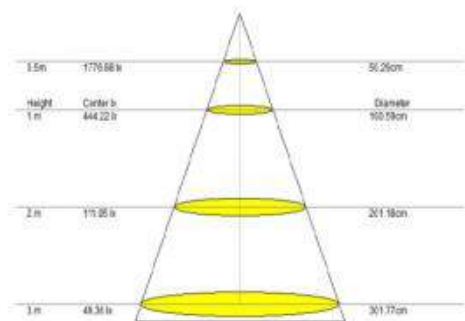

CE RoHS IP67 IK04

General Data	
Item No.	RC-LN1901A
Power	10 Watts
LED type	48PCS OSRAM 2835
Luminous flux	70-80lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	120°
Dimension	1000*30*38 (L x W x H)
Net Weight	0.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V
Driver	Excluding
Control	On/Off, DMX512
Construction Data	
IP rating	IP67 Waterproof
Material	Aluminium+Tempered glass(PC diffuser optional)
Finishing	Anodized film for housing
Packaging	
PCS/CTN	16PCS/CTN
Carton size	101.5*33.5*25cm


Effect Picture




LED Linear Lighting




Dimension

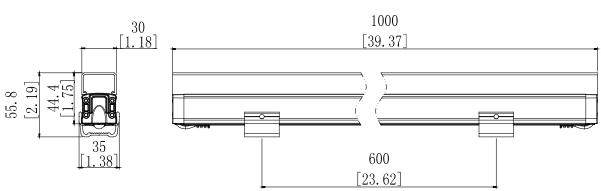

Light Distribution Curve (3000K 120°)

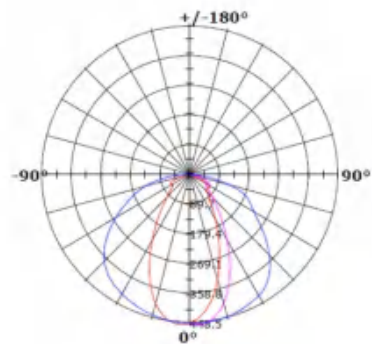

Lux Distance Curve (3000K 120°)

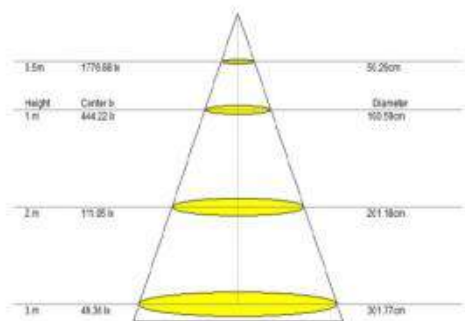

CE RoHS IP67 IK04

General Data	
Item No.	RC-LN1901B
Power	10 Watts
LED type	48PCS OSRAM 2835
Luminous flux	70-80lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	120°
Dimension	1000*30*58 (L x W x H)
Net Weight	0.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V
Driver	Excluding
Control	On/Off, DMX512
Construction Data	
IP rating	IP67 Waterproof
Material	Aluminium+Tempered glass(PC diffuser optional)
Finishing	Anodized film for housing
Packaging	
PCS/CTN	16PCS/CTN
Carton size	101.5*33.5*25cm


Effect Picture




LED Linear Lighting




Dimension

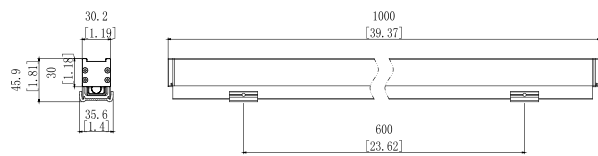

Light Distribution Curve (3000K 120°)

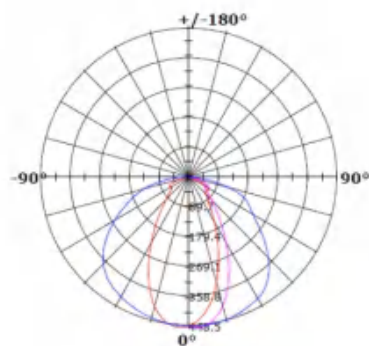

Lux Distance Curve (3000K 120°)

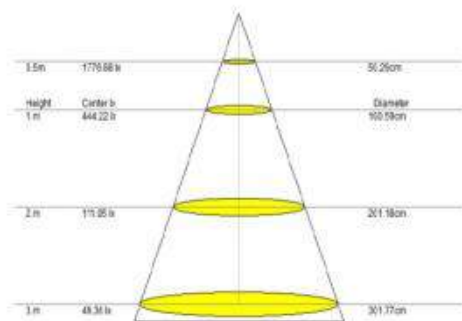

CE RoHS IP67 IK04

General Data	
Item No.	RC-LN1911A
Power	12 Watts
LED type	48PCS OSRAM 2835
Luminous flux	70-80lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	120°
Dimension	1000*30*46 (L x W x H)
Net Weight	1.3 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V
Driver	Excluding
Control	On/Off, DMX512
Construction Data	
IP rating	IP67 Waterproof
Material	Aluminium+Tempered glass(PC diffuser optional)
Finishing	Anodized film for housing
Packaging	
PCS/CTN	16PCS/CTN
Carton size	101.5*33.5*25cm


Effect Picture




LED Linear Lighting




Dimension

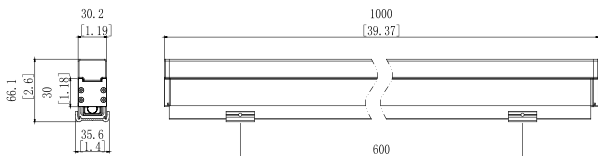

Light Distribution Curve (3000K 120°)

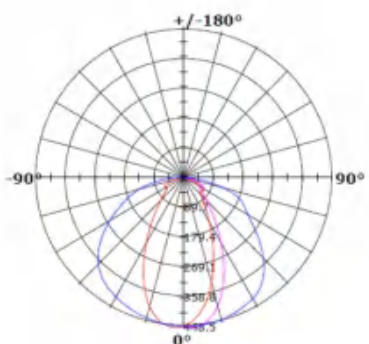

Lux Distance Curve (3000K 120°)

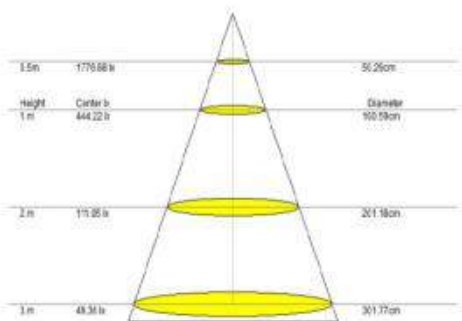


CE RoHS IP67 IK04

General Data	
Item No.	RC-LN1911B
Power	12 Watts
LED type	48PCS OSRAM 2835
Luminous flux	70-80lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	120°
Dimension	1000*30*66 (L x W x H)
Net Weight	1.3 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V
Driver	Excluding
Control	On/Off, DMX512
Construction Data	
IP rating	IP67 Waterproof
Material	Aluminium+Tempered glass(PC diffuser optional)
Finishing	Anodized film for housing
Packaging	
PCS/CTN	16PCS/CTN
Carton size	101.5*33.5*25cm

Effect Picture



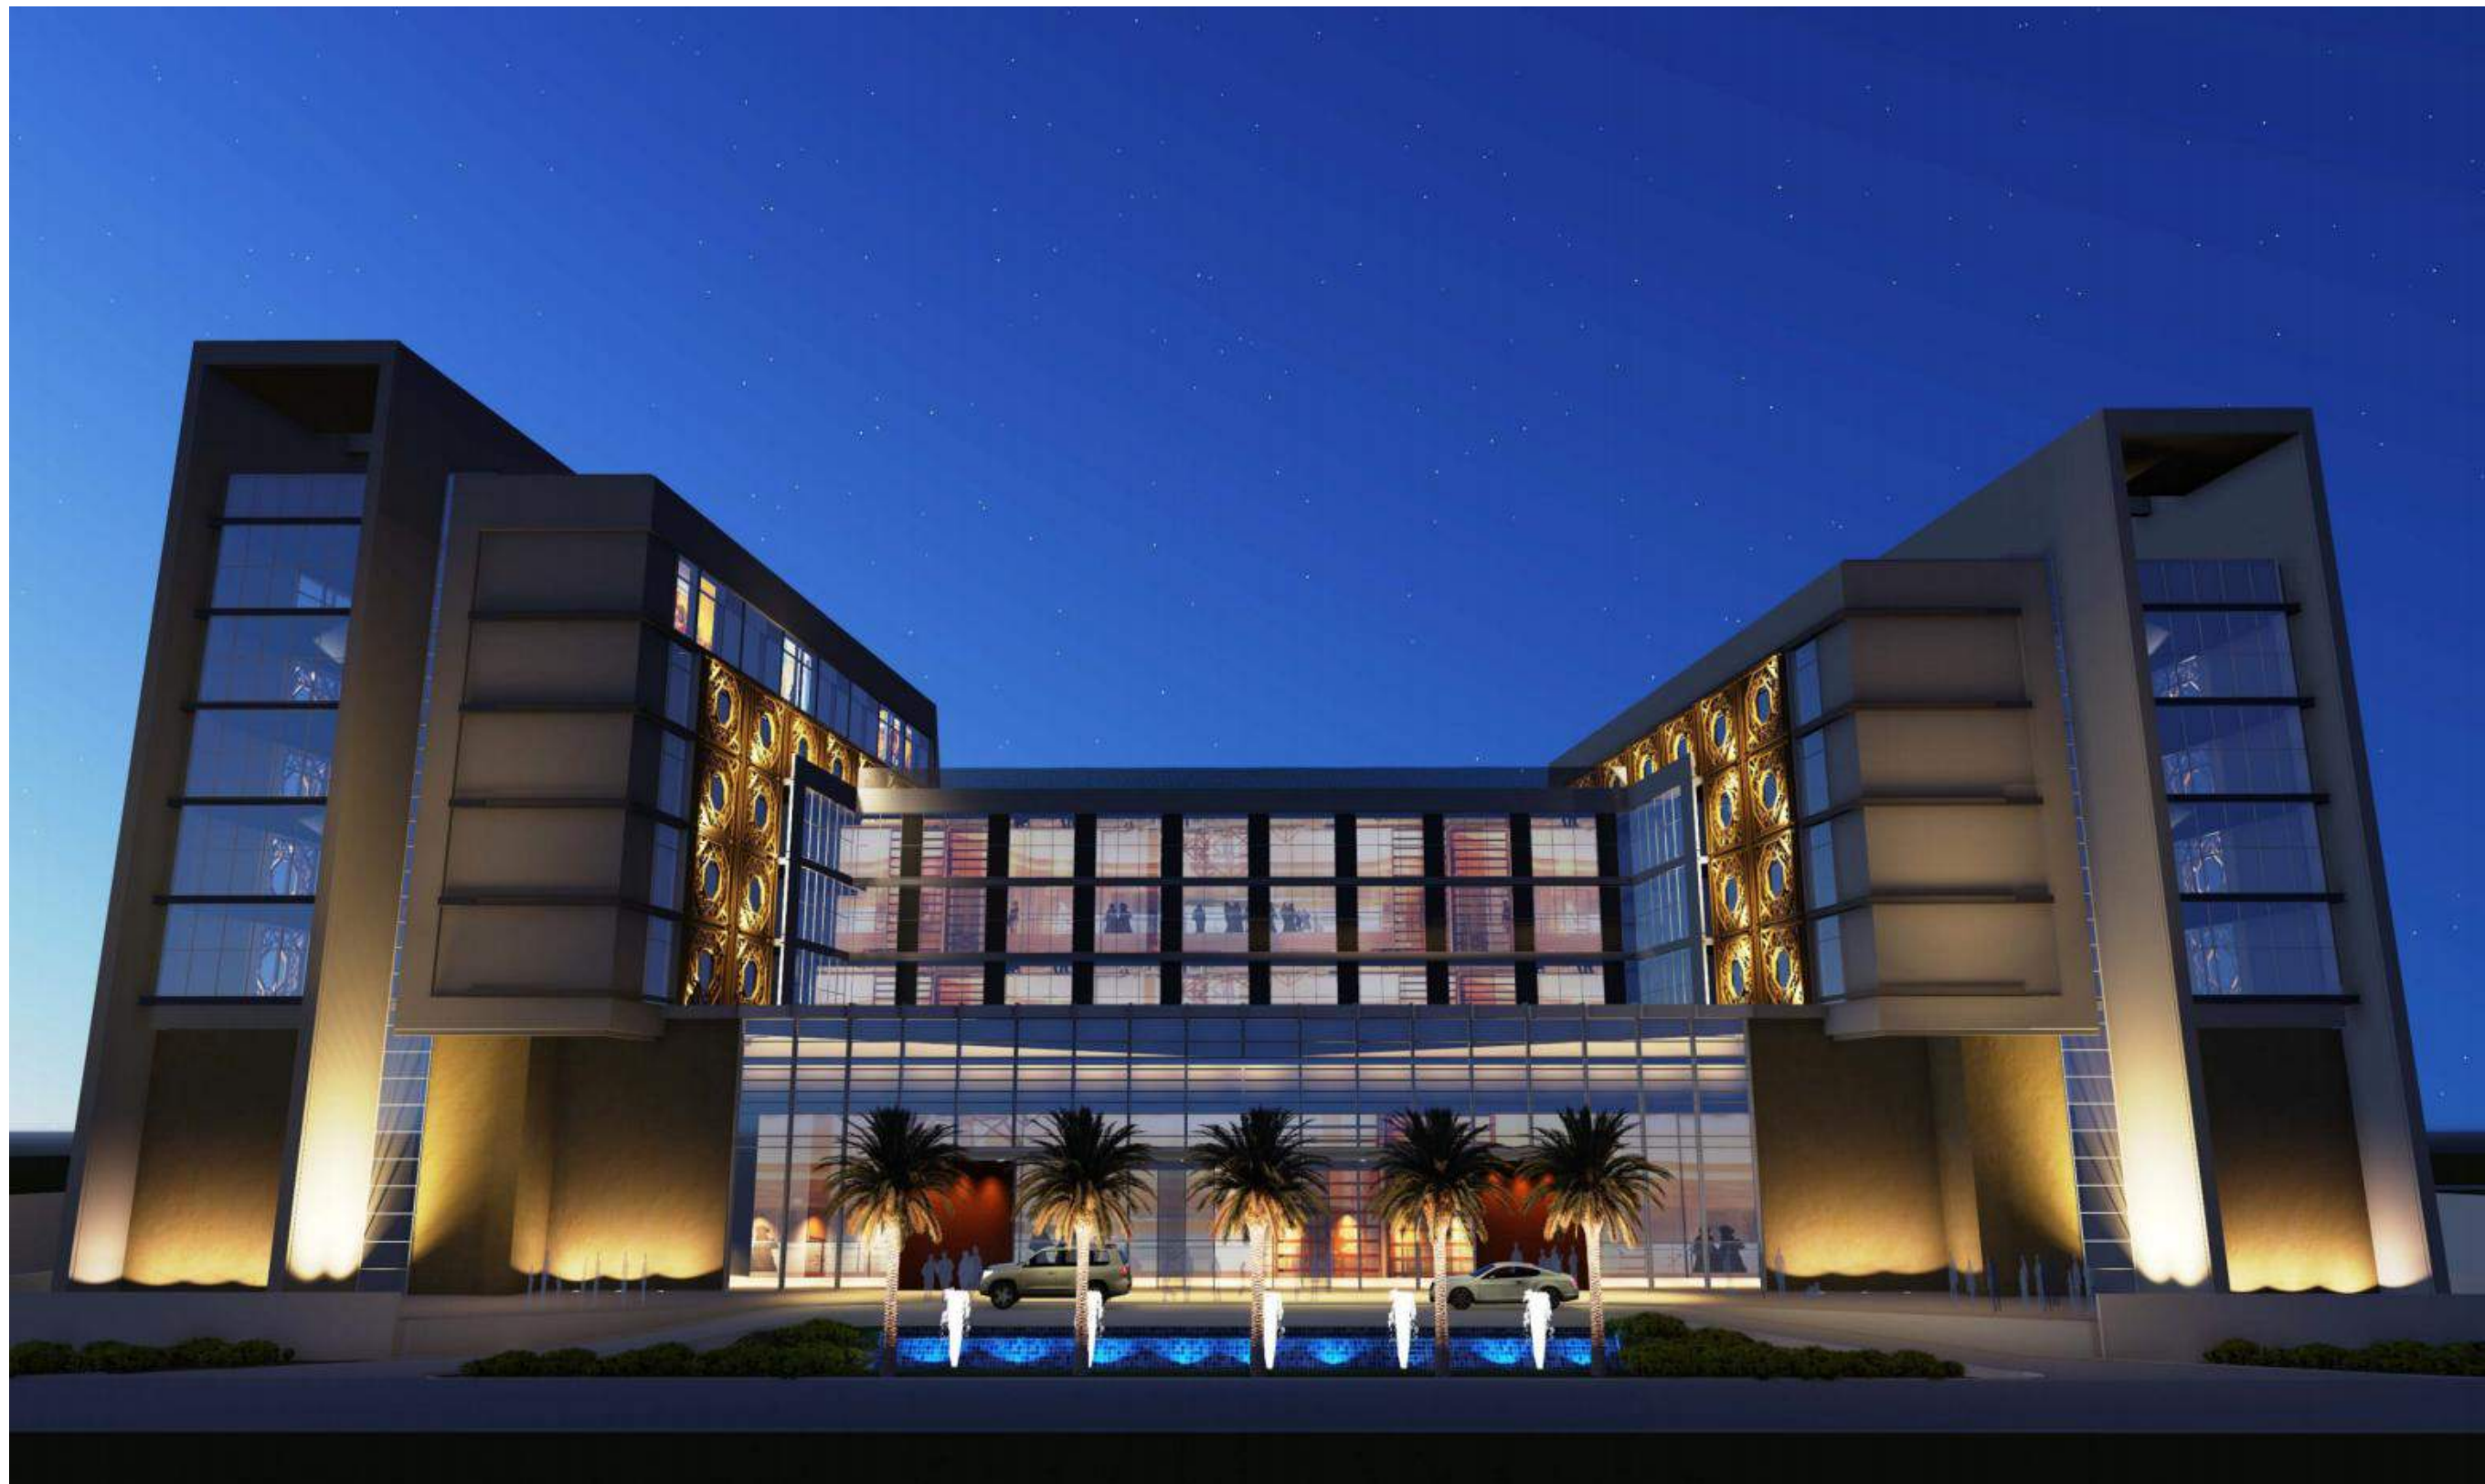

LED Flood Light Series



LED Flood Light




CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-TD89
Power	6-9 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-850lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø90*128mm
Net Weight	1kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	50PCS/CTN
Carton size	52*52*28cm


LED Colors




Dimension

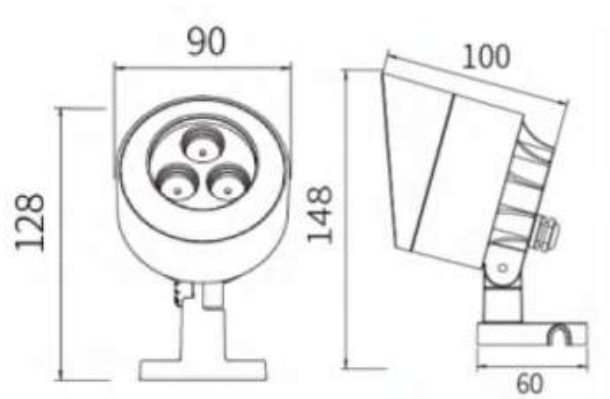

Light Distribution Curve (3000K 15°)

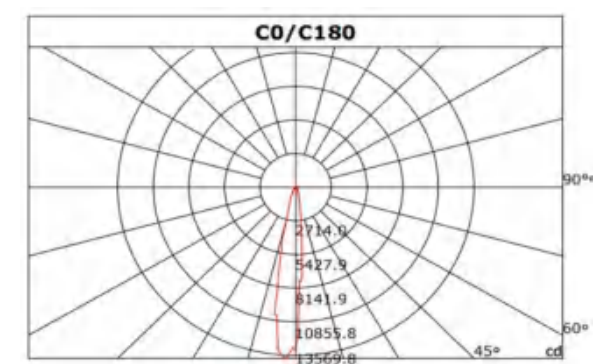

Lux Distance Curve (3000K 15°)

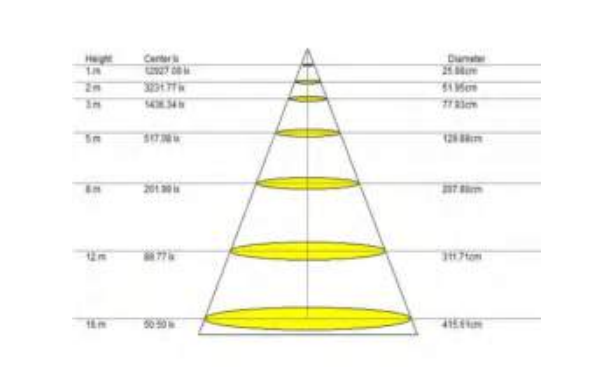

LED Flood Light




CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-TD130
Power	18 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø130*198mm (D x H x W)
Net Weight	2.2kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	20PCS/CTN
Carton size	70*29*29cm


LED Colors




Dimension

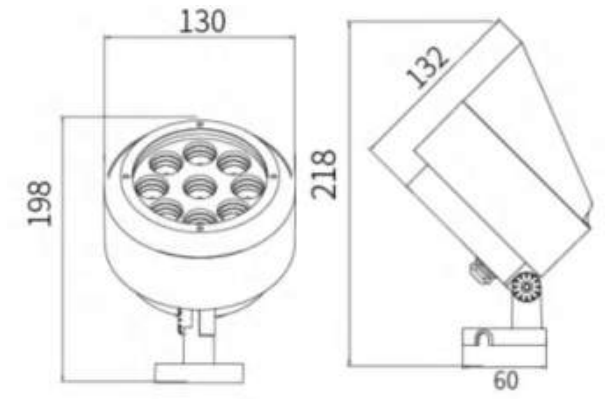

Light Distribution Curve (3000K 15°)

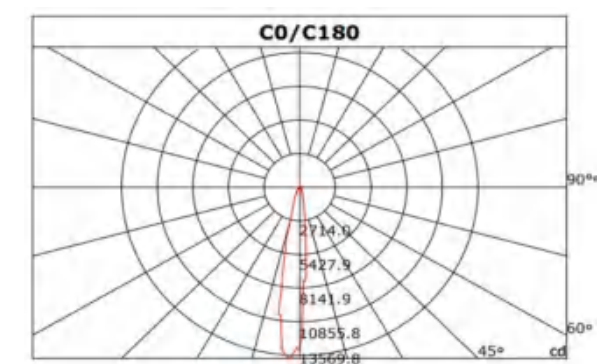


Lux Distance Curve (3000K 15°)

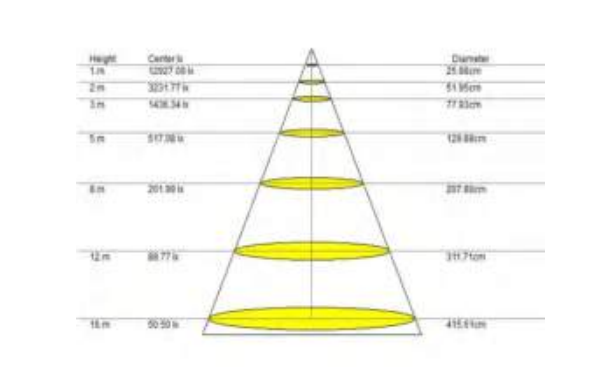

LED Flood Light




Dimension

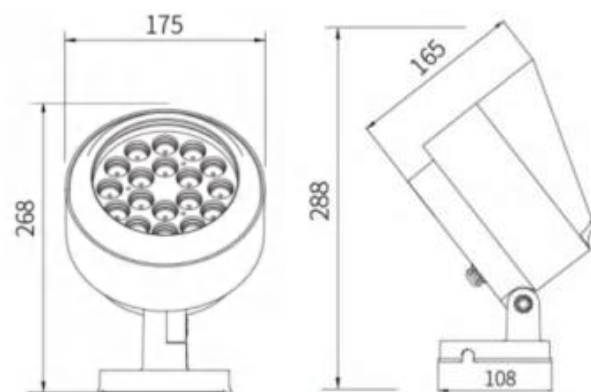

CE RoHS IP66 IK04

General Data	
Item No.	RC-TD175
Power	36 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø175*268mm
Net Weight	3.6kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	12PCS/CTN
Carton size	62*42*42cm


Light Distribution Curve (3000K 15°)-----

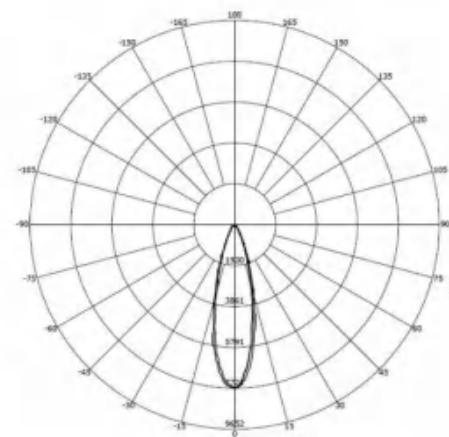

LED Colors




Lux Distance Curve (3000K 15°)-----



LED Flood Light




Dimension

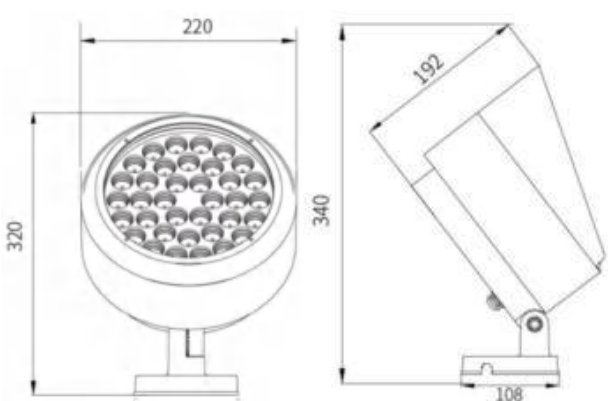

CE RoHS IP66 IK04

General Data	
Item No.	RC-TD220
Power	50/72 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø220*320mm (D x H x W)
Net Weight	5kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	4PCS/CTN
Carton size	52*52*28cm


Light Distribution Curve (3000K 15°)-----

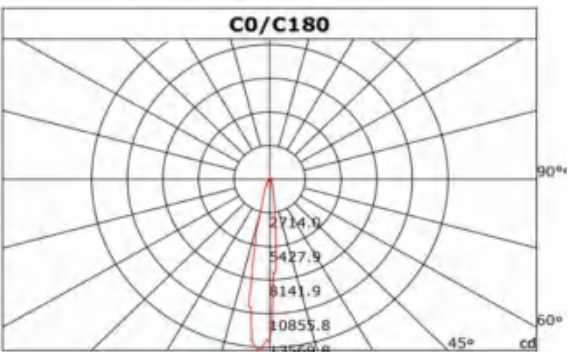

LED Colors




Lux Distance Curve (3000K 15°)-----

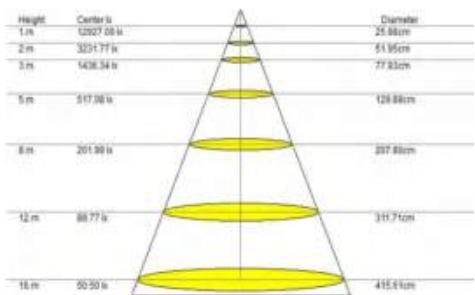

LED Flood Light




Dimension

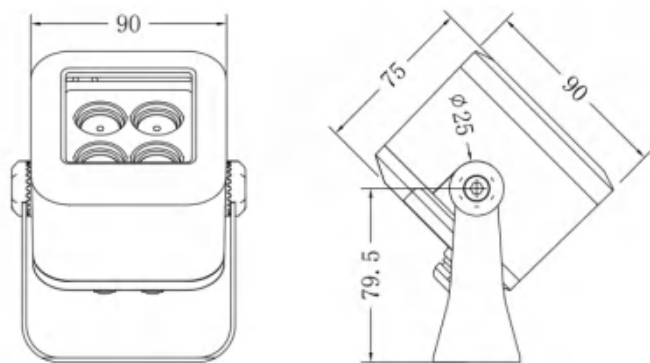

CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-TG90
Power	9 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	F90*W90*H110mm
Net Weight	1kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	50PCS/CTN
Carton size	52*52*28cm


Light Distribution Curve (3000K 15°)-----

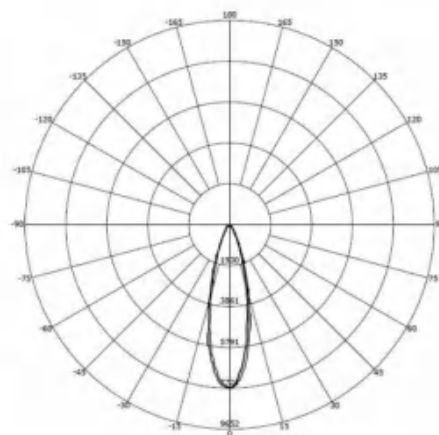

LED Colors




Lux Distance Curve (3000K 15°)-----

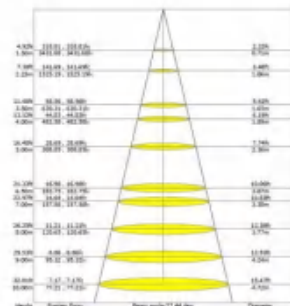

LED Flood Light




Dimension

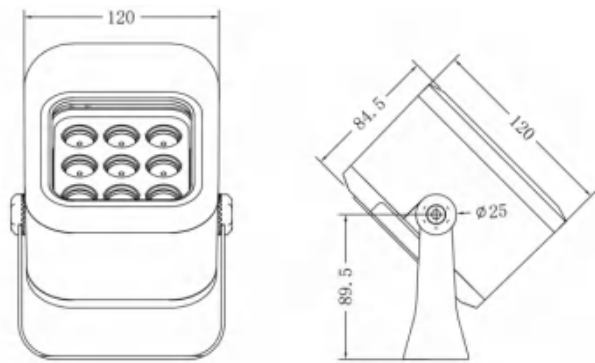

CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-TG120
Power	18 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	F120*W120*H160
Net Weight	2.2kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	20PCS/CTN
Carton size	70*29*29cm


Light Distribution Curve (3000K 15°)-----

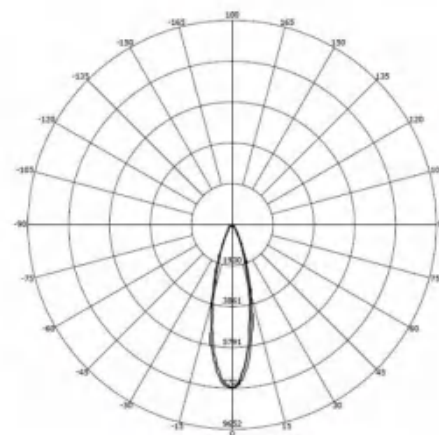

LED Colors




Lux Distance Curve (3000K 15°)-----



LED Flood Light




Dimension

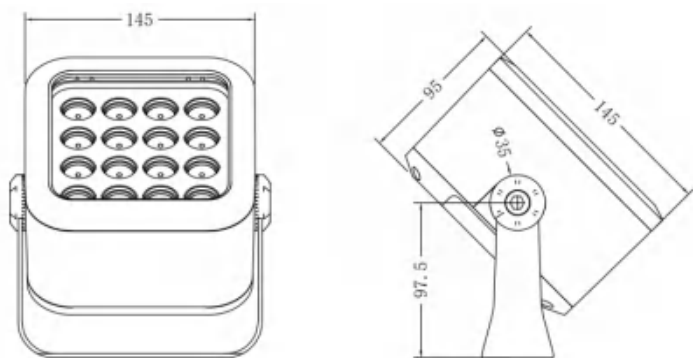

CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-TG145
Power	32 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	F145*W145*H180mm
Net Weight	3.6kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	12PCS/CTN
Carton size	62*42*42cm


Light Distribution Curve (3000K 15°)-----

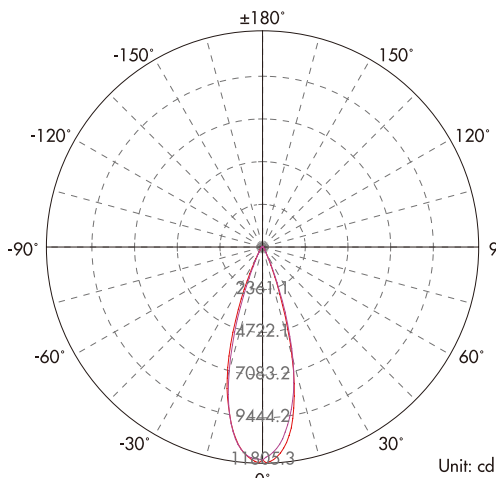

LED Colors




Lux Distance Curve (3000K 15°)-----

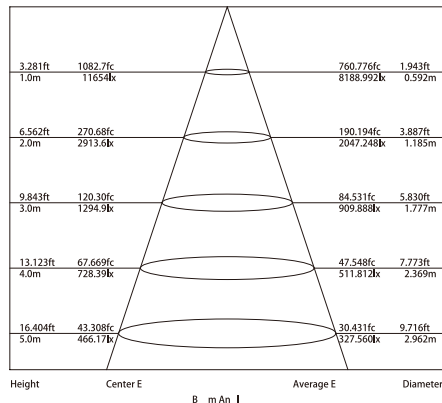

LED Flood Light




Dimension

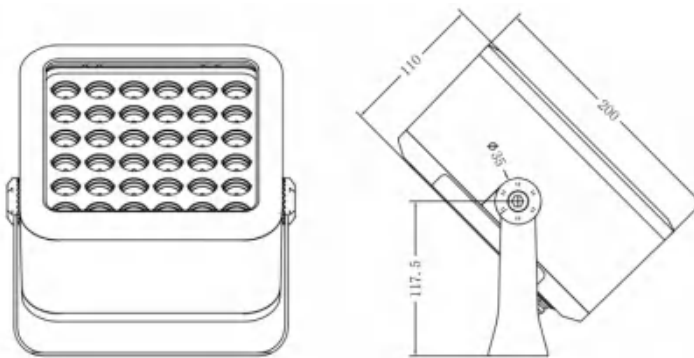

CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-TG200
Power	50/72 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	F200*W200*H210mm
Net Weight	5kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	4PCS/CTN
Carton size	52*52*28cm


Light Distribution Curve (3000K 15°)-----

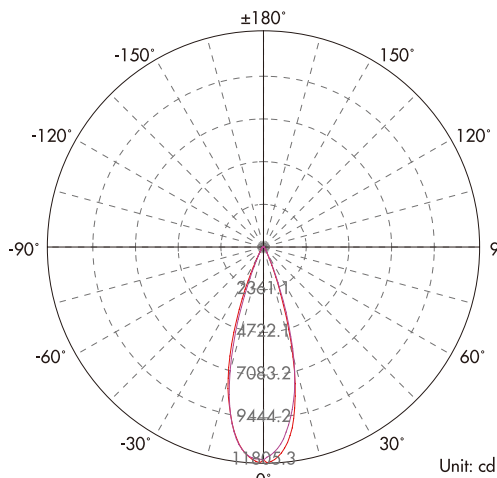

LED Colors




Lux Distance Curve (3000K 15°)-----

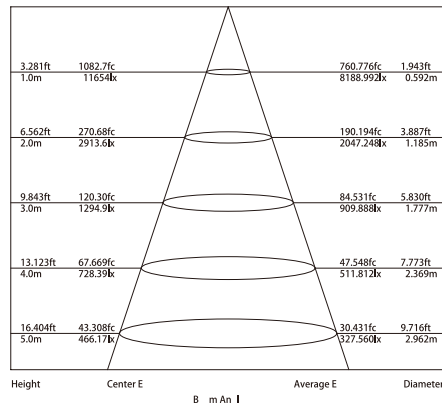

LED Flood Light




Dimension

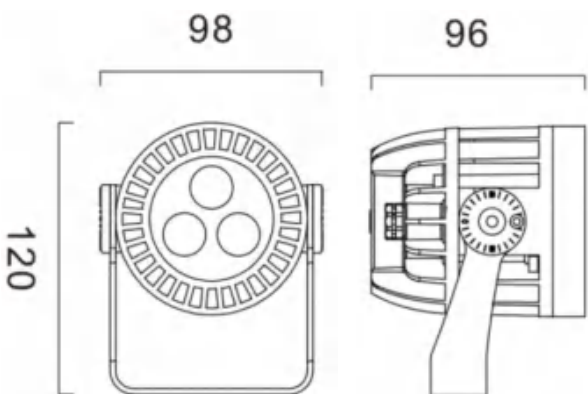

CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-FLD85
Power	6 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø85*96*120MM
Net Weight	1.4kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	20PCS/CTN
Carton size	60*25*25cm

Light Distribution Curve (3000K 15°)

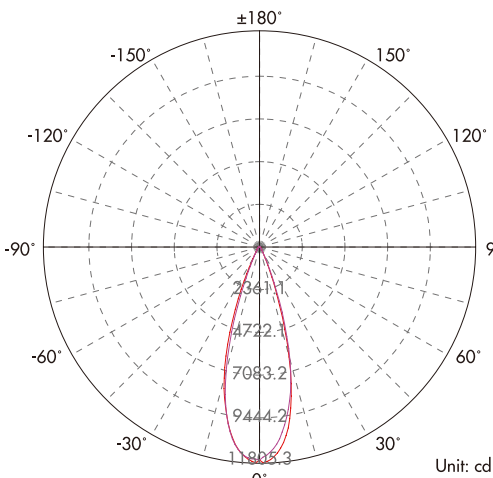


LED Colors



LED Flood Light




Dimension

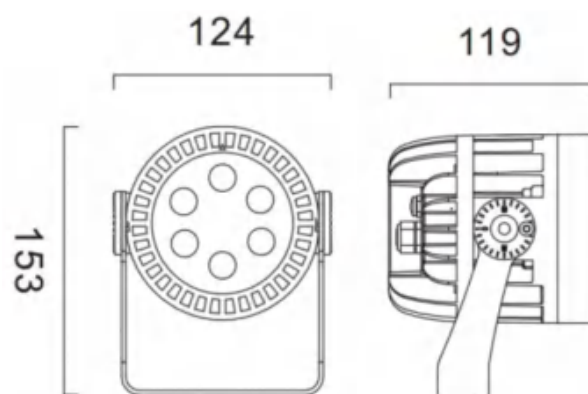

CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-FLD110
Power	18 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø110*119*153MM
Net Weight	2.4kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	20PCS/CTN
Carton size	80*32*32cm


Light Distribution Curve (3000K 15°)

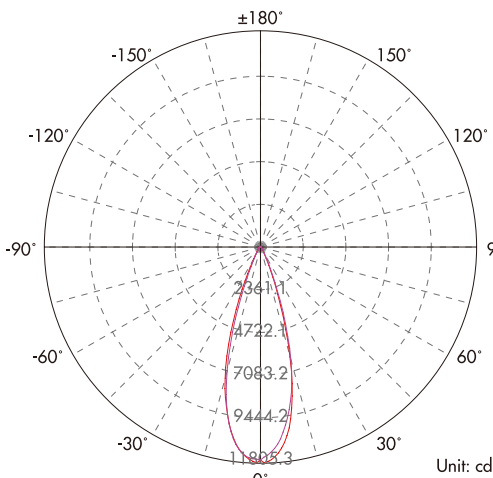


LED Colors



Lux Distance Curve (3000K 15°)

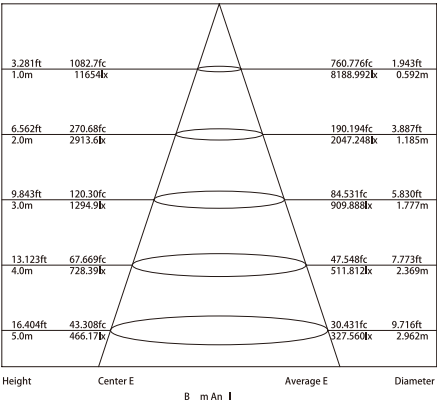


Lux Distance Curve (3000K 15°)

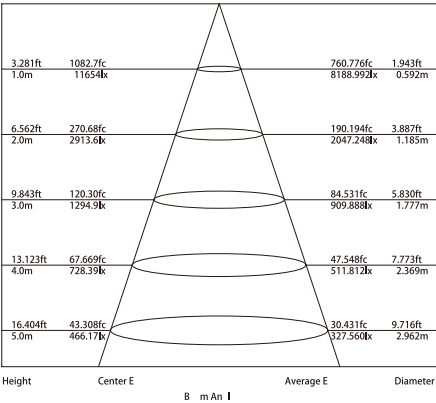

LED Flood Light




Dimension

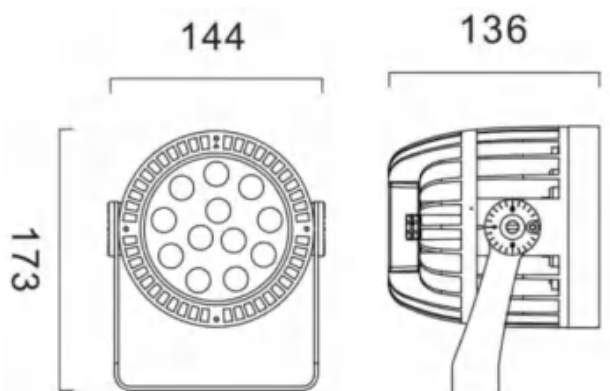

CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-FLD130
Power	24 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø130*136*173MM
Net Weight	1.8kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	8PCS/CTN
Carton size	36*36*36cm


Light Distribution Curve (3000K 15°)-----

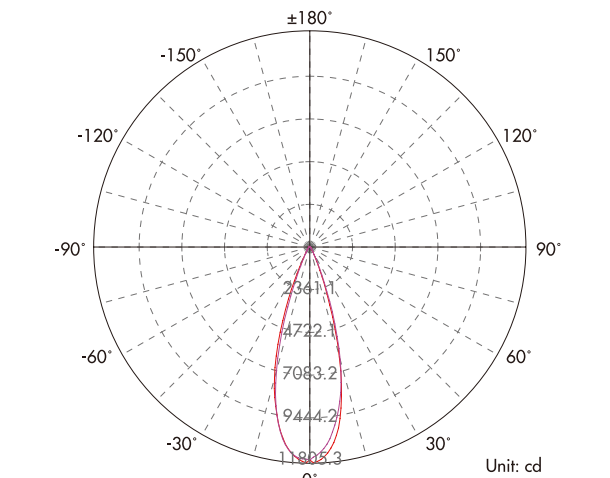

LED Colors




Lux Distance Curve (3000K 15°)-----

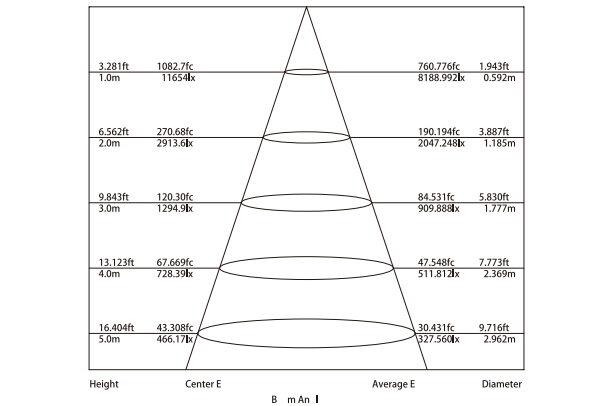

LED Flood Light




Dimension

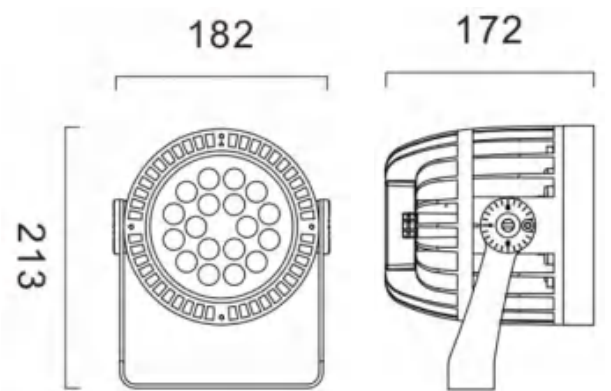

CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-FLD160
Power	36 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø160*172*213MM
Net Weight	3.2kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	8PCS/CTN
Carton size	45*45*45cm


Light Distribution Curve (3000K 15°)-----

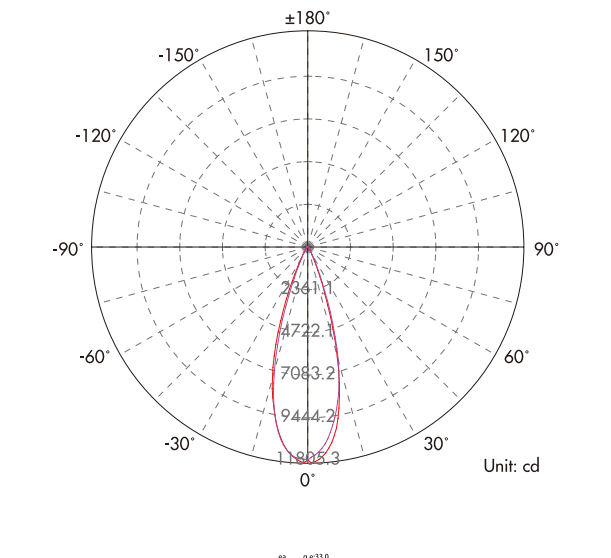

LED Colors



Lux Distance Curve (3000K 15°)-----

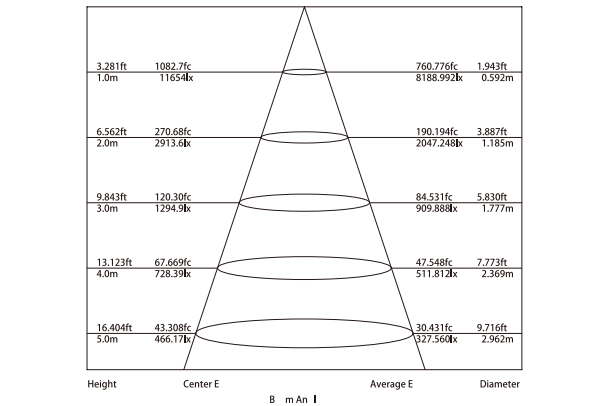

LED Flood Light




CE RoHS COMPLIANT IP66 IK 06

General Data	
Item No.	RC-FLD180
Power	48 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø180*180*242MM
Net Weight	4.2kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE,RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	4PCS/CTN
Carton size	50*50*25cm


LED Colors




Dimension

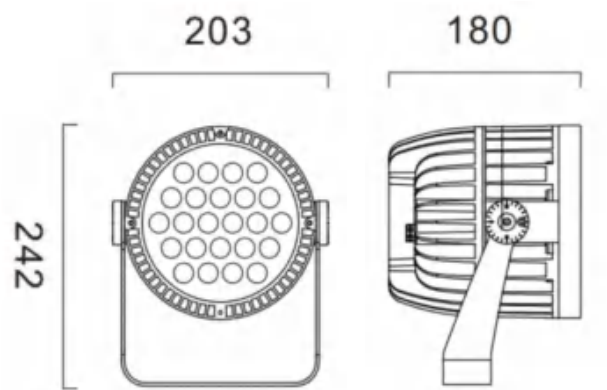

Light Distribution Curve (3000K 15°)

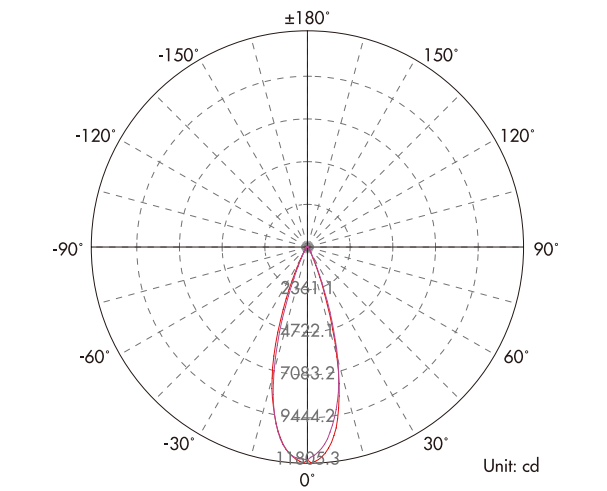

Lux Distance Curve (3000K 15°)

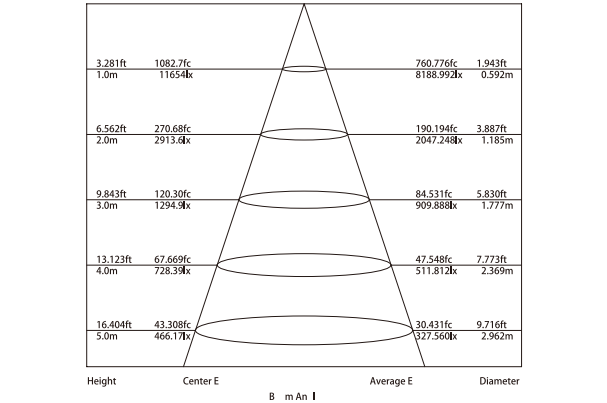

LED Flood Light




CE RoHS COMPLIANT IP66 IK 06

General Data	
Item No.	RC-FLD210
Power	72 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø210*222*273MM
Net Weight	6kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE,RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Meanwell
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	4PCS/CTN
Carton size	56*56*28cm


LED Colors




Dimension

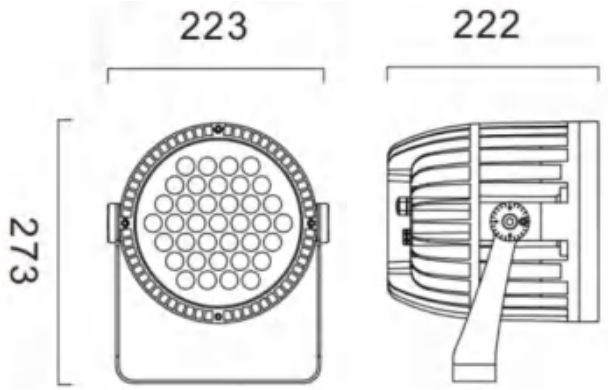

Light Distribution Curve (3000K 15°)

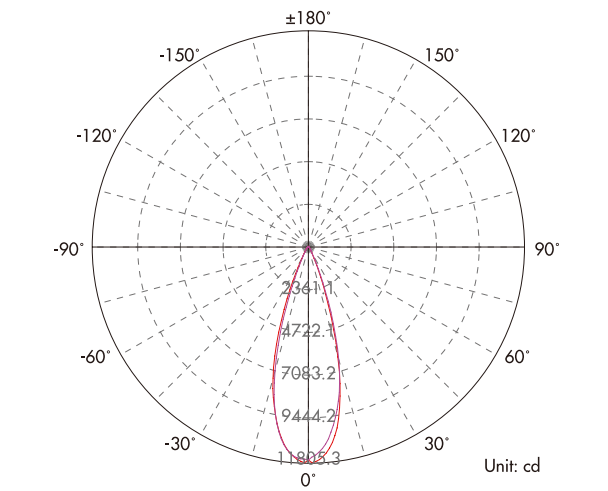

Lux Distance Curve (3000K 15°)

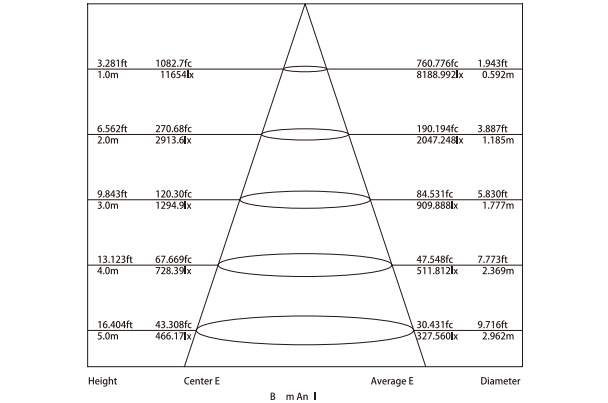


LED Flood Light




CE RoHS COMPLIANT IP66 IK 06

General Data	
Item No.	RC-FLD230
Power	96 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø230*244*319MM
Net Weight	8.8kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Meanwell
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	1PCS/CTN
Carton size	25*25*35cm

Dimension

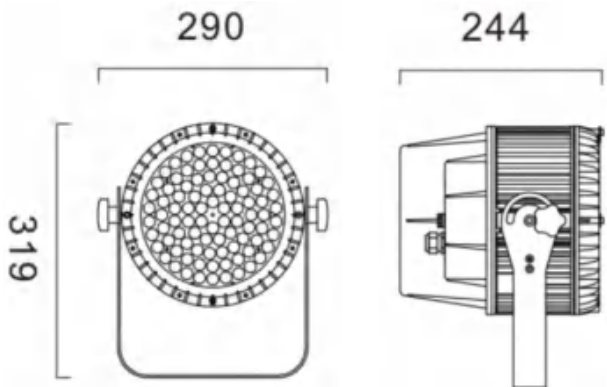


Light Distribution Curve (3000K 15°)-----

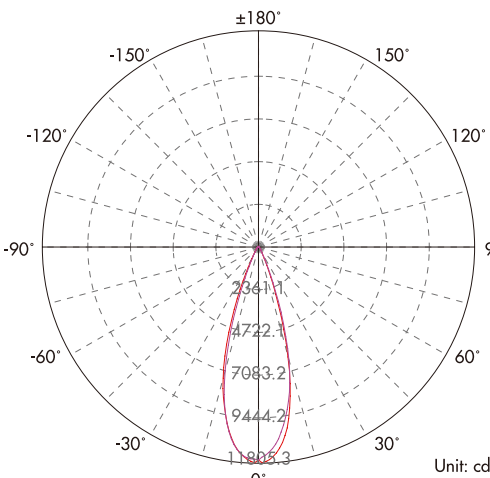

LED Colors



Lux Distance Curve (3000K 15°)-----

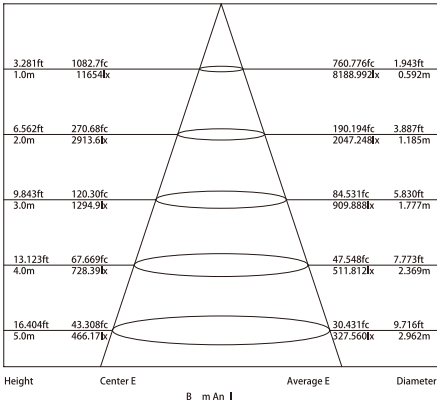


LED Flood Light




CE RoHS COMPLIANT IP66 IK 06

General Data	
Item No.	RC-FLD300
Power	144 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	ø300*278*394MM
Net Weight	18kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Meanwell
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	1PCS/CTN
Carton size	30*30*40cm

Dimension

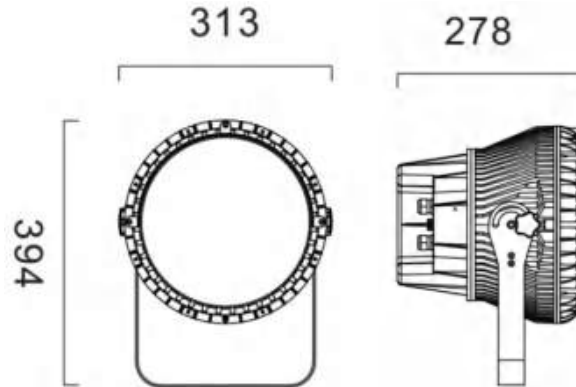


Light Distribution Curve (3000K 15°)-----

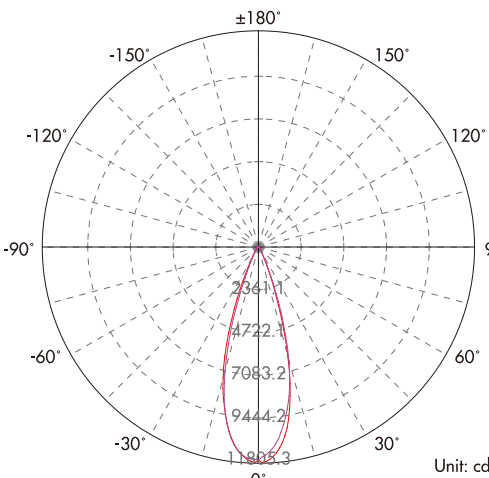

LED Colors




Lux Distance Curve (3000K 15°)-----

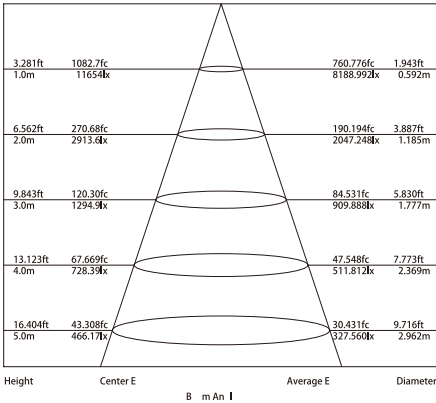

LED Flood Light




Dimension

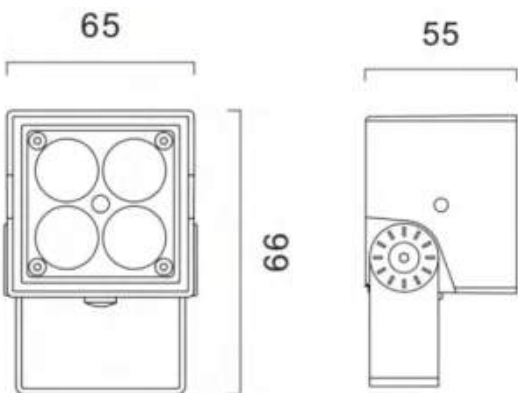

CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-FLW65
Power	8 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	65*55*99MM (L x W x H)
Net Weight	1.4kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	20PCS/CTN
Carton size	50*20*20cm


Light Distribution Curve (3000K 15°)-----

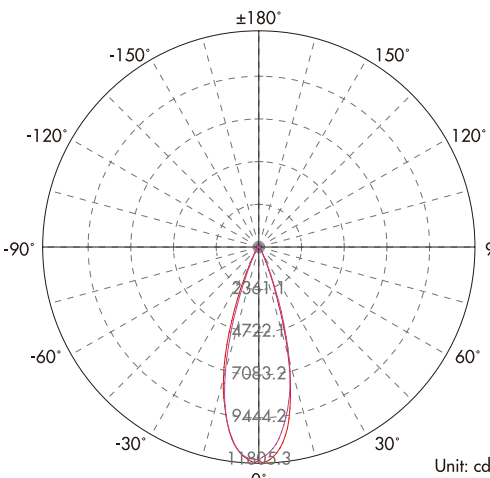

LED Colors




Lux Distance Curve (3000K 15°)-----

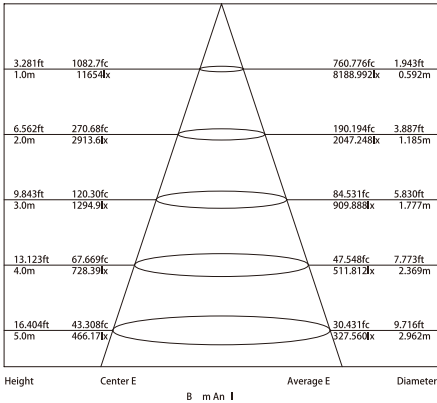

LED Flood Light




Dimension

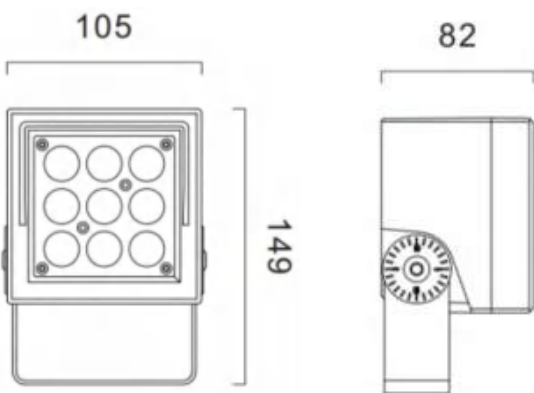

CE RoHS COMPLIANT IP66 IK04

General Data	
Item No.	RC-FLW105
Power	12/15 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	105*82*149MM (L x W x H)
Net Weight	2.4kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	20PCS/CTN
Carton size	75*30*30cm


Light Distribution Curve (3000K 15°)-----

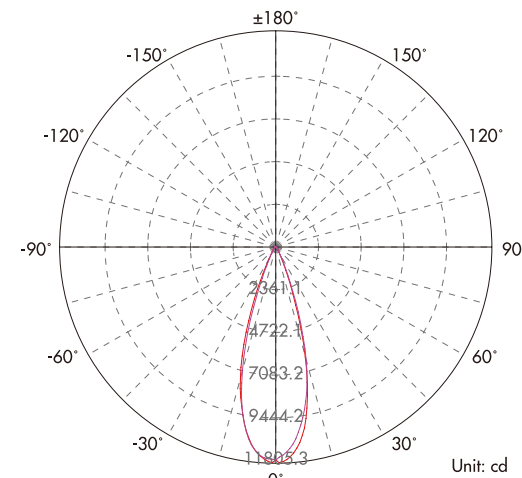

LED Colors




Lux Distance Curve (3000K 15°)-----

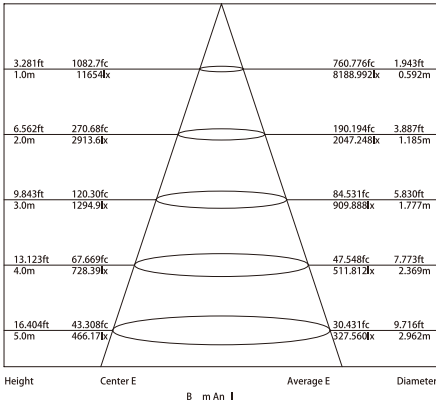

LED Flood Light




Dimension

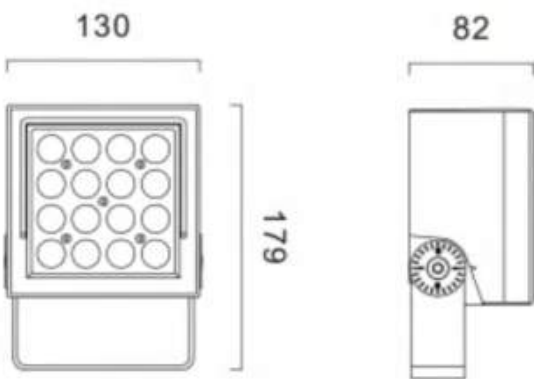

CE RoHS IP66 IK04

General Data	
Item No.	RC-FLW130
Power	24 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	130*82*179MM(L x W x H)
Net Weight	2.4kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	8PCS/CTN
Carton size	36*36*36cm


Light Distribution Curve (3000K 15°)

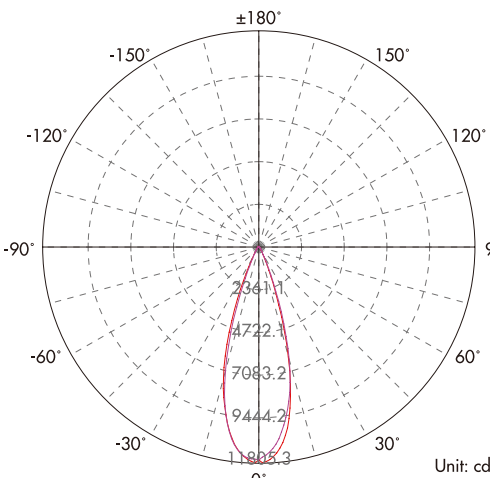

LED Colors




Lux Distance Curve (3000K 15°)

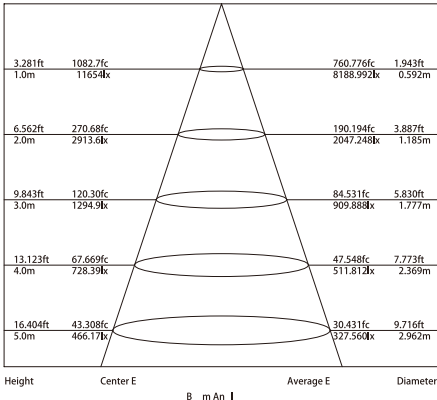

LED Flood Light




Dimension

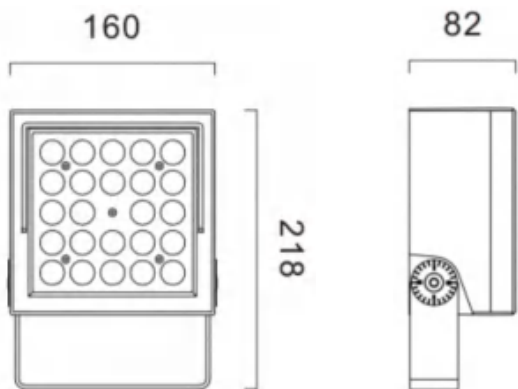

CE RoHS IP66 IK04

General Data	
Item No.	RC-FLW160
Power	36 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	160*82*218MM(L x W x H)
Net Weight	3kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	8PCS/CTN
Carton size	45*45*45cm


Light Distribution Curve (3000K 15°)

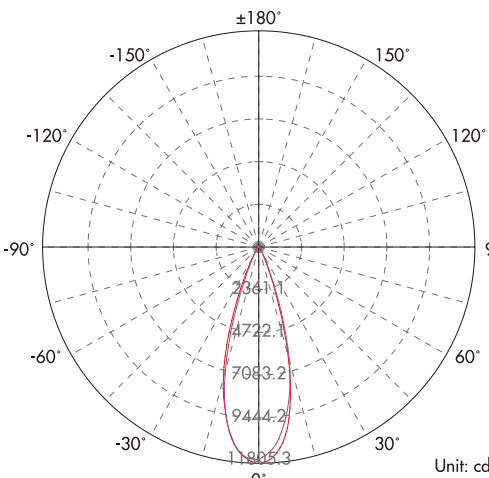

LED Colors




Lux Distance Curve (3000K 15°)

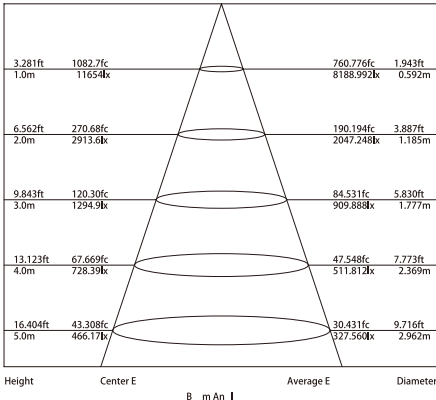

LED Flood Light




Dimension

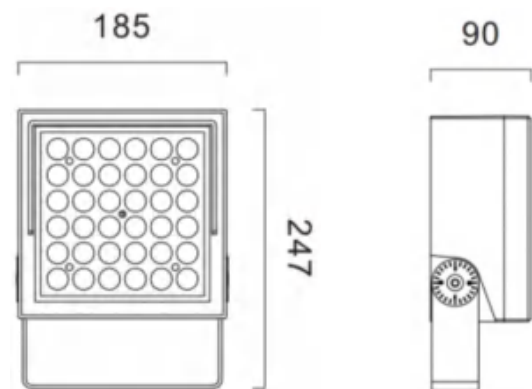

CE RoHS COMPLIANT IP66 IK 06

General Data	
Item No.	RC-FLW185
Power	48 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	185*90*247MM(L x W x H)
Net Weight	4.2kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	4PCS/CTN
Carton size	50*50*25cm


Light Distribution Curve (3000K 15°)-----

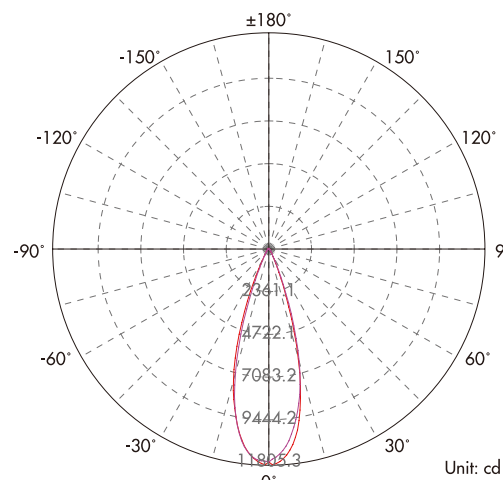

LED Colors




Lux Distance Curve (3000K 15°)-----

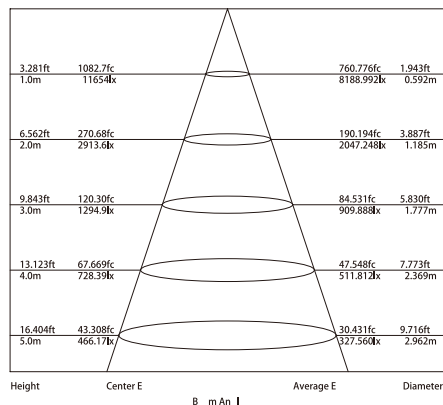

LED Flood Light




Dimension

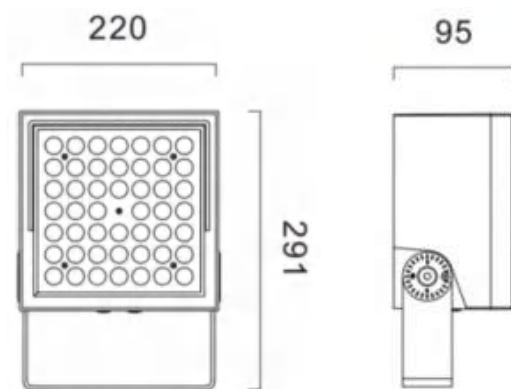

CE RoHS COMPLIANT IP66 IK 06

General Data	
Item No.	RC-FLW220
Power	72 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	220*95*291MM(L x W x H)
Net Weight	5kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	4PCS/CTN
Carton size	60*60*30cm


Light Distribution Curve (3000K 15°)-----

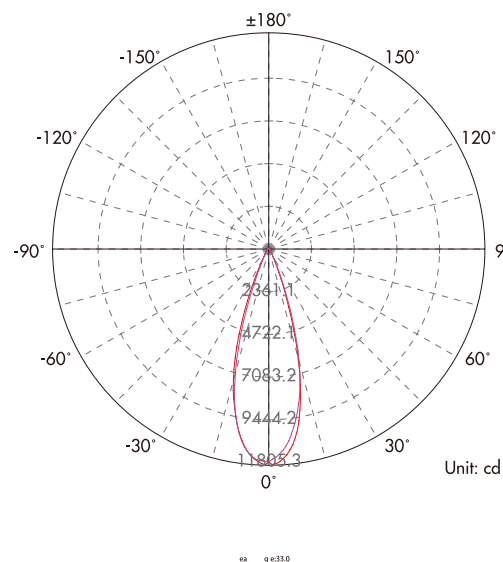

LED Colors




Lux Distance Curve (3000K 15°)-----

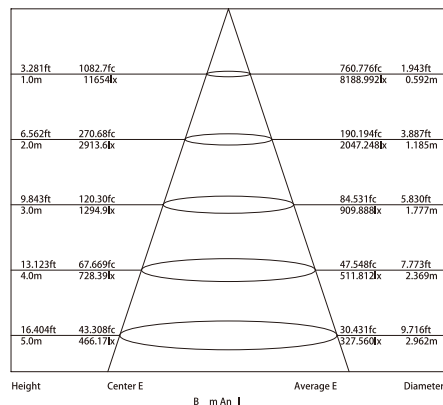

LED Flood Light




Dimension

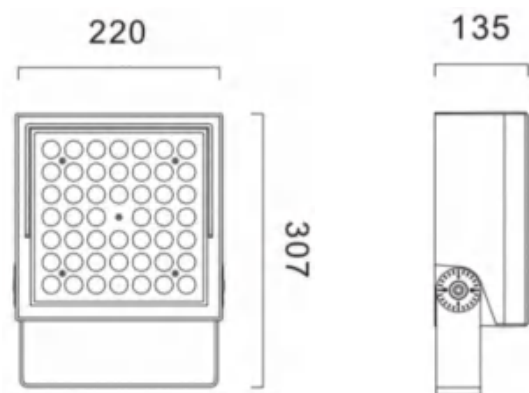

CE RoHS COMPLIANT IP66 IK 06

General Data	
Item No.	RC-FLW220L
Power	96 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	220*135*307MM(L x W x H)
Net Weight	6.3kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Meanwell
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	1PCS/CTN
Carton size	25*15*35cm


Light Distribution Curve (3000K 15°)-----

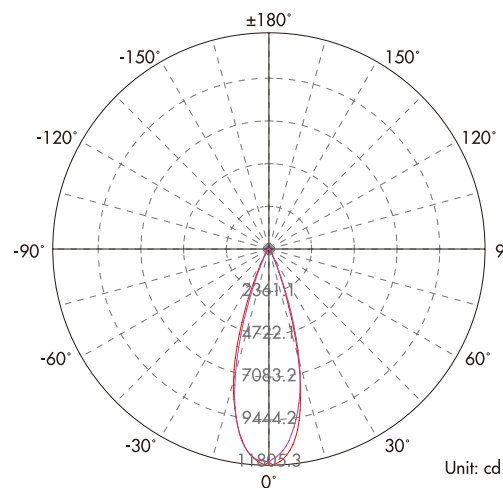

LED Colors




Lux Distance Curve (3000K 15°)-----

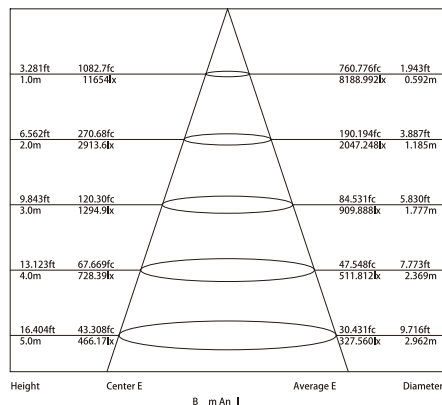

LED Flood Light




Dimension

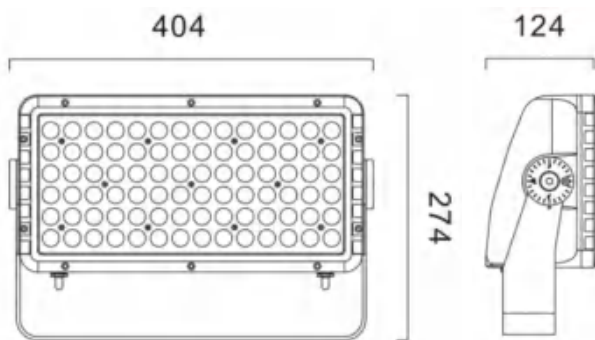

CE RoHS COMPLIANT IP66 IK 06

General Data	
Item No.	RC-FLW404
Power	120/144 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	404*124*274MM(L x W x H)
Net Weight	10.8kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Meanwell
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	1PCS/CTN
Carton size	45*15*30cm


Light Distribution Curve (3000K 15°)-----

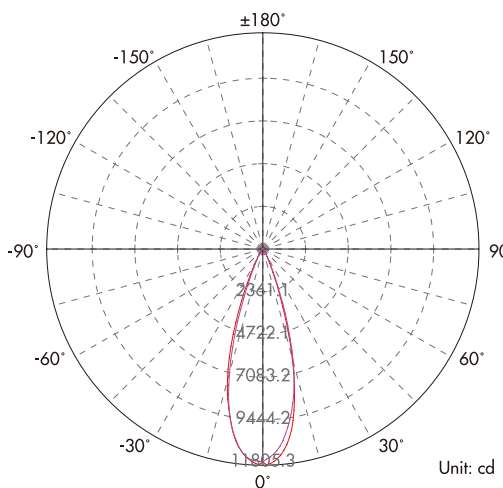

LED Colors




Lux Distance Curve (3000K 15°)-----

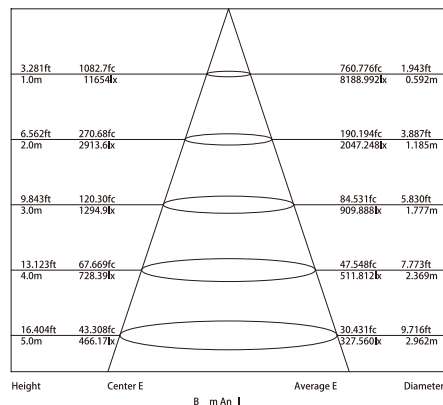

LED Flood Light




Dimension

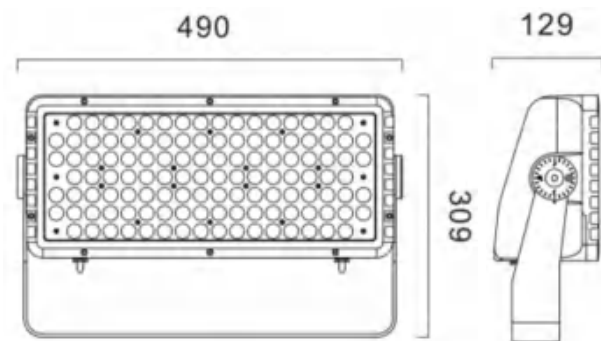

IP66 IK 06

Light Distribution Curve (3000K 15°)



General Data	
Item No.	RC-FLW490L
Power	200 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	490*129*309MM(L x W x H)
Net Weight	13.8kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Meanwell
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	1PCS/CTN
Carton size	50*15*35cm


Effect Picture



LED Flood Light




Dimension

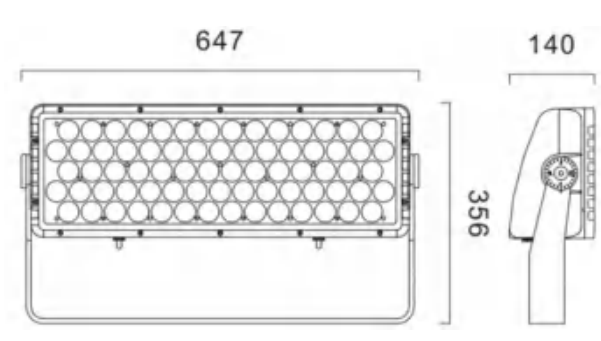


IP66 IK 06

Light Distribution Curve (3000K 15°)

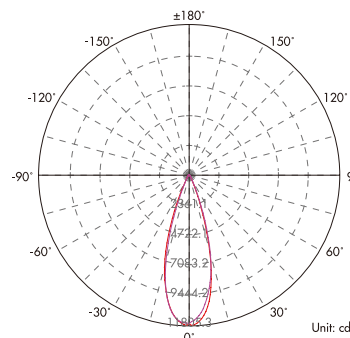

General Data	
Item No.	RC-FLW647
Power	240 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beam angle	8°/15°/30°/45°/60°/90°
Dimension	647*140*356MM(L x W x H)
Net Weight	18kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Meanwell
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	1PCS/CTN
Carton size	70*15*40cm

Lux Distance Curve (3000K 15°)

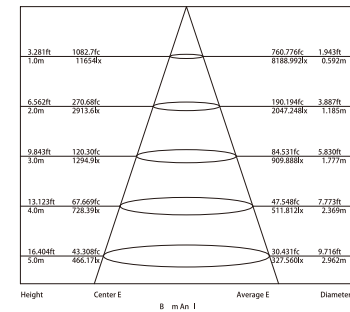


Effect Picture



LED Flood Light



Dimension

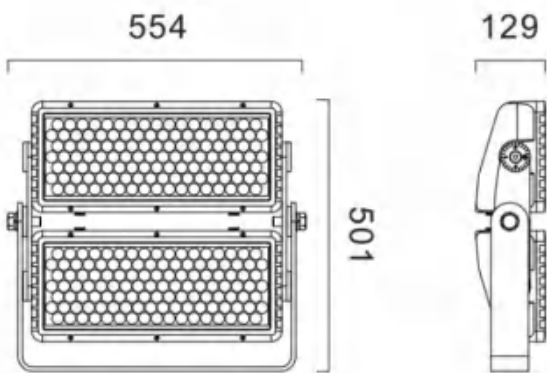

CE RoHS COMPLIANT IP66 IK 06

General Data	
Item No.	RC-FLW554
Power	300 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beamangle	8°/15°/30°/45°/60°/90°
Dimension	554*129*501MM(L x W x H)
Net Weight	30kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Meanwell
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	1PCS/CTN
Carton size	60*15*55cm


Effect Picture



LED Flood Light




Dimension

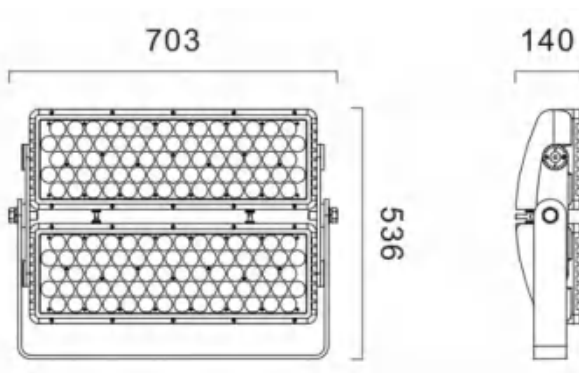


CE RoHS COMPLIANT IP66 IK 06

General Data	
Item No.	RC-FLW703
Power	480 Watts
LED type	CREE/OSRAM/LUMILEDS
Luminous flux	80-90lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beamangle	8°/15°/30°/45°/60°/90°
Dimension	703*140*536MM(L x W x H)
Net Weight	38.4kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Meanwell
Contro	On/Off, DMX512
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	1PCS/CTN
Carton size	75*15*55cm

Light Distribution Curve (3000K 15°)-----

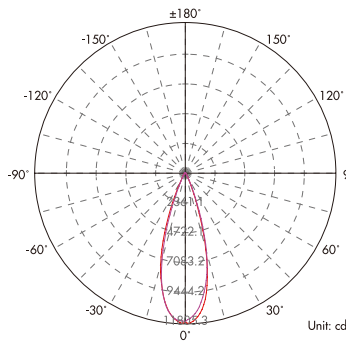

Lux Distance Curve (3000K 15°)-----



Effect Picture






Landscape Spot Light




Landscape Spot Light




Dimension

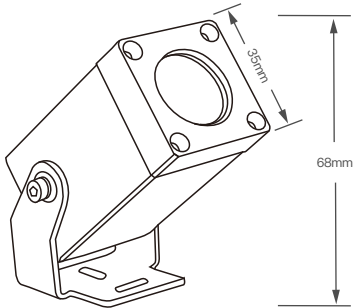

Light Distribution Curve (3000K 30°)

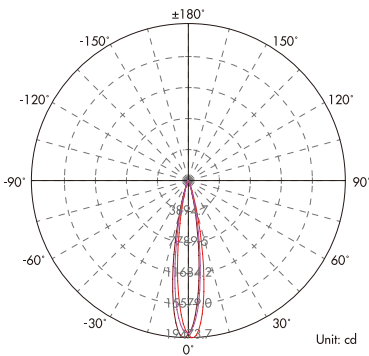


Lux Distance Curve (3000K 30°)

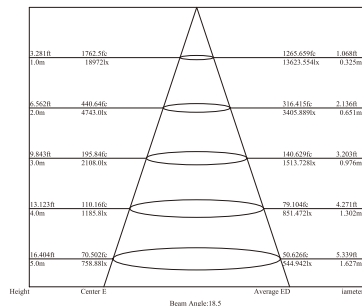

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-M01
Power	1-3 Watts
LED type	CREE/Bridgelux
Luminous flux	60-70lm/W
CCT	2700K-6000K
CRI	80+
Beamangle	30°/45°/60°
Dimension	35*68mm
Net Weight	0.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Constant current driver
Control	On/Off
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	50PCS/CTN
Carton size	52*40*22cm


Details

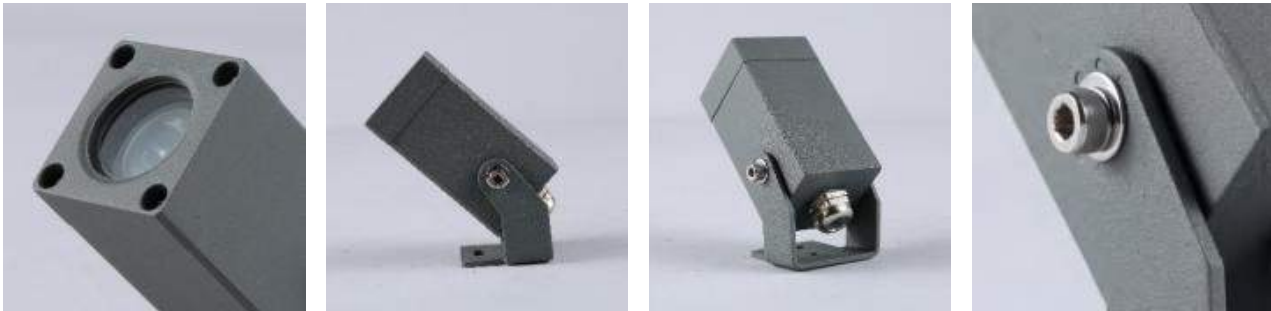


Landscape Spot Light




Dimension

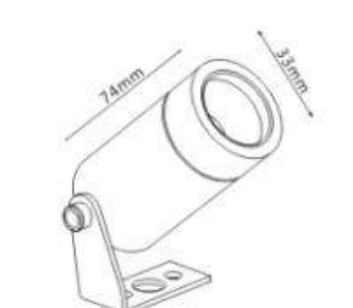

Light Distribution Curve (3000K 30°)

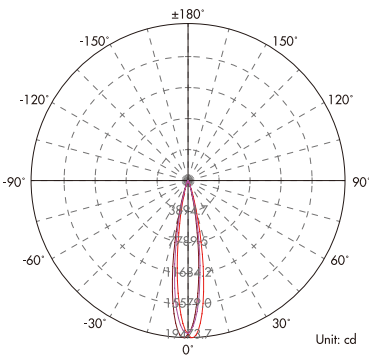


Lux Distance Curve (3000K 30°)

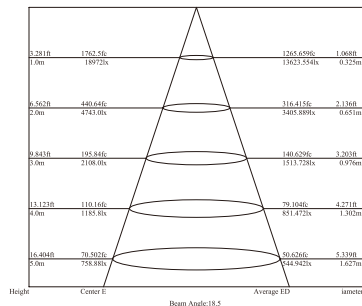

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-M02
Power	1-3 Watts
LED type	CREE/Bridgelux
Luminous flux	80-85lm/W
CCT	2700K-6000K
CRI	80+
Beamangle	30°/45°/60°
Dimension	33*74mm
Net Weight	0.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Constant current driver
Control	On/Off
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	50PCS/CTN
Carton size	52*40*22cm


Details

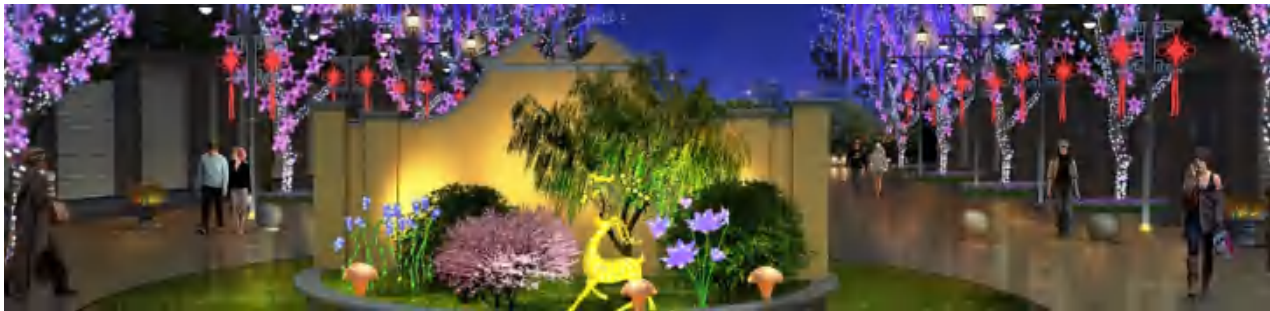


Landscape Spot Light




Dimension

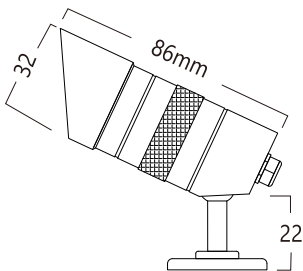

Light Distribution Curve (3000K 30°)

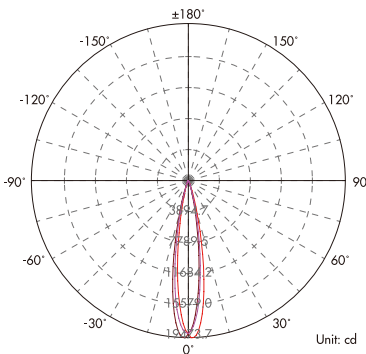

Lux Distance Curve (3000K 30°)

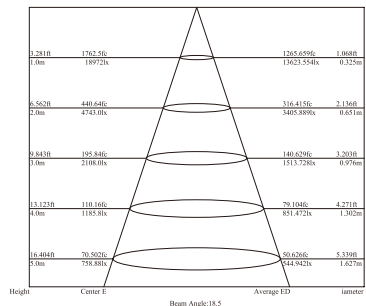

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-M03A
Power	3 Watts
LED type	CREE/Bridgelux
Luminous flux	60-70lm/W
CCT	2700K-6000K
CRI	80+
Beamangle	30°
Dimension	32*86mm
Net Weight	0.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Constant current driver
Control	On/Off
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	50PCS/CTN
Carton size	52*40*22cm


Details




Landscape Spot Light




Dimension

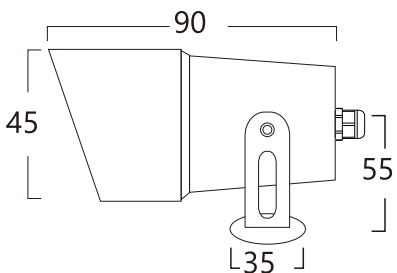

Light Distribution Curve (3000K 30°)

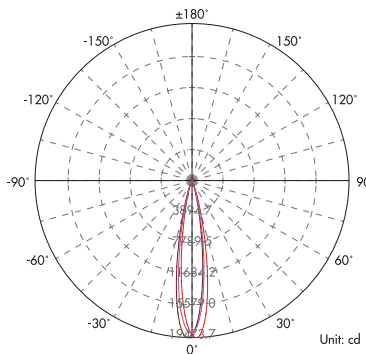

Lux Distance Curve (3000K 30°)

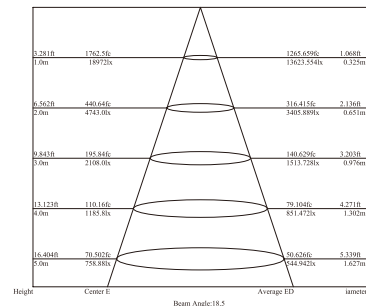

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-M03B
Power	3-5 Watts
LED type	CREE/Bridgelux
Luminous flux	60-70lm/W
CCT	2700K-6000K
CRI	80+
Beamangle	30°/45°/60°/90°
Dimension	45*90mm
Net Weight	0.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Constant current driver
Control	On/Off
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	50PCS/CTN
Carton size	52*40*22cm


Details




Landscape Spot Light




Dimension

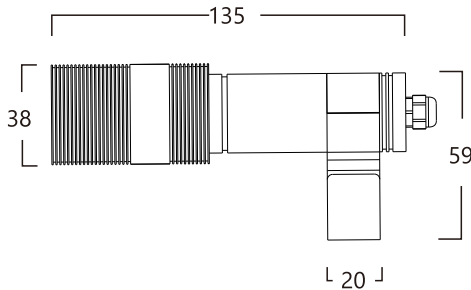

Light Distribution Curve (3000K 30°)

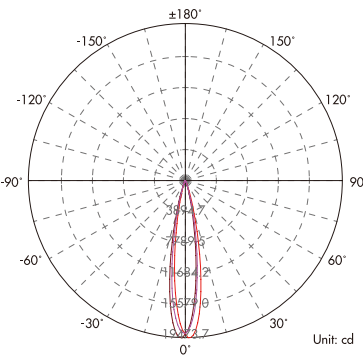

Lux Distance Curve (3000K 30°)

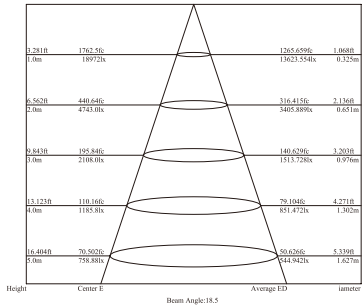

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-M05
Power	5 Watts
LED type	CREE/Bridgelux
Luminous flux	60-70lm/W
CCT	2700K-6000K
CRI	80+
Beamangle	30°
Dimension	38*135mm
Net Weight	0.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V
Driver	Low voltage constant current driver, excluding transformer
Control	On/Off
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	30PCS/CTN
Carton size	66.5*56*32.5cm


Details




Landscape Spot Light




Dimension



Light Distribution Curve (3000K 30°)

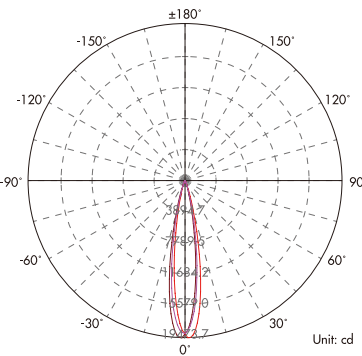

Lux Distance Curve (3000K 30°)

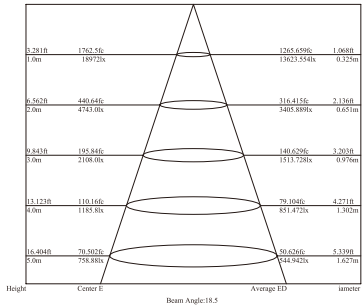

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-L05
Power	5 Watts
LED type	CREE/Bridgelux
Luminous flux	60-70lm/W
CCT	2700K-6000K
CRI	80+
Beamangle	30°/45°/60°/90°
Dimension	55*80mm
Net Weight	0.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V
Driver	Constant current driver
Control	On/Off
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	50PCS/CTN
Carton size	52*40*22cm


Details




Landscape Spot Light




Dimension

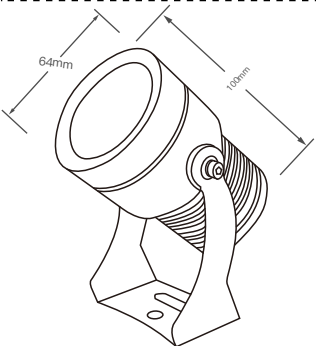

Light Distribution Curve (3000K 30°)

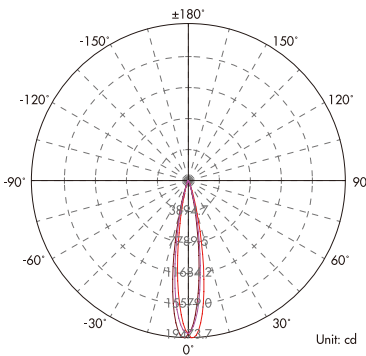

Lux Distance Curve (3000K 30°)

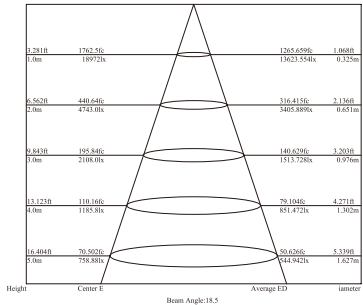

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-L07
Power	7 Watts
LED type	CREE/Bridgelux
Luminous flux	60-70lm/W
CCT	2700K-6000K
CRI	80+
Beamangle	30°/45°/60°
Dimension	64*100mm
Net Weight	0.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Constant current driver
Control	On/Off
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	9PCS/CTN
Carton size	66.5*56*32.5cm


Details




Landscape Spot Light




Dimension



Light Distribution Curve (3000K 30°)

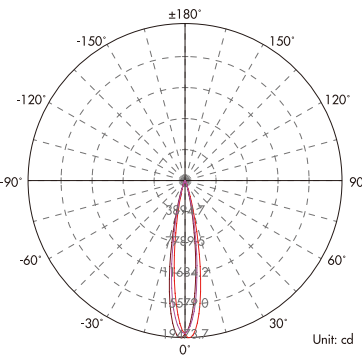

Lux Distance Curve (3000K 30°)

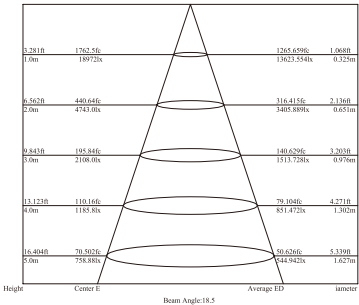

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-L10
Power	10 Watts
LED type	CREE/Bridgelux
Luminous flux	80-85lm/W
CCT	2700K-6000K
CRI	80+
Beamangle	30°/45°/60°
Dimension	85*130mm
Net Weight	0.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Constant current driver
Control	On/Off
Construction Data	
IP rating	IP66 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	30PCS/CTN
Carton size	52*32*34cm


Details




Landscape Spot Light




Dimension

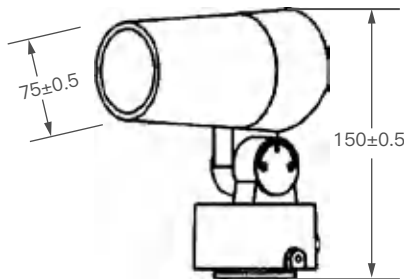

Light Distribution Curve (3000K 30°)

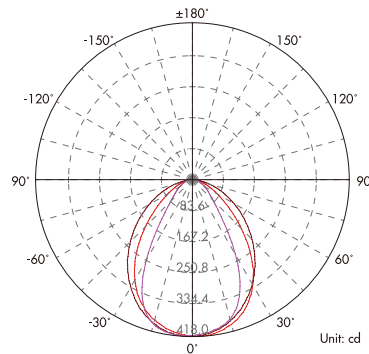

Lux Distance Curve (3000K 30°)

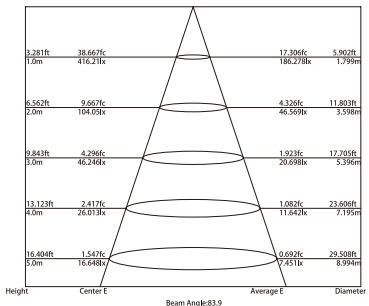

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-P10
Power	10 Watts
LED type	CREE COB
Luminous flux	60-70lm/W
CCT	2700K-6000K
CRI	80+
Beamangle	15° /23°/38°
Dimension	75*150mm (D x H)
Net Weight	1.8 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Control	On/Off
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	20PCS/CTN
Carton size	52*32*34cm


Details




Landscape Spot Light




Dimension

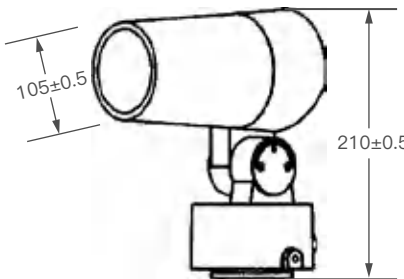

Light Distribution Curve (3000K 30°)

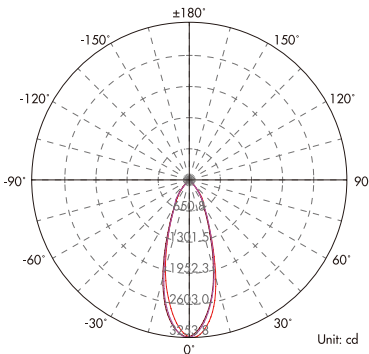

Lux Distance Curve (3000K 30°)

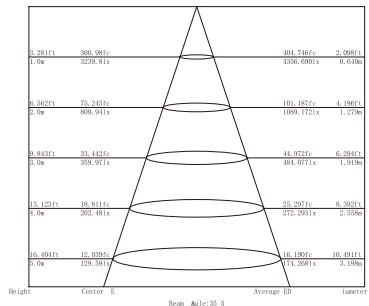

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-P20
Power	20 Watts
LED type	CREE COB
Luminous flux	60-70lm/W
CCT	2700K-6000K
CRI	80+
Beamangle	15° /23°/38°
Dimension	105*210mm (D x H)
Net Weight	2.6 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Control	On/Off
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	20PCS/CTN
Carton size	65*27*34cm


Details




Landscape Spot Light




Dimension

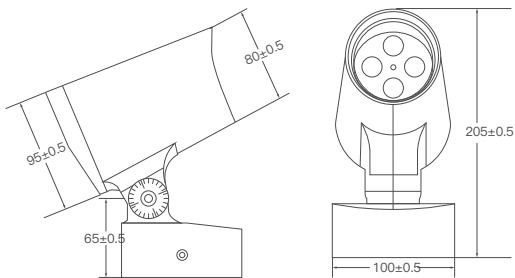

Light Distribution Curve (3000K 30°)

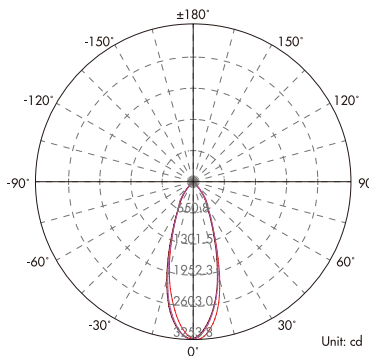

Lux Distance Curve (3000K 30°)

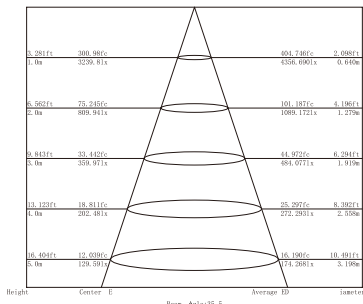

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-XJD80
Power	12-15 Watts
LED type	CREE/OSRAM
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beamangle	15°/20°/30°/45°/60°
Dimension	80*205mm (D x H)
Net Weight	2.2 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Cable	On/Off, DMX512
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	20PCS/CTN
Carton size	65*27*34cm


Details




Landscape Spot Light




Dimension

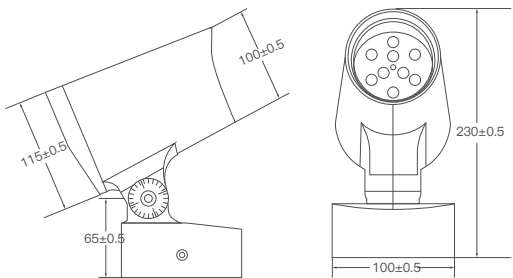

Light Distribution Curve (3000K 30°)

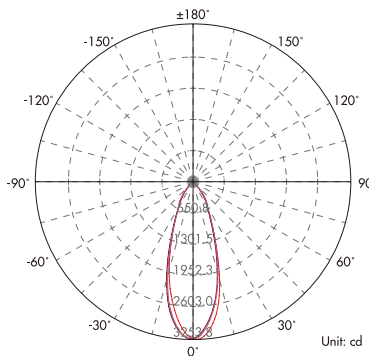

Lux Distance Curve (3000K 30°)

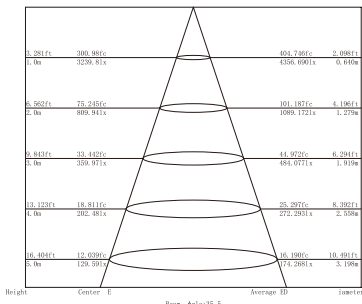

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-XJD100
Power	20-27 Watts
LED type	CREE/OSRAM
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beamangle	15°/20°/30°/45°/60°
Dimension	100*230mm (D x H)
Net Weight	3.4 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Cable	On/Off, DMX512
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	12PCS/CTN
Carton size	72*31*46cm


Details




Landscape Spot Light




Dimension

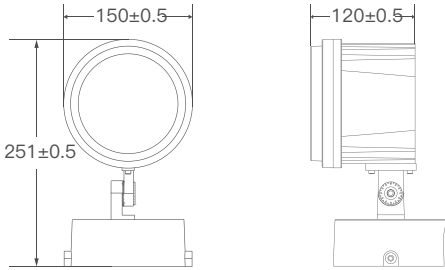

Light Distribution Curve (3000K 30°)

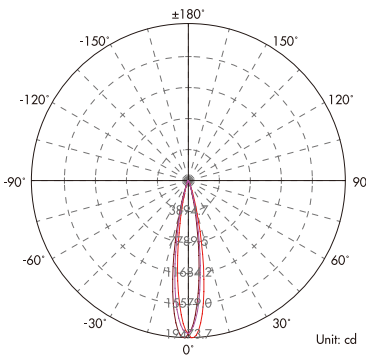

Lux Distance Curve (3000K 30°)

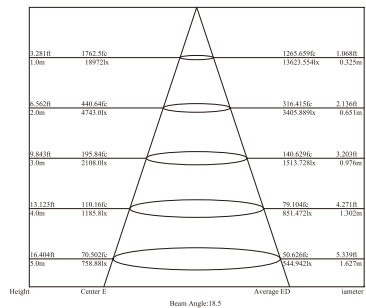

CE RoHS COMPLIANT IP 65 IK04

General Data	
Item No.	RC-SP-G18
Power	18 Watts
LED type	CREE/OSRAM
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beamangle	15°/30°/45°/60°/90°
Dimension	105*100*220mm (L x W x H)
Net Weight	2.3 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Control	On/Off, DMX512
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	20PCS/CTN
Carton size	72*31*46cm


Details




Landscape Spot Light




Dimension

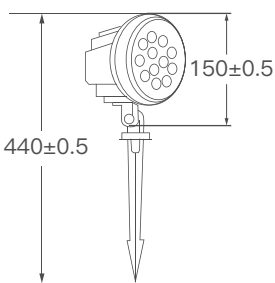

Light Distribution Curve (3000K 30°)

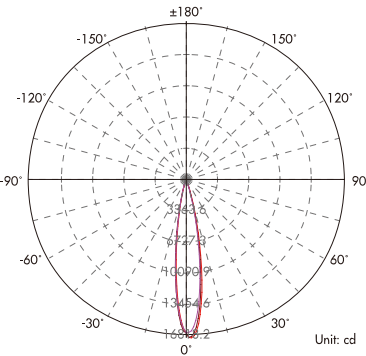

Lux Distance Curve (3000K 30°)

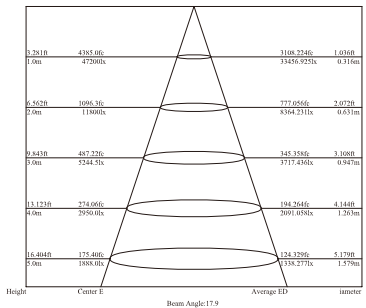

CE RoHS COMPLIANT IP 65 Ik04

General Data	
Item No.	RC-SP-G36
Power	36 Watts
LED type	CREE/OSRAM
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/RGB/RGBW
CRI	80+
Beamangle	15°/30°/45°/60°/90°
Dimension	150*120*265mm (L x W x H)
Net Weight	3.4 kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/AC100-260V,50/60Hz
Driver	Done
Control	On/Off, DMX512
Construction Data	
IP rating	Ip65 Waterproof
Material	Die cast aluminum+Tempered glass
Finishing	Matt grey/black
Packaging	
PCS/CTN	12PCS/CTN
Carton size	72*31*46cm

Details






LED Pixel Light Series




LED Pixel Light




Dimension

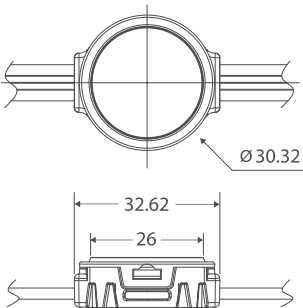

Light Distribution Curve (RGB)

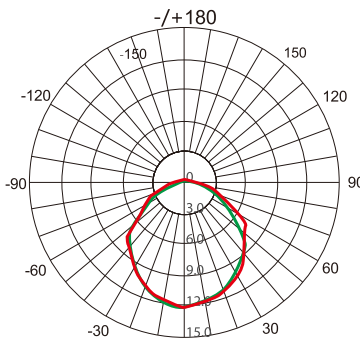

Lux Distance Curve (RGB)

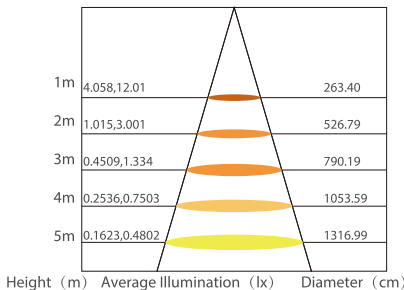

CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-PL030R
Power	0.72 Watts/ 0.9 Watts/ 1.0 Watts
LED Chip	Osram/Espistar
Luminous flux	90lm±5% @4000K
CCT	2700K - 6500K/RGB/RGBW Optional
CRI	80+
Beam angle	120°-160°
Dimension	D30mm
Working Temperature	-30 C ~ +55 C
Life time	50,000hours
Warranty	3 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC12V/15V
Driver	Excluding
Control Mode	On/off, DMX512, TTL
Construction Data	
IP rating	IP66
Material	PC
Finishing	Black


Details




LED Pixel Light




Dimension

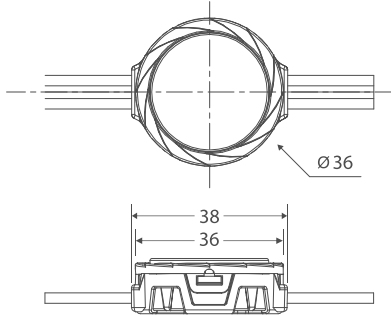

Light Distribution Curve (RGB)

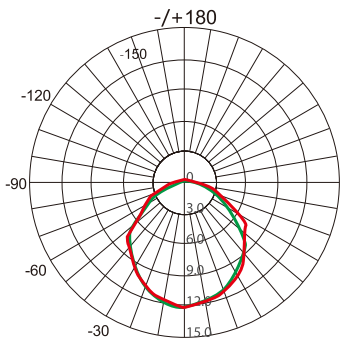

Lux Distance Curve (RGB)

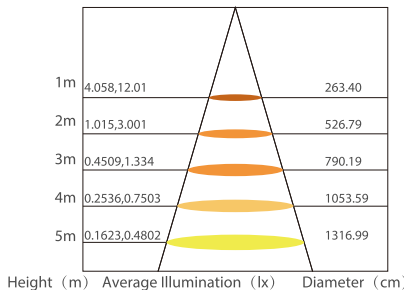

CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-PL036R
Power	0.72 Watts/ 1.0 Watts/ 1.44 Watts
LED Chip	Osram/Espistar
Luminous flux	90lm±5% @4000K
CCT	2700K - 6500K/RGB/RGBW Optional
CRI	80+
Beam angle	120°-160°
Dimension	D36mm
Working Temperature	-30 C ~ +55 C
Life time	50,000hours
Warranty	3 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC12V/15V/24V
Driver	Excluding
Control Mode	On/off, DMX512, TTL
Construction Data	
IP rating	IP66
Material	PC
Finishing	Black


Details




LED Pixel Light




Dimension



Light Distribution Curve (RGB)

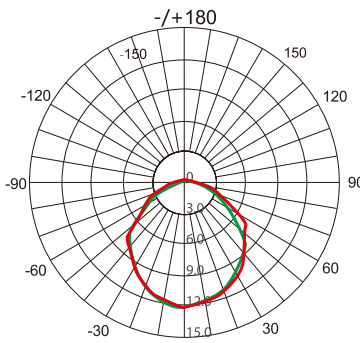

Lux Distance Curve (RGB)

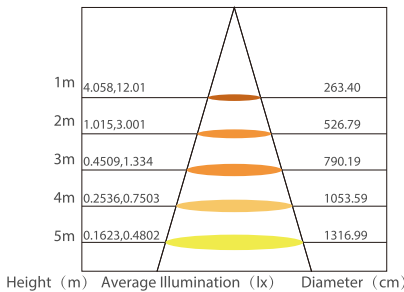

CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-PL040R
Power	0.72 Watts/ 1.0 Watts/ 1.44 Watts/ 2.4 Watts
LED Chip	Osram/Espistar
Luminous flux	90lm±5% @4000K
CCT	2700K - 6500K/RGB/RGBW Optional
CRI	80+
Beam angle	120°-160°
Dimension	D40mm
Working Temperature	-30 C ~ +55 C
Life time	50,000hours
Warranty	3 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC12V/15V/24V
Driver	Excluding
Control Mode	On/off, DMX512, TTL
Construction Data	
IP rating	IP66
Material	PC
Finishing	Black


Details




LED Pixel Light




Dimension

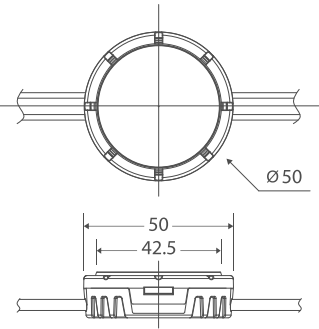

Light Distribution Curve (RGB)

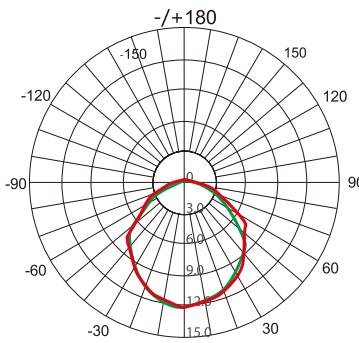


Lux Distance Curve (RGB)

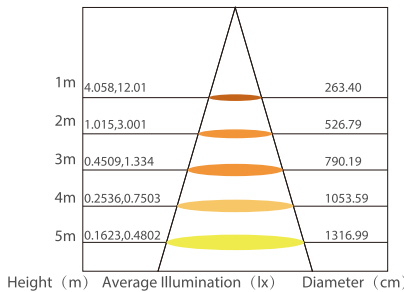


CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-PL050R
Power	5 Watts
LED Chip	Osram/Espistar
Luminous flux	90lm±5% @4000K
CCT	2700K - 6500K/RGB/RGBW Optional
CRI	80+
Beam angle	120°-160°
Dimension	D50mm
Working Temperature	-30 C ~ +55 C
Life time	50,000hours
Warranty	3 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC24V/36V
Driver	Excluding
Control Mode	On/off, DMX512, TTL
Construction Data	
IP rating	IP66
Material	PC
Finishing	Black


Details

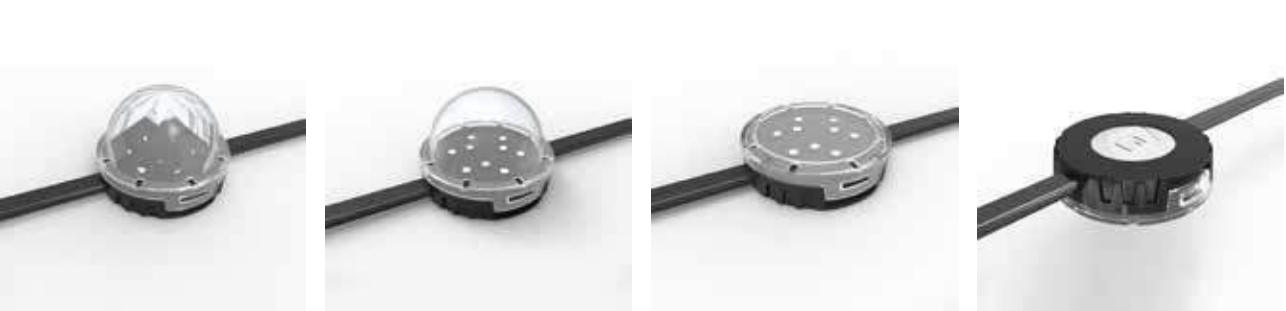


LED Pixel Light

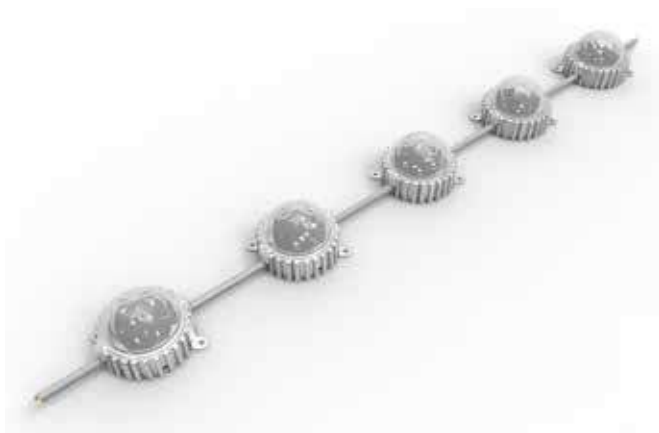


Dimension

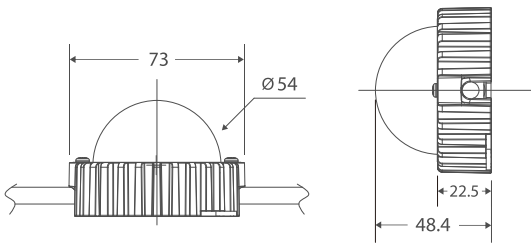


Light Distribution Curve (RGBW)

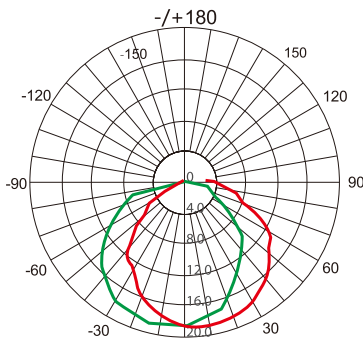

Lux Distance Curve (RGBW)

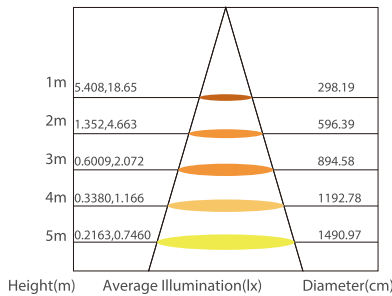


Details

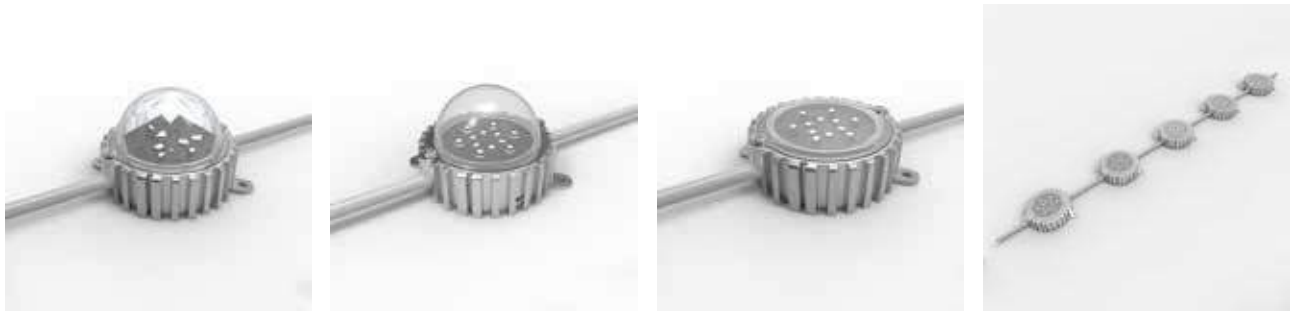


LED Pixel Light




Dimension

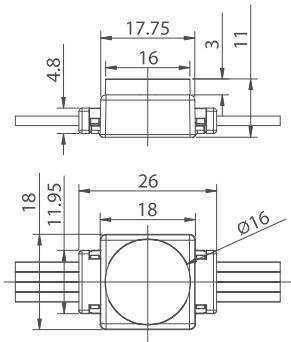

Light Distribution Curve (RGBW)

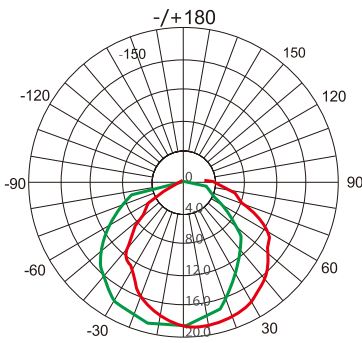

Lux Distance Curve (RGBW)

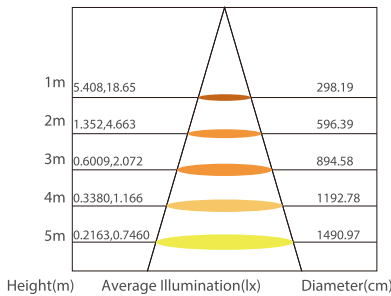

Details




LED Pixel Light




CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-PL020S
Power	0.72 Watts/ 0.9 Watts/ 1.44 Watts/ 1.8 Watts
LED Chip	Osram/Espistar
Luminous flux	90lm±5% @4000K
CCT	2700K - 6500K/RGB/RGBW Optional
CRI	80+
Beam angle	120°-160°
Dimension	L42mm*W20mm
Working Temperature	-30 C ~+55 C
Life time	50,000hours
Warranty	3 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC12V/15V/24V
Driver	Excluding
Control Mode	On/off, DMX512, TTL
Construction Data	
IP rating	IP66
Material	PC


Dimension

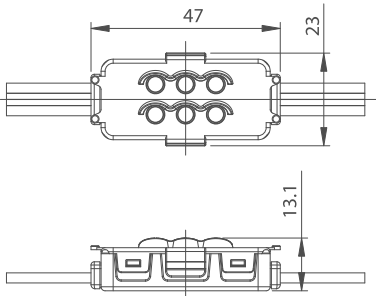


Light Distribution Curve (RGBW)

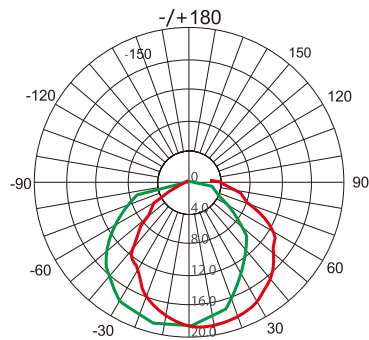

Lux Distance Curve (RGBW)

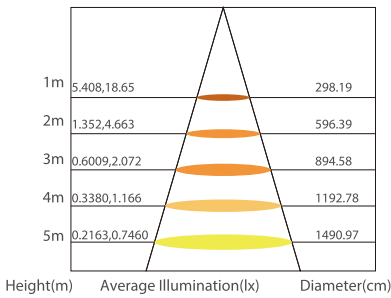

Details

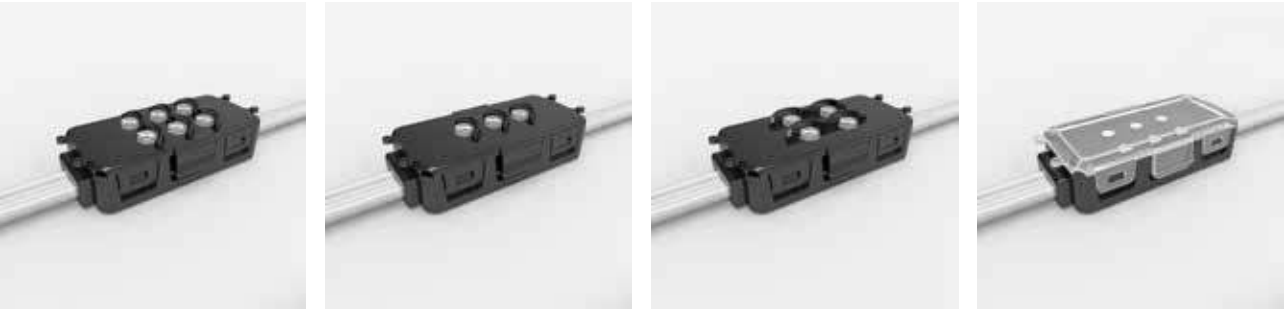


LED Pixel Light




CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-PL026S
Power	0.72 Watts/ 0.9 Watts/ 1.0 Watts
LED Chip	Osram/Espistar
Luminous flux	90lm±5% @4000K
CCT	2700K - 6500K/RGB/RGBW Optional
CRI	80+
Beam angle	120°-160°
Dimension	L30*W26mm
Working Temperature	-30 C ~+55 C
Life time	50,000hours
Warranty	3 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC12V/15V
Driver	Excluding
Control Mode	On/off, DMX512, TTL
Construction Data	
IP rating	IP66
Material	PC


Dimension

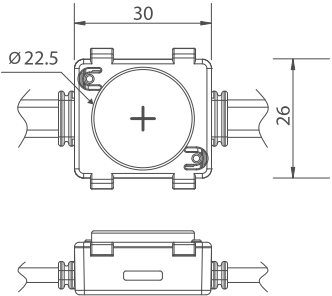


Light Distribution Curve (RGBW)

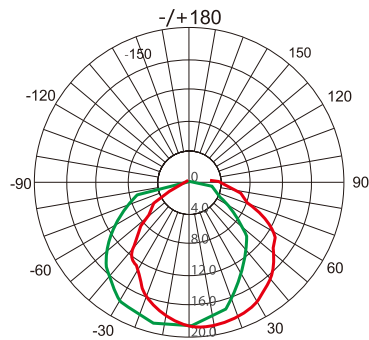


Lux Distance Curve (RGBW)

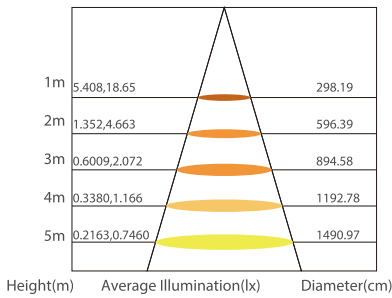

Details

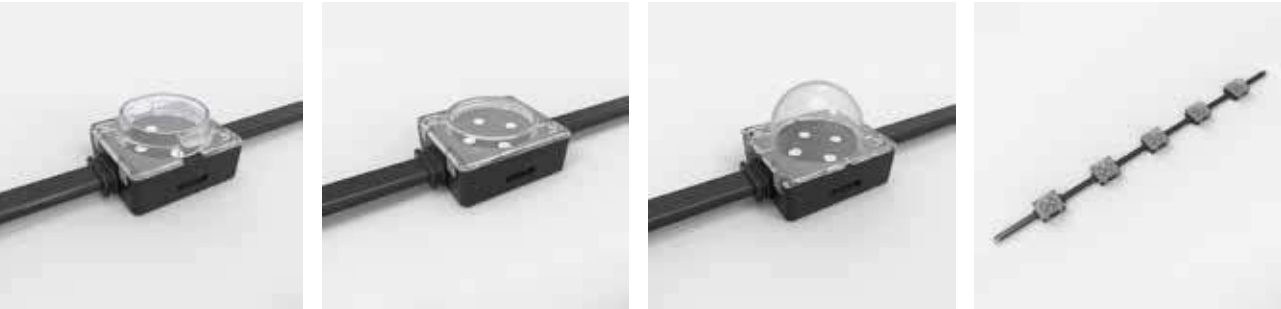


LED Pixel Light

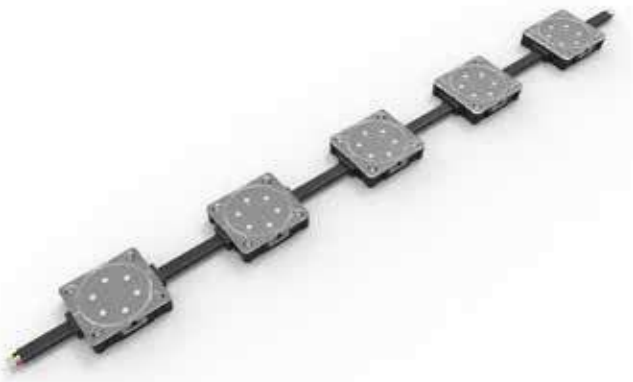


CE RoHS COMPLIANT IP67 IK04

General Data	
Item No.	RC-PL040S
Power	0.9 Watts/ 1.44 Watts
LED Chip	Osram/Espistar
Luminous flux	90lm±5% @4000K
CCT	2700K - 6500K/RGB/RGBW Optional
CRI	80+
Beam angle	120°-160°
Dimension	L42*W38mm
Working Temperature	-30 C ~ +55 C
Life time	50,000hours
Warranty	3 years
Standards	CE, RoHS
Electrical Data	
Input voltage	DC12V/15V/24V
Driver	Excluding
Control Mode	On/off, DMX512, TTL
Construction Data	
IP rating	IP66
Material	PC


Dimension

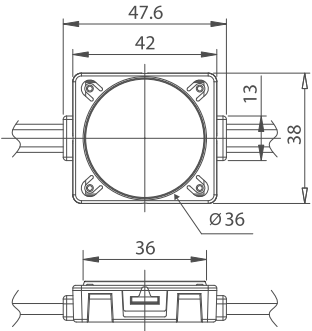



Light Distribution Curve (RGBW)

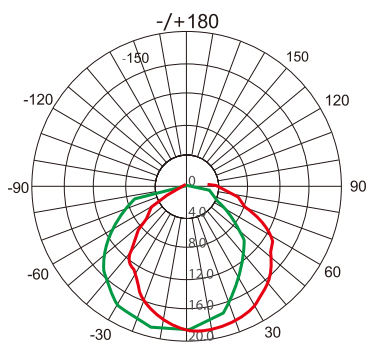


Lux Distance Curve (RGBW)

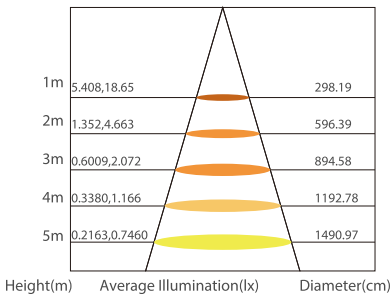

Details

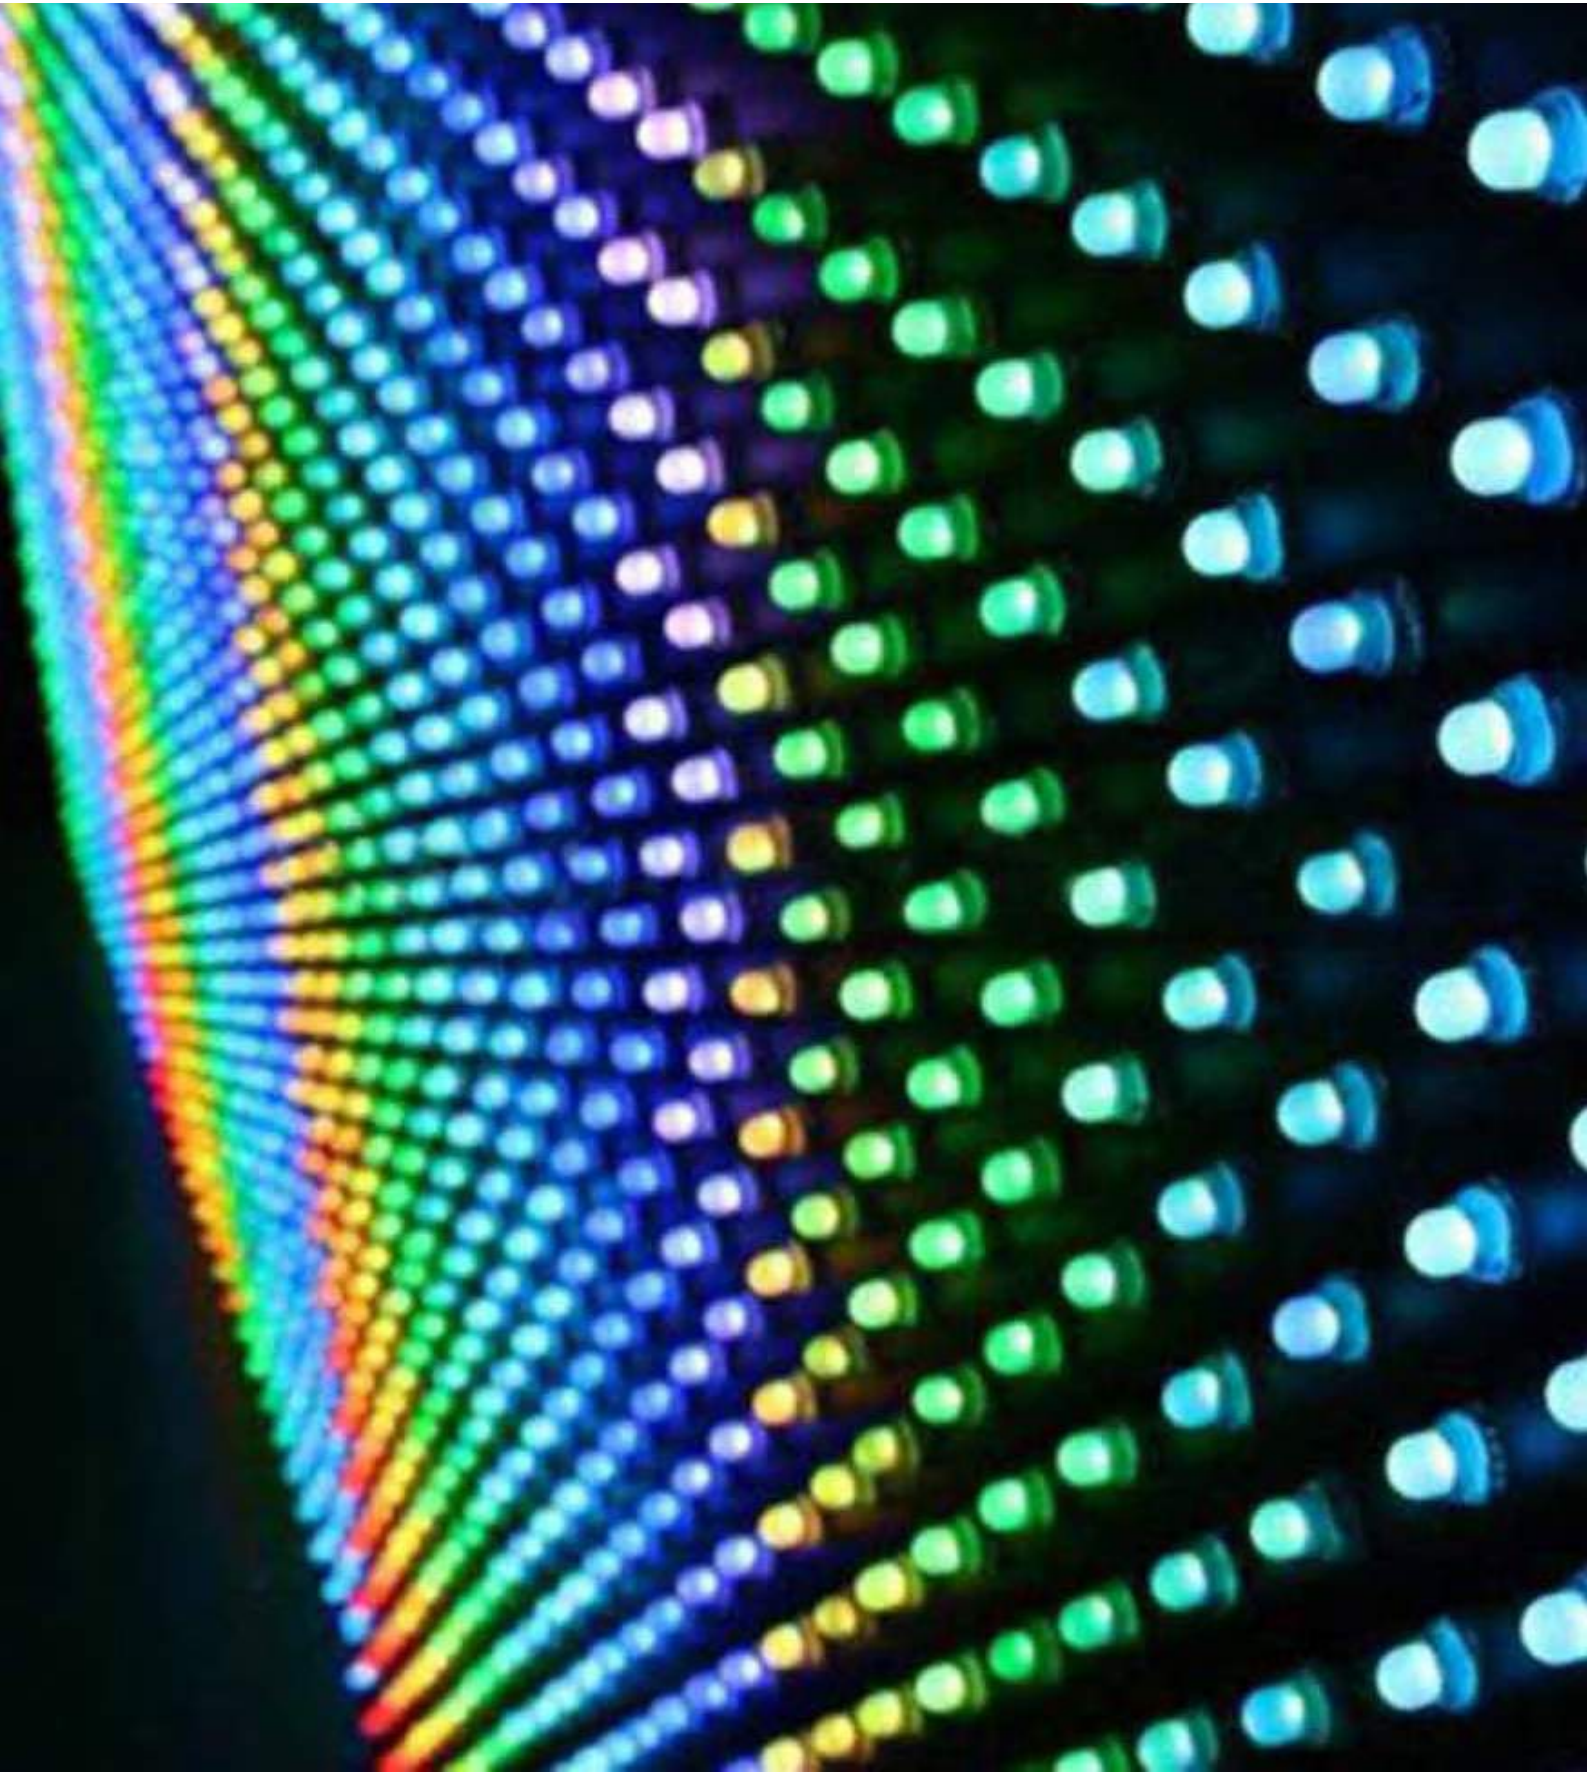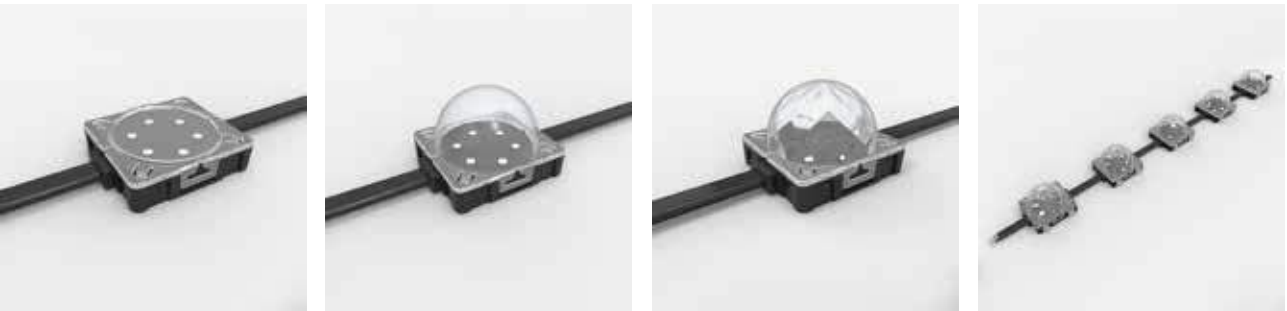

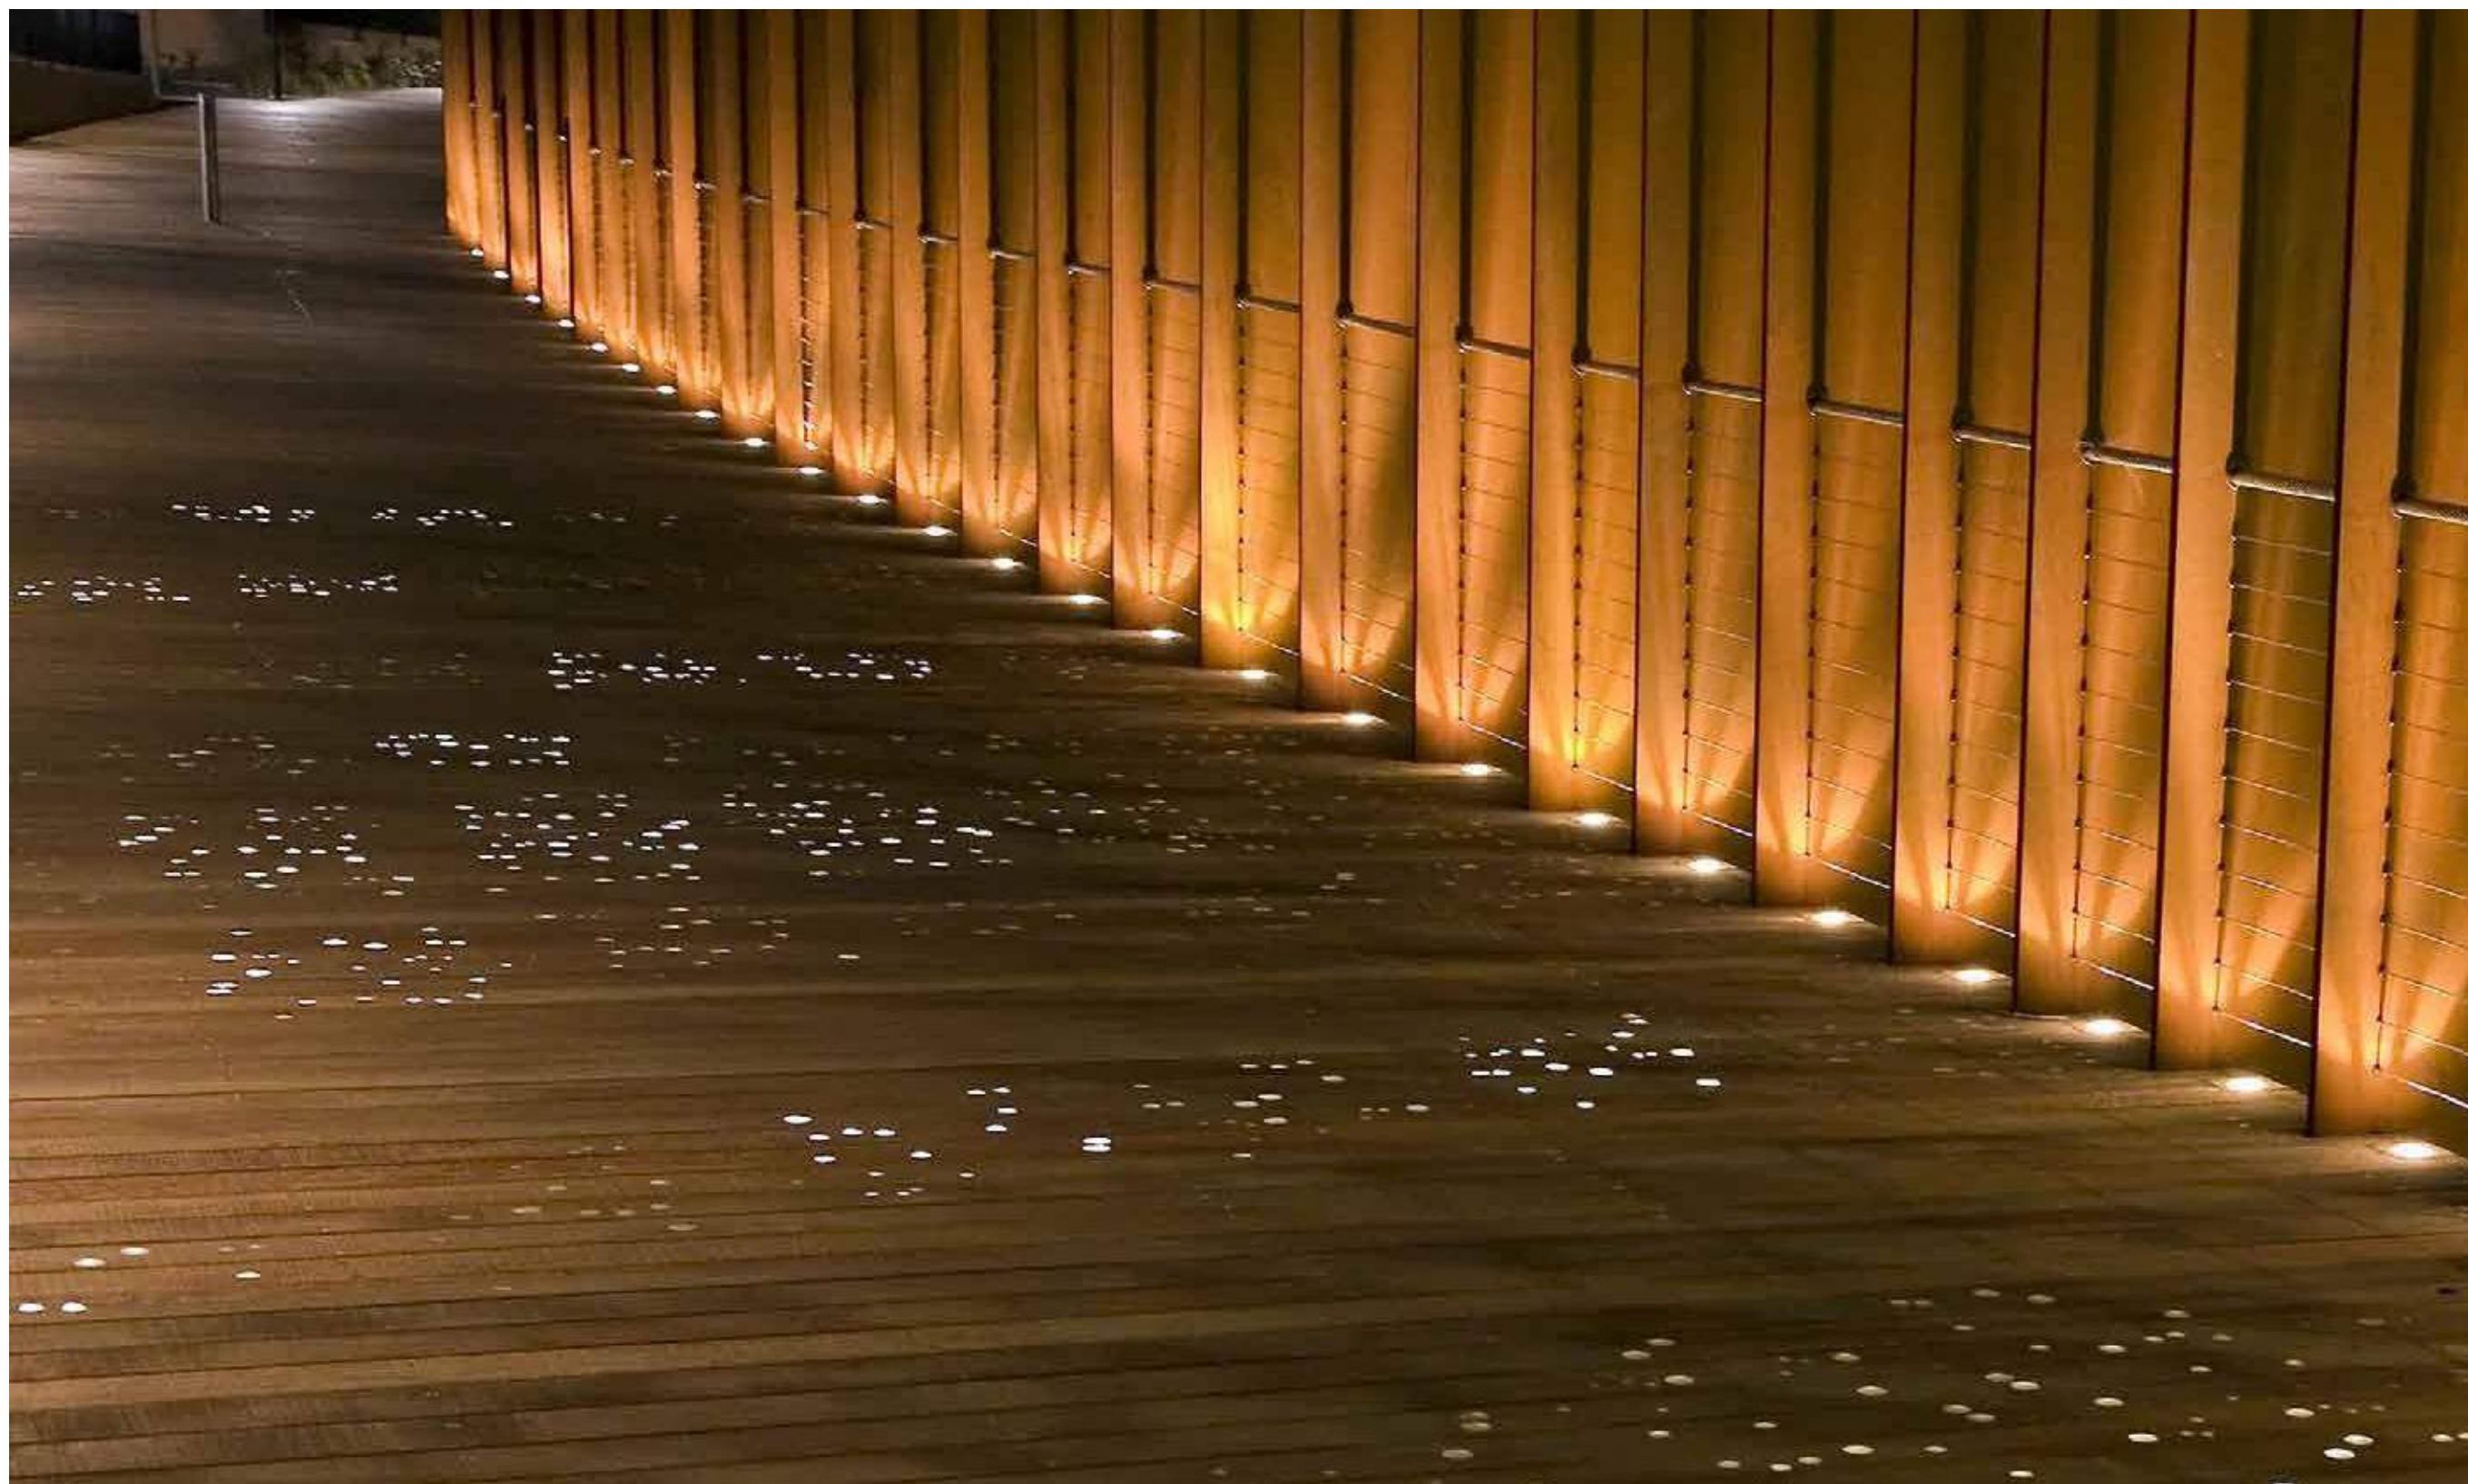

Inground Well Light




Inground Well Light




CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-MIG001
Power	1 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beamangle	15° 30° 45° 60° 90°
Dimension	42*72mm (D x H)
Cut out	37mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	50PCS/CTN
Carton size	30.5*30.5*18cm (GW:12kg)

Dimension

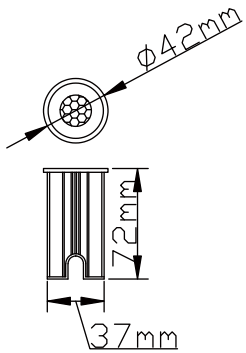

Light Distribution Curve (3000K, 1x25°)-----

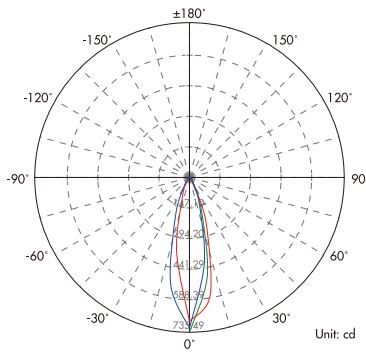

Lux Distance Curve (3000K, 1x25°)-----

	Center Beam LUX	Beam Width	
		V	H
2m	170.99 LUX	0.9m	1.0m
4m	42.75 LUX	1.9m	1.9m
6m	19.00 LUX	2.8m	2.9m
8m	10.69 LUX	3.8m	3.8m
10m	6.84 LUX	4.7m	4.8m
12m	4.75 LUX	5.6m	5.8m

Vert.Spread:26.5 Horiz.Spread:27.0

Details




Inground Well Light




CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-MIG002
Power	1 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beamangle	15° 30° 45° 60° 90°
Dimension	52*72mm (D x H)
Cut out	47mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	50PCS/CTN
Carton size	30.5*30.5*21.5cm (GW:14.5kg)

Dimension



Light Distribution Curve (3000K, 1x25°)-----

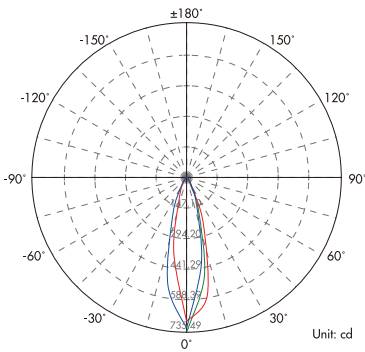

Lux Distance Curve (3000K, 1x25°)-----

	Center Beam LUX	Beam Width	
		V	H
2m	170.99 LUX	0.9m	1.0m
4m	42.75 LUX	1.9m	1.9m
6m	19.00 LUX	2.8m	2.9m
8m	10.69 LUX	3.8m	3.8m
10m	6.84 LUX	4.7m	4.8m
12m	4.75 LUX	5.6m	5.8m

Vert.Spread:26.5 Horiz.Spread:27.0


Details




Inground Well Light




Dimension

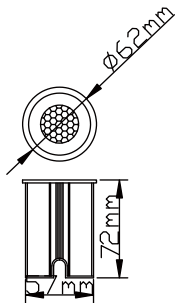

Light Distribution Curve (3000K, 1x25°)

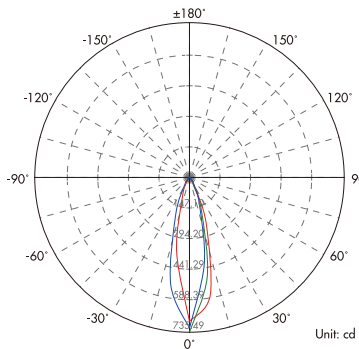

Lux Distance Curve (3000K, 1x25°)

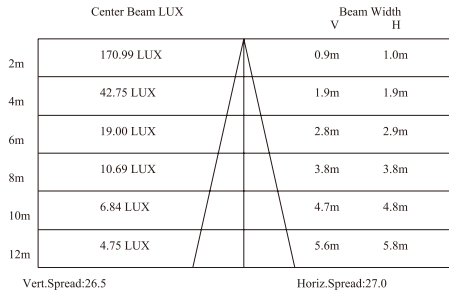


Details




Inground Well Light




Dimension

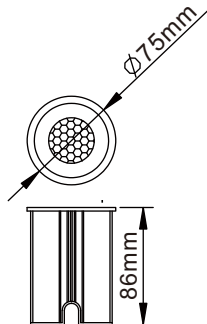

Light Distribution Curve (3000K, 1x25°)

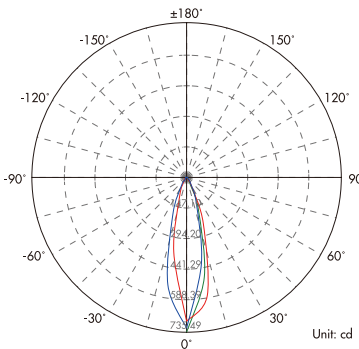

Lux Distance Curve (3000K, 1x25°)

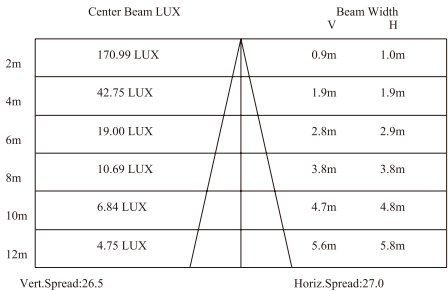


Details




Inground Well Light




Dimension



Light Distribution Curve (3000K, 1x25°).....

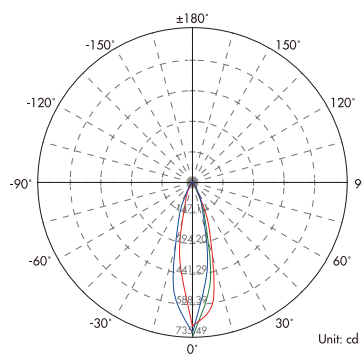

Lux Distance Curve (3000K, 1x25°).....

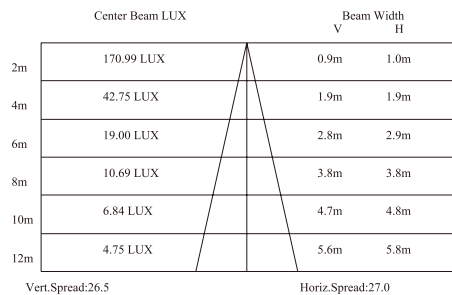

CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-IG100-3W/RC-IG100-6W
Power	3 Watts/ 6 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beamangle	15° 30° 45° 60° 90°
Dimension	100*80mm (D x H)
Cut out	95mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	30PCS/CTN
Carton size	56*34*25cm (GW:20kg)


Details




Inground Well Light




Dimension

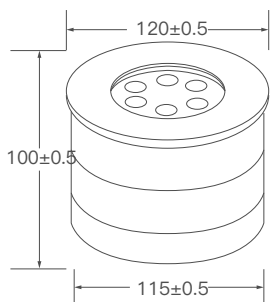

Light Distribution Curve (3000K, 1x25°).....

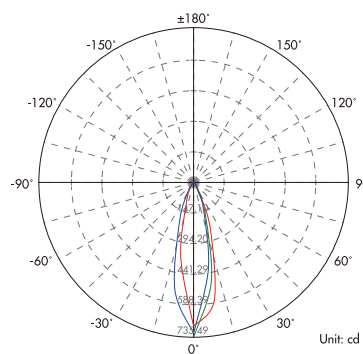

Lux Distance Curve (3000K, 1x25°).....

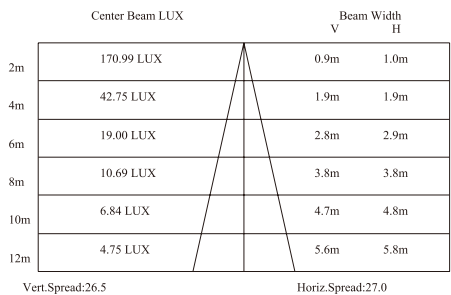

CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-IG120-6W/RC-IG120-9W
Power	6 Watts/ 9 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beamangle	120*100mm (D x H)
Dimension	100*100mm (D x H)
Cut out	115mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	30PCS/CTN
Carton size	47*33*30cm (GW:24.5kg)


Details



Inground Well Light




Dimension




CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-IG150-9W/RC-IG150-12W
Power	9 Watts/ 12 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beamangle	15° 30° 45° 60° 90°
Dimension	150*100mm (D x H)
Cut out	135mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	12PCS/CTN
Carton size	52*36*26cm (GW:23.6kg)

Light Distribution Curve (3000K, 1x25°)

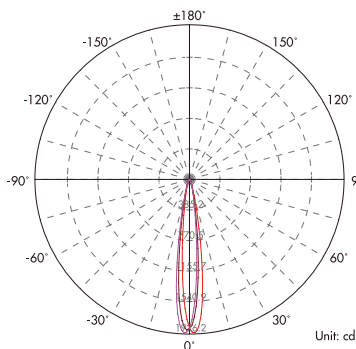

Lux Distance Curve (3000K, 1x25°)

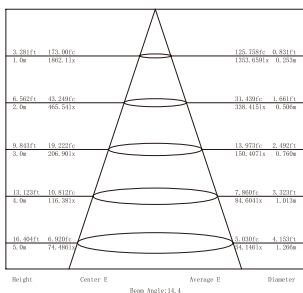


Details



Inground Well Light




Dimension

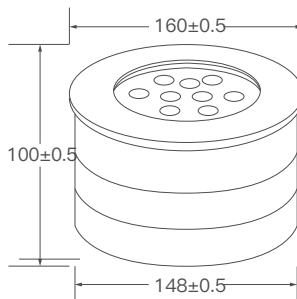


CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-IG160-12W
Power	12 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beamangle	15° 30° 45° 60° 90°
Dimension	160×100mm (D x H)
Cut out	148mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	12PCS/CTN
Carton size	52*36*26cm (GW:23.6kg)

Light Distribution Curve (3000K, 1x25°)

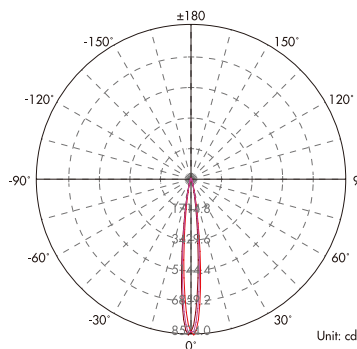

Lux Distance Curve (3000K, 1x25°)

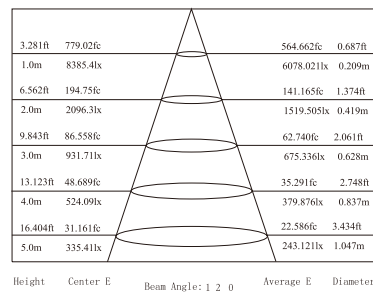


Details



Inground Well Light




Dimension

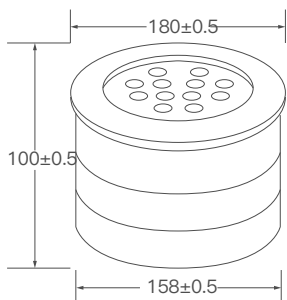


IP67 IK08

General Data	
Item No.	RC-IG180-18W
Power	18 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beamangle	15° 30° 45° 60° 90°
Dimension	180*100mm (D x H)
Cut out	158mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	8PCS/CTN
Carton size	39*39*28.5cm (GW:18kg)

Light Distribution Curve (3000K, 1x25°)-----

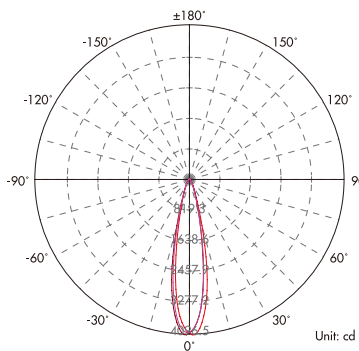

Lux Distance Curve (3000K, 1x25°)-----

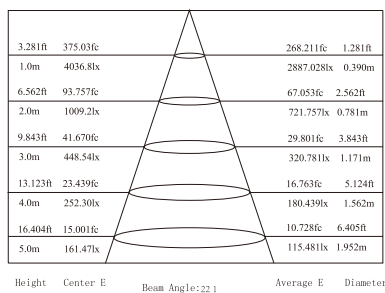


Details



Inground Well Light




Dimension




IP67 IK08

General Data	
Item No.	RC-IG200-24W
Power	24 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beamangle	15° 30° 45° 60° 90°
Dimension	200*100mm (D x H)
Cut out	187mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	8PCS/CTN
Carton size	45*45*28cm (GW:25kg)

Light Distribution Curve (3000K, 1x25°)-----

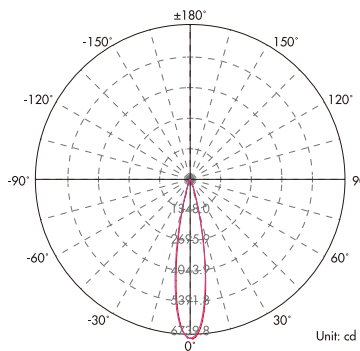

Lux Distance Curve (3000K, 1x25°)-----

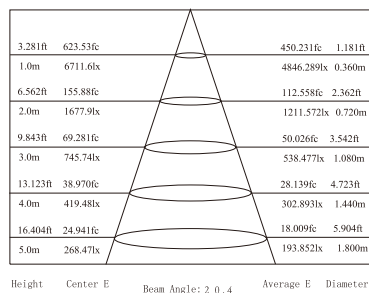


Details




Inground Well Light




Dimension



Light Distribution Curve (3000K, 1x25°)

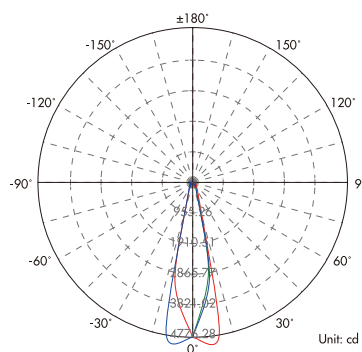

Lux Distance Curve (3000K, 1x25°)

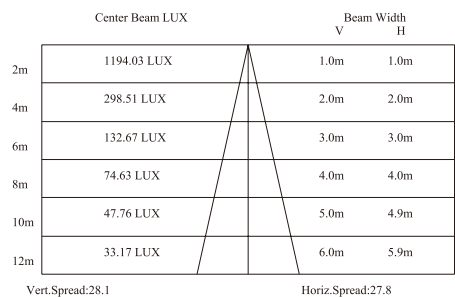

IP67 IK08

General Data	
Item No.	RC-IG250-36W
Power	36 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	15° 30° 45° 60° 90°
Dimension	250*100mm (D x H)
Cut out	240mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	6PCS/CTN
Carton size	48.5*25*45cm (GW:21.8kg)


Details




Inground Well Light




Dimension



Light Distribution Curve (3000K, 1x25°)

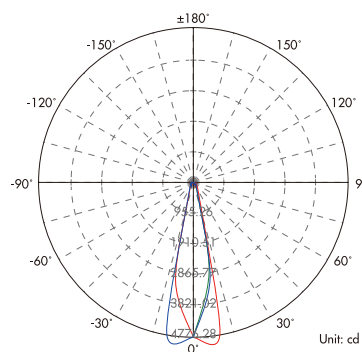

Lux Distance Curve (3000K, 1x25°)

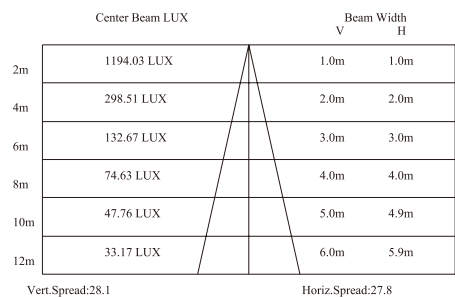

IP67 IK08

General Data	
Item No.	RC-IG320-54W
Power	54 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	15° 30° 45° 60° 90°
Dimension	320*100mm (D x H)
Cut out	292mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	4PCS/CTN
Carton size	67*35*24.5cm (GW:5.9kg)


Details



Inground Well Light




Dimension




CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-IG130AD-3W/RC-IG130AD-6W
Power	3 Watts/ 6 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beamangle	15° 30° 45° 60° 90°
Dimension	130*139mm (D x H)
Cut out	115mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	24PCS/CTN
Carton size	43*29*36cm (GW:28.4kg)

Light Distribution Curve (3000K, 1x25°)

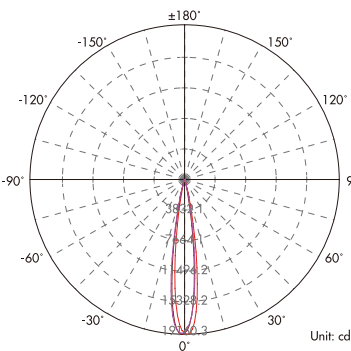

Lux Distance Curve (3000K, 1x25°)




Details



Inground Well Light




Dimension

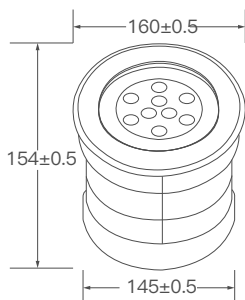


CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-IG160AD-9W/RC-IG160AD-18W
Power	9 Watts/ 18 Watts
LED type	6PCS CREE XPE LED
Luminous flux	80-85lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beamangle	15° 30° 45° 60° 90°
Dimension	160*154mm (D x H)
Cut out	145mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Built-in high voltage constant current driver with transformer
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Solid Passivated (Anodizing) Aluminum CNC machined
Finishing	20~25µm thickness anodized film for housing
Packaging	
PCS/CTN	12PCS/CTN
Carton size	52*36*26cm (GW:23.6kg)

Light Distribution Curve (3000K, 1x25°)

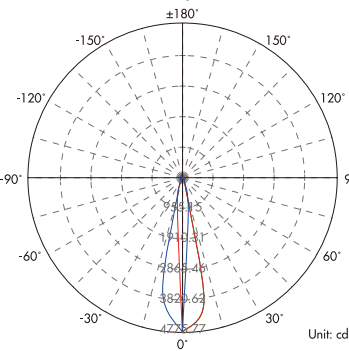

Lux Distance Curve (3000K, 1x25°)

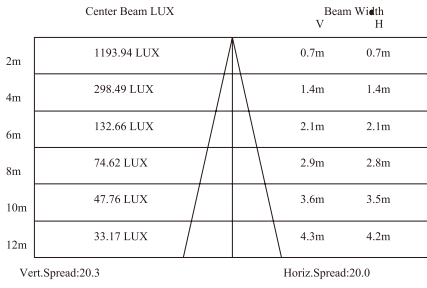


Details



Inground Well Light




Dimension

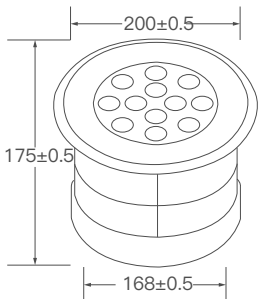


CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-IG200AD-18W/RC-IG200AD-24W
Power	18 Watts/ 24 Watts
LED type	12 PCS 2W CREE XPE LED
Luminous flux	80-85lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beamangle	15° 30° 45° 60° 90°
Dimension	200*175 (D x H)
Cut out	168 mm
Life time	50,000hours
Warranty	3-5 years
Standards	CE,RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Built-in high voltage constant current driver with transformer
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Solid Passivated (Anodizing) Aluminum CNC machined
Finishing	20~25µm thickness anodized film for housing
Packaging	
PCS/CTN	8PCS/CTN
Carton size	45*45*28cm (GW:25kg)


Light Distribution Curve (3000K, 1x25°)

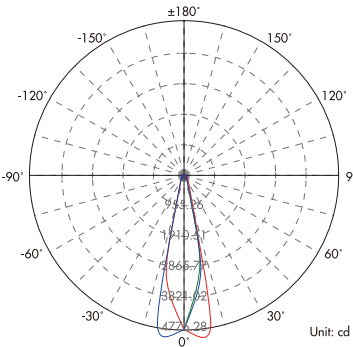

Lux Distance Curve (3000K, 1x25°)

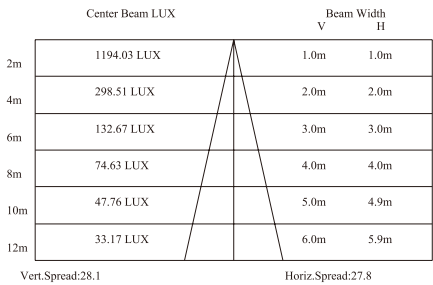


Details

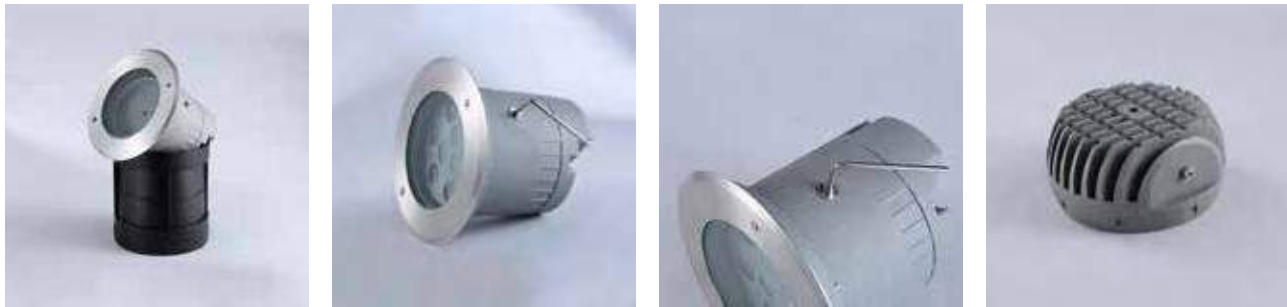

Inground Well Light




Dimension




CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-IG260AD-36W
Power	36 Watts
LED type	18 PCS CREE XPE LED
Luminous flux	80-85lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beamangle	15° 30° 45° 60° 90°
Dimension	260*196mm (D x H)
Cut out	240mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE,RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Built-in high voltage constant current driver with transformer
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Solid Passivated (Anodizing) Aluminum CNC machined
Finishing	20~25µm thickness anodized film for housing, Dark grey
Packaging	
PCS/CTN	6PCS/CTN
Carton size	48.5*25*45cm (GW:21.8kg)

Light Distribution Curve (3000K, 1x25°)

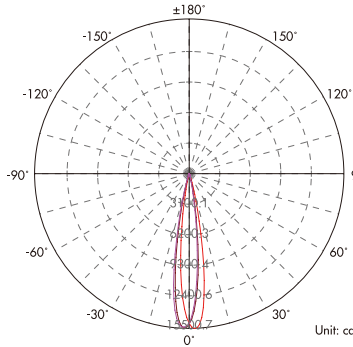

Lux Distance Curve (3000K, 1x25°)

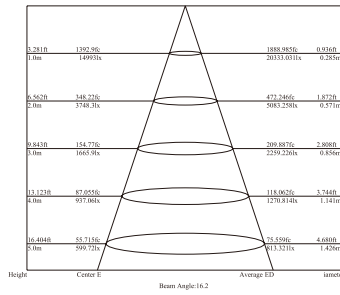


Details




Inground Well Light




Dimension



Light Distribution Curve (3000K, 1x25°)

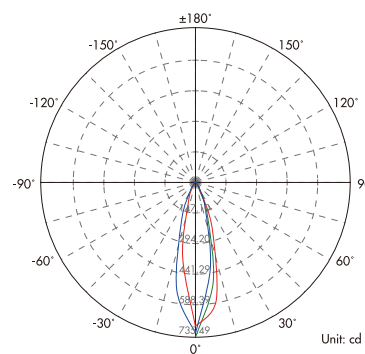

Lux Distance Curve (3000K, 1x25°)

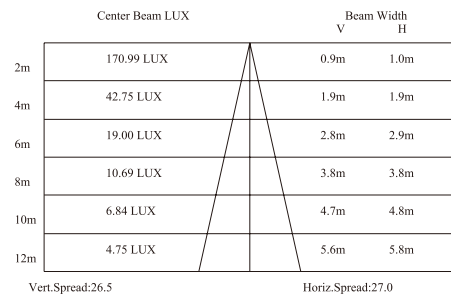

CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-SIG-D100
Power	3 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	1/2/3/4 sides light optional
Dimension	100*95mm (D x H)
Cut out	95mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS

Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	30PCS/CTN
Carton size	56*34*25cm (GW:15.5kg)


Details




Inground Well Light




Dimension

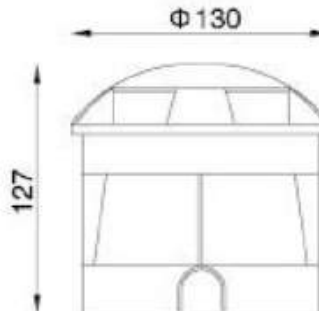

Light Distribution Curve (3000K, 1x25°)

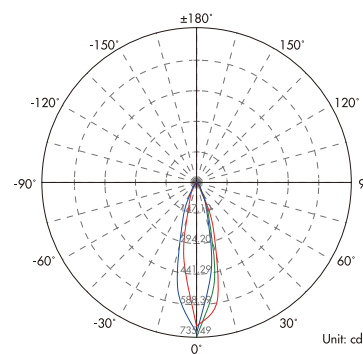

Lux Distance Curve (3000K, 1x25°)

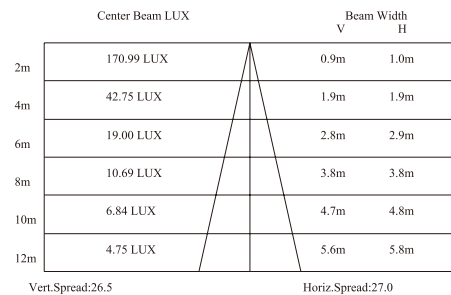

CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-SIG-D130
Power	6 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	1/2/3/4 sides light optional
Dimension	130*127mm (D x H)
Cut out	125mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS

Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	12PCS/CTN
Carton size	44*29.5*30cm (GW:12.5kg)


Details




Inground Well Light




Dimension

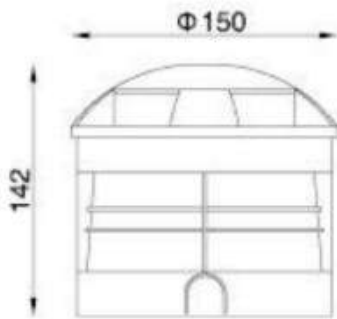

Light Distribution Curve (3000K, 1x25°)

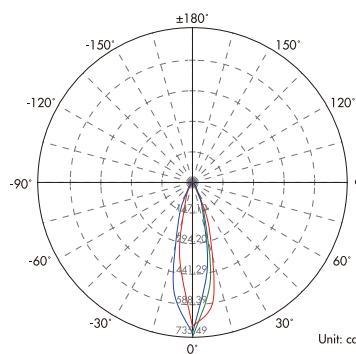

Lux Distance Curve (3000K, 1x25°)

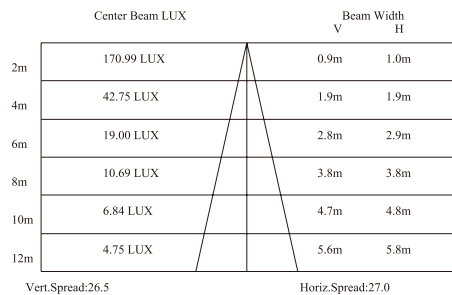

CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-SIG-D150
Power	9 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	1/2/3/4 sides light optional
Dimension	150*142mm (D x H)
Cut out	145mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Constant current driver
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Stainless Steel 304+Diecasting Aluminum
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	12PCS/CTN
Carton size	46*32*33cm (GW:15.2kg)


Details




Inground Well Light




Dimension



Light Distribution Curve (3000K, 1x25°)

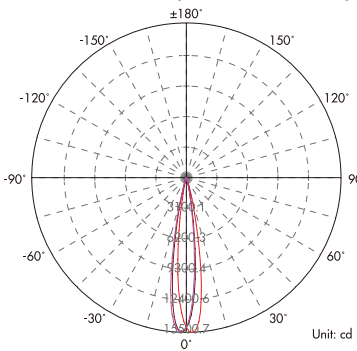

Lux Distance Curve (3000K, 1x25°)




CE RoHS COMPLIANT IP67 IK08

General Data	
Item No.	RC-LIG1000
Power	36 Watts
LED type	18 PCS CREE XPE LED
Luminous flux	80-85lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angl	15° 30° 45° 60° 90°
Dimension	L1000*W90*H75MM
Cut out	240mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	100-260V AC; 12V/24V DC
Driver	Built-in high voltage constant current driver with transformer
Control	On/Off, DALI, DMX512 optional
Construction Data	
IP rating	IP67 Waterproof
Material	Solid Passivated (Anodizing) Aluminum CNC machined
Finishing	20~25µm thickness anodized film for housing, Dark grey
Packaging	
PCS/CTN	4PCS/CTN
Carton size	985*80*110cm (GW:24kg)

Details



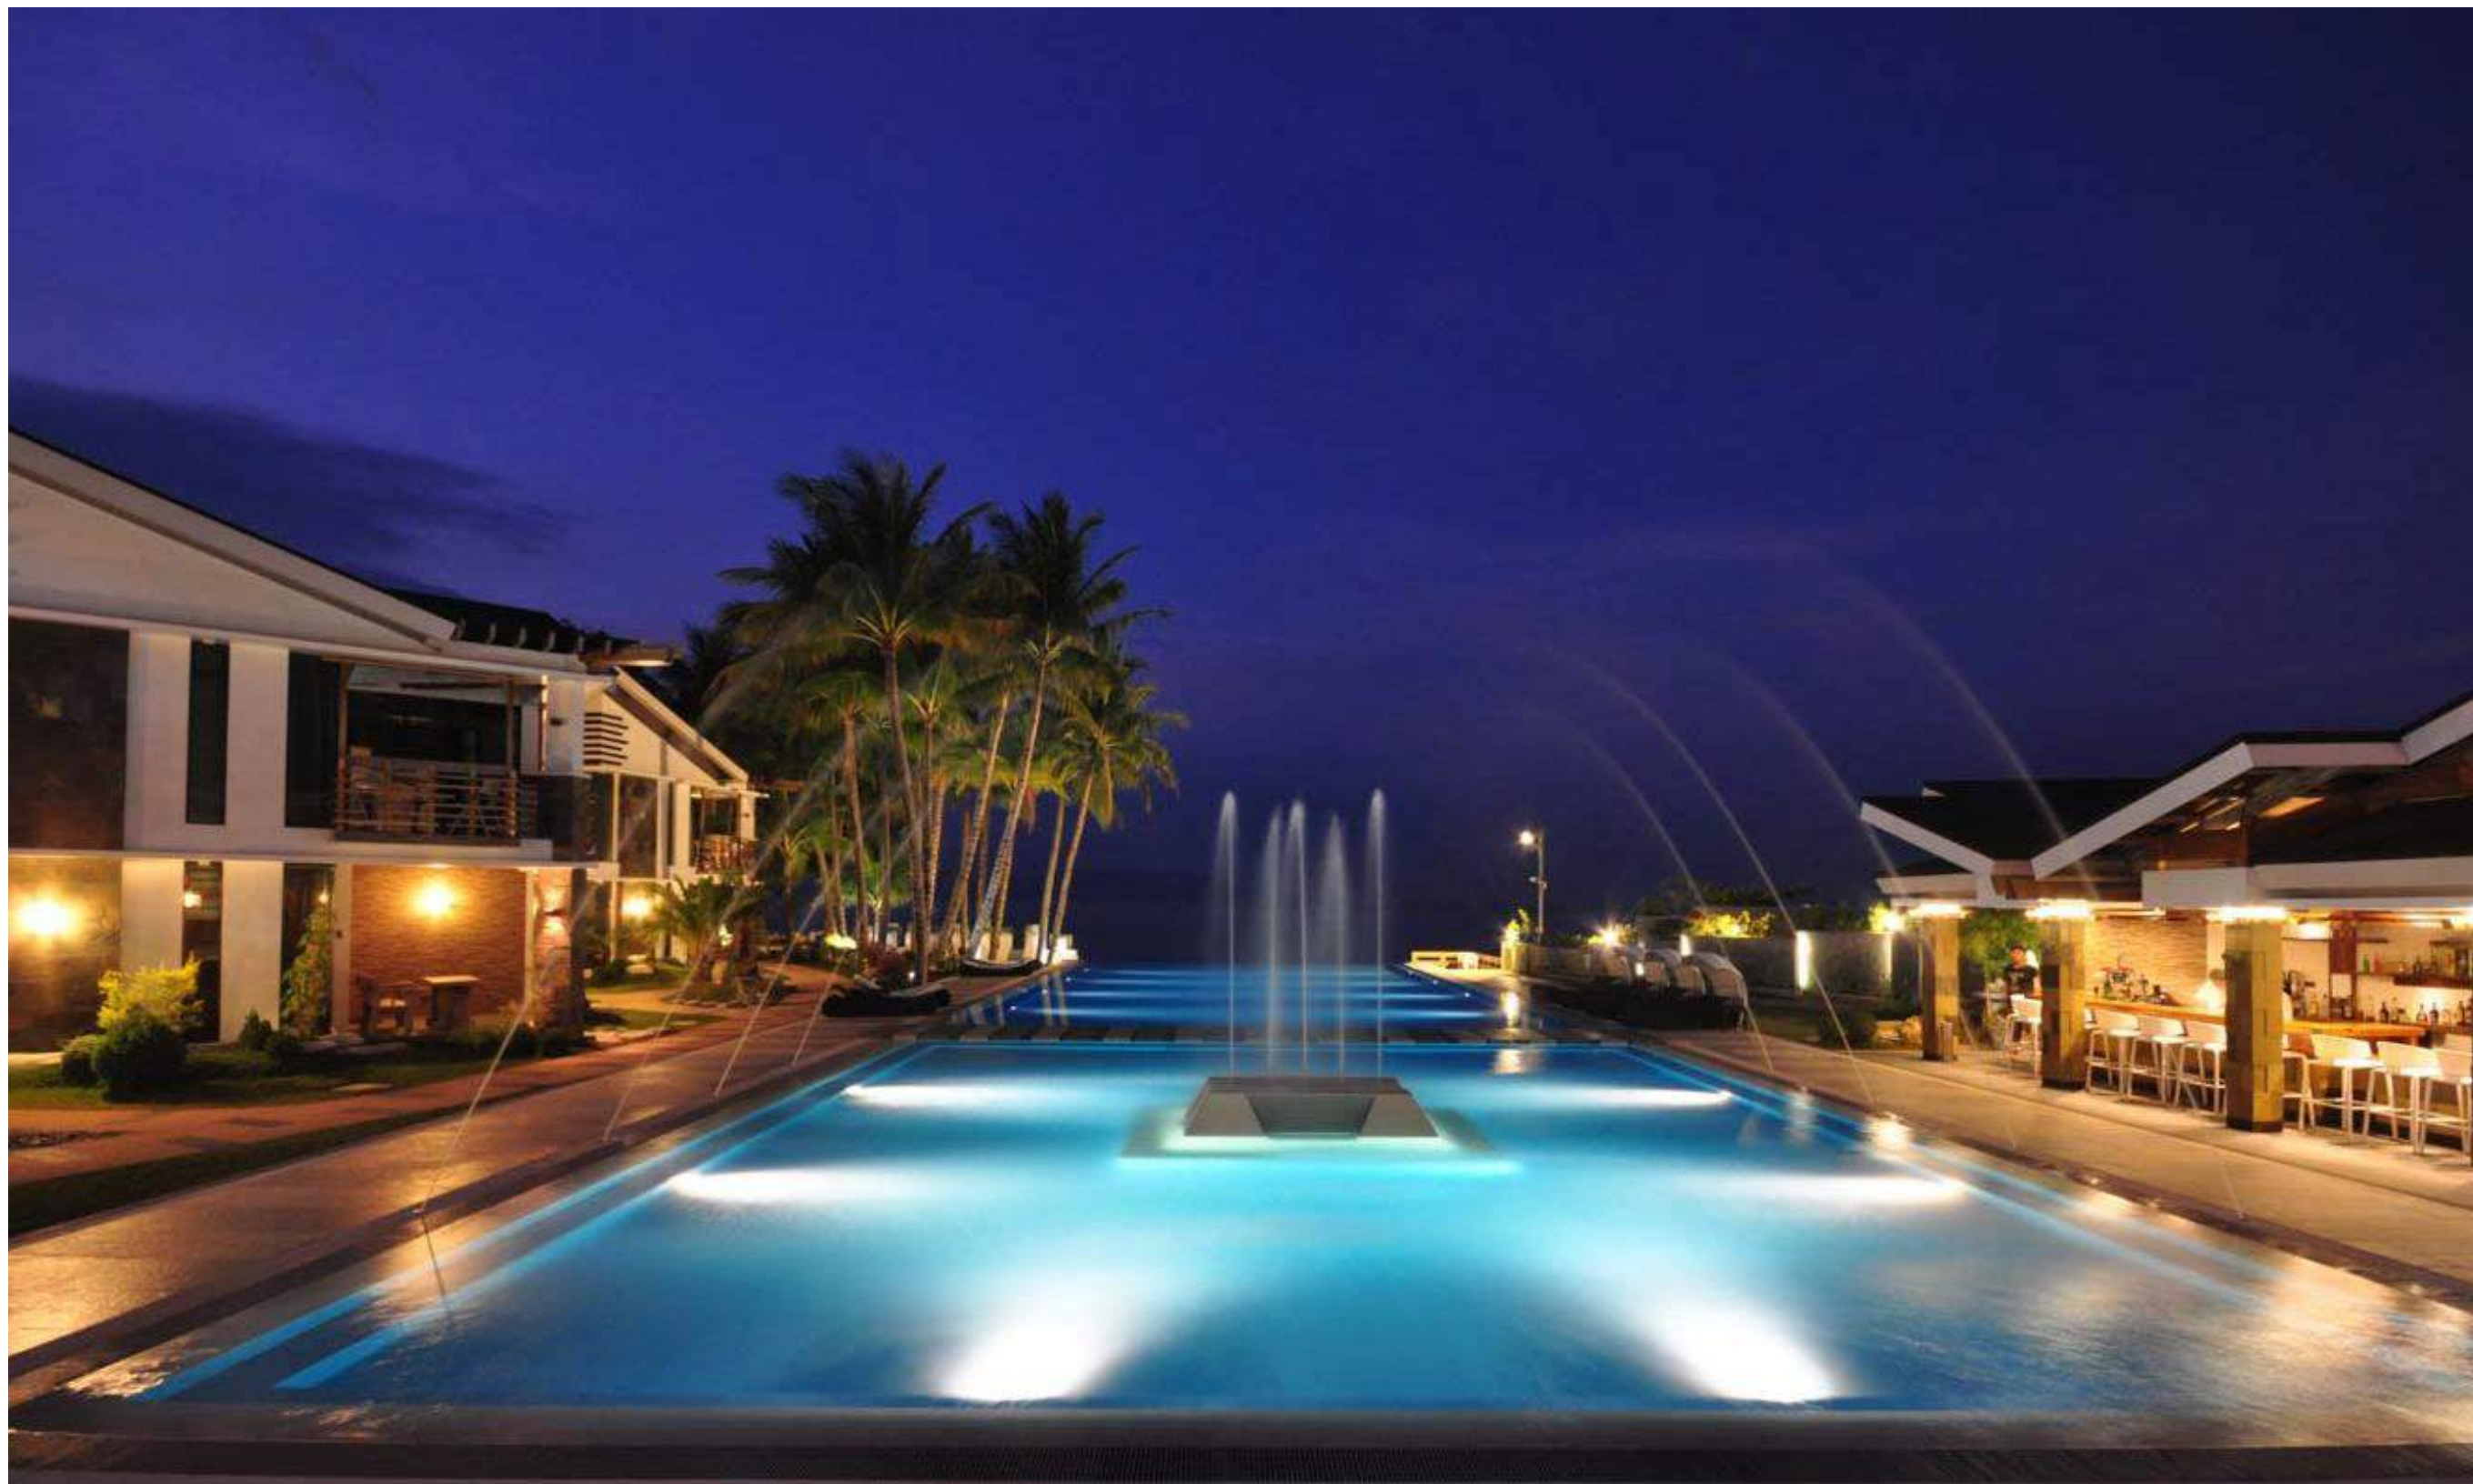


LED Underwater Light Series



LED Underwater Light




Dimension

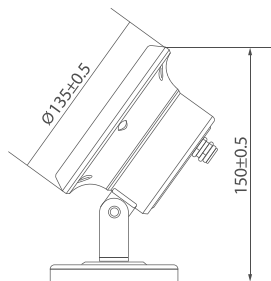


IP68 IK08

General Data	
Item No.	RC-UW006
Power	6 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	135*150mm (D x H)
Net Weight	1.2kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	18PCS/CTN
Carton size	48*48*34cm (GW:23.6kg)

Light Distribution Curve (3000K, 10°)

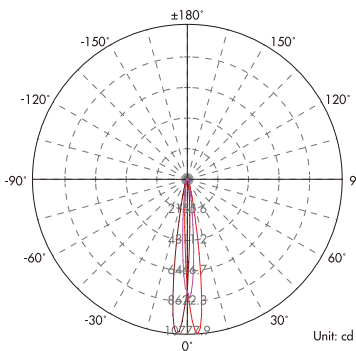

Lux Distance Curve (3000K, 10°)




Details



LED Underwater Light




Dimension

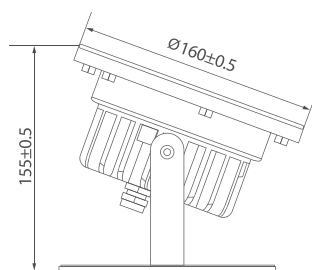


IP68 IK08

General Data	
Item No.	RC-UW009
Power	9 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	160*155mm (D x H)
Net Weight	1.5kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	18PCS/CTN
Carton size	53*48*36cm (GW:29kg)

Light Distribution Curve (3000K, 10°)

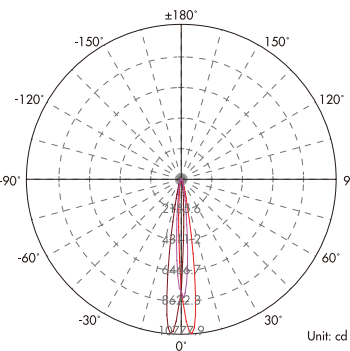

Lux Distance Curve (3000K, 10°)




Details



LED Underwater Light




Dimension




CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-UW012
Power	12 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	170*160mm (D x H)
Net Weight	1.9kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	18PCS/CTN
Carton size	53*48*36cm (GW:36.2kg)

Light Distribution Curve (3000K, 10°)

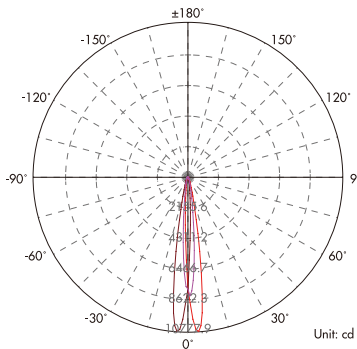

Lux Distance Curve (3000K, 10°)




Details



LED Underwater Light




Dimension

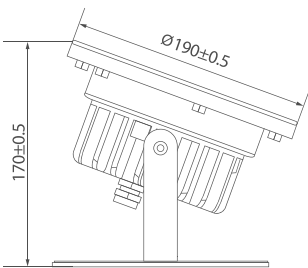


CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-UW018
Power	18 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	190*170mm (D x H)
Net Weight	2.5kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	12PCS/CTN
Carton size	48*48*34cm (GW:32kg)

Light Distribution Curve (3000K, 10°)

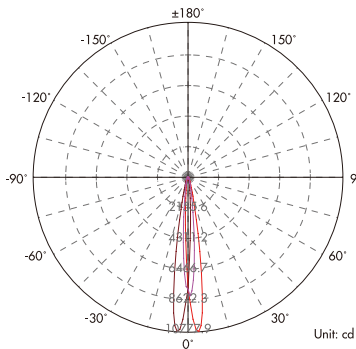

Lux Distance Curve (3000K, 10°)




Details



LED Underwater Light




Dimension




CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-UW024
Power	24 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	215*180mm (D x H)
Net Weight	3.2kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	8PCS/CTN
Carton size	48*48*34cm (GW:27.6kg)

Light Distribution Curve (3000K, 10°)

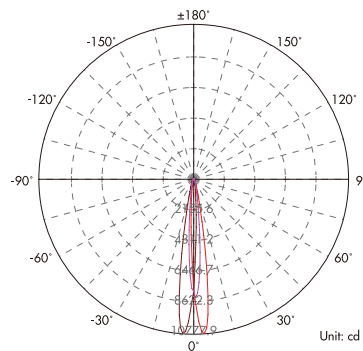

Lux Distance Curve (3000K, 10°)

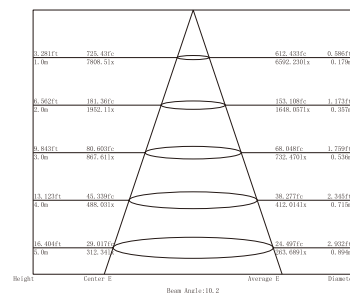


Details



LED Underwater Light




Dimension




CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-UW036
Power	36 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	250*200mm (D x H)
Net Weight	3.9kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	8PCS/CTN
Carton size	52*52*35cm (GW:33.2kg)

Light Distribution Curve (3000K, 10°)

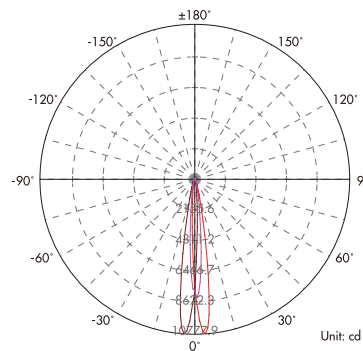

Lux Distance Curve (3000K, 10°)

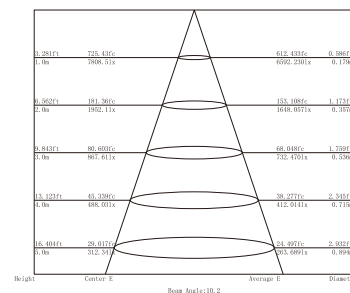


Details




LED Underwater Light




Dimension



Light Distribution Curve (3000K, 10°)

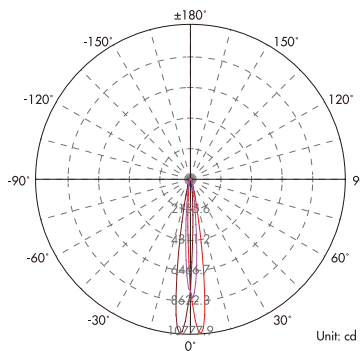

Lux Distance Curve (3000K, 10°)

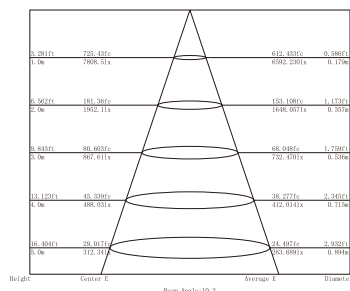

CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-UW048
Power	48 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	300*240mm (D x H)
Net Weight	6.8kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	4PCS/CTN
Carton size	62*32*38cm (GW:29.2kg)


Details




LED Underwater Light




Dimension



Light Distribution Curve (3000K, 10°)

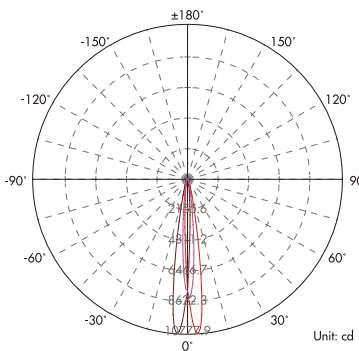

Lux Distance Curve (3000K, 10°)




CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-UW060
Power	60 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	350*260mm (D x H)
Net Weight	10.9kg
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	2PCS/CTN
Carton size	36*36*44cm (GW:23.6kg)

Details




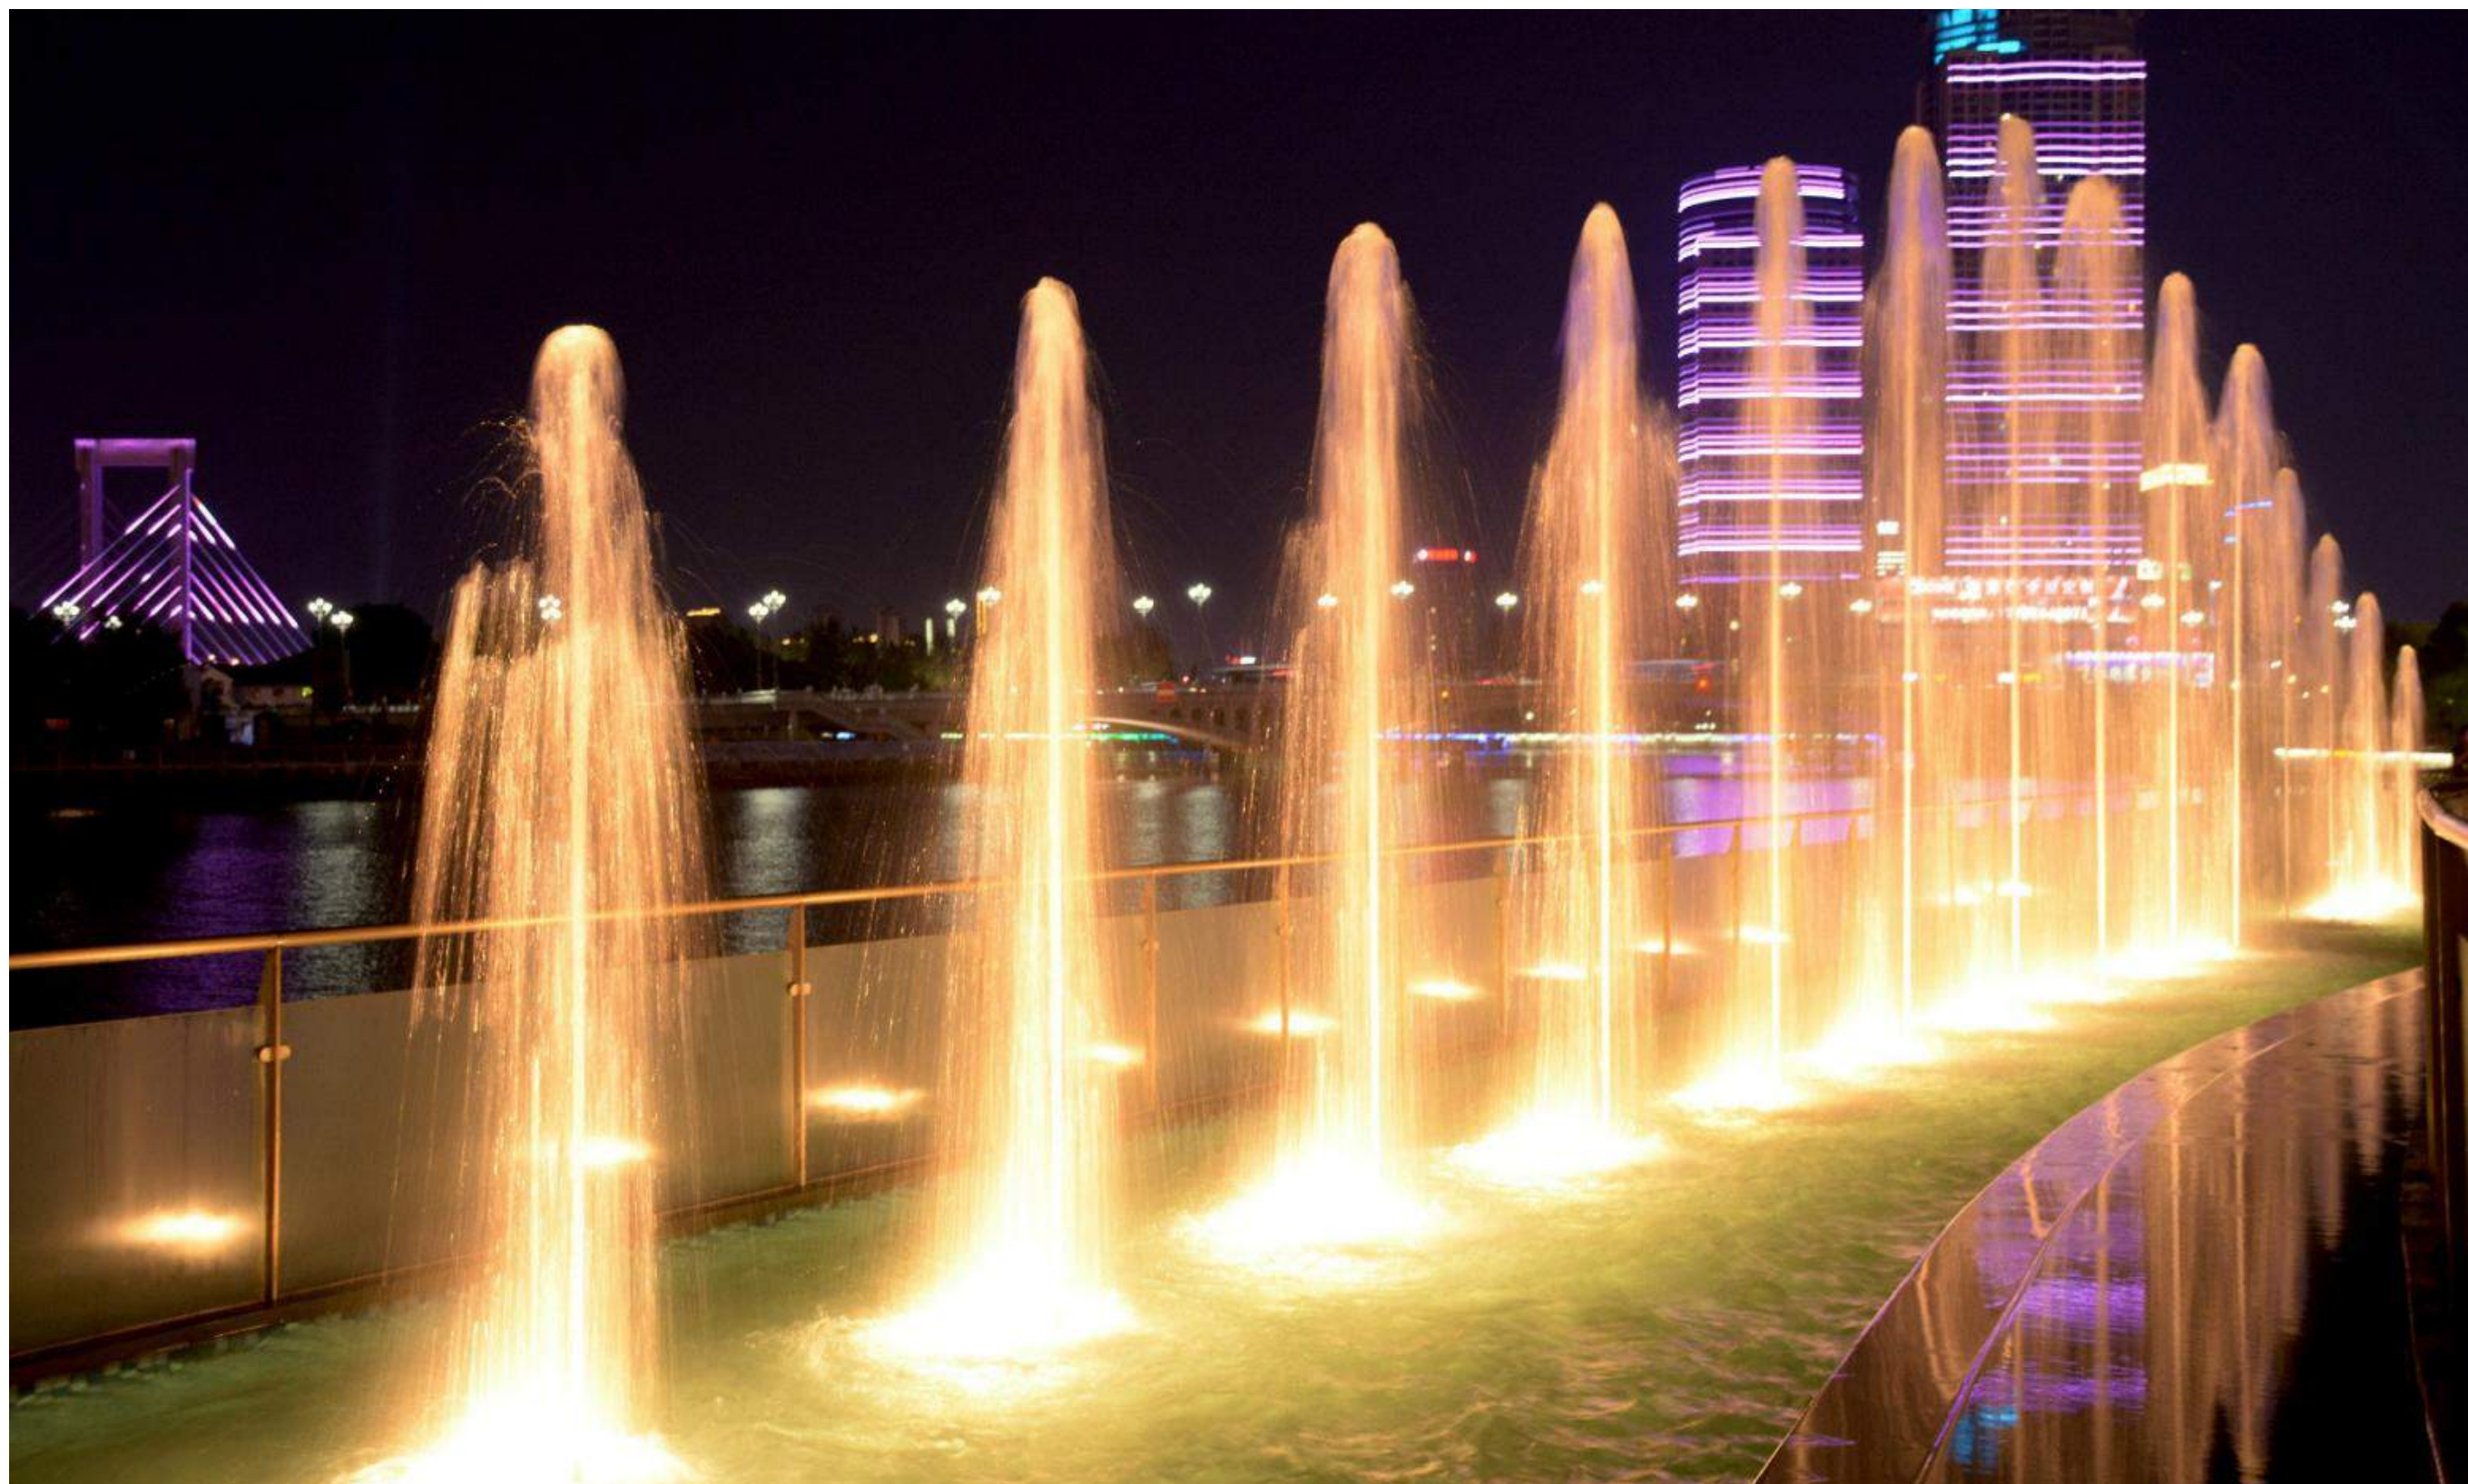


Fountain Lamp Series



Fountain Lamp

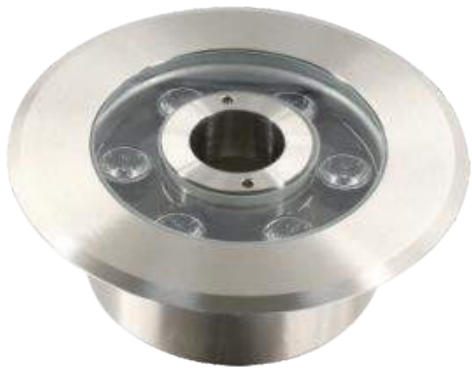


Dimension

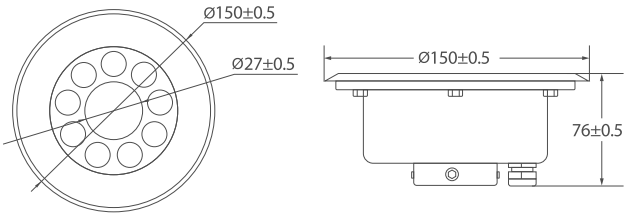


CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-FT006
Power	6 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	150*76mm (D x H)
Inner hole size	27mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	18PCS/CTN
Carton size	47*33*30cm (GW:20kg)

Light Distribution Curve (3000K, 10°)

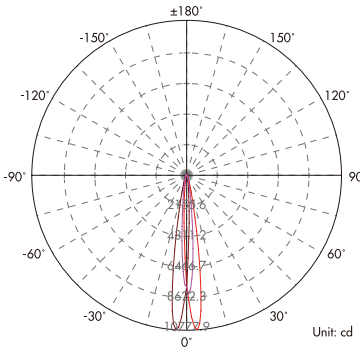

Lux Distance Curve (3000K, 10°)




Details



Fountain Lamp




Dimension

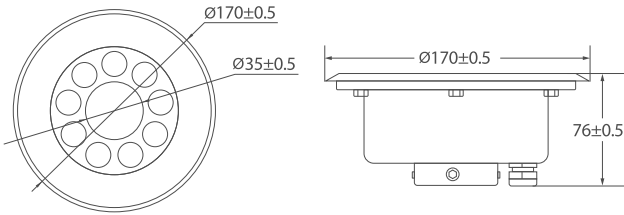


CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-FT009
Power	9 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	170*76mm (D x H)
Inner hole size	35mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	12PCS/CTN
Carton size	38.5*38.5*30cm (GW:18kg)

Light Distribution Curve (3000K, 10°)

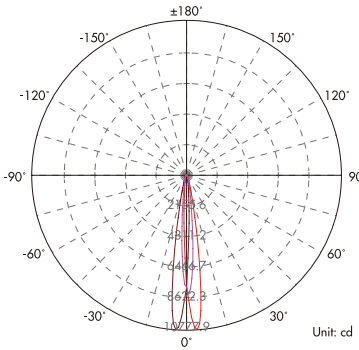

Lux Distance Curve (3000K, 10°)




Details



Fountain Lamp




Dimension

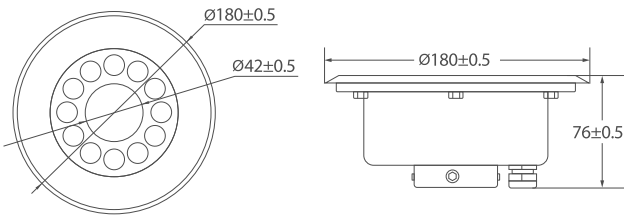


CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-FT012
Power	12 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	180*76mm (D x H)
Inner hole size	42mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	12PCS/CTN
Carton size	38.5*38.5*30cm (GW:21.2kg)

Light Distribution Curve (3000K, 10°)

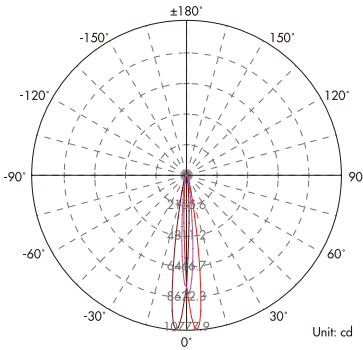


Lux Distance Curve (3000K, 10°)




Details



Fountain Lamp

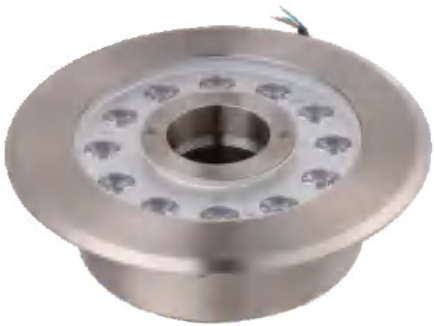


Dimension

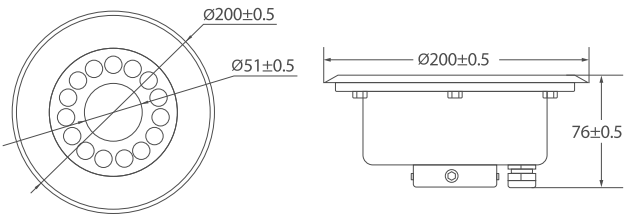


CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-FT015
Power	15 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	210*76mm (D x H)
Inner hole size	51mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	12PCS/CTN
Carton size	47*47*35cm (GW:26kg)

Light Distribution Curve (3000K, 10°)

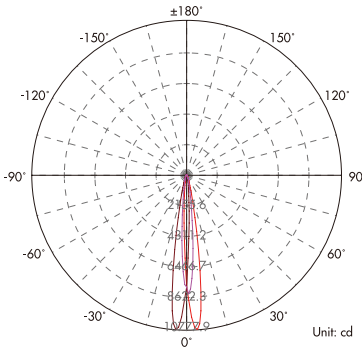


Lux Distance Curve (3000K, 10°)




Details




Fountain Lamp

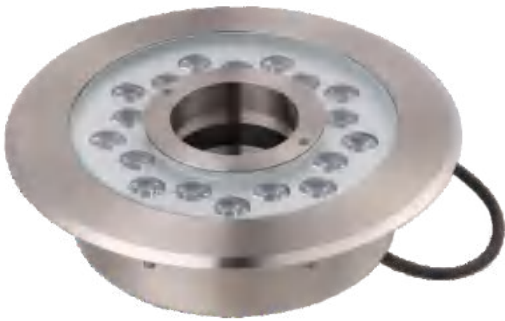


Dimension

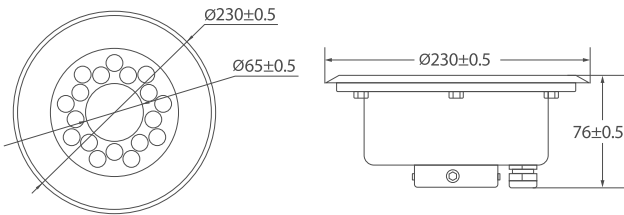

Light Distribution Curve (3000K, 10°)

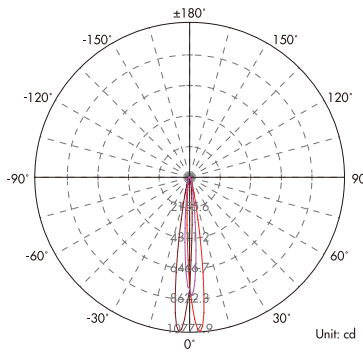

Lux Distance Curve (3000K, 10°)

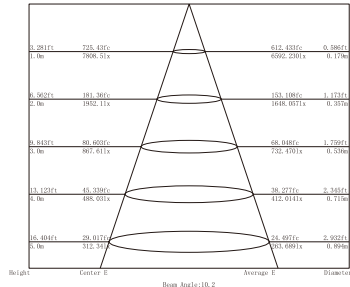

CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-FT018
Power	18 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	230*76mm (D x H)
Inner hole size	65mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	8PCS/CTN
Carton size	52*30*46cm (GW:20.8kg)


Details




Fountain Lamp




Dimension

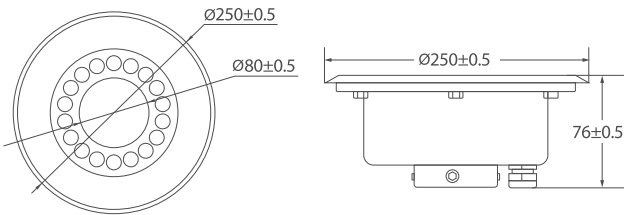

Light Distribution Curve (3000K, 10°)

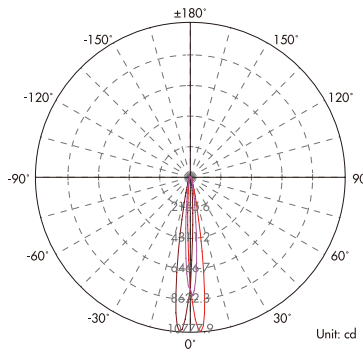

Lux Distance Curve (3000K, 10°)

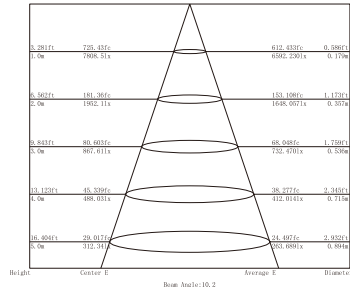

CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-FT024
Power	24 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	250*76mm (D x H)
Inner hole size	80mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	8PCS/CTN
Carton size	53*28*45cm (GW:28kg)


Details



Fountain Lamp




Dimension

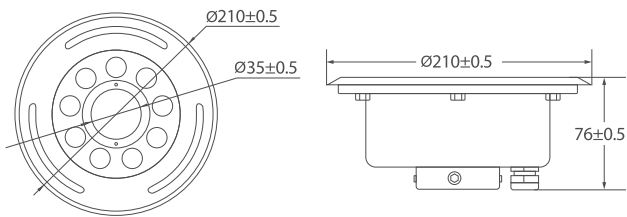


CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-FT009S
Power	9 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	210*76mm (D x H)
Inner hole size	35mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	12PCS/CTN
Carton size	47*47*35cm (GW:20.6kg)

Light Distribution Curve (3000K, 10°)

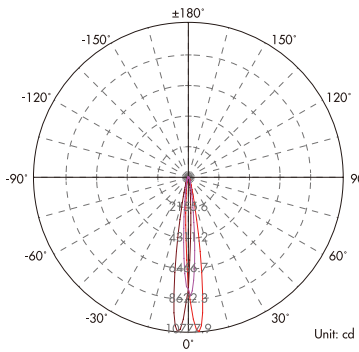

Lux Distance Curve (3000K, 10°)




Details



Fountain Lamp




Dimension

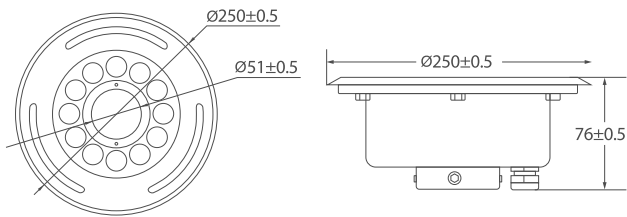


CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-FT012S
Power	12 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	250*76mm (D x H)
Inner hole size	51mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	8PCS/CTN
Carton size	53*28*45cm (GW:20kg)

Light Distribution Curve (3000K, 10°)

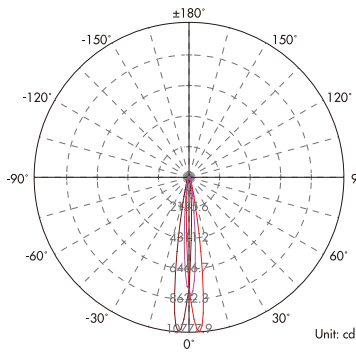

Lux Distance Curve (3000K, 10°)

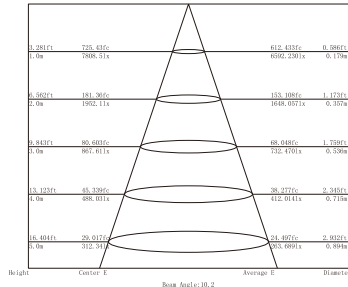


Details




Fountain Lamp




Dimension

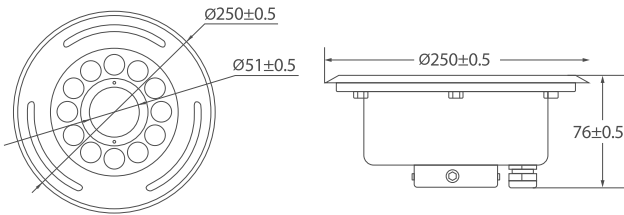

Light Distribution Curve (3000K, 10°)

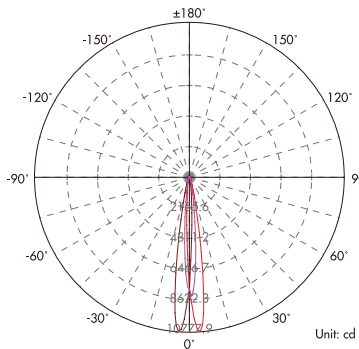

Lux Distance Curve (3000K, 10°)

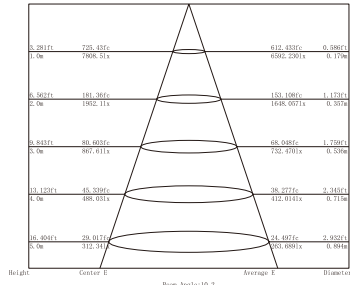

CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-FT015S
Power	15 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	250*76mm (D x H)
Inner hole size	51mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	8PCS/CTN
Carton size	53*28*45cm (GW:20kg)


Details




Fountain Lamp




Dimension

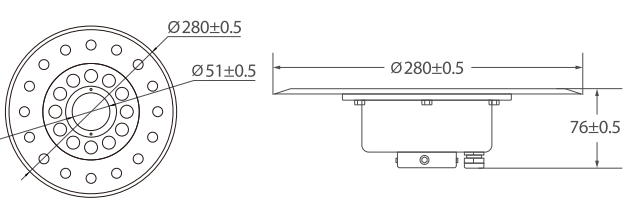

Light Distribution Curve (3000K, 10°)

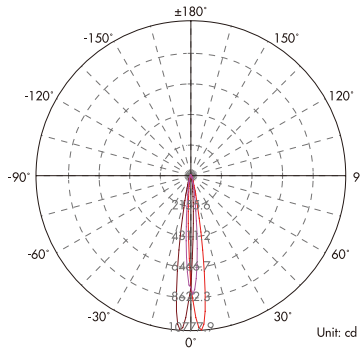

Lux Distance Curve (3000K, 10°)

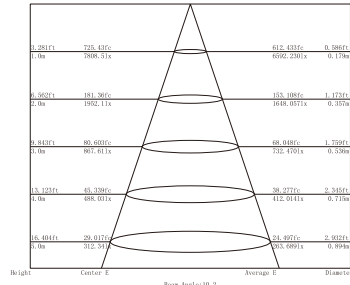

CE RoHS COMPLIANT IP68 IK08

General Data	
Item No.	RC-FT015HS
Power	15 Watts
LED type	Cree/Osram/Bridgelux
Luminous flux	80-85lm/W
CCT	3000K/4000K/6000K/R/G/B/RGB
CRI	>80 @3000K
Beam angle	10° 30° 45° 60° 90°
Dimension	280*76mm (D x H)
Inner hole size	51mm dia
Life time	50,000hours
Warranty	3-5 years
Standards	CE, RoHS
Electrical Data	
Input voltage	12V/24V DC
Driver	Low voltage constant current driver. Excluding the transformer
Control	On/Off, DMX512
Construction Data	
IP rating	IP68 Waterproof
Material	Stainless Steel 304
Finishing	Polishing Stainless Steel
Packaging	
PCS/CTN	8PCS/CTN
Carton size	58*58*18cm (GW:26kg)

Details






LED Pathway Lights Series



LED Pathway Lights

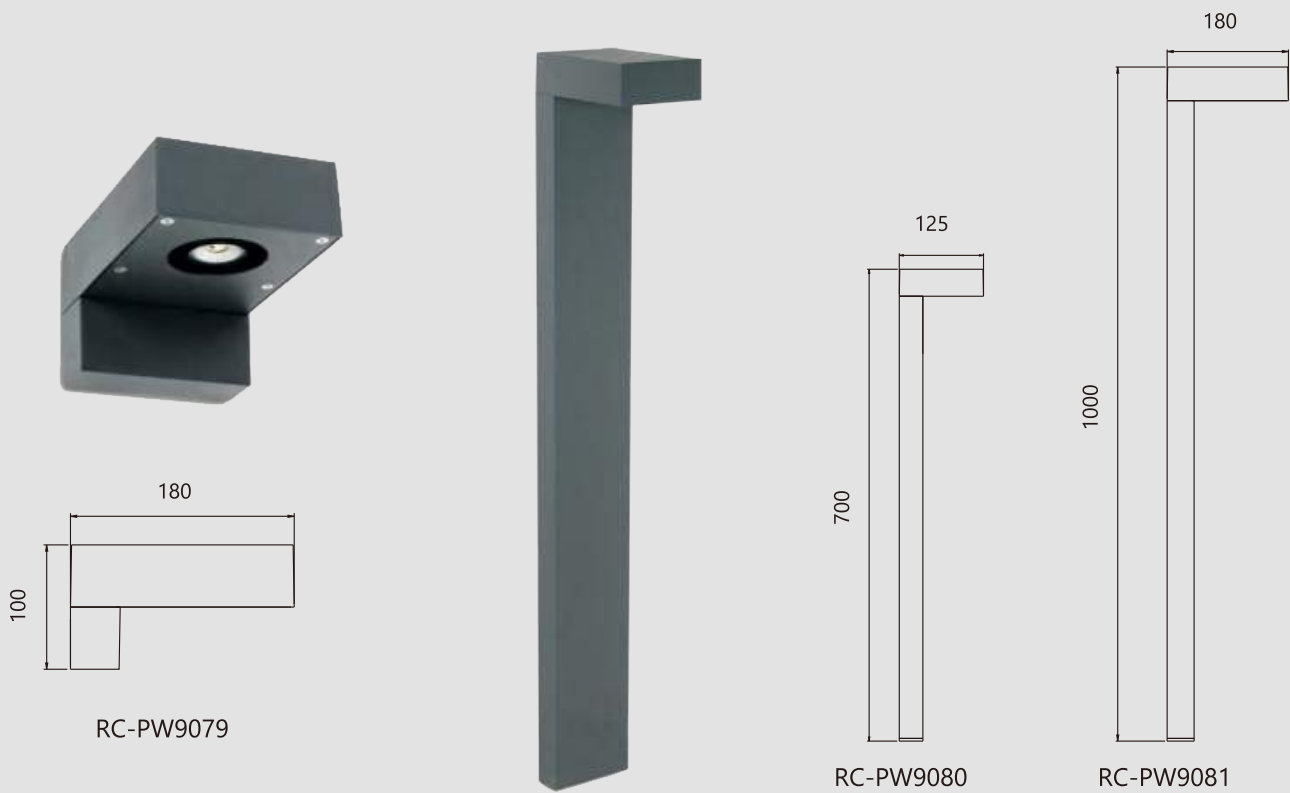

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.


IP

IP65

RC-PW9079		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

RC-PW9080/RC-PW9081		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X5W/ 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights

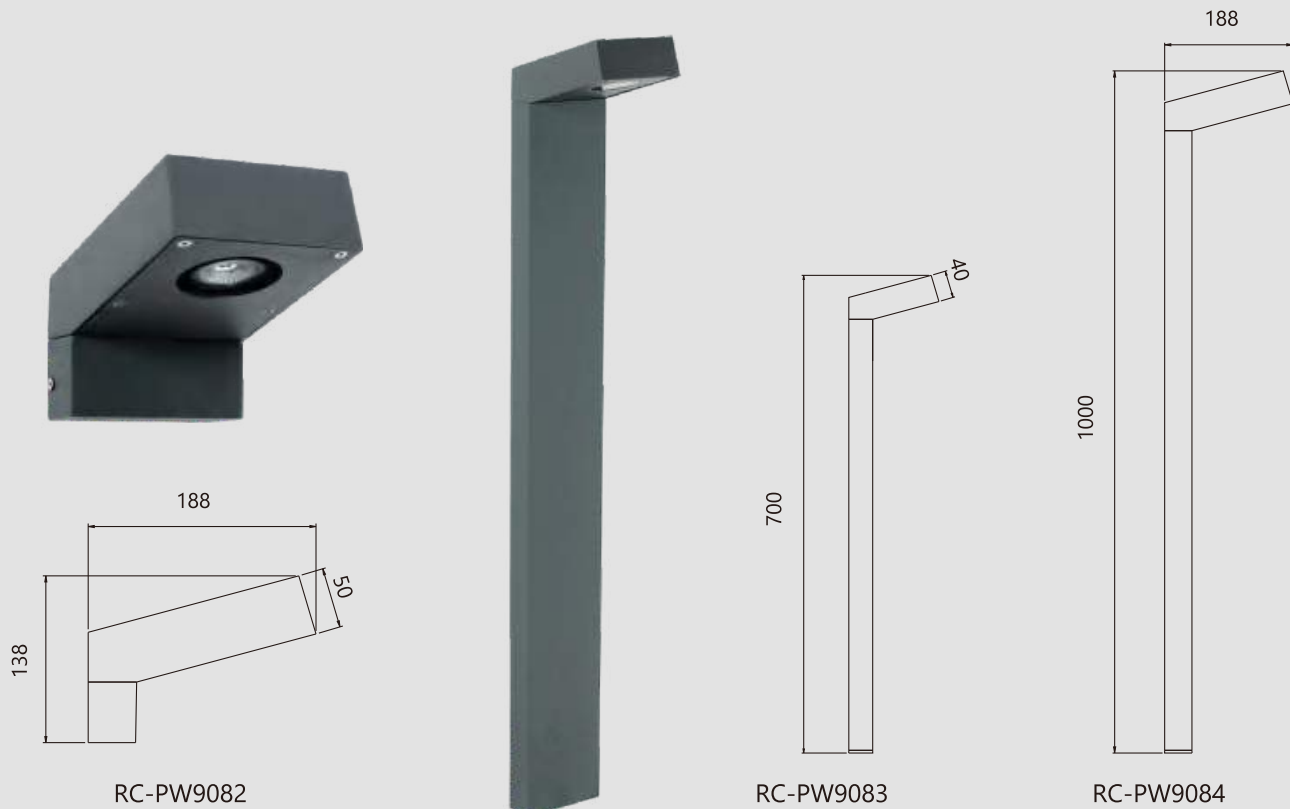

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.


IP

IP65

RC-PW9082		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

RC-PW9083/RC-PW9084		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X5W/ 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights

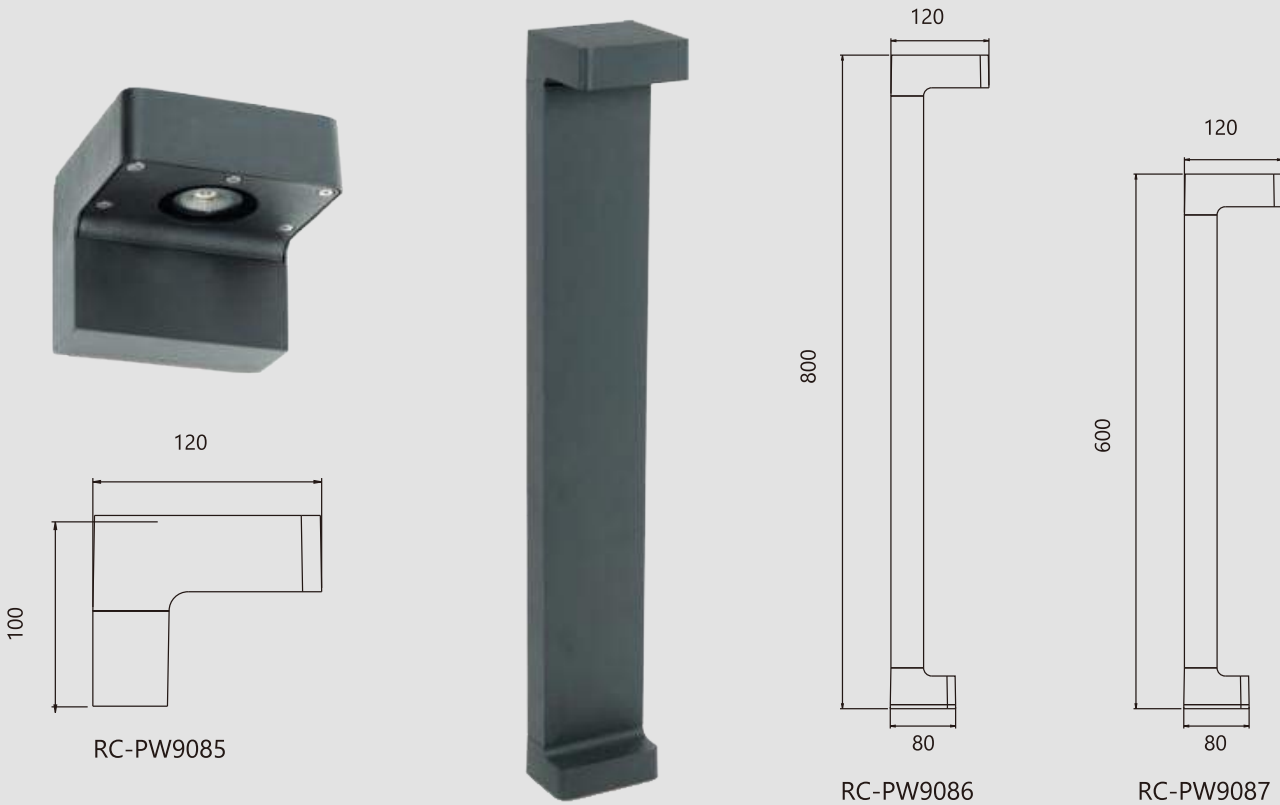

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.


IP

IP65

RC-PW9085		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

RC-PW9086/RC-PW9087		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights

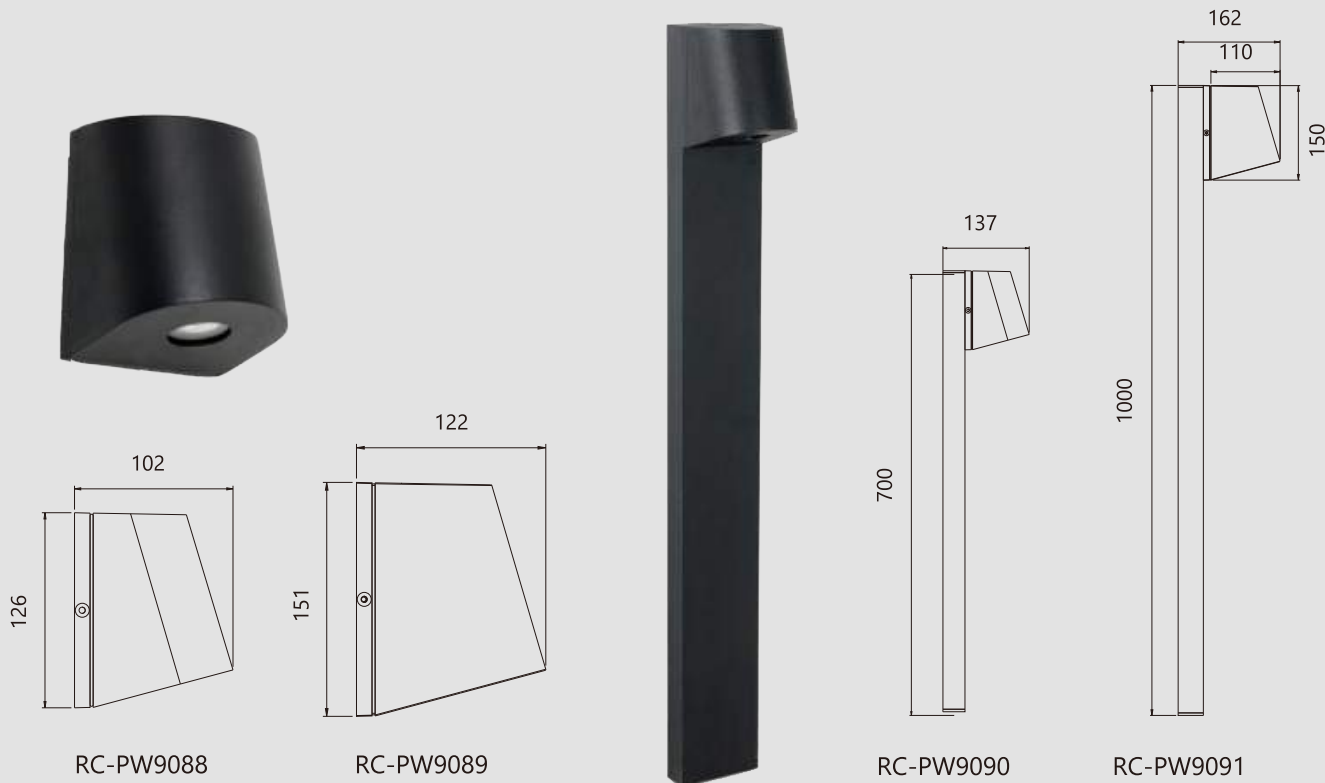

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.



IP

IP65



RC-PW9088/RC-PW9089		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X5W / 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

RC-PW9090/RC-PW9091		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X5W / 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights

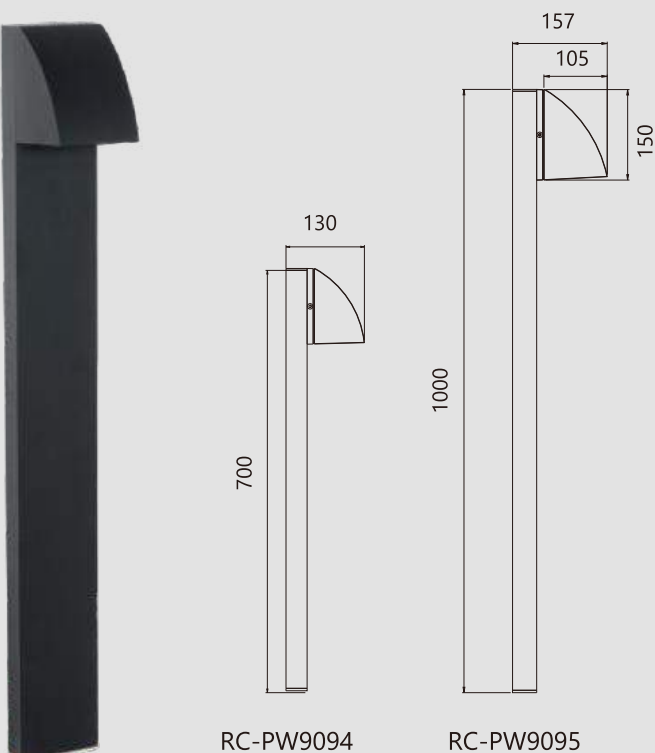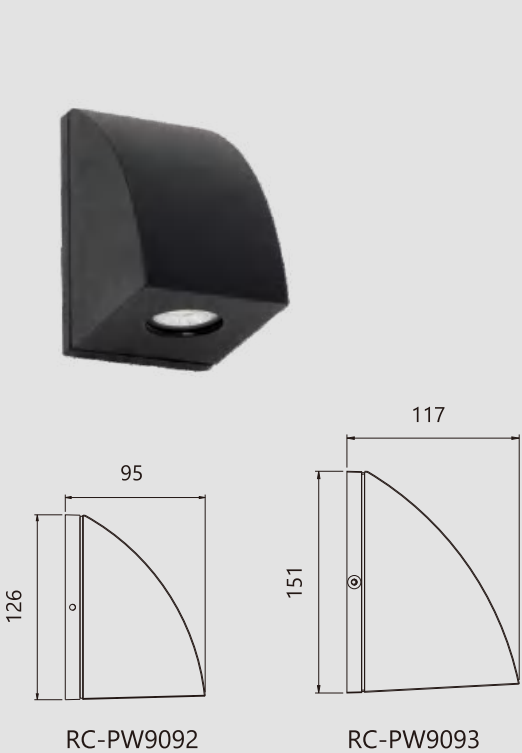

LED Pathway Lights

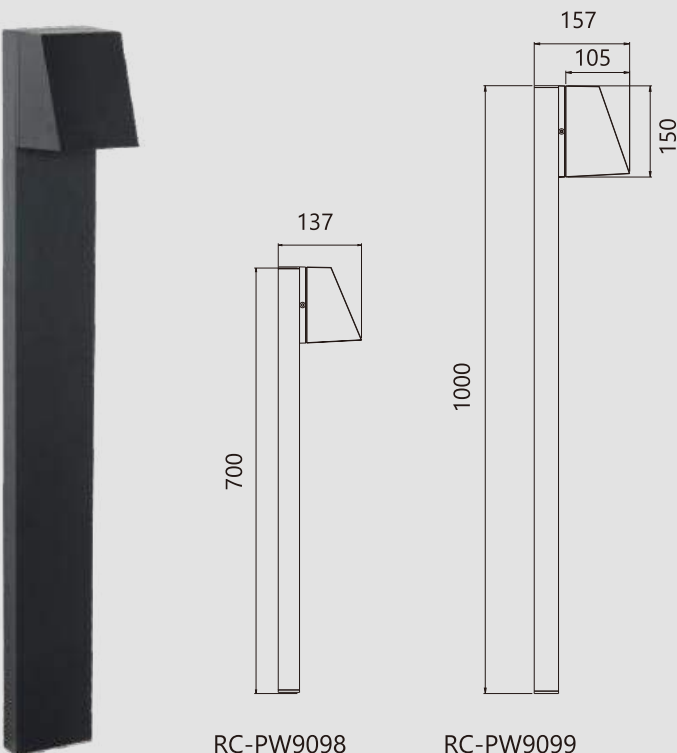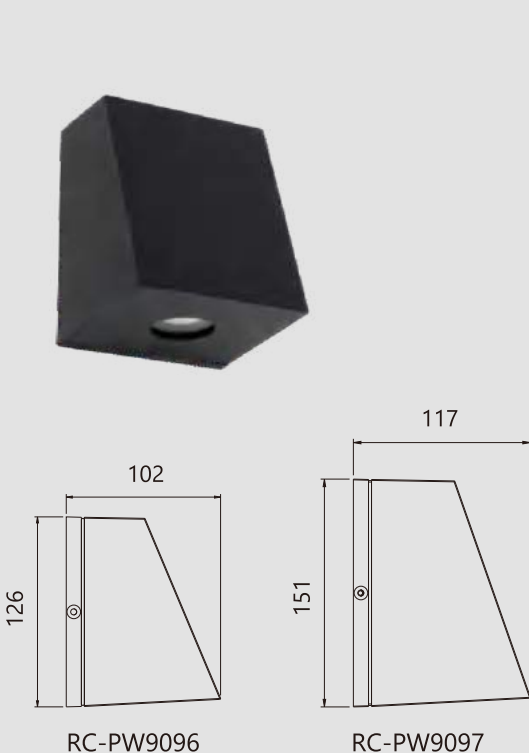

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9092/RC-PW9093		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X5W / 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

RC-PW9094/RC-PW9095		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X5W / 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.



IP

IP65

RC-PW9096/RC-PW9097		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X5W / 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

RC-PW9098/RC-PW9099		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 1X5W / 1X10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights

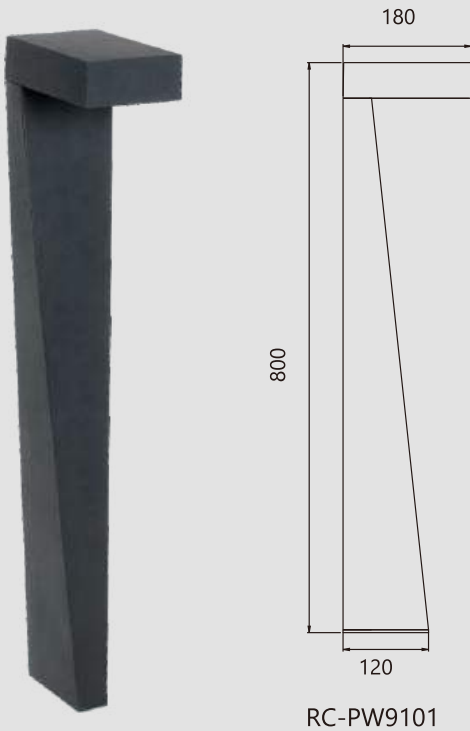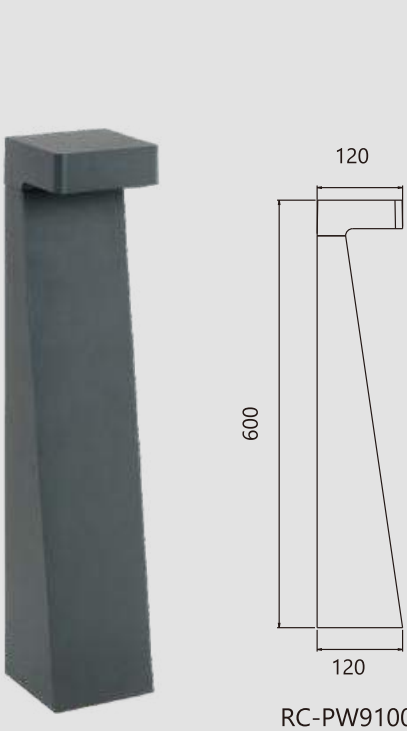

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9100	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 1X10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9101	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 1X10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

LED Pathway Lights



Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear polycarbonate

Reflector

Made of anodized high pure aluminum.

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.


IP

IP65

RC-PW9102	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 1X9W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9103	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 1X9W	☐ 6000K
Voltage: 90-260V 50/60Hz	

LED Pathway Lights

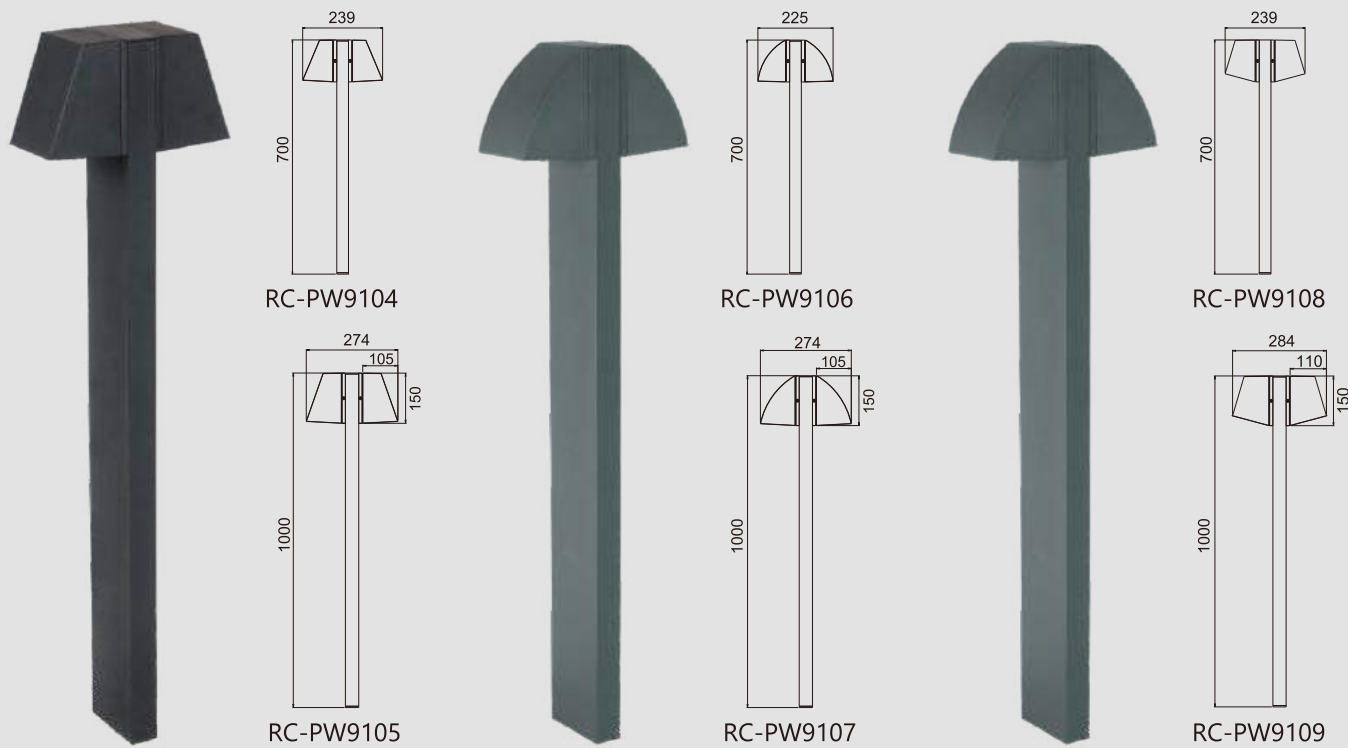

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9104/RC-PW9105		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 2X5W/2x10W		☐ 6000K
Voltage: 90-260V 50/60Hz		
RC-PW9106/RC-PW9107		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 2X5W/2x10W		☐ 6000K
Voltage: 90-260V 50/60Hz		
RC-PW9108/RC-PW9109		Color Temperature
Lamp: LED COB		☒ 3000K
LED Power: 2X5W/2x10W		☐ 6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights



Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9110		Color Temperature
Lamp: LED		☒ 3000K
LED Power: 13.5W		☐ 6000K
Voltage: 90-260V 50/60Hz		
RC-PW9111		Color Temperature
Lamp: LED		☒ 3000K
LED Power: 9W		☐ 6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights



Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

PC

Reflector

Made of anodized high pure aluminum.

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9116	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 7W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9117	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 9W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9118	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 9W	☐ 6000K
Voltage: 90-260V 50/60Hz	

LED Pathway Lights



Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

PC/PMMA

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.


IP

IP65

RC-PW9119	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 7W/E27x1	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9120	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 9W/E27x1	☐ 6000K
Voltage: 90-260V 50/60Hz	

LED Pathway Lights

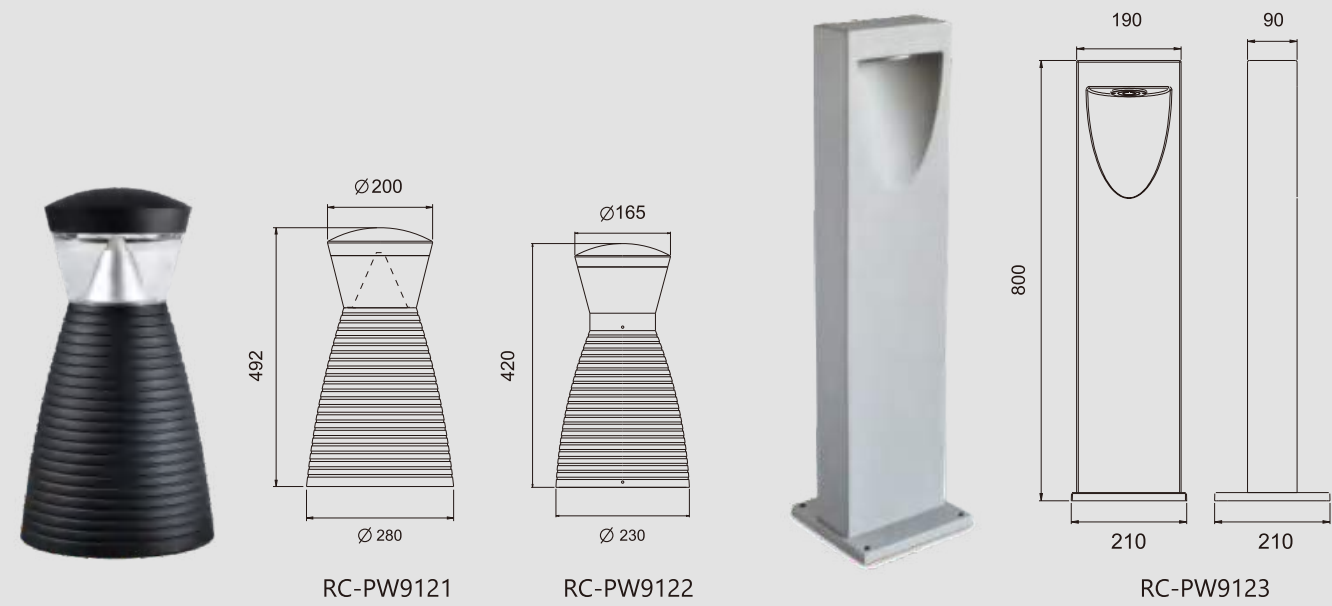

Body

Made of cast aluminum with treatment of anti-corrosion and UV-proof powder coating.

Diffuser

PC/Clear glass

Reflector

Made of anodized high pure aluminum.

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9121/RC-PW9122		Color Temperature
Lamp: LED	☒	3000K
LED Power: 9W	☐	6000K
Voltage: 90-260V 50/60Hz		

RC-PW9123		Color Temperature
Lamp: LED COB	☒	3000K
LED Power: 1x10W	☐	6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights



Body

Made of cast aluminum with treatment of anti-corrosion and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP





IP65

RC-PW9127		Color Temperature
Lamp: LED COB	☒	3000K
LED Power: 1x10W	☐	6000K
Voltage: 90-260V 50/60Hz		

RC-PW9128		Color Temperature
Lamp: LED COB	☒	3000K
LED Power: 1x10W	☐	6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights

LED Pathway Lights

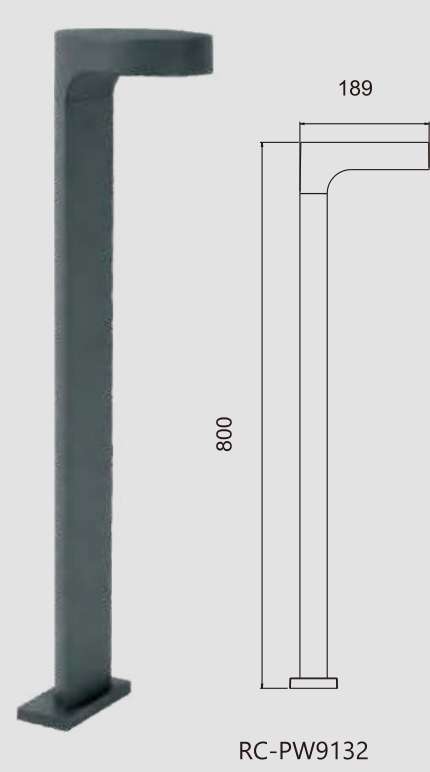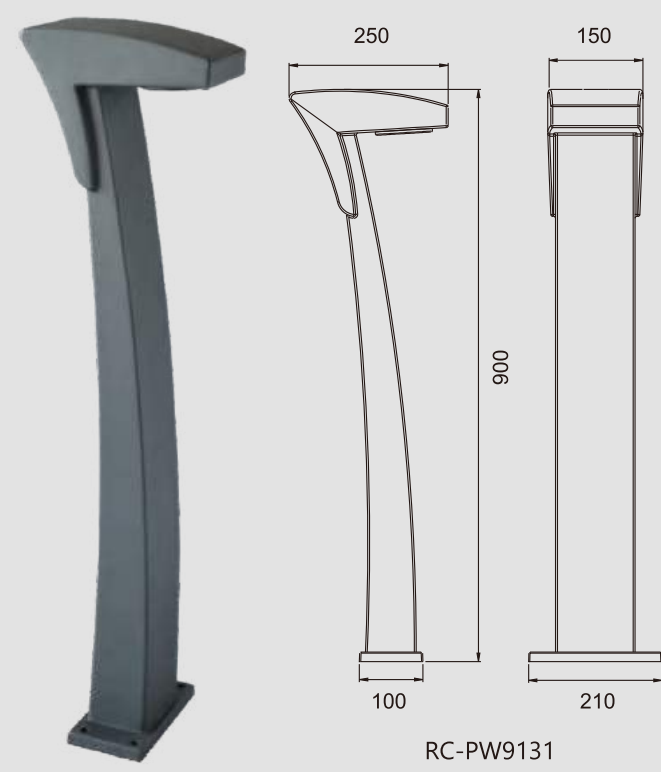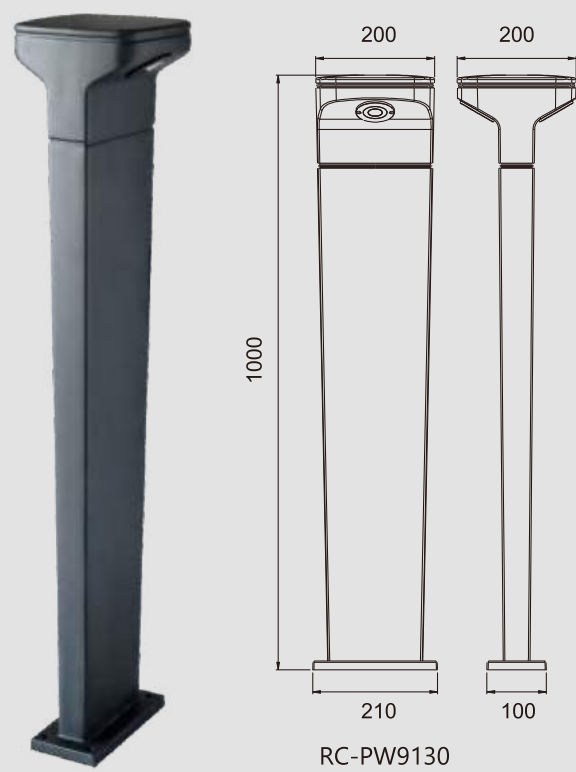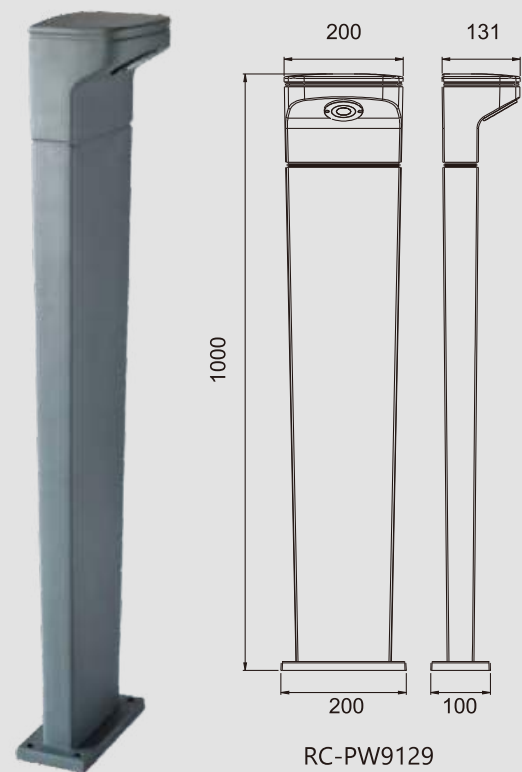

Body

Made of cast aluminum with treatment of anti-corrosion and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9129	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 1x10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9130	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 2x10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

Body

Made of cast aluminum with treatment of anti-corrosion and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP


IP65

RC-PW9131	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 1x10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9132	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 1x10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

LED Pathway Lights

LED Pathway Lights

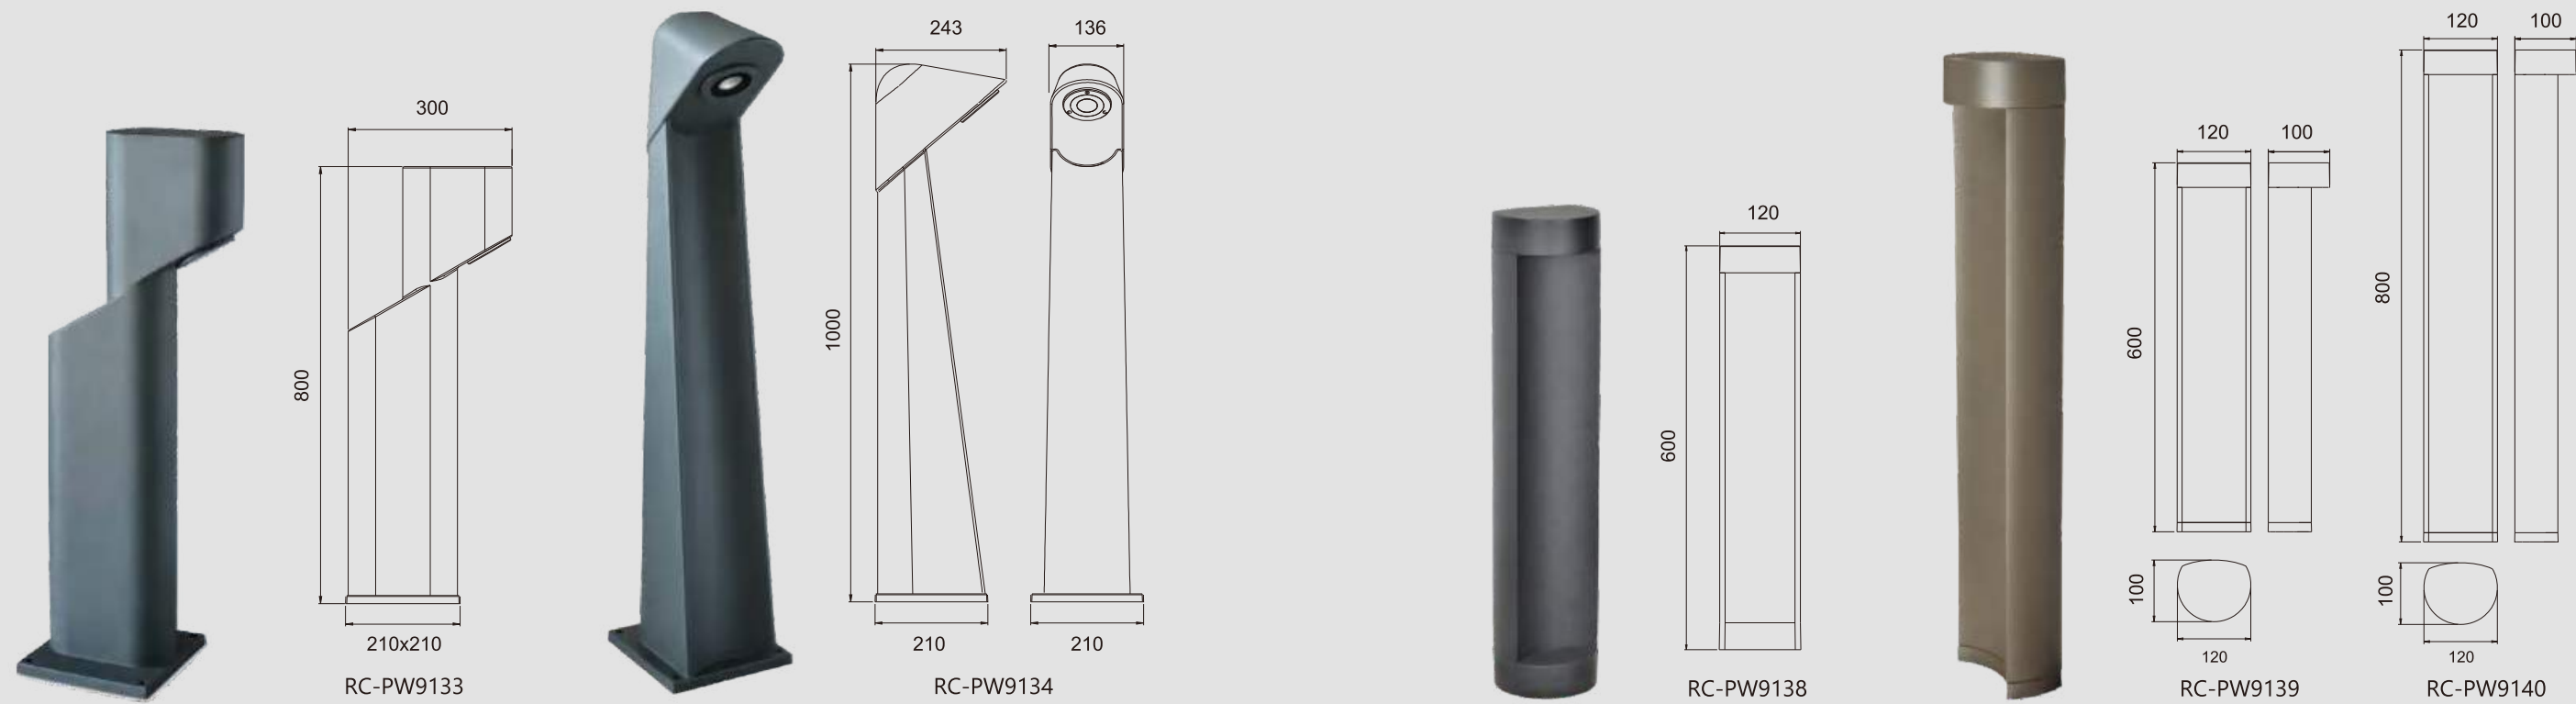

Body

Made of cast aluminum with treatment of anti-corrosion and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9133	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 1x10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9134	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 1x10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

Body

Made of cast aluminum with treatment of anti-corrosion and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9138	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 5W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9139/RC-PW9140	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 5W	☐ 6000K
Voltage: 90-260V 50/60Hz	

LED Pathway Lights



Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

PMMA

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.


IP

IP65

RC-PW9141		Color Temperature
Lamp: LED COB		3000K
LED Power: 10W		6000K
Voltage: 90-260V 50/60Hz		

RC-PW9142/RC-PW9143		Color Temperature
Lamp: LED COB		3000K
LED Power: 5W/10W		6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights

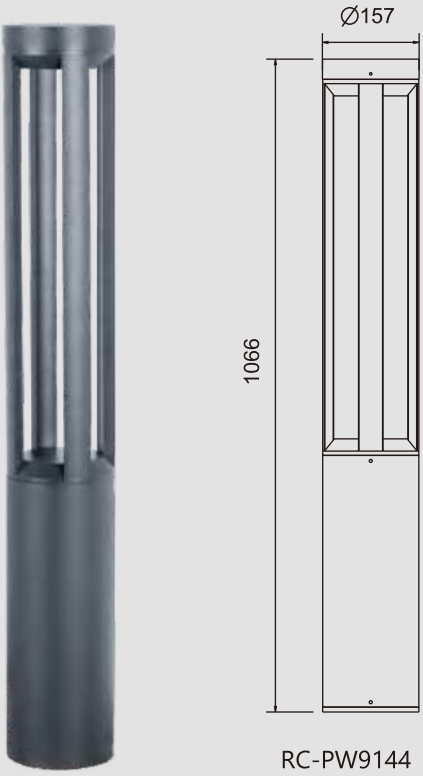

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9144		Color Temperature
Lamp: LED COB		3000K
LED Power: 10W		6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights



Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9145	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9146	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9147	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

LED Pathway Lights



Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP


IP65

RC-PW9148	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9149	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-PW9150	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

LED Pathway Lights

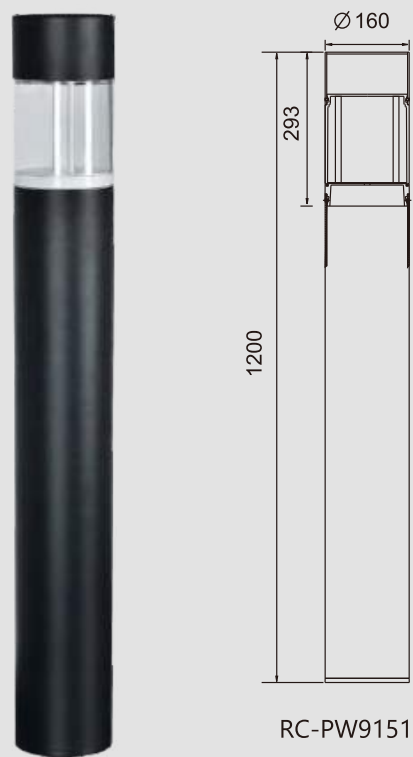

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

PMMA

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener


304 stainless steel.

IP

IP65

RC-PW9151	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

LED Pathway Lights

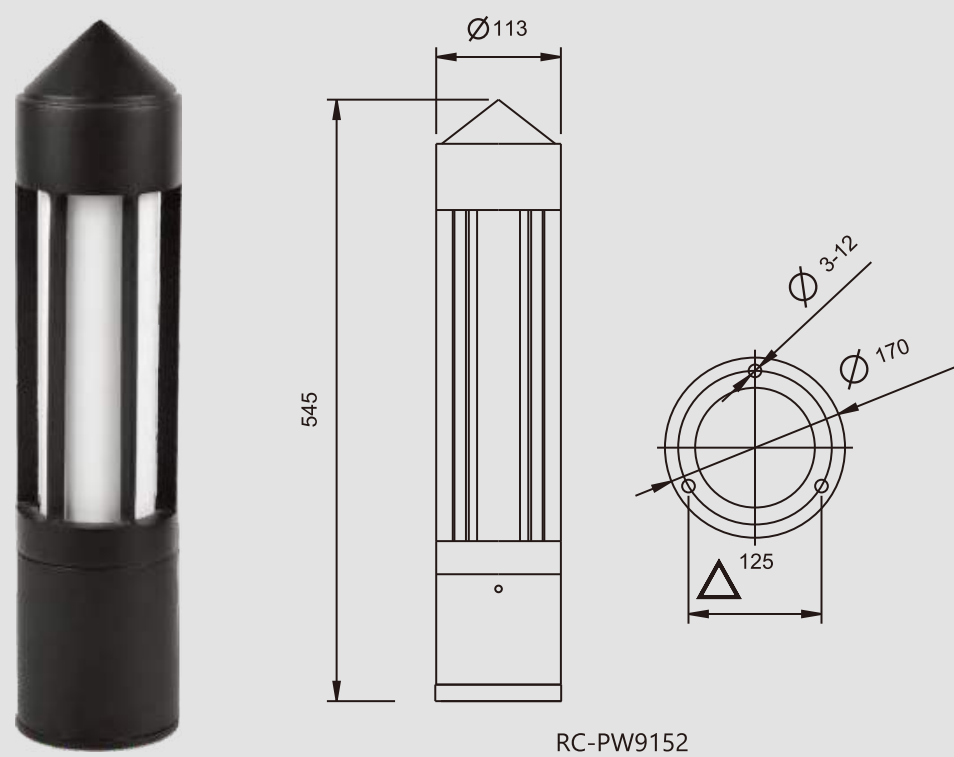

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

PMMA

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9152	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 15W	☐ 6000K
Voltage: 90-260V 50/60Hz	

LED Pathway Lights



Body

Stainless steel

Diffuser

PC

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.


IP

IP65

RC-PW9166		Color Temperature
Lamp: LED	☒	3000K
LED Power: 5W	☐	6000K
Voltage: 90-260V 50/60Hz		

RC-PW9167		Color Temperature
Lamp: LED	☒	3000K
LED Power: 10W	☐	6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights

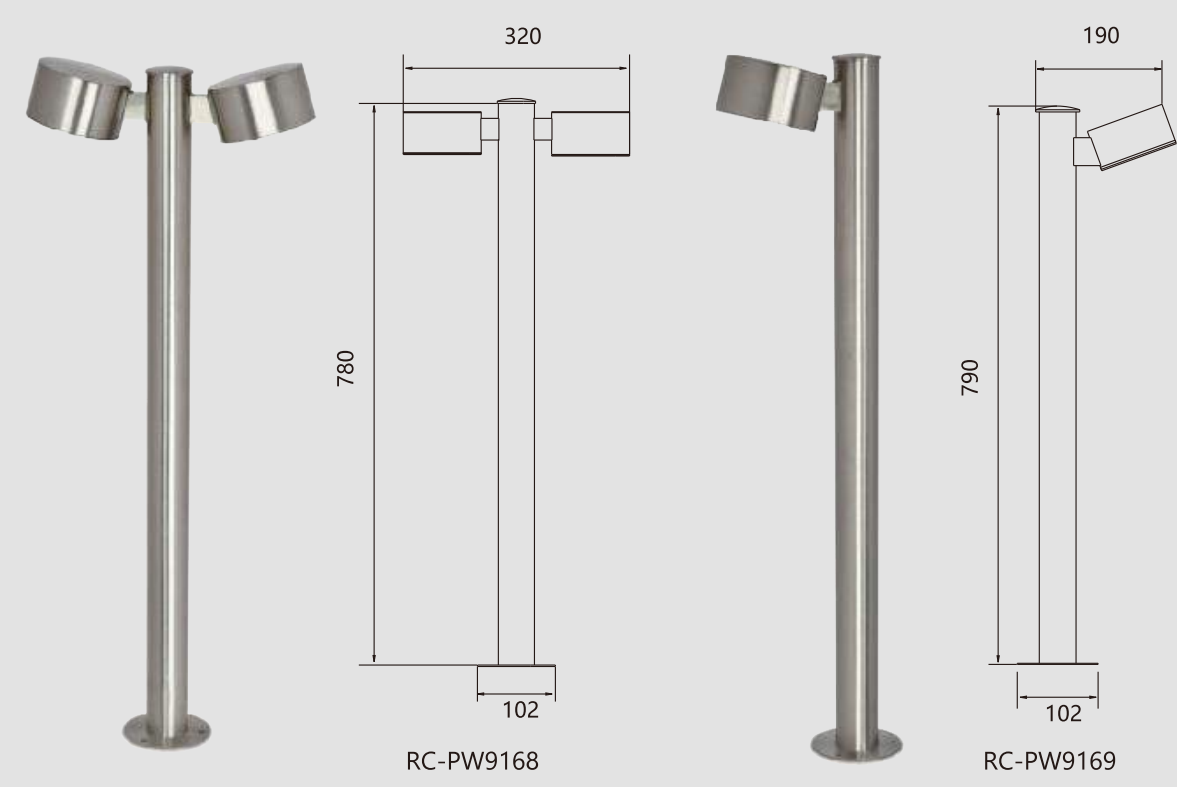

Body

Stainless steel

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP

IP65

RC-PW9168		Color Temperature
Lamp: LED	☒	3000K
LED Power: 6Wx2	☐	6000K
Voltage: 90-260V 50/60Hz		


RC-PW9169		Color Temperature
Lamp: LED	☒	3000K
LED Power: 6W	☐	6000K
Voltage: 90-260V 50/60Hz		

LED Pathway Lights


LED Pathway Lights




RC-PW8462




RC-PW8463



RC-PW8464

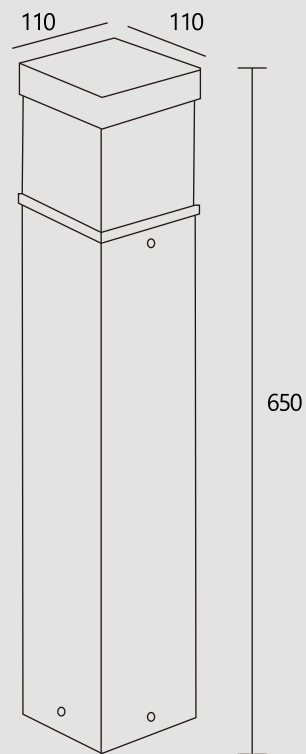

RC-PW5733-280



RC-PW5733-760



Body

Body and bracket in die-cast aluminium.

Diffuser

Clear PC

IP

IP65

Finish

Powder coated with pretreatment for outdoor use.

RC-PW8462	Color Temperature
Lamp: LED SMD	☒ 3000K
LED Power: 9W	☐ 6000K
Voltage: 220-240V 50Hz	

RC-PW8463	Color Temperature
Lamp: LED SMD	☒ 3000K
LED Power: 9W	☐ 6000K
Voltage: 220-240V 50Hz	

RC-PW8464	Color Temperature
Lamp: LED SMD	☒ 3000K
LED Power: 9W	☐ 6000K
Voltage: 220-240V 50Hz	

Driver

LED driver certified by Intertek.

Gasketing

Silicon rubber gasket.

Body

Body and bracket in die-cast aluminium.

Diffuser

Frost PC

IP

IP65

Finish

Powder coated with pretreatment for outdoor use.

RC-PW5733-280	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 10W	☐ 6000K
Voltage: 220-240V 50Hz	

Driver

LED driver certified by Intertek.

RC-PW5733-760	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 10W	☐ 6000K
Voltage: 220-240V 50Hz	

Gasketing

Silicon rubber gasket.

LED Pathway Lights



RC-PW321

Body

Die-cast aluminium.

Finish

Powder coated with pretreatment for outdoor use.

Finish Color



Gasketing

Silicon rubber gasket.

Diffuser


Glass

IP

IP65

RC-PW321	Color Temperature
Lamp: LED SMD	☒ 2700K
LED Power: 20W	☐ 6500K
Voltage: 200-240V 50Hz	

LED Pathway Lights

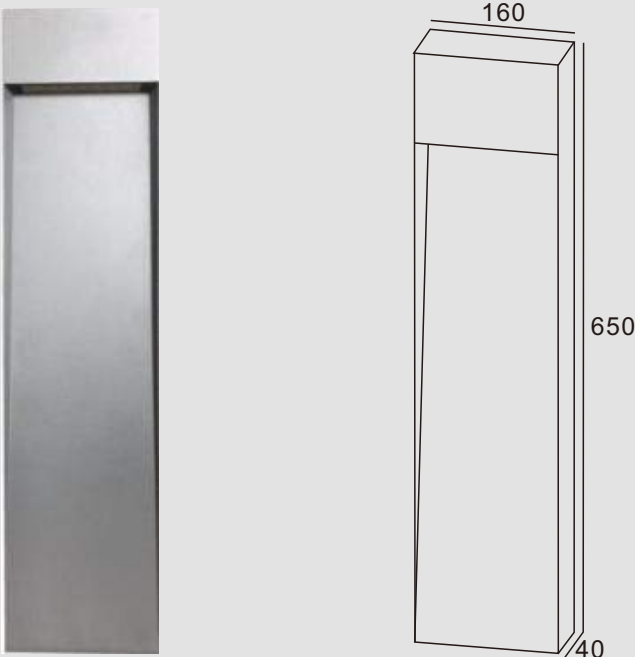

RC-PW6516

Body

Body and bracket in die-cast aluminium.

Finish

Powder coated with pretreatment for outdoor use.

Driver

LED driver certified by Intertek.

Gasketing

Silicon rubber gasket.

Diffuser

Frost glass

IP

IP65

RC-PW6516	Color Temperature
Lamp: LED SMD	☒ 3000K
LED Power: 7W	☐ 6000K
Voltage: 220-240V 50Hz	

LED Pathway Lights



Body

Body and bracket in die-cast aluminium.

Finish

Powder coated with pretreatment for outdoor use.

Driver

LED driver certified by Intertek.

Gasketing

Silicon rubber gasket.

Diffuser

Frost glass


IP

IP54

RC-PW1201		Color Temperature
Lamp: LED SMD		☒ 3000K
LED Power: 7W		☐ 6000K
Voltage: 220-240V 50Hz		

RC-PW1202		Color Temperature
Lamp: LED SMD		☒ 3000K
LED Power: 7W		☐ 6000K
Voltage: 220-240V 50Hz		

LED Pathway Lights

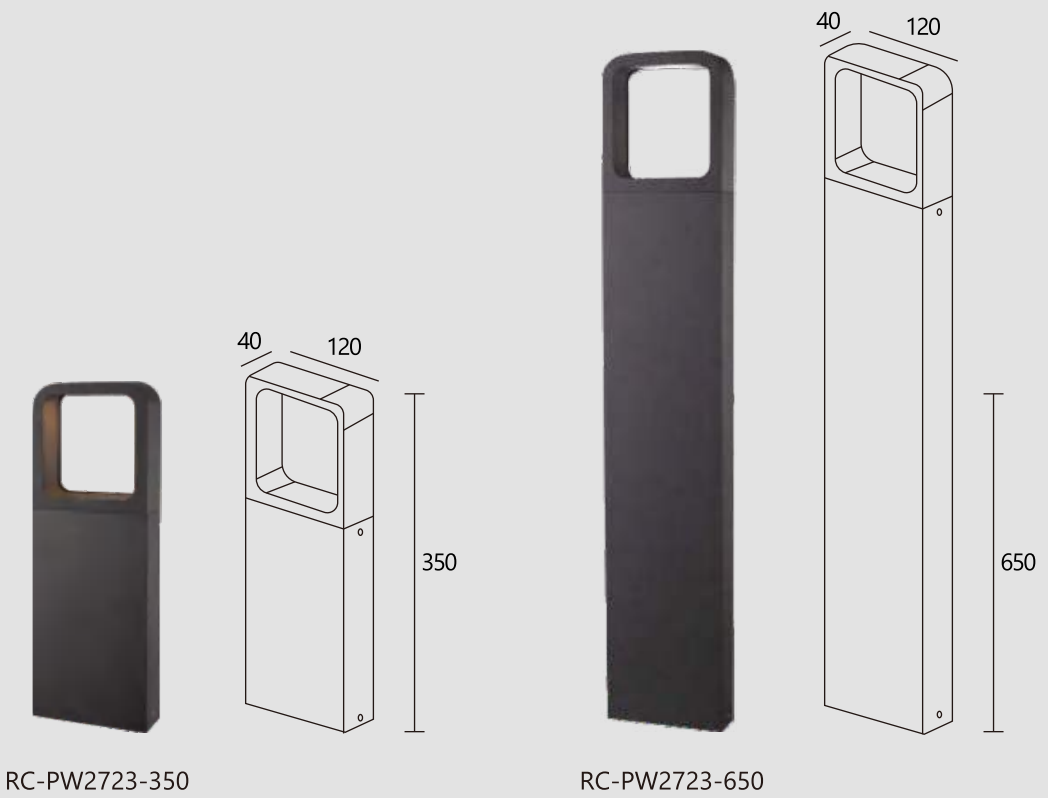

Body

Body and bracket in die-cast aluminium.

Finish

Powder coated with pretreatment for outdoor use.

Driver

LED driver certified by Intertek.

Gasketing

Silicon rubber gasket.

Diffuser

Frost PC

IP

IP54

RC-PW1201		Color Temperature
Lamp: LED CREE		☒ 3000K
LED Power: 7W		☐ 6000K
Voltage: 220-240V 50Hz		

RC-PW1202		Color Temperature
Lamp: LED CREE		☒ 3000K
LED Power: 7W		☐ 6000K
Voltage: 220-240V 50Hz		

LED Pathway Lights



RC-PW5853

Body

Body and bracket in die-cast aluminium.

Diffuser

Clear PC

IP

IP65

Finish

Powder coated with pretreatment for outdoor use.

RC-PW5853	Color Temperature
Lamp: LED CREE	☒ 3000K
LED Power: 7W	☐ 6000K
Voltage: 220-240V 50Hz	


Driver

LED driver certified by Intertek.

Gasketing

Silicon rubber gasket.

LED Pathway Lights

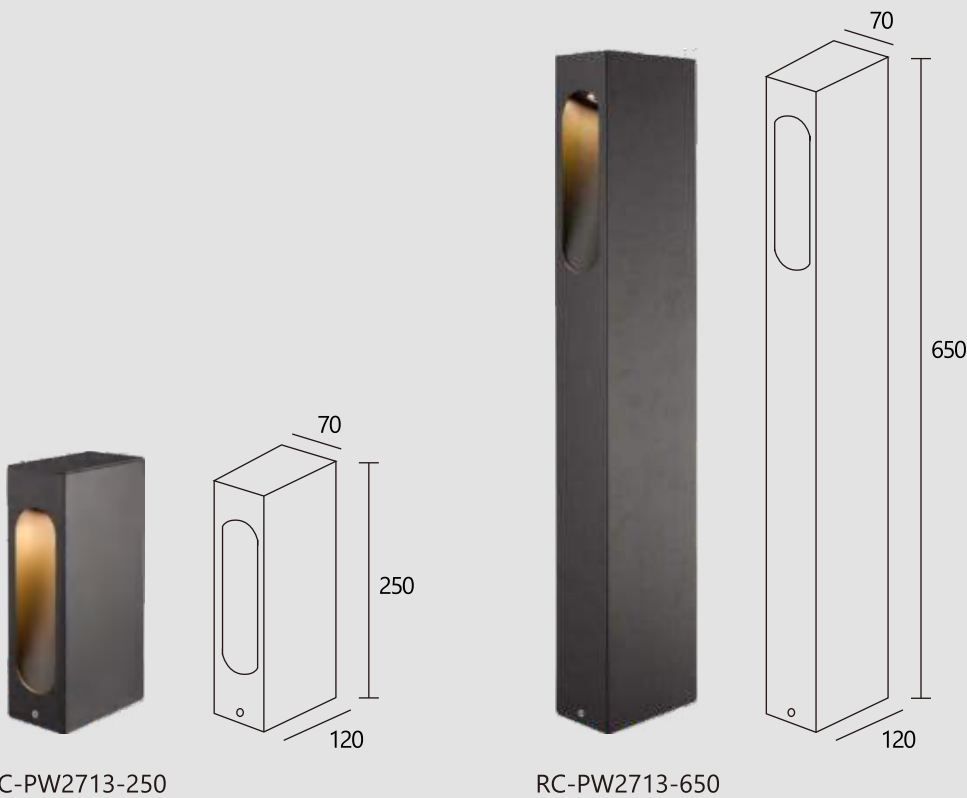

RC-PW2713-250

RC-PW2713-650

Body

Body and bracket in die-cast aluminium.

Diffuser

Clear PC

IP

IP54

Finish

Powder coated with pretreatment for outdoor use.

RC-PW2713-250	Color Temperature
Lamp: LED CREE	☒ 3000K
LED Power: 7W	☐ 6000K
Voltage: 220-240V 50Hz	

Driver


LED driver certified by Intertek.

RC-PW2713-650	Color Temperature
Lamp: LED CREE	☒ 3000K
LED Power: 7W	☐ 6000K
Voltage: 220-240V 50Hz	

Gasketing

Silicon rubber gasket.

LED Pathway Lights

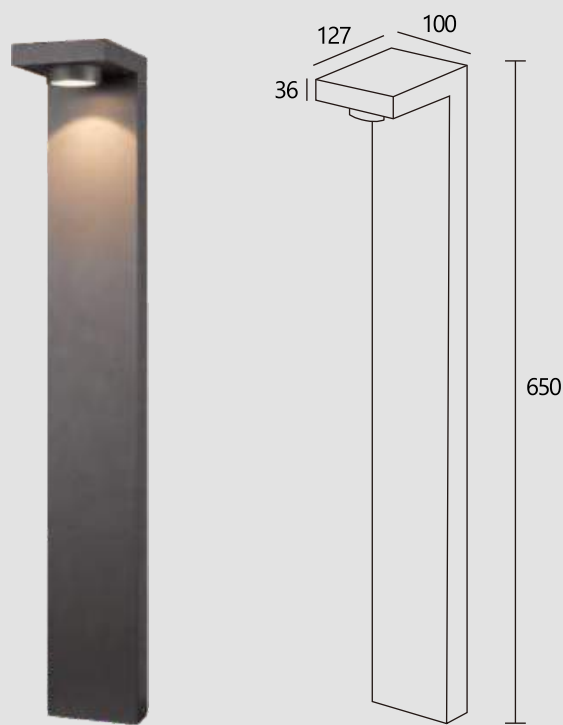

RC-PW1171

Body

Body and bracket in die-cast aluminium.

Diffuser

Clear glass

IP

IP54

Finish

Powder coated with pretreatment for outdoor use.

RC-PW1171	Color Temperature
Lamp: LED CREE	☒ 3000K
LED Power: 7W	☐ 6000K
Voltage: 220-240V 50Hz	

Driver

LED driver certified by Intertek.

Gasketing

Silicon rubber gasket.

LED Pathway Lights



RC-PW1263-500

ø150

RC-PW1263-800

ø150

Body

Body and bracket in die-cast aluminium.

Diffuser

Clear glass

IP

IP65

Finish

Powder coated with pretreatment for outdoor use.

RC-PW1263-500	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 7W	☐ 6000K
Voltage: 220-240V 50Hz	

Driver

RC-PW1263 LED driver certified by Intertek.
RC-PW1265 AC LED, without driver.



RC-PW1263-800	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 10W	☐ 6000K
Voltage: 220-240V 50Hz	

Gasketing

Silicon rubber gasket.

LED Pathway Lights

LED Pathway Lights

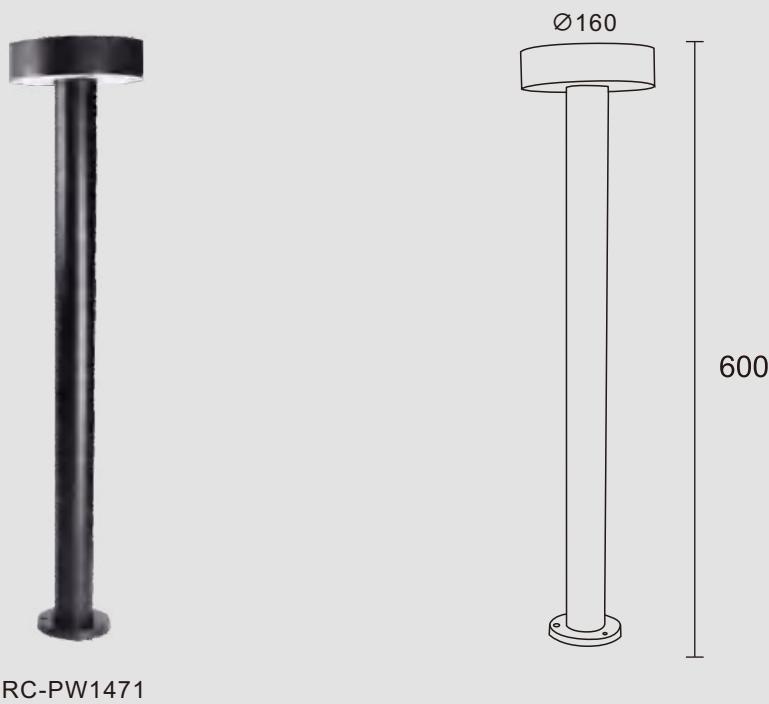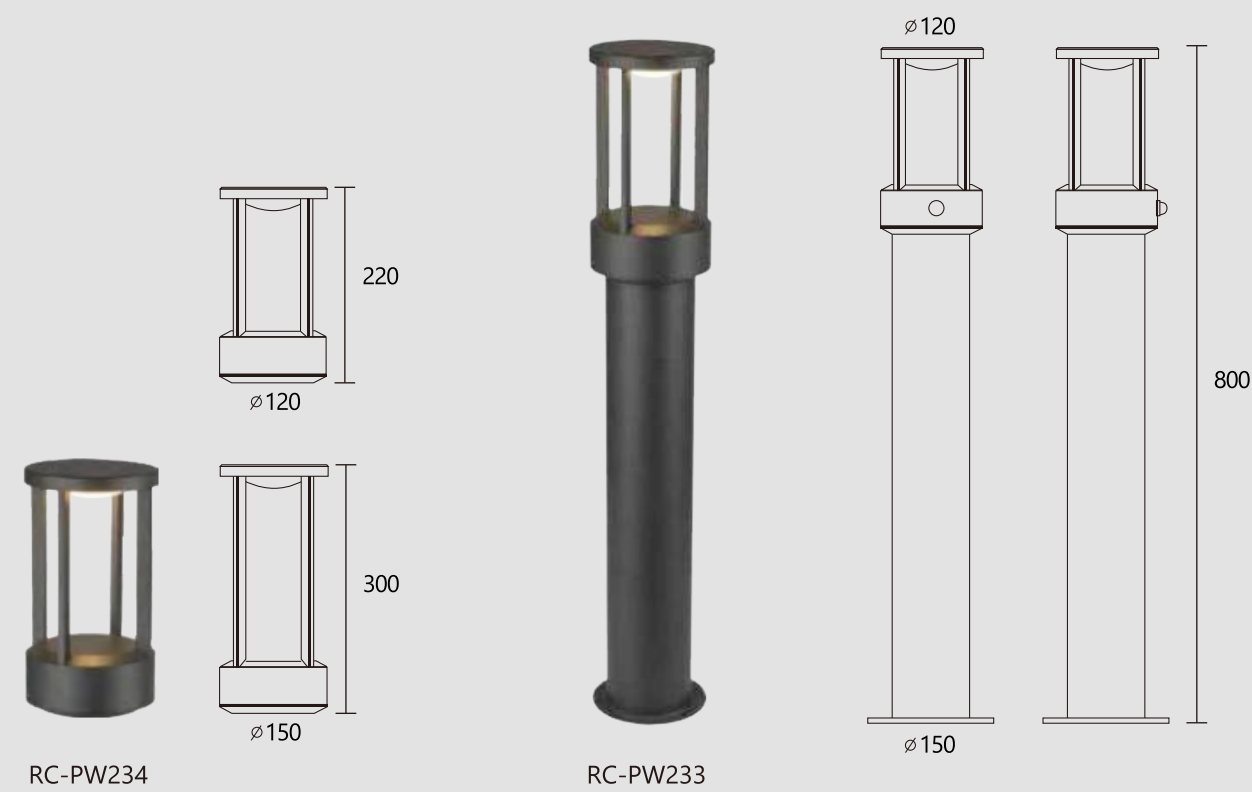

Body

Die-cast aluminium.

Diffuser

PC

IP

IP65

Finish

Powder coated with pretreatment for outdoor use.

RC-PW234/ RC-PW233	Color Temperature
Lamp: LED SMD	☒ 2700K
LED Power: 13W	☐ 6500K
Voltage: 200-240V 50Hz	

Finish Color



Gasketing

Silicon rubber gasket.

Body

Body and bracket in die-cast aluminium.

IP

IP65

Finish

Powder coated with pretreatment for outdoor use.

RC-PW1471	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 12W	☐ 6000K
Voltage: 220-240V 50Hz	


Usage

Used as a socket.

Gasketing

Silicon rubber gasket.

LED Pathway Lights

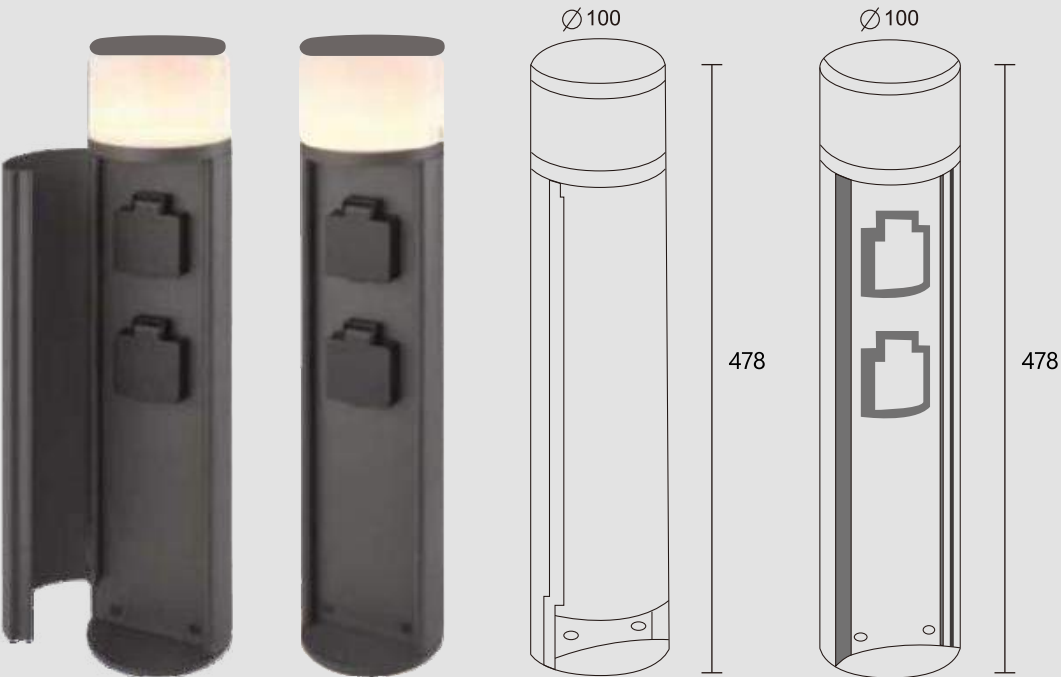

RC-PW3111

Body

Body and bracket in die-cast aluminium.

Finish

Powder coated with pretreatment for outdoor use.

Usage

Used as a socket.

Gasketing


Silicon rubber gasket.

IP

IP44

RC-PW3111	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 3W	☐ 6000K
Voltage: 220-240V 50Hz	

LED Pathway Lights

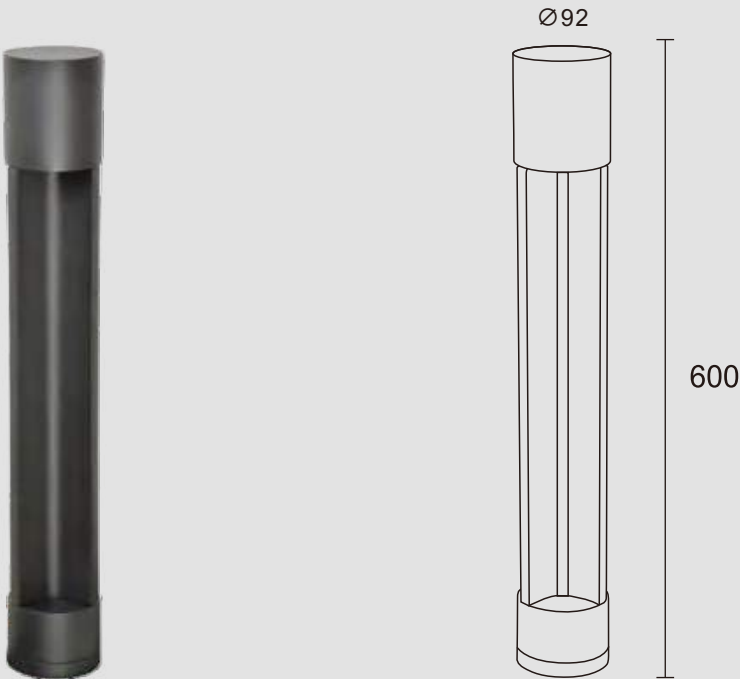

RC-PW1461

Body

Die-cast aluminium.

Finish

Powder coated for outdoor use.

Diffuser


Clear glass

IP

IP65

RC-PW1461	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 35W Max.	☐ 6000K
Voltage: 220-240VAC	

LED Pathway Lights

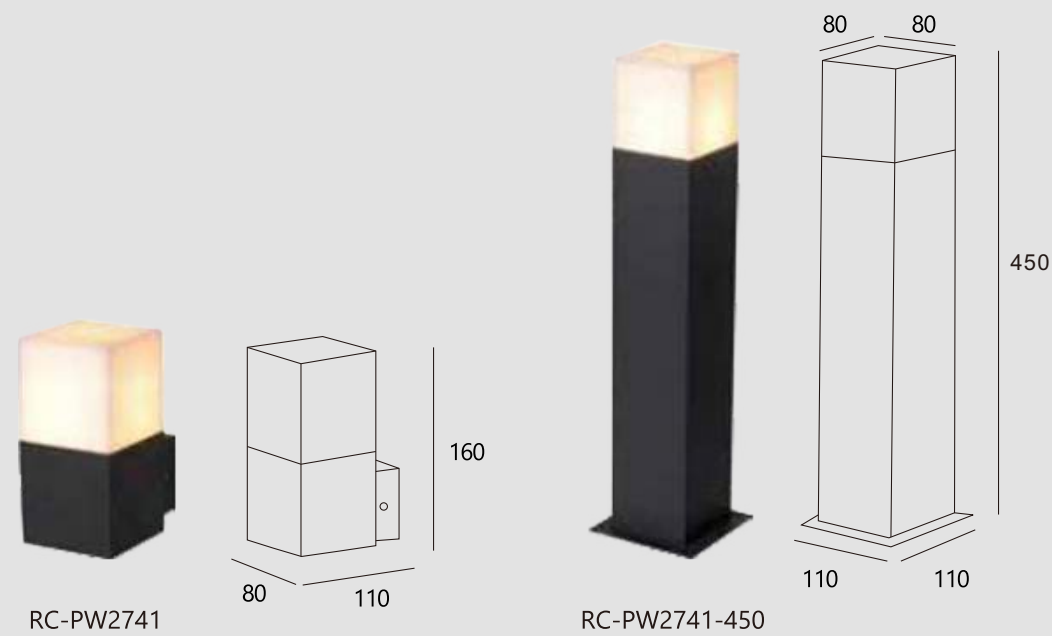

Body

Die-cast aluminium.

Finish

Powder coated for outdoor use.

Description

RC-PW2741 Surface wall mounted.
RC-PW2741-450 Bollard light.

Diffuser

Opal PC
Smokey PC


IP

IP44

RC-PW2741		Color Temperature
Lamp: LED		☒ 3000K
LED Power: 13W Max.		☐ 6000K
Voltage: 220-240VAC		

RC-PW2741-450		Color Temperature
Lamp: LED		☒ 3000K
LED Power: 13W Max.		☐ 6000K
Voltage: 220-240VAC		

LED Pathway Lights

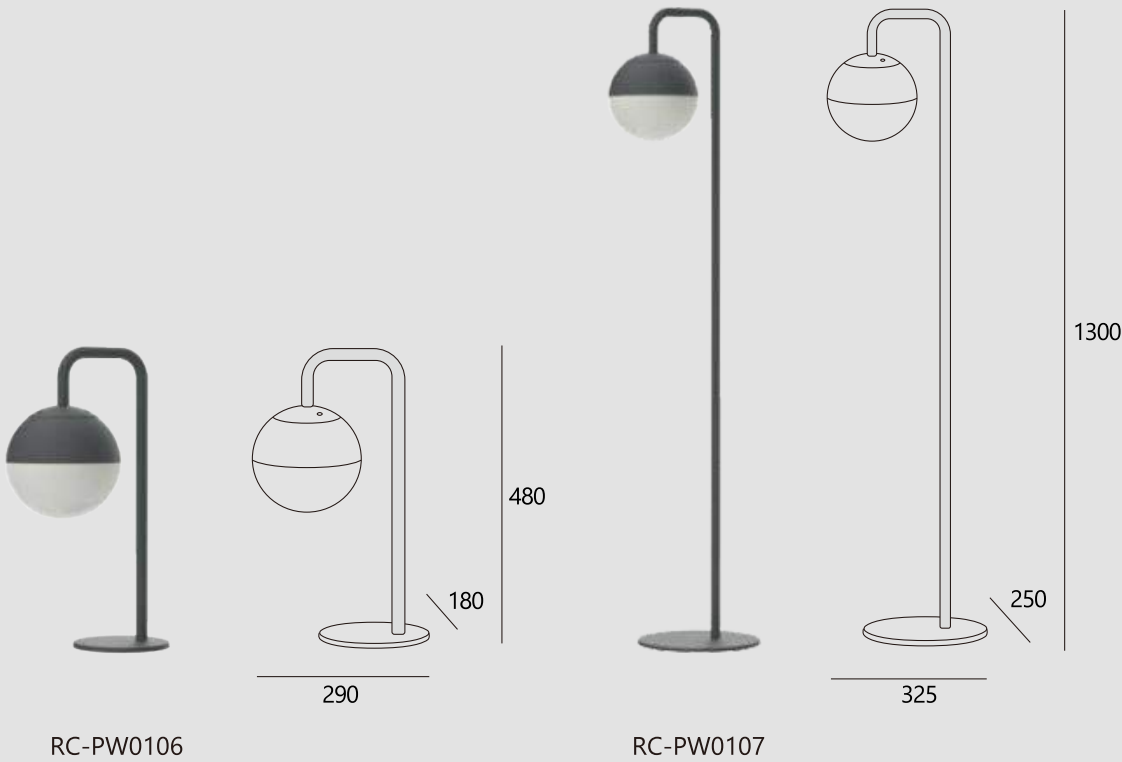

Body

Die-cast aluminium.

Finish

Powder coated for outdoor use.

Description

RC-PW0106 Outdoor table light
RC-PW0107 Outdoor floor light

Diffuser

Opal PC
Smokey PC
Transparent PC

IP

IP54


RC-PW0106		Color Temperature
Lamp: LED SMD		☒ 3000K
LED Power: 6W		☐ 6000K
Voltage: 220-240VAC		

RC-PW0107		Color Temperature
Lamp: LED SMD		☒ 3000K
LED Power: 6W		☐ 6000K
Voltage: 220-240VAC		

LED Pathway Lights



LED Pathway Lights

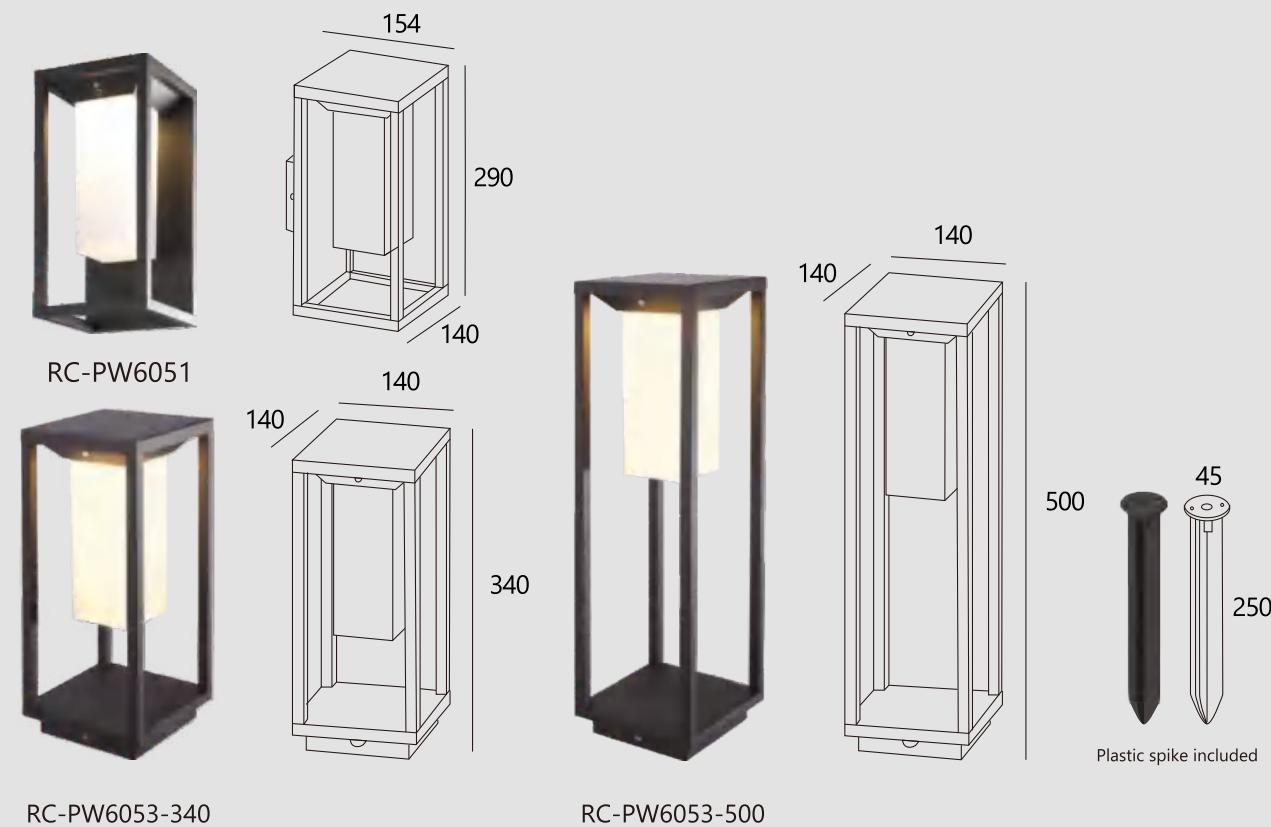

Body

Body and bracket in die-cast aluminium.

RC-PW6006-340/500

Automatically light up at night ($\leq 20\text{lux}$).

Finish

Powder coated with pretreatment for outdoor use.

Diffuser

Clear PC.

IP

IP54

Charge

6-8H (sunshine).

RC-PW6003-340/500

Color Temperature	
☒ 3000K	☐ 6000K
Lamp: Solar light	
LED Power: 2.2W	
Voltage: DC 3.7V	

RC-PW6006-340/500

Color Temperature	
☒ 3000K	☐ 6000K
Lamp: Solar light	
LED Power: 0.45W	
Voltage: DC 3.7V	

Gasketing

Silicon rubber gasket.

Body

Body and bracket in die-cast aluminium.

Finish

Powder coated with pretreatment for outdoor use.

Work time

100% of light 2.5~3H, 15% of light 20~25H.

Charge

6-8H (sunshine).

RC-PW6051

Color Temperature	
☒ 3000K	☐ 6000K
Lamp: Solar light	
LED Power: 2.2W	
Voltage: DC 3.7V	

Gasketing

Silicon rubber gasket.



RC-PW6053-340/500

Color Temperature	
☒ 3000K	☐ 6000K
Lamp: Solar light	
LED Power: 2.2W	
Voltage: DC 3.7V	

LED Pathway Lights



LED Pathway Lights

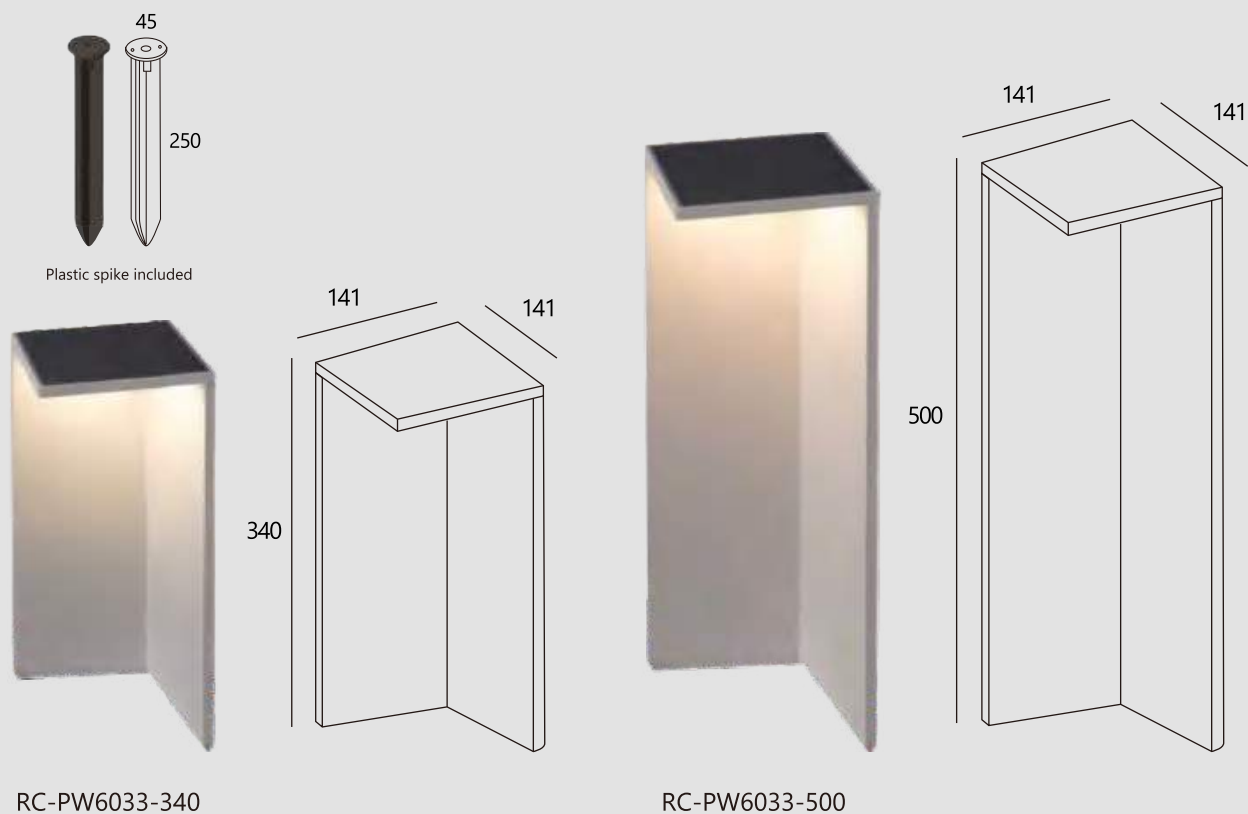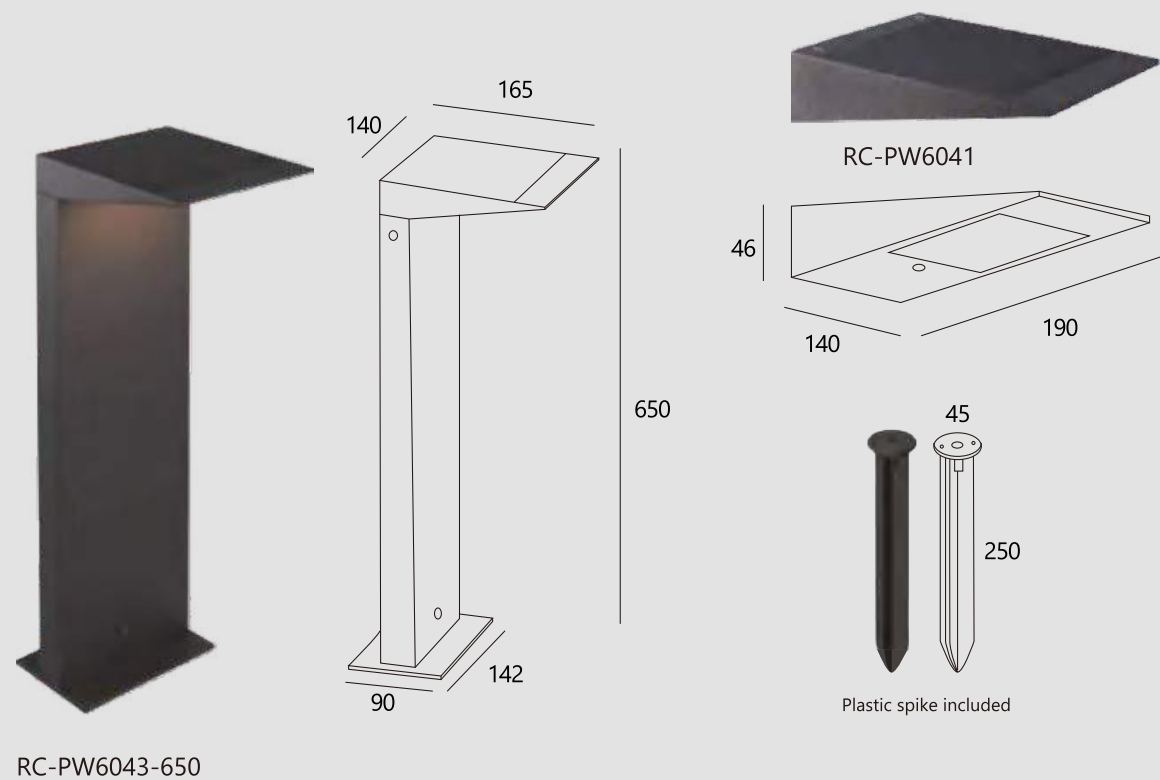

Body

Body and bracket in die-cast aluminium.

Finish

Powder coated with pretreatment for outdoor use.

Charge

6-8H (sunshine).

Gasketing

Silicon rubber gasket.

Work time

100% of light 2.5~3H, 15% of light 20~25H.

Diffuser

Clear PC.

IP

IP54

RC-PW6041	Color Temperature
Lamp: Solar light	☒ 3000K
LED Power: 2.2W	☐ 6000K
Voltage: DC 3.7V	

RC-PW6043-650	Color Temperature
Lamp: Solar light	☒ 3000K
LED Power: 2.2W	☐ 6000K
Voltage: DC 3.7V	

Body

Body and bracket in die-cast aluminium.

Finish

Powder coated with pretreatment for outdoor use.

Charge

6-8H (sunshine).

Gasketing

Silicon rubber gasket.

Work time

100% of light 2.5~3H, 15% of light 20~25H.

Diffuser

Clear PC.

IP

IP54

RC-PW6033	Color Temperature
Lamp: Solar light	☒ 3000K
LED Power: 2.2W	☐ 6000K
Voltage: DC 3.7V	




Garden Lights Series





Garden Lights

Body: Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: PC.
Fastener: 304 stainless steel.
IP: IP65

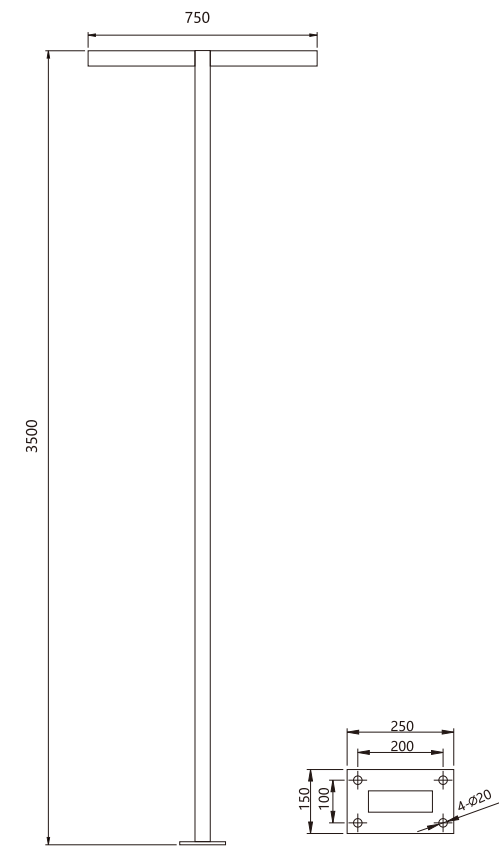


RC-GL9065	
Lamp: LED	Color Temperature
LED Power: 30WX2	3000K
Voltage: 90-260V 50/60Hz	6000K






Garden Lights

Body: Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: PC.
Fastener: 304 stainless steel.
IP: IP65

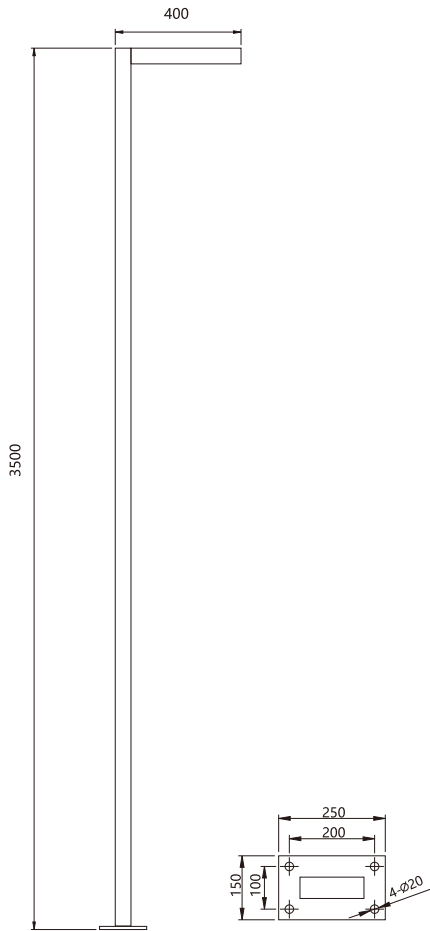


RC-GL9066	Color Temperature
Lamp: LED	3000K
LED Power: 30W	6000K
Voltage: 90-260V 50/60Hz	

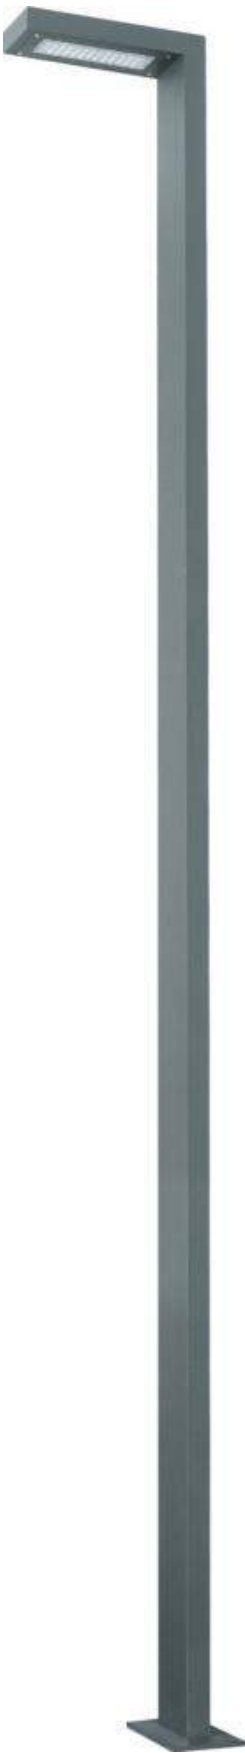




Garden Lights

Body: Made of stainless steel with treatment of corrosion protection and UV-proof powder coating.
Diffuser: PMMA.
Fastener: 304 stainless steel.
IP: IP65

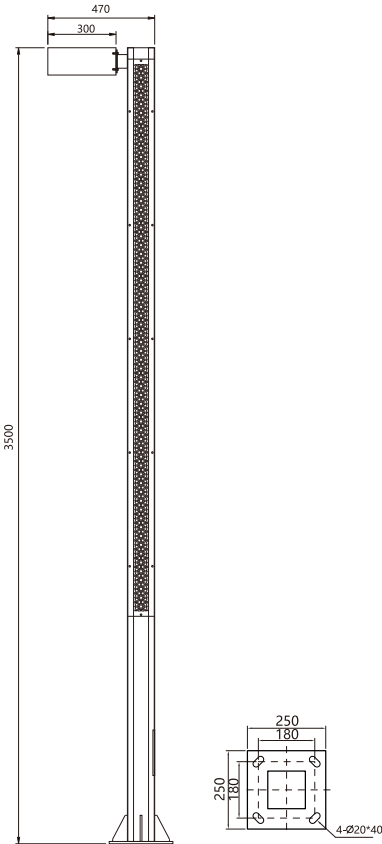

RC-GL9067	
Lamp: LED	Color Temperature
LED Power: 30W+36W	☒ 3000K
Voltage: 90-260V 50/60Hz	☐ 6000K

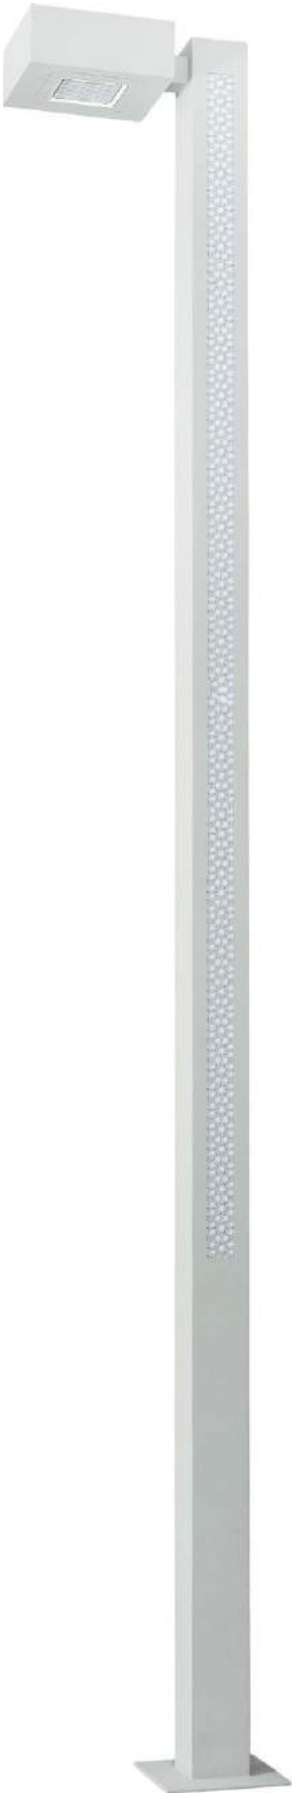



Garden Lights

Body: Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: PMMA.
Fastener: 304 stainless steel.
IP: IP65




RC-GL9068	Color Temperature
Lamp: LED	3000K
LED Power: 30W LED	6000K
Voltage: 90-260V 50/60Hz	





Garden Lights

Body: Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: PMMA.
Fastener: 304 stainless steel.
IP: IP65

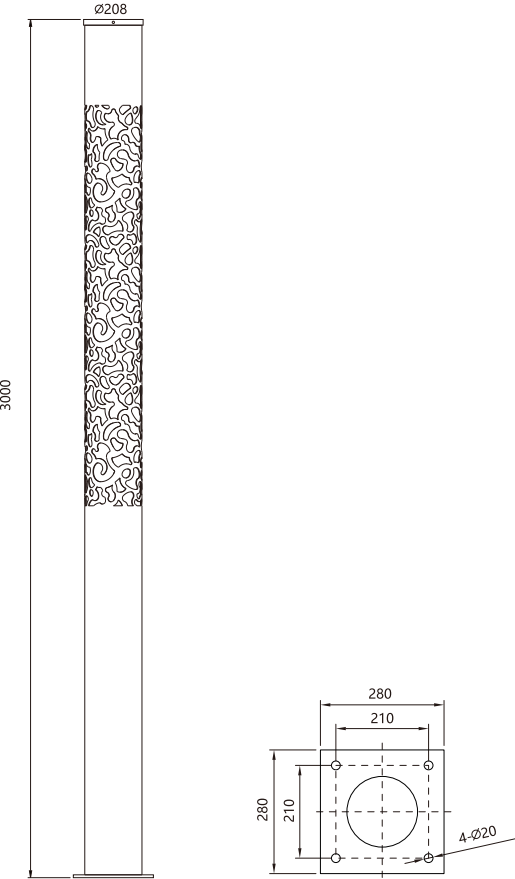

RC-GL9069	
Lamp: LED	Color Temperature
LED Power: 60W	3000K
Voltage: 90-260V 50/60Hz	6000K






Garden Lights

Body: Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: Clear glass.

Fastener: 304 stainless steel.

IP: IP65

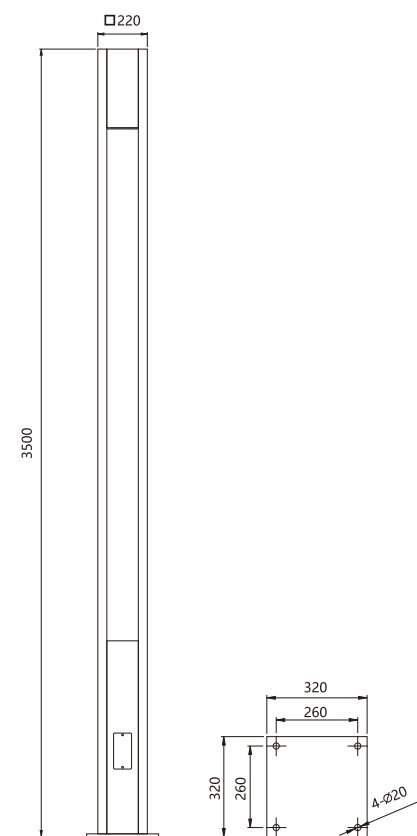

RC-GL9070

Lamp: LED

LED Power: 20W-50W

Voltage: 90-260V 50/60Hz

Color Temperature

3000K

6000K




Garden Lights

Body: Made of stainless steel with treatment of corrosion protection and UV-proof powder coating.

Diffuser: PMMA.

Fastener: 304 stainless steel.

IP: IP65

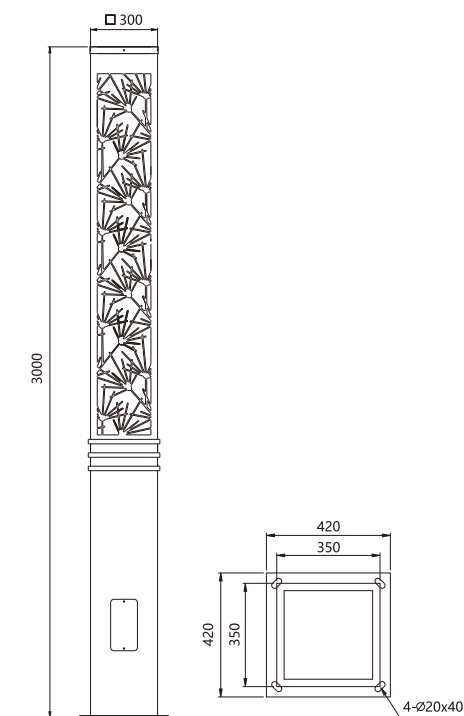

RC-GL9071

Lamp: LED

LED Power: 48W

Voltage: 90-260V 50/60Hz

Color Temperature

3000K


6000K






Garden Lights

Body: Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: PC.
Fastener: 304 stainless steel.
IP: IP65

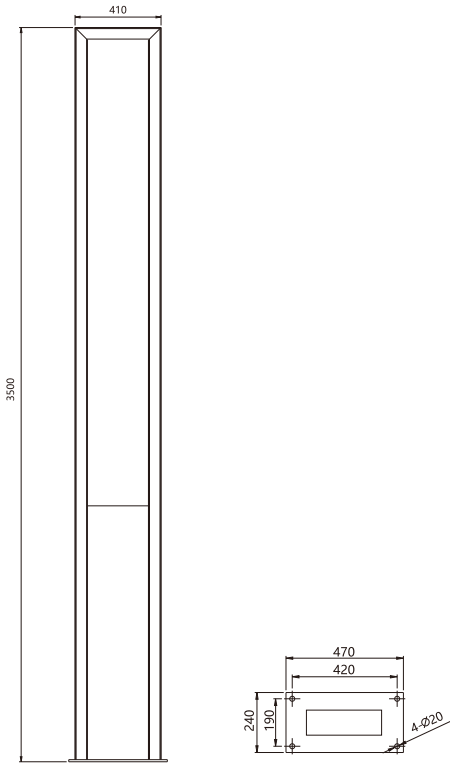


RC-GL9072		Color Temperature
Lamp: LED		☒ 3000K
LED Power: 36W		☐ 6000K
Voltage: 90-260V 50/60Hz		

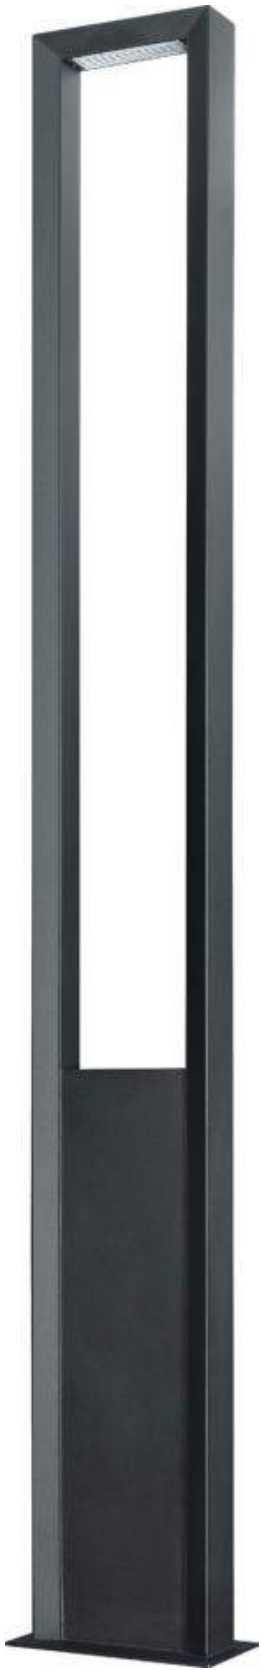



Garden Lights

Body: Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: Clear glass.
Fastener: 304 stainless steel.
IP: IP65

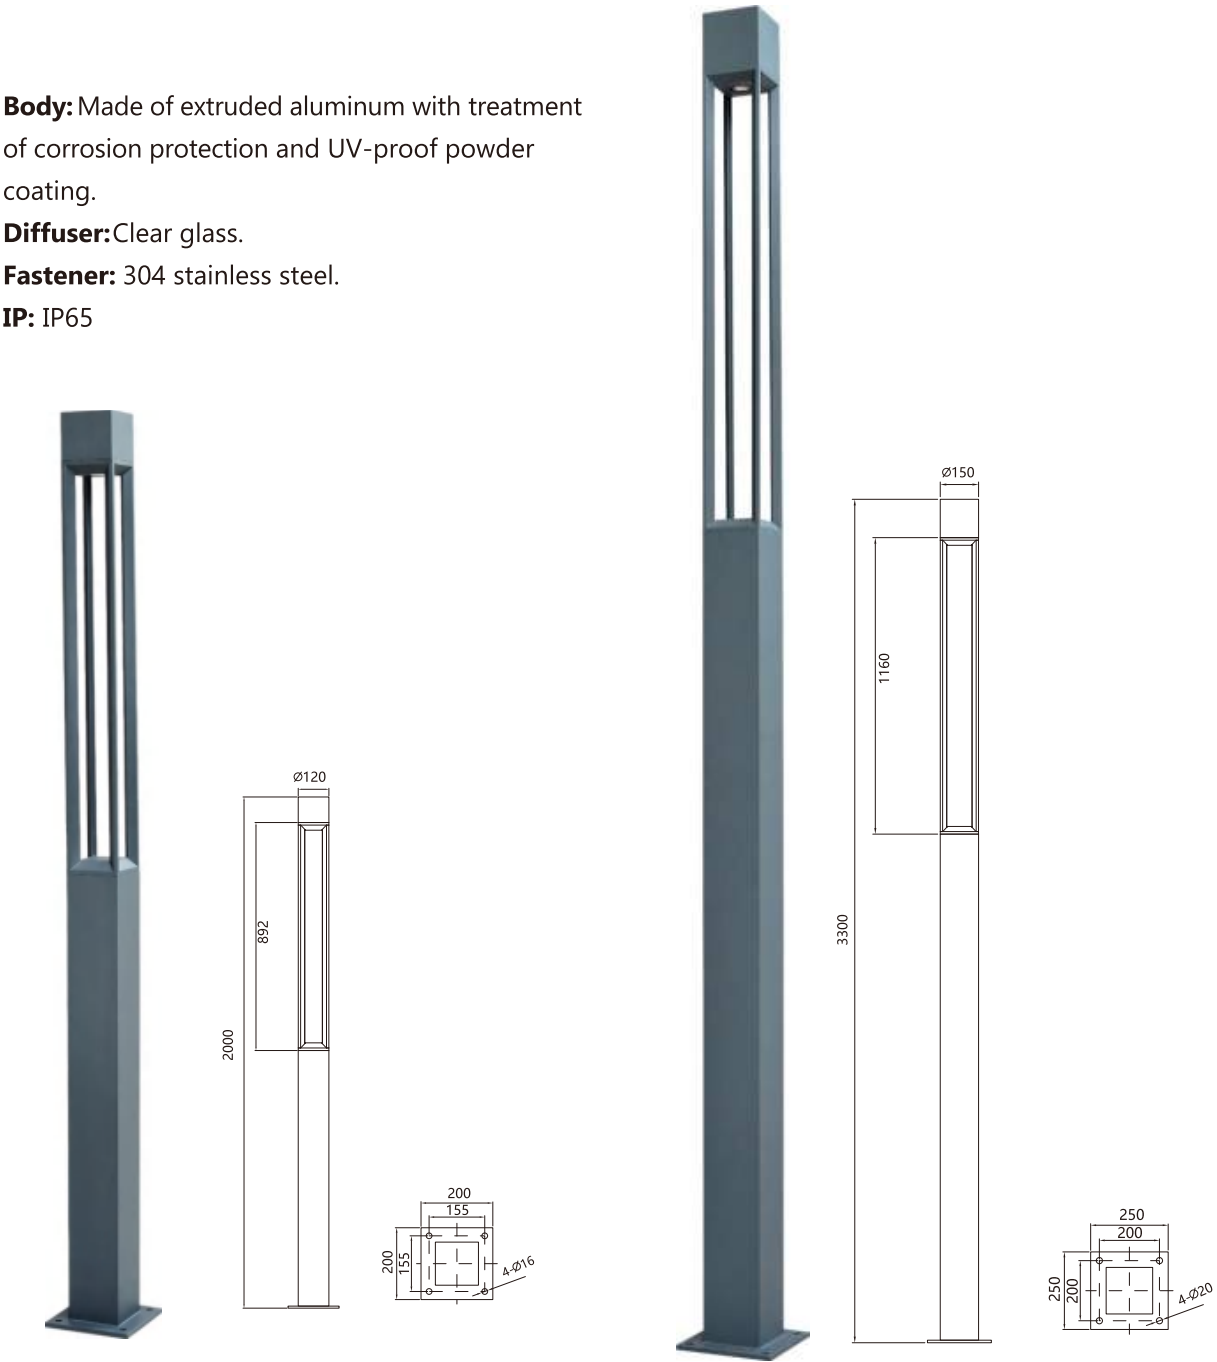

RC-GL9073
Lamp: LED
LED Power: 20W
Voltage: 90-260V 50/60Hz

Color Temperature
3000K
6000K

RC-GL9074
Lamp: LED
LED Power: 30W
Voltage: 90-260V 50/60Hz


Color Temperature
3000K
6000K





Garden Lights

Body: Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: Clear glass.
Fastener: 304 stainless steel.
IP: IP65

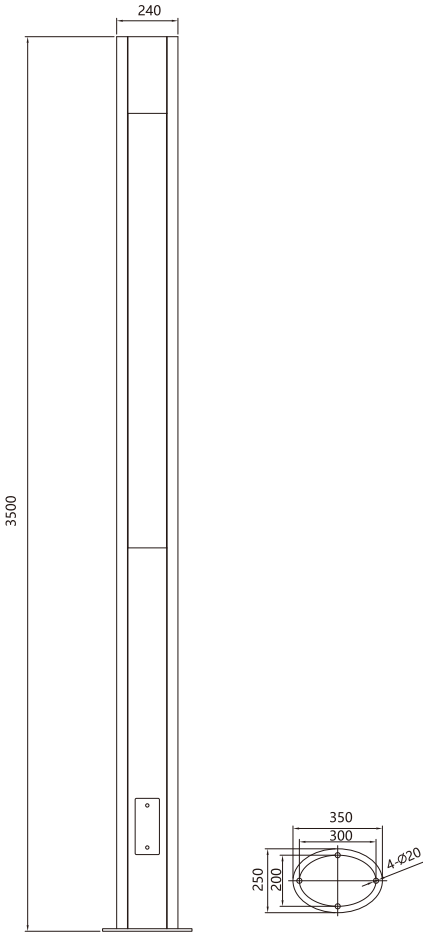


RC-GL9075	Color Temperature
Lamp: LED	3000K
LED Power: 40W	6000K
Voltage: 90-260V 50/60Hz	





Garden Lights

Body: Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: Clear glass.
Fastener: 304 stainless steel.
IP: IP65

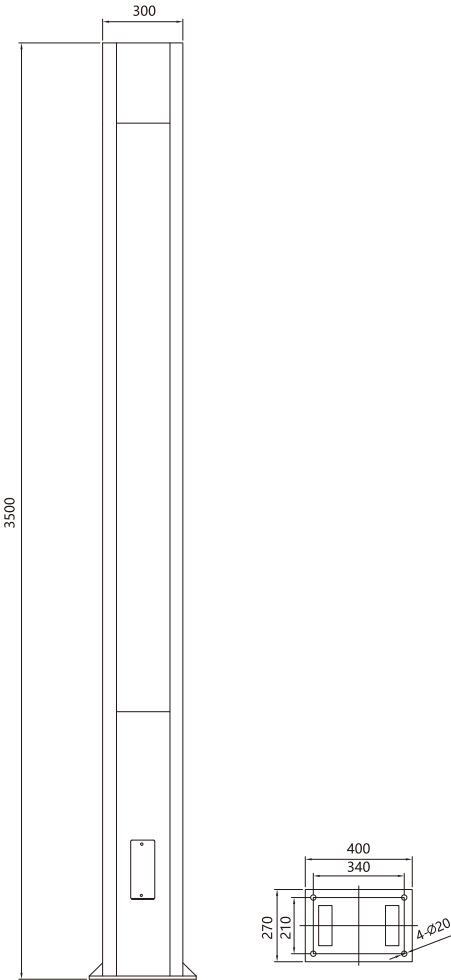

RC-GL9076	
Lamp: LED	Color Temperature
LED Power: 40W	3000K
Voltage: 90-260V 50/60Hz	6000K





Outdoor Wall Light Series






Outdoor Wall Light

Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: Frosted glass.
Gasketing: Made of thermostable silica gel to improve protection class.
Fastener: 304 stainless steel.
IP: IP65



RC-WL9197

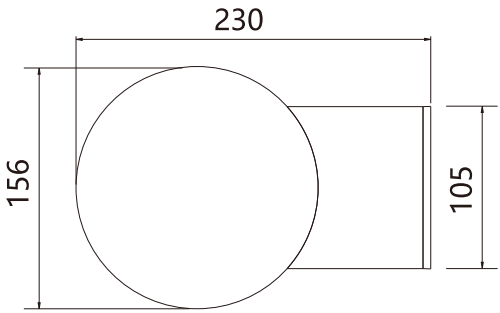

RC-WL9197	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 7W	☐ 6000K
Voltage: 90-260V 50/60Hz	






Outdoor Wall Light

Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: PC.
Reflector: Made of anodized high pure aluminum.
Gasketing: Made of thermostable silica gel to improve protection class.
Fastener: 304 stainless steel .
IP: IP65



RC-WL9198
RC-WL9199

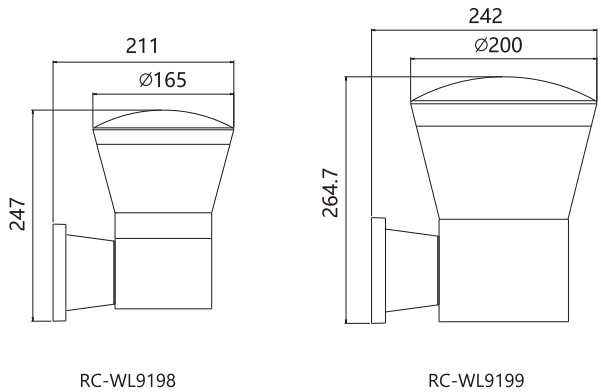

RC-WL9198/RC-WL9199	
Lamp: LED	Color Temperature
LED Power: 7W/ 9W	☒ 3000K
Voltage: 90-260V 50/60Hz	☐ 6000K






Outdoor Wall Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: Gass.
Gasketing: Made of thermostable silica gel to improve protection class.
Fastener: 304 stainless steel .
IP: IP65



RC-WL9200
RC-WL9201



RC-WL9200



RC-WL9201

RC-WL9200/RC-WL9201	
Lamp: LED	Color Temperature
LED Power: 5W	☒ 3000K
Voltage: 90-260V 50/60Hz	☐ 6000K






Outdoor Wall Light

Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: PMMA.
Gasketing: Made of thermostable silica gel to improve protection class.
Fastener: 304 stainless steel .
IP: IP65



RC-WL9202
RC-WL9203

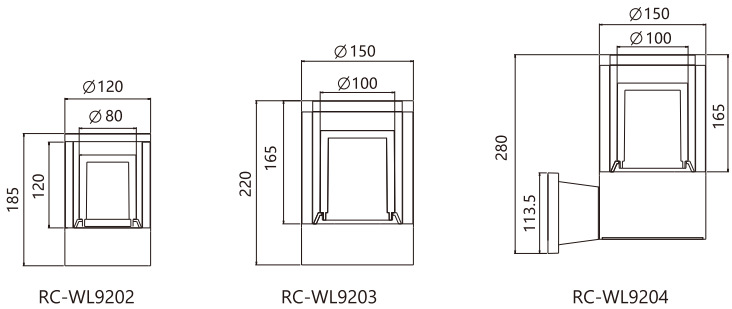

RC-WL9204

RC-WL9202/RC-WL9203	
Lamp: LED COB	Color Temperature
LED Power: 5W/ 10W	☒ 3000K
Voltage: 90-260V 50/60Hz	☐ 6000K
RC-WL9204	
Lamp: LED COB	Color Temperature
LED Power: 10W	☒ 3000K
Voltage: 90-260V 50/60Hz	☐ 6000K



Outdoor Wall Light

Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: Clear glass.

Gasketing: Made of thermostable silica gel to improve protection class.

Fastener: 304 stainless steel.


IP: IP65



RC-WL9205



RC-WL9206

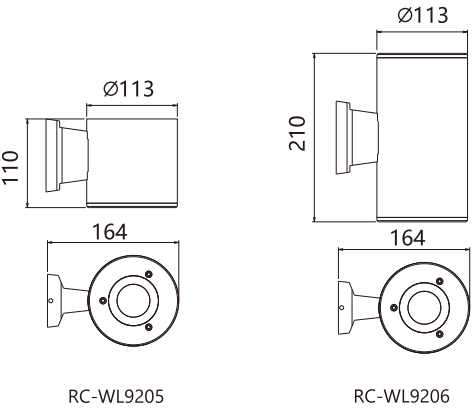

RC-WL9205	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 1X10W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-WL9206	Color Temperature
Lamp: LED COB	☒ 3000K
LED Power: 2X10W	☐ 6000K
Voltage: 90-260V 50/60Hz	



Outdoor Wall Light

Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: PMMA.


Gasketing: Made of thermostable silica gel to improve protection class.

Fastener: 304 stainless steel.

IP: IP65



RC-WL9207

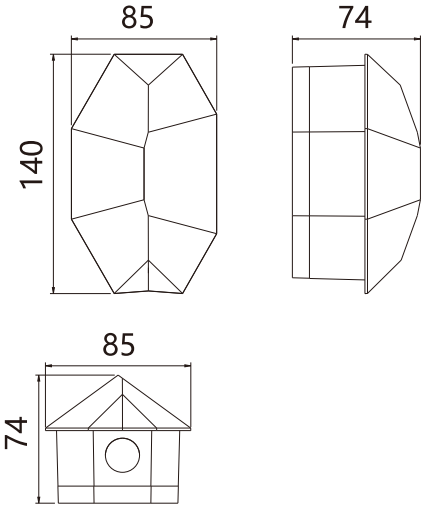

RC-WL9207	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 2X1W	☐ 6000K
Voltage: 90-260V 50/60Hz	






Outdoor Wall Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: Clear glass.
Gasketing: Made of thermostable silica gel to improve protection class.
Fastener: 304 stainless steel .
IP: IP65



RC-WL9208



RC-WL9208



RC-WL9209



RC-WL9209

RC-WL9208	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 2X3W	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-WL9209	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 3W	☐ 6000K
Voltage: 90-260V 50/60Hz	



Outdoor Wall Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: PMMA/PC.

Gasketing: Made of thermostable silica gel to improve protection class.

Fastener: 304 stainless steel .

IP: IP65

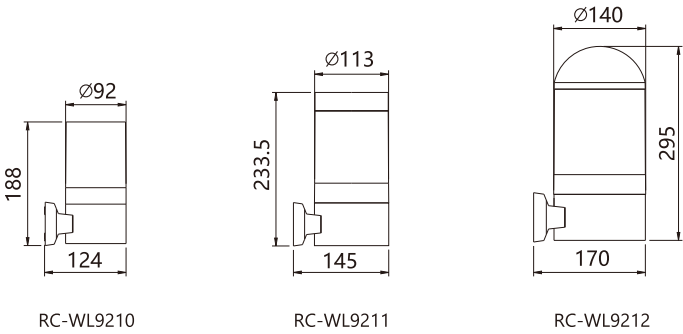

RC-WL9210	Color Temperature
Lamp: LED	☒ 3000K
LED Power: LED 4W / E27X1	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-WL9211	Color Temperature
Lamp: LED	☒ 3000K
LED Power: LED 7W / E27X1	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-WL9212	Color Temperature
Lamp: LED	☒ 3000K
LED Power: LED 9W / E27X1	☐ 6000K
Voltage: 90-260V 50/60Hz	



Outdoor Wall Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: PMMA/PC.

Gasketing: Made of thermostable silica gel to improve protection class.

Fastener: 304 stainless steel .

IP: IP65

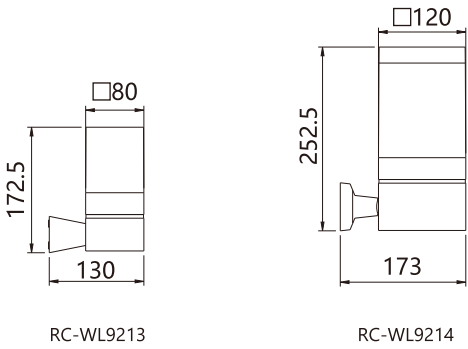

RC-WL9213	Color Temperature
Lamp: LED	☒ 3000K
LED Power: LED 4W / E27X1	☐ 6000K
Voltage: 90-260V 50/60Hz	

RC-WL9214	Color Temperature
Lamp: LED	☒ 3000K
LED Power: LED 9W / E27X1	☐ 6000K
Voltage: 90-260V 50/60Hz	





LED Step Light Series





LED Step Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: Clear tempered glass.
Gasketing: Made of thermostable silica gel to improve protection class.
Fastener: 304 stainless steel.
IP: IP65



RC-ST9231



RC-ST9232

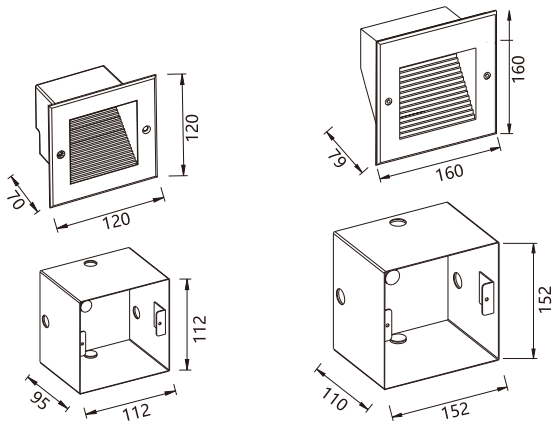

RC-ST9231

RC-ST9232

RC-ST9231	Color Temperature
Lamp: LED	3000K
LED Power: 2.8W	
Voltage: AC 240V	

RC-ST9232	Color Temperature
Lamp: LED	3000K
LED Power: 5.6W	
Voltage: AC 240V	






LED Step Light

Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.
Diffuser: Clear tempered glass.
Gasketing: Made of thermostable silica gel to improve protection class.
Fastener: 304 stainless steel.
IP: IP65



RC-ST9233

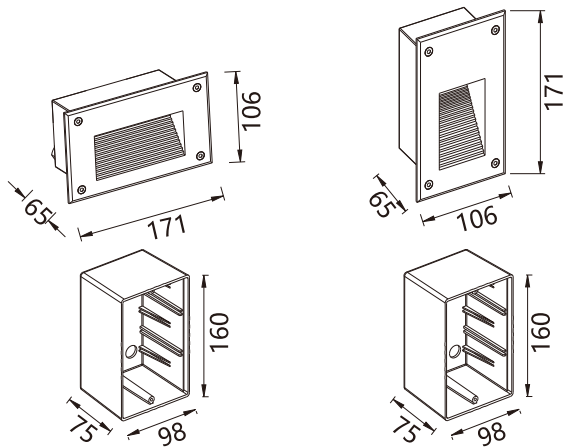

RC-ST9233

RC-ST9234



RC-ST9234

RC-ST9233	Color Temperature
Lamp: LED	3000K
LED Power: 2.8W	
Voltage: AC 240V	

RC-ST9234	Color Temperature
Lamp: LED	3000K
LED Power: 2.8W	
Voltage: AC 240V	



LED Step Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: Clear tempered glass.

Gasketing: Made of thermostable silica gel to improve protection class.

Fastener: 304 stainless steel.

IP: IP65

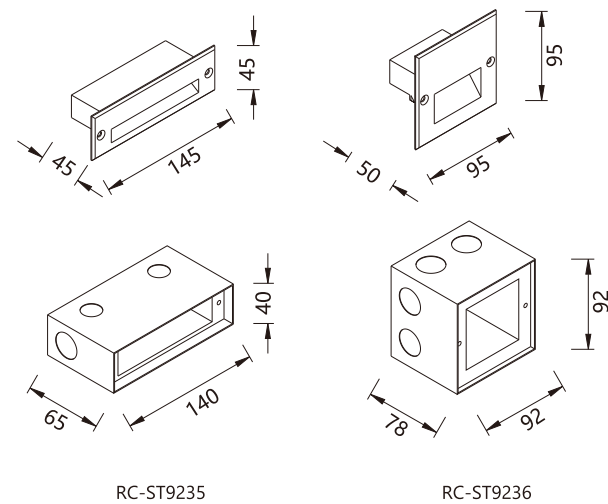

RC-ST9235	Color Temperature
Lamp: LED	3000K
LED Power: 1.8W	
Voltage: AC 240V	

RC-ST9236	Color Temperature
Lamp: LED	3000K
LED Power: 1.8W	
Voltage: AC 240V	



RC-ST9235



RC-ST9236



LED Step Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: Clear tempered glass.

Gasketing: Made of thermostable silica gel to improve protection class.

Fastener: 304 stainless steel.

IP: IP65

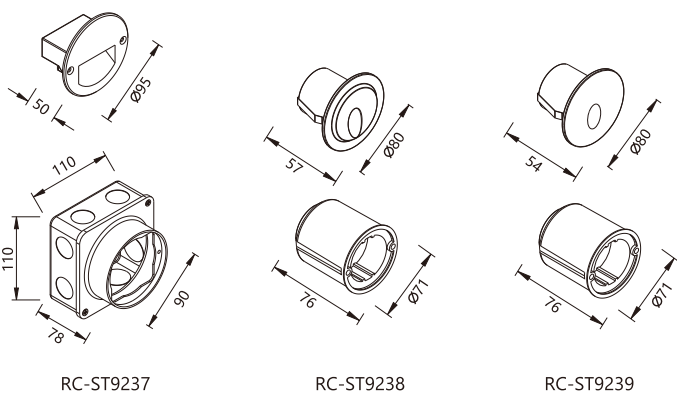

RC-ST9237	Color Temperature
Lamp: LED	3000K
LED Power: 1.8W	
Voltage: AC 240V	

RC-ST9238	Color Temperature
Lamp: LED	3000K
LED Power: 2.3W	
Voltage: AC 240V	

RC-ST9239	Color Temperature
Lamp: LED	3000K
LED Power: 2.3W	
Voltage: AC 240V	



RC-ST9237



RC-ST9238



RC-ST9239



LED Step Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: Clear tempered glass.

Gasketing: Made of thermostable silica gel to improve protection class.

Fastener: 304 stainless steel.

IP: IP65

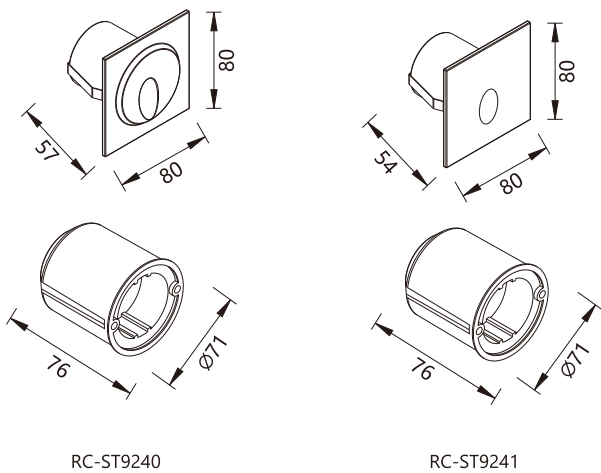

RC-ST9240	Color Temperature
Lamp: LED	3000K
LED Power: 2.3W	
Voltage: AC 240V	

RC-ST9241	Color Temperature
Lamp: LED	3000K
LED Power: 2.3W	
Voltage: AC 240V	



RC-ST9240



RC-ST9241



LED Step Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: Glass/PMMA.

Gasketing: Made of thermostable silica gel to improve protection class.

Fastener: 304 stainless steel .

IP: IP65

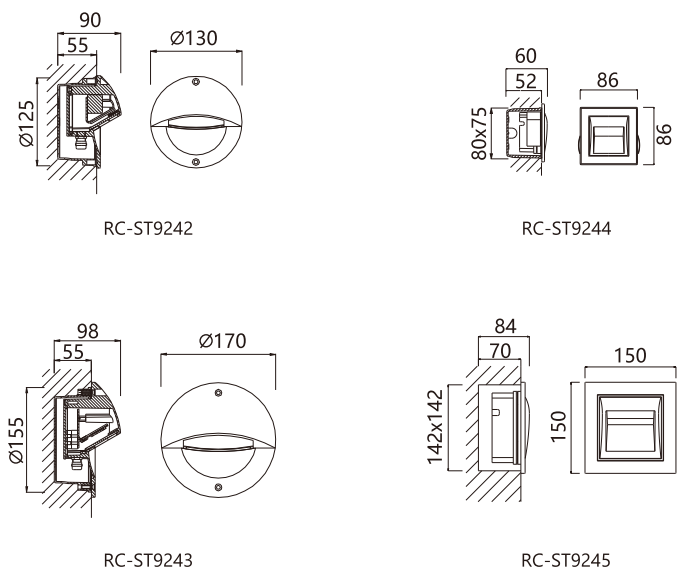

RC-ST9242/RC-ST9243	Color Temperature
Lamp: LED	3000K
LED Power: 3W/ 5W	6000K
Voltage: 90-260V 50/60Hz	

RC-ST9244/RC-ST9245	Color Temperature
Lamp: LED	3000K
LED Power: 3W/ 7.5W	6000K
Voltage: 90-260V 50/60Hz	



RC-ST9242
RC-ST9243



RC-ST9244
RC-ST9245



LED Step Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: Clear tempered glass.

Gasketing: Made of thermostable silica gel to improve protection class.

Fastener: 304 stainless steel.

IP: IP65

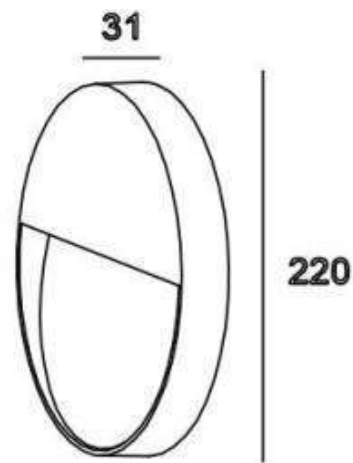


RC-ST-Y220



RC-ST-Y220

RC-ST-Y220	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 8W	☐ 6000K
Voltage: 90-260V 50/60Hz	

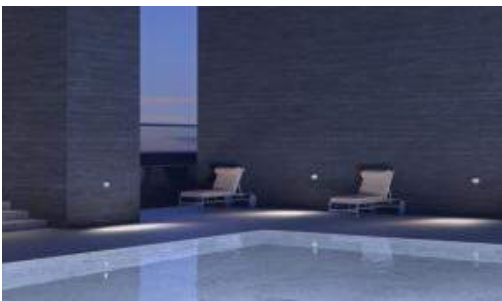

LED Step Light


Body: Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: Clear tempered glass.

Gasketing: Made of thermostable silica gel to improve protection class.

Fastener: 304 stainless steel.

IP: IP65

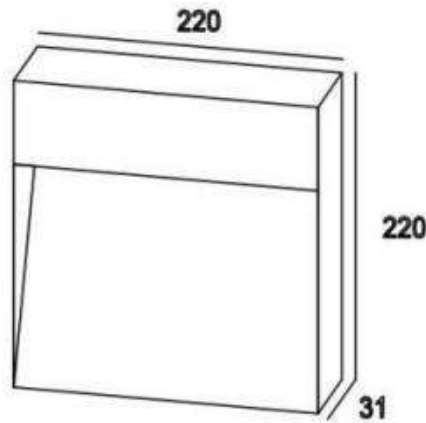


RC-ST-F220



RC-ST-F220

RC-ST-F220	Color Temperature
Lamp: LED	☒ 3000K
LED Power: 8W	☐ 6000K
Voltage: 90-260V 50/60Hz	

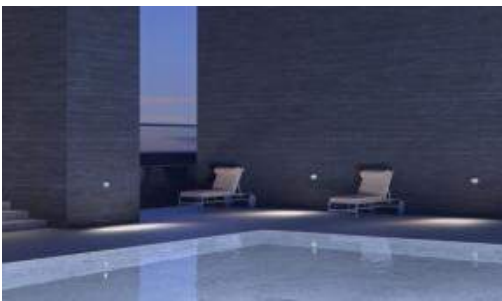

our "CLIENTS"

We are trusted by a variety of leading businesses, including industrial plants, hotels, retail outlets, and major real estate developments.

Our projects reflect our ability to tailor lighting solutions to meet diverse client.

our "TEAM"

Our expert team brings extensive experience in lighting procurement and installation.

We are dedicated to delivering the best solutions to meet the specific needs of every client.

Contact Us

Light Loop

Pracha Uthit Road, Klong Bung Plakot,
Nai Klong Bung Plakot Subdistrict, Phra Samut Chedi District,
Samut Prakan Province 10290

Phone: +66 82-919-9941

Email: sales@constufftrading.com

